

Лабораторная работа №11

Операционные системы

Савкин Д. В.

02 сентября 2026

Российский университет дружбы народов, Москва, Россия

Информация

- Савкин Дмитрий Вадимович
- РУДН, группа НПИбд-02-25
- Тема: редактор Emacs



Цель работы

- Получение практических навыков работы с текстовым редактором Emacs

Задание


Задание

- Создать файл lab07.sh с тем же скриптом, что в лабораторной работе про vi
- Освоить буферы, окна, поиск и замену

Выполнение работы


Запуск Emacs

Запускаем Emacs в терминальном режиме, открываем файл.

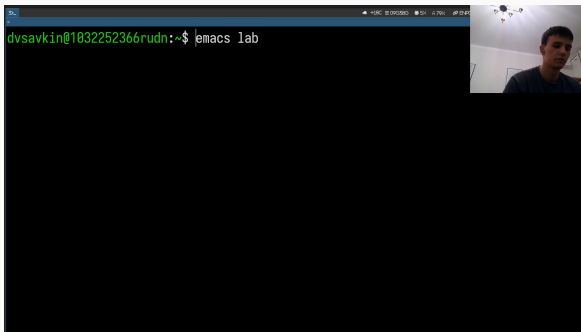

Ввод и сохранение

Вводим текст скрипта, сохраняем: Ctrl+X, Ctrl+S.

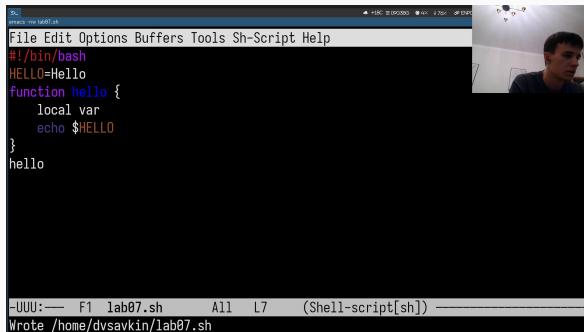


```
File Edit Options Buffers Tools Sh-Script Help
#!/bin/bash
HELLO=Hello
function hello {
    local var
    echo $HELLO
}
hello

-UUU:— F1 lab07.sh All L7 (Shell-script[sh]) —
Wrote /home/dvsavkin/lab07.sh
```

Копирование строки

Выделяем строку, копируем в конец файла.

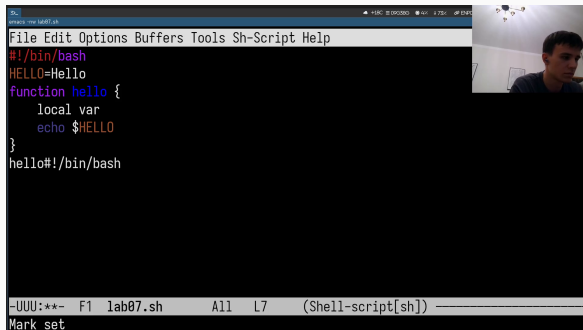


The screenshot shows a terminal window with a menu bar (File, Edit, Options, Buffers, Tools, Sh-Script, Help) and a dark background. The script content is as follows:

```
#!/bin/bash
HELLO=Hello
function hello {
    local var
    echo $HELLO
}
hello#!/bin/bash
```

At the bottom of the terminal, the status bar shows: `-UUU:*** F1 lab07.sh All L7 (Shell-script[sh])`. Below the terminal window, the text `Mark set` is visible. In the top right corner of the terminal window, there is a small video inset showing a person's face.

Вырезание и вставка

Вырезаем фрагмент, вставляем через Ctrl+Y.

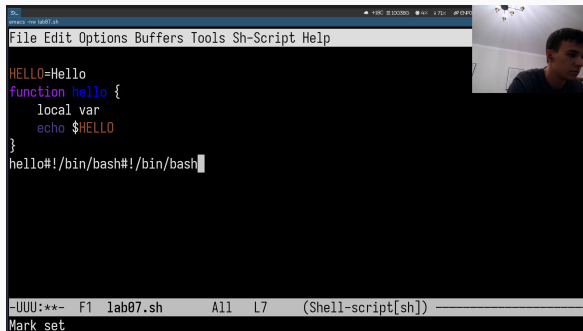


The screenshot shows a terminal window with a menu bar (File, Edit, Options, Buffers, Tools, Sh-Script, Help) and a status bar at the bottom. The terminal content includes a variable assignment, a function definition, and a shell prompt. A video inset in the top right corner shows a person's face. The status bar indicates the file is 'lab07.sh' and the shell is '(Shell-script[sh])'.

```
HELLO=Hello
function hello {
    local var
    echo $HELLO
}
hello#!/bin/bash#!/bin/bash
```

UUU:*** F1 lab07.sh All L7 (Shell-script[sh])
Mark set

Разбиение на окна

Разбиваем фрейм на 4 окна.

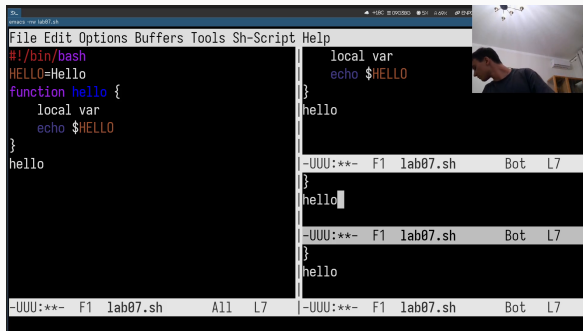

```
File Edit Options Buffers Tools Sh-Script Help
#!/bin/bash
HELLO=Hello
function hello {
    local var
    echo $HELLO
}
hello

local var
echo $HELLO
}
hello


-UUU:***- F1 lab07.sh Bot L7
}
hello

-UUU:***- F1 lab07.sh Bot L7
}
hello

-UUU:***- F1 lab07.sh All L7 | -UUU:***- F1 lab07.sh Bot L7
```

Навигация по буферу

Возвращаемся к одному окну, переходим по буферу.

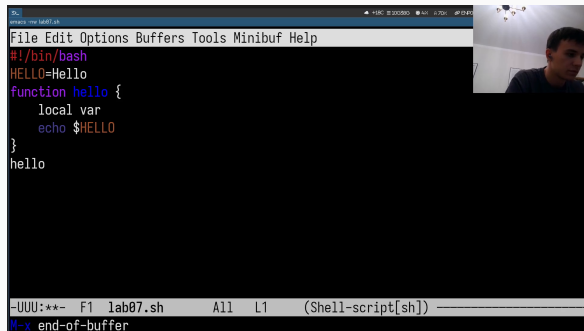


The screenshot shows a terminal window with a menu bar (File, Edit, Options, Buffers, Tools, Minibuf, Help) and a status bar at the bottom. The terminal content is a shell script. A video inset in the top right corner shows a person's face.

```
File Edit Options Buffers Tools Minibuf Help
#!/bin/bash
HELLO=Hello
function hello {
  local var
  echo $HELLO
}
hello

-UUU:***- F1 lab07.sh All L1 (Shell-script[sh])
M-x end-of-buffer
```

Отменяем тестовые правки: Ctrl+/.

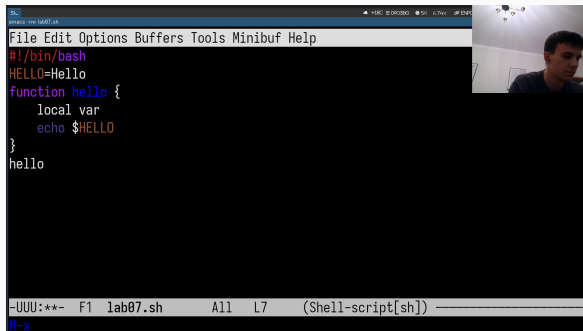


The screenshot shows a terminal window with a menu bar (File, Edit, Options, Buffers, Tools, Minibuf, Help) and a status bar at the bottom. The terminal content is as follows:

```
#!/bin/bash
HELLO=Hello
function hello {
    local var
    echo $HELLO
}
hello
```

The status bar displays: -UUU:***- F1 lab07.sh All L7 (Shell-script[sh]) M-x. In the top right corner, there is a small video feed of a person.

Список буферов

Открываем список буферов, переключаемся между окнами.

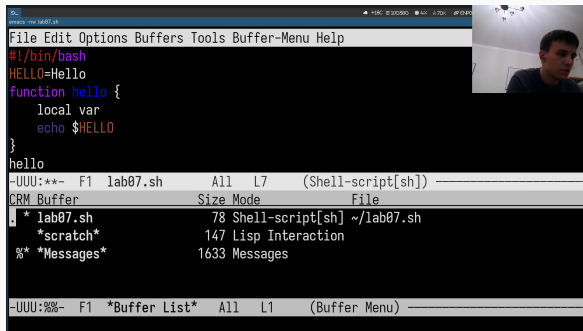

The screenshot shows the Emacs editor interface. The top menu bar includes 'File Edit Options Buffers Tools Buffer-Menu Help'. The main text area contains a shell script:

```
#!/bin/bash
HELLO=Hello
function hello {
  local var
  echo $HELLO
}
hello
```

Below the text area, the buffer list is displayed, showing the current buffer and other buffers in the workspace:


CRM Buffer	Size	Mode	File
* lab07.sh	78	Shell-script[sh]	~/lab07.sh
scratch	147	Lisp Interaction	
%* *Messages*	1633	Messages	

At the bottom, the buffer menu is open, showing the current buffer and other buffers in the workspace:

```
-UUU:%%- F1 *Buffer List* All L1 (Buffer Menu)
```


Поиск с заменой

Запускаем поиск с заменой HELLO на HELLO2.

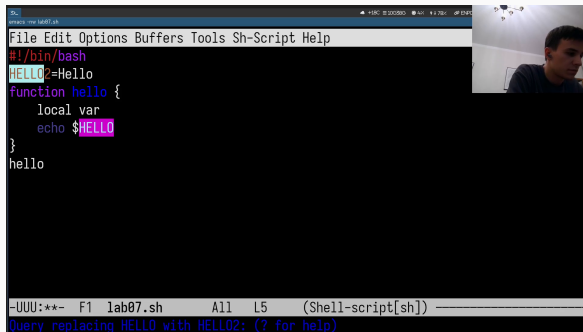


The screenshot shows a Shell script editor window titled 'lab07.sh'. The script content is as follows:

```
#!/bin/bash
HELLO?=Hello
function hello {
    local var
    echo $HELLO
}
hello
```

The editor has a menu bar with 'File', 'Edit', 'Options', 'Buffers', 'Tools', 'Sh-Script', and 'Help'. A search bar at the top right contains the text 'HELLO?'. The status bar at the bottom displays '-UUU:***- F1 lab07.sh All L5 (Shell-script[sh])' and a message 'Query replacing HELLO with HELLO2: (? for help)'.

Подтверждение замены

Подтверждаем замену всех вхождений.

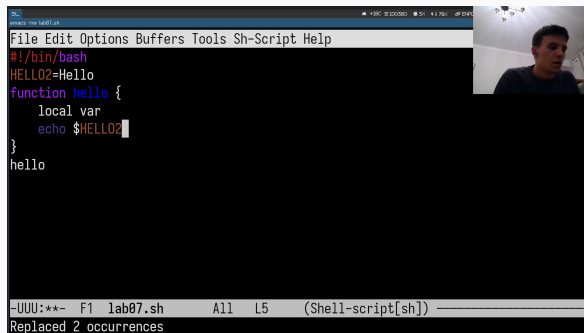


```
File Edit Options Buffers Tools Sh-Script Help
#!/bin/bash
HELLO2=Hello
function hello {
    local var
    echo $HELLO2
}
hello

-UUU:*** F1 lab07.sh All L5 (Shell-script[sh])
Replaced 2 occurrences
```

Альтернативный поиск

Проверяем результат через Alt+S, O.

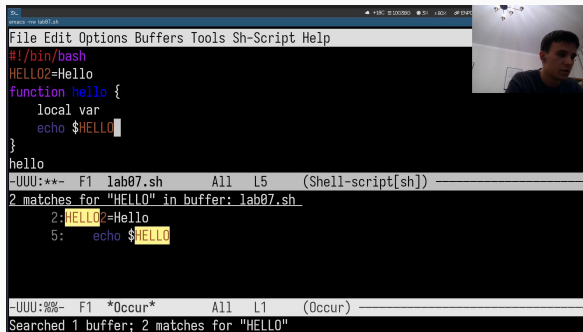

The screenshot shows a terminal window with a menu bar (File, Edit, Options, Buffers, Tools, Sh-Script, Help) and a status bar. The terminal content includes a shell script definition for a function named 'hello' and its execution. Below the script, search results for the string 'HELLO' are displayed, showing two matches in the buffer 'lab07.sh'. The matches are highlighted in yellow. The status bar at the bottom indicates the search was performed on 1 buffer and found 2 matches for 'HELLO'.

```
File Edit Options Buffers Tools Sh-Script Help
#!/bin/bash
HELLO2=Hello
function hello {
    local var
    echo $HELLO
}
hello
-UUU:***- F1 lab07.sh      All L5  (Shell-script[sh]) -----
2 matches for "HELLO" in buffer: lab07.sh
2: HELLO2=Hello
5:   echo $HELLO

-UUU:%%- F1 *Occur*      All L1  (Occur) -----
Searched 1 buffer; 2 matches for "HELLO"
```

Выводы

- Освоены создание/сохранение файла, вырезание/копирование/вставка
- Изучены буферы, окна, поиск и поиск с заменой в Emacs