

Практическая работа - Настройка OAuth 2.0 авторизации в Django приложении (Django + OAuth + Google)

1. Установка зависимостей

```
PS C:\Users\Admin> pip install django-allauth
Defaulting to user installation because normal site-packages is not writeable
Collecting django-allauth
  Downloading django_allauth-65.12.0.tar.gz (2.0 MB)
    2.0/2.0 MB 779.3 kB/s eta 0:00:00
Installing build dependencies ... done
Getting requirements to build wheel ... done
Preparing metadata (pyproject.toml) ... done
```

2. Добавление allauth apps

```
settings.py X
mysite > settings.py > ...
32
33 INSTALLED_APPS = [
34     'polls.apps.PollsConfig',
35     'accounts',
36     'django.contrib.admin',
37     'django.contrib.auth',
38     'django.contrib.contenttypes',
39     'django.contrib.sessions',
40     'django.contrib.messages',
41     'django.contrib.staticfiles',
42     'django.contrib.sites',
43     'allauth',
44     'allauth.account',
45     'allauth.socialaccount',
46     'allauth.socialaccount.providers.google',
47 ]
```

3. Добавление SITE_ID и Backend аутентификации

```
134 SITE_ID = 1
135
136 AUTHENTICATION_BACKENDS = [
137     'django.contrib.auth.backends.ModelBackend',
138     'allauth.account.auth_backends.AuthenticationBackend',
139 ]
```

4. Добавление настроек allauth и конфигурации провайдера Google (scopes)

```
141 # allauth
142 ACCOUNT_AUTHENTICATION_METHOD = 'username_email'
143 ACCOUNT_EMAIL_REQUIRED = True
144 ACCOUNT_EMAIL_VERIFICATION = 'optional'
145 SOCIALACCOUNT_QUERY_EMAIL = True
146
147 SOCIALACCOUNT_PROVIDERS = {
148     'google': {
149         'SCOPE': [
150             'profile',
151             'email',
152         ],
153         'AUTH_PARAMS': {
154             'access_type': 'online',
155         },
156     }
157 }
```

5. Подключение URL-набора

```
urls.py  X
mysite > urls.py > ...
17 from django.contrib import admin
18 from django.urls import include, path
19
20 urlpatterns = [
21     path("polls/", include("polls.urls")),
22     path("admin/", admin.site.urls),
23     path("accounts/", include("allauth.urls")),
24     path("user/", include("accounts.urls")),
25 ]
```

6. Создание шаблона, который совмещает форму входа allauth + кнопку входа через Google

```
login.html  X
templates > admin > account > login.html > ...
1 {% extends "base.html" %}
2 {% load i18n %}
3 {% load account socialaccount %}
4
5 {% block content %}
6 <h2>Log in</h2>
7
8 <form method="post" action="{% url 'account_login' %}">
9     {% csrf_token %}
10     {{ form.as_p }}
11
12     <button type="submit" class="btn btn-primary">Log in</button>
13 </form>
14
15 <hr>
16
17 <p>Or log in with</p>
18 <a href="{% provider_login url 'google' %}" class="btn btn-outline-danger">
19     
20     Log in with Google
21 </a>
22
23 <p class="mt-3">
24     Don't have an account? <a href="{% url 'account_signup' %}">Sign Up</a>
25 </p>
26
27 {% endblock %}
```


7. Добавление middleware

```
49 MIDDLEWARE = [
50     'django.middleware.security.SecurityMiddleware',
51     'django.contrib.sessions.middleware.SessionMiddleware',
52     'django.middleware.common.CommonMiddleware',
53     'django.middleware.csrf.CsrfViewMiddleware',
54     'django.contrib.auth.middleware.AuthenticationMiddleware',
55     'allauth.account.middleware.AccountMiddleware',
56     'django.contrib.messages.middleware.MessageMiddleware',
57     'django.middleware.clickjacking.XFrameOptionsMiddleware',
58 ]
```

8. Установка модуля

```
PS C:\Users\Admin> pip install cryptography
Defaulting to user installation because normal site-packages is not writeable
Collecting cryptography
  Downloading cryptography-46.0.2-cp311-abi3-win_amd64.whl.metadata (5.7 kB)
Collecting cffi>=2.0.0 (from cryptography)
  Downloading cffi-2.0.0-cp312-cp312-win_amd64.whl.metadata (2.6 kB)
Collecting pycparser (from cffi>=2.0.0->cryptography)
  Downloading pycparser-2.23-py3-none-any.whl.metadata (993 bytes)
Downloaded cryptography-46.0.2-cp311-abi3-win_amd64.whl (3.5 MB)
3.5/3.5 MB 1.2 MB/s eta 0:00:00
Downloaded cffi-2.0.0-cp312-cp312-win_amd64.whl (183 kB)
Downloaded pycparser-2.23-py3-none-any.whl (118 kB)
Installing collected packages: pycparser, cffi, cryptography
Successfully installed cffi-2.0.0 cryptography-46.0.2 pycparser-2.23
```

9. Создание копии base.html в папке templates

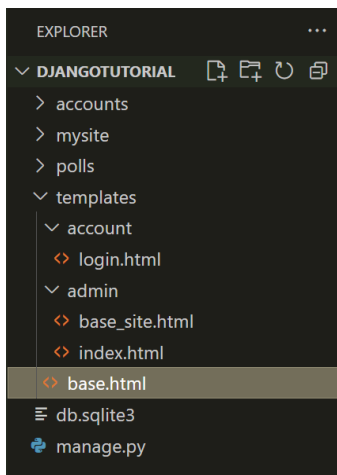

10. Создание OAuth 2.0 Client ID в Google Cloud Console

Google Cloud Search (/) for resources, docs, products, and more

New Project

 You have 12 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)

[Manage Quotas](#)

Project name * 

Project ID: djangoauth-475111. It cannot be changed later. [Edit](#)

Location * [Browse](#)

Parent organization or folder

[Create](#) [Cancel](#)

Google Cloud

DjangoAuth

Search (/) for resources, docs, products, and more

Search

Google Auth Platform / Overview / Create branding

Overview

Branding

Audience

Clients

Data Access

Verification Center

Settings

Project configuration

1 App Information

2 Audience

3 Contact Information

4 Finish

Internal

Only available to users within your organization. You will not need to submit your app for verification. [Learn more about user type](#)

External

Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more about user type](#)

Next

Create Cancel

Project configuration

1 App Information

2 Audience

3 Contact Information

4 Finish

Create

Cancel

Google Cloud

DjangoAuth

Search (/) for resources, docs, products, and more

Google Auth Platform / Clients / Create client

Overview

Branding

Audience

Clients

Data Access

Verification Center

Settings

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *

Web application

Name *

Django OAuth Localhost

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

Authorized JavaScript origins

For use with requests from a browser

URIs 1 *

http://127.0.0.1:8000

URIs 2 *

http://localhost:8000

+ Add URI

Authorized redirect URIs

For use with requests from a web server

URIs 1 *

http://127.0.0.1:8000/accounts/google/login/callback/

URIs 2 *

http://localhost:8000/accounts/google/login/callback/

+ Add URI

Note: It may take 5 minutes to a few hours for settings to take effect

Create

Cancel

OAuth client created

The client ID can always be accessed from Clients tab under Google Auth Platform.

OAuth access is restricted to the [test users](#) listed on your [OAuth consent screen](#)

Client ID	81...ap ps.googleusercontent.com
-----------	-------------------------------------

Начиная с июня 2025 года, после закрытия этого диалогового окна вы больше не сможете просматривать или скачивать секрет клиента. Убедитесь, что вы скопировали или скачали приведенную ниже информацию и надежно храните ее.

Секретный клиент	...
------------------	-----

Creation date	October 14, 2025 at 3:06:54 PM GMT+3
Status	Enabled

Download JSON

OK

11. Добавление Google OAuth приложения в Django admin (SocialApp из пакета allauth)

Google OAuth | Change social app

127.0.0.1:8000/admin/socialaccount/socialapp/1/change/

Polls Administration WELCOME, ADMIN, VIEW SITE / CHANGE PASSWORD / LOG OUT

Home > Social Accounts > Social applications > Google OAuth

Start typing to filter...

ACCOUNTS

- Email addresses + Add

AUTHENTICATION AND AUTHORIZATION

- Groups + Add
- Users + Add

POLLS

- Questions + Add

SITES

- Sites + Add

SOCIAL ACCOUNTS

- Social accounts + Add
- Social application tokens + Add
- Social applications + Add

Change social application

Google OAuth HISTORY

Provider: Google

Provider ID:

Name: Google OAuth

Client id: [REDACTED] apps.googleusercontent.com
App ID, or consumer key

Secret key: [REDACTED]
API secret, client secret, or consumer secret

Key:
Key

Settings:

Sites:

Available sites
Choose sites by selecting them and then select the "Choose" arrow button.

Filter

Choose all sites

Chosen sites
Remove sites by selecting them and then select the "Remove" arrow button.

Filter

example.com

Remove all sites

Hold down "Control", or "Command" on a Mac, to select more than one.

SAVE Save and add another Save and continue editing Delete

12. Результат

