



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

Experiment No. 8
Implement Restoring algorithm using c-programming
Name: Dnyanesh Baburao Panchal
Roll Number: 34
Date of Performance:
Date of Submission:

**Aim:** To implement Restoring division algorithm using c-programming.

### Objective -

1. To understand the working of Restoring division algorithm.
2. To understand how to implement Restoring division algorithm using c-programming.

### Theory:


- 1) The divisor is placed in M register, the dividend placed in Q register.
- 2) At every step, the A and Q registers together are shifted to the left by 1-bit
- 3) M is subtracted from A to determine whether A divides the partial remainder. If it does, then Q0 set to 1-bit. Otherwise, Q0 gets a 0 bit and M must be added back to A to restore the previous value.
- 4) The count is then decremented and the process continues for n steps. At the end, the quotient is in the Q register and the remainder is in the A register.

### Flowchart



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

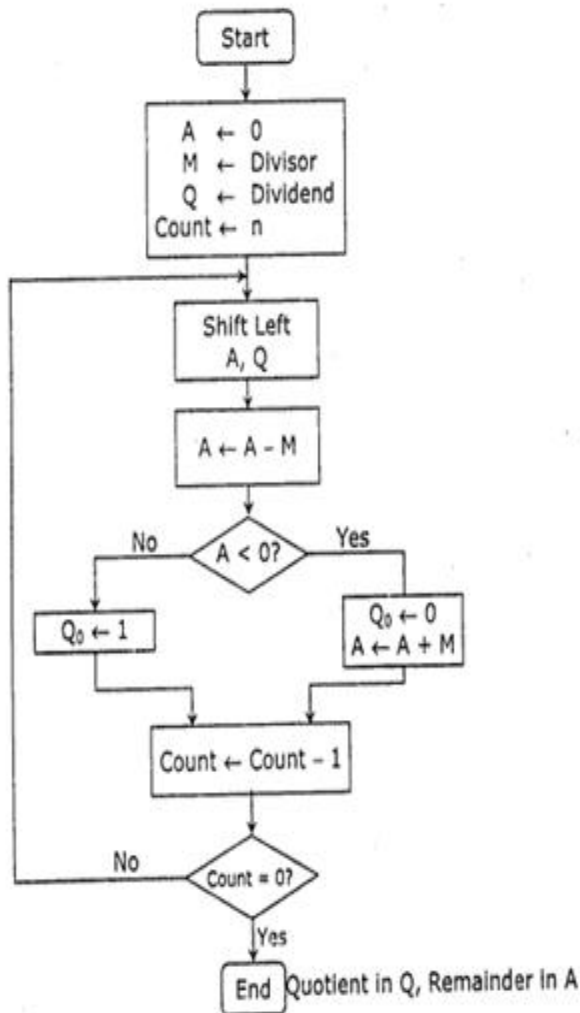

Perform  $8 + 3$  by restoring division technique.

	A Register	Q Register
Initially	0 0 0 0	1 0 0 0
Shift	0 0 0 1	0 0 0 □
Subtract M	1 1 1 0 1	
Set Q <sub>0</sub>	① 1 1 1 0	
Restore(A+M)	0 0 0 1 1	
	0 0 0 1	0 0 0 ①
Shift	0 0 0 1 0	0 0 ① □
Subtract M	1 1 1 0 1	
Set Q <sub>0</sub>	① 1 1 1 1	
Restore(A+M)	0 0 0 1 1	
	0 0 0 1 0	0 0 ① ①
Shift	0 0 1 0 0	0 ① ① □
Subtract M	1 1 1 0 1	
Set Q <sub>0</sub>	① 0 0 0 1	
Shift	0 0 0 1 0	0 0 ① ①
Subtract M	1 1 1 0 1	① ① ① □
Set Q <sub>0</sub>	① 1 1 1 1	
Restore(A+M)	0 0 0 1 1	
	0 0 0 1 0	① ① ① ①
	Remainder	Quotient

### Program-

```
#include <stdio.h>
```

```
#include <stdlib.h>
```

```
int dec_bin(int, int []);
```

```
int twos(int [], int []);
```

```
int left(int [], int []);
```

```
int add(int [], int []);
```

```
int main()
```

```
{
```

```
    int a, b, m[4]={0,0,0,0}, q[4]={0,0,0,0}, acc[4]={0,0,0,0}, m2[4], i, n=4;
```

```
    printf("Enter the Dividend: ");
```



```
scanf("%d", &a);
printf("Enter the Divisor: ");
scanf("%d", &b);
dec_bin(a, q);
dec_bin(b, m);
twos(m, m2);
printf("\nA\tQ\tComments\n");
for(i=3; i>=0; i--)
{
    printf("%d", acc[i]);
}
printf("\t");
for(i=3; i>=0; i--)
{
    printf("%d", q[i]);
}
printf("\tStart\n");
while(n>0)
{
    left(acc, q);
    for(i=3; i>=0; i--)
    {
        printf("%d", acc[i]);
    }
    printf("\t");
    for(i=3; i>=1; i--)
    {
        printf("%d", q[i]);
    }
    printf("\tLeft Shift A,Q\n");
    add(acc, m2);
    for(i=3; i>=0; i--)
    {
        printf("%d", acc[i]);
    }
    printf("\t");
    for(i=3; i>=1; i--)
    {
        printf("%d", q[i]);
    }
}
```



```
}
printf("_\tA=A-M\n");
if(acc[3]==0)
{
    q[0]=1;
    for(i=3; i>=0; i--)
    {
        printf("%d", acc[i]);
    }
    printf("\t");
    for(i=3; i>=0; i--)
    {
        printf("%d", q[i]);
    }
    printf("\tQo=1\n");
}
else
{
    q[0]=0;
    add(acc, m);
    for(i=3; i>=0; i--)
    {
        printf("%d", acc[i]);
    }
    printf("\t");
    for(i=3; i>=0; i--)
    {
        printf("%d", q[i]);
    }
    printf("\tQo=0; A=A+M\n");
}
n--;
}
printf("\nQuotient = ");
for(i=3; i>=0; i--)
{
    printf("%d", q[i]);
}
printf("\tRemainder = ");
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
for(i=3; i>=0; i--)
{
    printf("%d", acc[i]);
}
printf("\n");
return 0;
}
```

```
int dec_bin(int d, int m[])
{
    int b=0, i=0;
    for(i=0; i<4; i++)
    {
        m[i]=d%2;
        d=d/2;
    }
    return 0;
}
```

```
int twos(int m[], int m2[])
{
    int i, m1[4];
    for(i=0; i<4; i++)
    {
        if(m[i]==0)
        {
            m1[i]=1;
        }
        else
        {
            m1[i]=0;
        }
    }
    for(i=0; i<4; i++)
    {
        m2[i]=m1[i];
    }
    if(m2[0]==0)
    {

```



```
    m2[0]=1;
}
else
{
    m2[0]=0;
    if(m2[1]==0)
    {
        m2[1]=1;
    }
    else
    {
        m2[1]=0;
        if(m2[2]==0)
        {
            m2[2]=1;
        }
        else
        {
            m2[2]=0;
            if(m2[3]==0)
            {
                m2[3]=1;
            }
            else
            {
                m2[3]=0;
            }
        }
    }
}
return 0;
}
```

```
int left(int acc[], int q[])
{
    int i;
    for(i=3; i>0; i--)
    {
        acc[i]=acc[i-1];
    }
}
```



```
}
acc[0]=q[3];
for(i=3; i>0; i--)
{
    q[i]=q[i-1];
}
}

int add(int acc[], int m[])
{
    int i, carry=0;
    for(i=0; i<4; i++)
    {
        if(acc[i]+m[i]+carry==0)
        {
            acc[i]=0;
            carry=0;
        }
        else if(acc[i]+m[i]+carry==1)
        {
            acc[i]=1;
            carry=0;
        }
        else if(acc[i]+m[i]+carry==2)
        {
            acc[i]=0;
            carry=1;
        }
        else if(acc[i]+m[i]+carry==3)
        {
            acc[i]=1;
            carry=1;
        }
    }
    return 0;
}
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

### Output -

Enter the Dividend: 12

Enter the Divisor: 2

A	Q	Comments
0000	1100	Start
0001	100_	Left Shift A,Q
1111	100_	A=A-M
0001	1000	Q <sub>0</sub> =0; A=A+M
0011	000_	Left Shift A,Q
0001	000_	A=A-M
0001	0001	Q <sub>0</sub> =1
0010	001_	Left Shift A,Q
0000	001_	A=A-M
0000	0011	Q <sub>0</sub> =1
0000	011_	Left Shift A,Q
1110	011_	A=A-M
0000	0110	Q <sub>0</sub> =0; A=A+M

Quotient = 0110      Remainder = 0000

### Conclusion -

This experiment involving the Restoring Division Algorithm has provided a comprehensive understanding of this fundamental technique for binary division. The algorithm's step-by-step restoration process allows for precise quotient calculation, making it a valuable tool in computer arithmetic. This experiment has not only reinforced the importance of understanding and implementing division algorithms but has also demonstrated its practical application in various computer systems and data processing tasks.