

Microsoft Intune Configuration Profiles

Architect Edition: Zero-to-Advanced Master SOP

**Settings Catalog | Templates | ADMX | Custom OMA-URI | Browser | OneDrive |
Wi-Fi | Reports | Architecture**

Purpose

A deeply explained, screenshot-based architecture and operations guide. Each screenshot is expanded with what the screen shows, why the feature is used, how to configure it, real-world examples, design choices, common mistakes, validation, and troubleshooting. This replaces a screenshot-only reference with a practical knowledge base.

Document field	Value
Owner	Endpoint Management / IT Operations
Platform	Microsoft Intune
Topics	Windows Configuration Profiles, Settings Catalog, ADMX, Templates, Custom Profiles
Source screenshots	Configuration Profiles.docx
Edition	Architect Edition 1.1
Prepared date	25 September 2026
Classification	Internal use

Executive Summary


Architecture, operations, and governance at a glance

Microsoft Intune configuration profiles apply managed settings through Settings Catalog, purpose-built templates, imported ADMX, and Custom OMA-URI. The recommended design is to use the most native supported policy surface, maintain one authoritative owner for each setting family, deploy through controlled rings, validate actual endpoint behavior, and keep a tested rollback path.

Executive priorities

Priority	Required control
Standardize	Use approved profile types, naming convention, ownership, versions, and policy records
Reduce risk	Lab and pilot first; prevent overlap; separate high-risk settings and rollback domains
Validate	Check local endpoint behavior, dependencies, user impact, and portal reporting
Operate	Monitor errors, conflicts, certificate expiry, encryption readiness, and stale assignments

Architecture decision flow

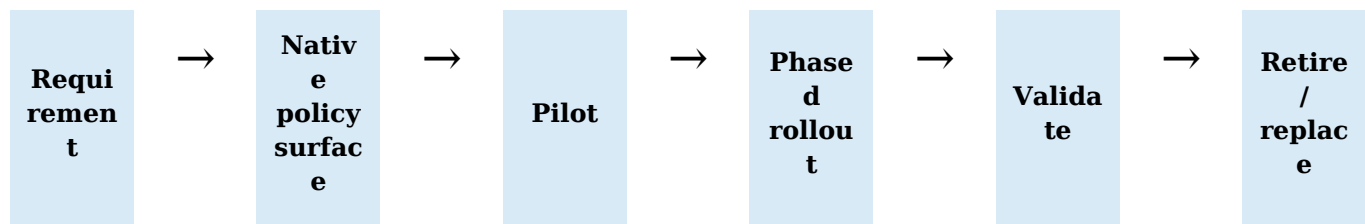

Mandatory architect decisions

- Prefer Settings Catalog when the required Windows setting is available.
- Use workload templates for Wi-Fi, VPN, certificates, Domain Join, and supported Custom scenarios.
- Use imported ADMX only for trusted settings that are not available natively, with dependencies reviewed first.
- Use Custom OMA-URI only when path, scope, data type, supported editions, value, and rollback are documented.
- Prevent overlap across Settings Catalog, Endpoint security, baselines, GPO, browser-cloud management, imported ADMX, and Custom CSP policies.

Executive control point


Succeeded confirms policy processing, not the intended business outcome. Production acceptance requires endpoint validation, dependency testing, user-impact review, and monitoring evidence.

1. Configuration Profiles Fundamentals

1.1 What a configuration profile is

A configuration profile is a collection of device or user settings that Intune delivers to managed endpoints. A profile can configure Windows features, browsers, security options, Wi-Fi, VPN, certificates, OneDrive, restrictions, and application preferences. The profile is assigned to Microsoft Entra groups and processed by the device through MDM or related management channels.

1.2 Processing flow

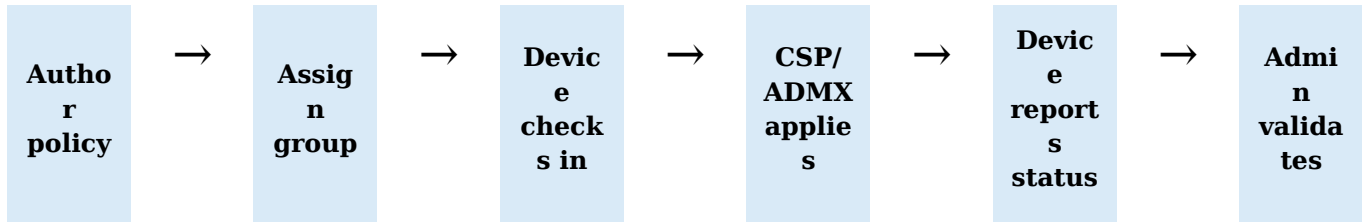

1.3 Configuration vs compliance vs endpoint security

Area	Primary purpose	Example
Configuration profile	Apply a setting	Enable OneDrive silent sign-in
Compliance policy	Evaluate state	Require encryption or minimum OS
Endpoint security policy	Apply security-focused configuration	Configure BitLocker or Firewall
Security baseline	Apply a Microsoft-recommended bundle	Windows or Edge baseline
Application policy	Install/configure application content	Deploy Chrome/Zoom app

1.4 Architectural layers

Layer	Role
Intune policy object	Stores settings, assignments, scope tags, filters
Microsoft Entra group	Defines targeted users/devices
MDM/CSP or ADMX channel	Translates policy to Windows configuration
Device registry/configuration store	Holds effective local state
Reporting	Shows assignment and setting results

Layer	Role
Operations	Investigates conflicts, errors, and lifecycle

Key principle

A policy showing Succeeded means Intune processed the profile. Always validate the actual device behavior, particularly for browser, OneDrive, certificate, Wi-Fi, and Custom OMA-URI settings.

2. Choose the Correct Profile Type

Profile type	Use when	Preferred position
Settings Catalog	The required setting is available in the unified catalog	First choice for new Windows policies
Template	A purpose-built template exists, such as Wi-Fi, VPN, Domain Join, or Custom	Use when the template matches the scenario
Administrative Templates in Settings Catalog	Managing ADMX-backed Windows/application settings	Use the unified Settings Catalog experience
Imported ADMX	A trusted third-party setting is unavailable natively	Use after dependency and vendor review
Custom OMA-URI	A supported CSP setting is unavailable in catalog/template	Last-resort expert option
Endpoint security policy	Security workload is available under Endpoint security	Prefer for security ownership and reporting

2.1 Decision flowchart



2.2 Do not choose Custom first

- Settings Catalog provides searchable metadata, supported values, and clearer reporting.
- Templates reduce typing and path errors.
- Imported ADMX can present vendor policy settings in the portal.
- Custom OMA-URI requires exact CSP path, data type, value, scope, and edition support.

3. Navigate to Configuration Profiles

Exact portal path

Microsoft Intune admin center > Devices > Configuration

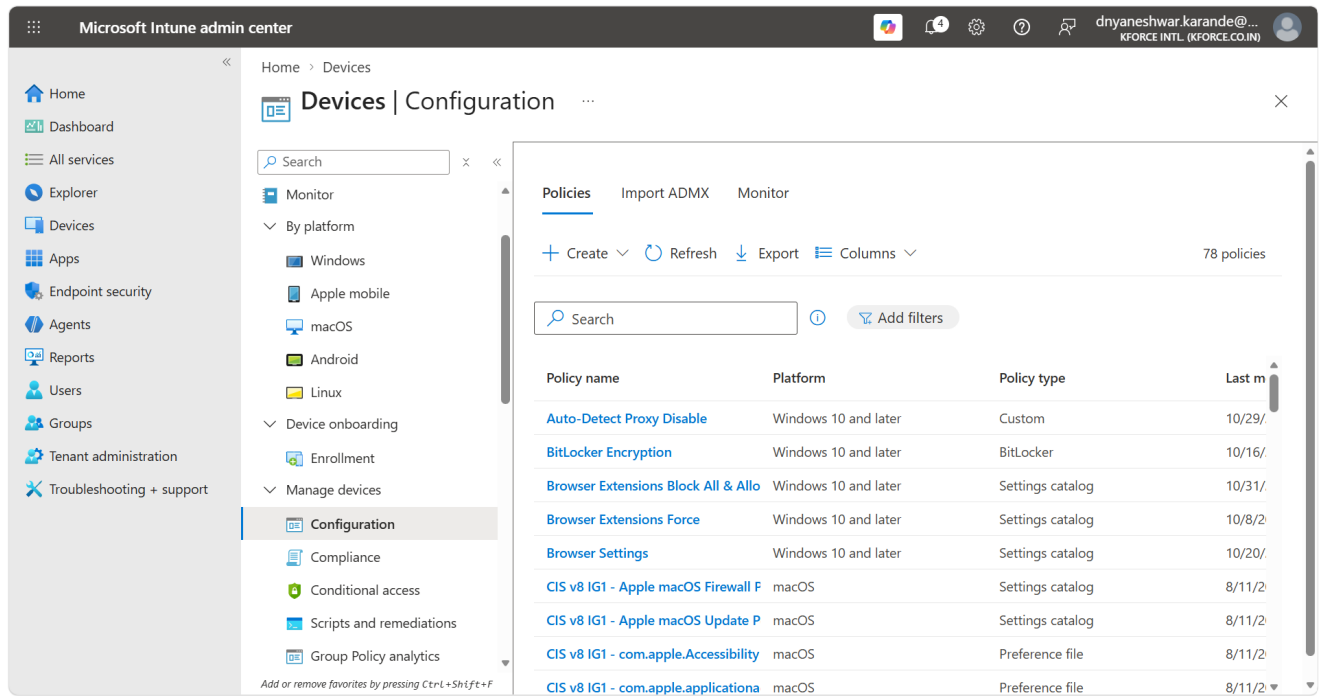


Figure 1. Devices > Configuration overview. This is the central workspace for policies, ADMX import, monitoring, encryption, certificates, assignment failures, and restricted-app reports.

3.1 What this screen is used for

- Create and manage device configuration policies.
- Import approved ADMX/ADML templates.
- Open operational reports.
- Review encryption and certificate inventory.
- Investigate assignment failures.
- Review restricted app detections.

Home > Devices

Devices | Configuration

×

»

Policies
Import ADMX
Monitor

+ Create
Refresh
Export
Columns

78 policies

Add filters

Policy name	Platform	Policy type	Last modified	Scope tag
CIS v8 IG2 - com.apple.contraicent	macOS	Preference file	8/11/2026, 8:17:50 PM	Default
CIS v8 IG2 - com.apple.Terminal	macOS	Preference file	8/11/2026, 8:18:48 PM	Default
CIS v8 IG2 - com.apple.timed	macOS	Preference file	8/11/2026, 8:19:31 PM	Default
Delivery Optimization - India IDC	Windows 10 and later	Delivery Optimization	10/16/2025, 9:48:44 PM	Default
Device Settings	Windows 10 and later	Settings catalog	11/11/2025, 10:34:55 PM	Default
Enterprise Apple macOS Platform S	macOS	Settings catalog	8/11/2026, 6:22:31 PM	Default
Enterprise Privilege Management E	Windows 10 and later	Elevation settings policy	11/17/2025, 8:51:54 PM	Default
Google Chrome Browser Configura	macOS	Preference file	9/15/2026, 1:40:31 AM	Default
Google Chrome Browser Configura	macOS	Preference file	8/11/2026, 9:59:01 PM	Default

Figure 2. Configuration navigation from Devices and platform pages.

3.2 Architect interpretation

The Configuration workspace is not only a policy list. It is the operational center for policy lifecycle: design, creation, assignment, monitoring, failure analysis, encryption posture, and certificate visibility. An architect should link every profile to an owner and a validation report.

4. Policy Inventory and Imported ADMX

Home > Devices

Devices | Configuration

»

Policies

Import ADMX

Monitor

+ Create

Refresh

Export

Columns

78 policies

Search

Add filters

Policy name	Platform	Policy type	Last modified	Scope tag
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:28 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:28 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Hello for Business	Windows 10 and later	Settings catalog	11/18/2025, 2:09:05 AM	Default
Wireless Profile - India IDC	Windows 10 and later	Wi-Fi	10/23/2025, 9:07:23 PM	Default
Wireless Profile - India IDC macOS	macOS	Wi-Fi	9/16/2026, 11:21:36 PM	Default
Zscaler Windows Firewall Rule	Windows 10 and later	Windows Firewall Rules	1/28/2026, 11:43:50 PM	Default

Figure 3. Policies, Import ADMX, and Monitor tabs with Create, Refresh, and Export actions.

Home > Devices

Devices | Configuration

»

Policies

Import ADMX

Monitor

Refresh

Configuration policy assignment failures

Policies with error or conflict

1

Additional monitoring reports

Devices with restricted apps

View a list of devices on which users have installed one or more restricted apps.

Device encryption status

View encryption details, including encryption readiness, encryption status, and TPM version.

Certificates

Review info on certificates, including thumbprints, issuance info, and status.

Figure 4. Import ADMX inventory and administrative-template management area.

4.1 Policy inventory procedure

- Open Policies.

Internal Master SOP | Configuration Profiles Page 8

- Export the policy list before major redesign or migration.
- Record name, platform, profile type, assignments, last modified date, and owner.
- Identify duplicates and legacy Administrative Templates.
- Map each profile to business purpose and support team.
- Do not delete a policy until replacement behavior is validated.

4.2 Import ADMX procedure

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Import ADMX > Import

- Download ADMX and matching en-US ADML from the trusted vendor.
- Open the ADMX in a text editor and identify namespace dependencies.
- Import dependency files first.
- Select ADMX and ADML files.
- Add a clear description and upload.
- Wait until Status is Available.
- Create a Settings Catalog profile and locate the imported Administrative Template settings.
- Pilot before production.

4.3 Current Microsoft limitations

Microsoft documents imported ADMX/ADML as a Windows feature in public preview. Microsoft states a maximum of 20 ADMX files, each ADMX up to 1 MB, one ADML per ADMX, and en-US as the supported language. Dependencies must be imported first.

Current platform change

Microsoft states the older Templates > Administrative Templates profile type became deprecated and read-only starting with the December 2412 release. Build new ADMX-backed Windows policies through Settings Catalog and plan controlled migration of legacy profiles.

5. Create a Settings Catalog Profile from Scratch

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy

5.1 Platform and profile type

- Set Platform to Windows 10 and later.
- Set Profile type to Settings catalog.
- Select Create.
- On Basics, enter a unique Name.
- Enter a Description with owner, purpose, scope, version, ticket, and risk.
- Select Next.

5.2 Select settings

- Select Add settings.
- Search by plain-language keyword, CSP family, or Administrative Templates category.
- Open setting help text and confirm supported editions and scope.
- Select only settings required for this policy.
- Close the picker.
- Configure each setting value.
- Remove accidental duplicate or conflicting settings.


5.3 Scope tags and assignments

- Apply Scope tags if help-desk or regional RBAC requires them.
- Assign to a small pilot group first.
- Use device groups for device-scoped settings and user groups for user-scoped settings.
- Use assignment filters only with documented include/exclude logic.
- Review included and excluded groups.

5.4 Review and create

- Review every configured value.
- Confirm policy name and assignments.
- Select Create.
- Open the new policy.
- Confirm device and user check-in status.
- Validate actual endpoint behavior.

5.5 Creation flowchart

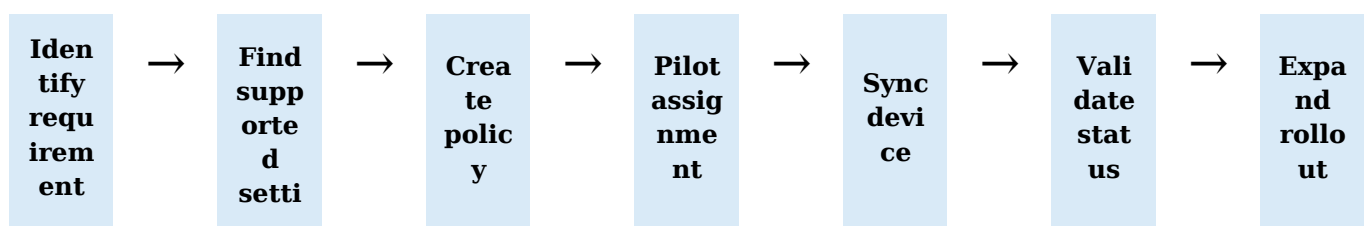

ng

6. Monitoring Architecture and Assignment Failures

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Monitor

Home > Devices | Configuration

Assignment failures (preview)

This report may be delayed in showing the most recent information.

Refresh Export Columns

1 item

Search Add filters

Policy name	Policy type	Policy source	Platform	Devices with errors	Devices with conflict
CIS v8 IG1 - Apple macOS Update P	Settings Catalog	Device Configu...	MacOS	1	0

Figure 5. Assignment failures report. The report lists policies that have one or more failed assignments and helps prioritize operational investigation.

Home > Devices | Configuration > Assignment failures (preview)

Assignment failures - CIS v8 IG1 - Apple macOS Update Policy DDM

Configuration policies with one or more failed device assignments.

This report may be delayed in showing the most recent information.

Refresh Export Columns

1 item

Search Add filters

Device name	User principal name	Deployment status	Last check-in
IN-GX537H96GD	morty.smith@kforce.co.in	Error	09/18/2026, 08:16:12 PM


Figure 6. Assignment failure detail for an Apple macOS update policy, showing the failed policy record.

6.1 How to investigate assignment failure

- Open Assignment failures.
- Filter by policy, platform, user, or device.
- Open the failed policy.
- Confirm the assignment group and effective membership.
- Confirm platform and OS support.

- Check whether the setting is device-scoped or user-scoped.
- Review per-setting status.
- Verify network and device check-in.
- Collect client logs and local state.
- Document root cause and resolution.

6.2 Failure flowchart

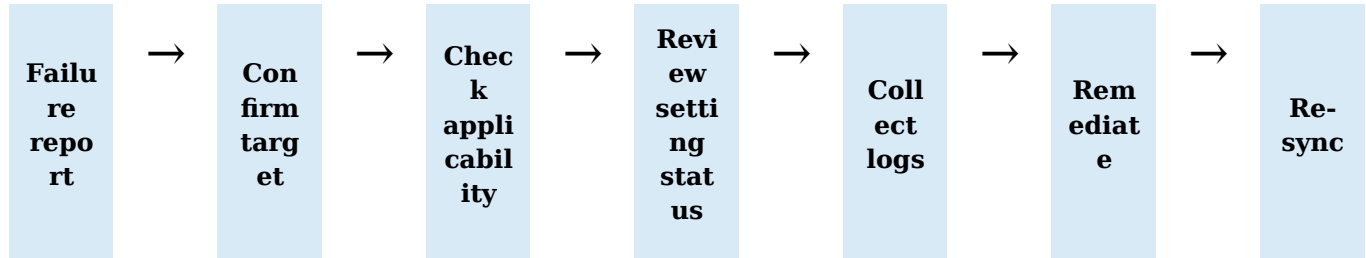

6.3 Common causes

Cause	Example	Resolution
Wrong scope	User setting assigned only to device without user session	Use correct user/device group
Unsupported OS/edition	CSP not supported on installed edition	Adjust requirement or use supported scope
Conflict	Two profiles configure different values	Consolidate ownership and remove overlap
Data/config error	Invalid OMA-URI or value	Correct path/data type/value
Dependency	Certificate or ADMX dependency missing	Deploy dependency first
Stale device	Device has not checked in	Restore connectivity and sync

7. Devices with Restricted Apps

Home > Devices | Configuration

Devices with restricted apps ...



Refresh Export Columns

Search ⓘ

Device name	Email address	Profile name	Platform	State	Restricted apps
-------------	---------------	--------------	----------	-------	-----------------

**No data found**

Figure 7. Devices with restricted apps report, showing device and user identifiers.

7.1 What the report means

This report identifies devices where an application restriction policy detected restricted applications. It is useful for validating allowed/blocked application governance, but it does not replace application inventory, Defender discovery, or software asset management.

7.2 Investigation procedure

- Open the report.
- Export results for audit evidence.
- Confirm the source configuration profile and restriction definition.
- Identify device, user, application, detection time, and ownership.
- Validate whether the application is truly prohibited or falsely matched.
- Coordinate remediation with user, manager, security, and software governance.
- Remove or allow the application through approved change.
- Re-sync and confirm the report clears.

7.3 Real-world example

Scenario

A prohibited remote-access utility appears on a corporate laptop. The endpoint engineer confirms the device and user, validates the exact app, opens a security ticket, removes the app, blocks reinstallation using the organization's approved security control, and records the evidence.

8. Encryption Report and BitLocker Architecture

Home > Devices | Configuration

Encryption report

Use this report to track the status of encryption on your devices. The readiness column reports whether or not a device meets the requirements to enable encryption. To learn more about macOS and Windows 10 or later encryption policies and their requirements, see the Intune documentation. [Learn more](#)

Recently updated information can take up to 24 hours to be available in this report.

Refresh Export Columns 110 items

Search Add filters

Device name ↑	OS	OS version	TPM version	Encryption readiness	Encryption status	User principal name
APP8GB-APF5C69V	Windows	10.0.26200.9448	2.0	Ready	Not encrypted	
APP8GB-NN1AT8NS	Windows	10.0.26200.9448	2.0	Ready	Not encrypted	
IN-5CD5249872	Windows	10.0.26100.9448	2.0	Ready	Encrypted	manish.hiwase@kforce.co.
IN-5CD524987D	Windows	10.0.26100.9445	2.0	Ready	Encrypted	sonika.katariya@kforce.co
IN-5CD524987L	Windows	10.0.26100.9445	2.0	Ready	Encrypted	sakshi.sharma@kforce.co.i
IN-5CD52498H5	Windows	10.0.26200.9106	2.0	Ready	Encrypted	procheta.ganguly@kforce.
IN-5CD524B9V4	Windows	10.0.26100.9106	2.0	Ready	Encrypted	shaurya.deshmukh@kfor

Figure 8. Encryption report showing encryption status and readiness across devices.

Home > Devices | Configuration

Encryption report

Use this report to track the status of encryption on your devices. The readiness column reports whether or not a device meets the requirements to enable encryption. To learn more about macOS and Windows 10 or later encryption policies and their requirements, see the Intune documentation. [Learn more](#)

Recently updated information can take up to 24 hours to be available in this report.

Refresh Export Columns

Search Add filters

Device name ↑	OS	OS version	TPM version	Encryption readiness
IN-5CD5390VVX	Windows	10.0.26200.9445	2.0	Ready
IN-5CD5390VX4	Windows	10.0.26200.9448	2.0	Ready
IN-5CD5390VX9	Windows	10.0.26200.9106	2.0	Ready
IN-5CD5390VZJ	Windows	10.0.26100.9106	2.0	Ready
IN-5CD5391HNB	Windows	10.0.26200.9106	2.0	Ready
IN-5CD5391HQ8	Windows	10.0.26200.9445	2.0	Ready
IN-5CD539CZX5	Windows	10.0.26200.9106	Unknown	Not ready

Device encryption status

IN-5CD5390VX9

Device name
IN-5CD5390VX9

Encryption readiness
Ready

Encryption status
Encrypted

Profiles
BitLocker Encryption


Profile state summary
Succeeded

Status details
Success

8.1 What the report provides

- Encryption status.
- Readiness to enable encryption.
- Platform and OS context.
- TPM-related information where reported.
- Operational visibility across Windows and macOS encryption policies.

8.2 Configuration vs report

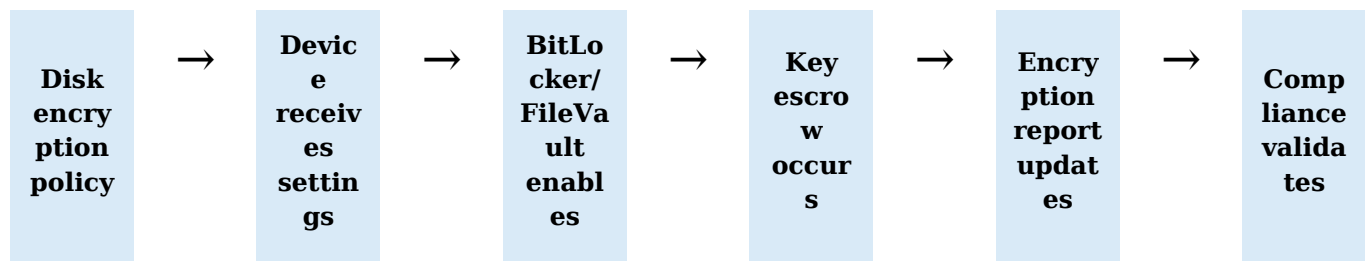

8.3 Real-world example

Scenario

A device reports Ready but Not encrypted. The engineer checks the Endpoint security disk-encryption profile assignment, per-setting status, TPM state, edition, reboot requirements, and recovery-key escrow. The engineer does not treat readiness as proof of encryption.

8.4 Troubleshooting

- Check encryption policy assignment.
- Check TPM state and BIOS.
- Check local encryption status.
- Check recovery key in Intune/Entra.
- Review per-setting conflicts.
- Review last check-in and report latency notice.
- Validate device ownership and user context.

9. Certificate Inventory and Lifecycle

Microsoft Intune Center

Home > Devices | Configuration

Certificates

This report may be delayed in showing the most recent information.

Refresh Export Columns 205 items

Search

Device name	User name	Thumbprint	Serial number	Subject name	Issuer	Key usage	Extended key ...
DESKTOP-3ATR...		D6D73114FE44...	3DCB5E8C651A...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
DESKTOP-9VC...		A67D77ADFC6...	5CEE782EFA1...	CN=Kforce International Issuing CA, O=Kforce International, C=US			1.3.6.1.5.5.7.3.2
DESKTOP-I6I9G...		196952F4F7D6...	18E373F264F2...				1.3.6.1.5.5.7.3.2
DESKTOP-N84I...		78B937F54458...	008B2408E17C...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
DESKTOP-OKD...		575DDECA1071...	6CDA9178BC6...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD5249872		AC40BB3BD08B...	00EDC9029837...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD524987D		0C0D73E7411E...	00D9A50FB16F...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD524987D		B92DBBC573D...	00CA3A957E8A...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2

Figure 10. Certificates report with certificate inventory, device, user, and issuance details.

Home > Devices | Configuration

Certificates

This report may be delayed in showing the most recent information.

Refresh Export Columns 205 items

Search

Device name	User name	Thumbprint	Serial number	Subject name	Issuer	Key usage	Extended key ...
IN-5CD52498H5		B9C91C47DDE...	68303EDAF5F1...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52498H5		50134CD0304C...	0D7193910CEB...	CN=Kforce International Issuing CA, O=Kforce International, C=US			1.3.6.1.5.5.7.3.2
IN-5CD524B9V4		14A7F0655959...	15848745AEE1...				1.3.6.1.5.5.7.3.2
IN-5CD52933X7		2BBCA021F341...	00BFA73DAACE...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X7		B53916E2D0A1...	00D453826F92...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X7		9FF97A43B0A8...	00B0BCB29658...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X8		B913A99D50E6...	00D69DB64D8...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X9		E9F979A54C9D...	00F2B3660117E...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2

Figure 11. Certificates report with additional records and expiration information.

Certificates

ⓘ This report may be delayed in showing the most recent information.

Refresh Export Columns 205 items

Search ⓘ


Subject name	Issuer	Key usage	Extended key ...	Certificate issu...	Certificate expi...	Certificate status	Policy Id
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	02/03/2026, 10:01	02/03/2027, 12:00	Revoked	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	05/04/2026, 06:28	05/04/2027, 12:00	Issued	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	04/27/2026, 12:36	04/27/2027, 12:00	Revoked	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	01/08/2026, 07:25	01/08/2027, 12:00	Revoked	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/16/2026, 05:37	07/16/2027, 12:00	Issued	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	12/15/2025, 03:11	12/15/2026, 12:00	Issued	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	12/15/2025, 02:23	12/15/2026, 12:00	Revoked	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/07/2026, 07:05	07/07/2027, 12:00	Revoked	29c3adfc-6aa5-...
CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/01/2026, 12:57	07/01/2027, 12:00	Revoked	29c3adfc-6aa5-...

Figure 12. Certificate report filtered or continued for operational review.

9.1 Why certificate visibility matters

Certificates support Wi-Fi, VPN, S/MIME, authentication, and device trust. Expired, missing, duplicated, or mis-scoped certificates can break access even when a configuration profile reports success.

9.2 Certificate architecture

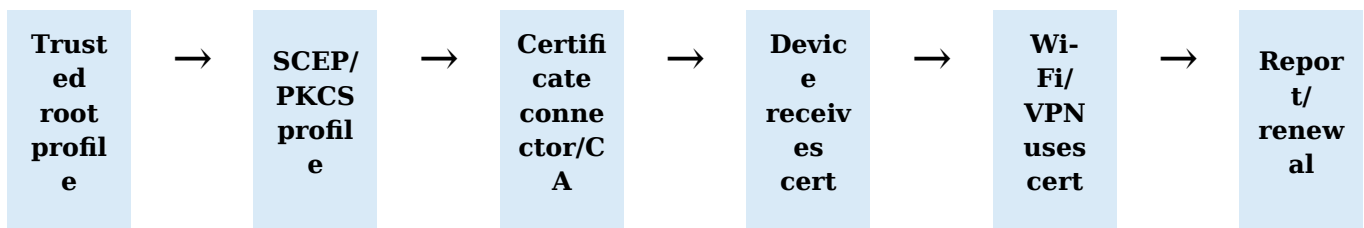

9.3 Real-world example

Scenario

Corporate Wi-Fi fails after a certificate renewal. The engineer checks the trusted root chain, SCEP profile assignment, connector health, certificate subject/SAN, expiry, user/device scope, and Wi-Fi EAP configuration.

9.4 Operational checks

- Export certificate inventory.
- Track expiry before outage.
- Confirm chain and issuing CA.

- Confirm certificate is user or device scoped as intended.
- Confirm connectors and NDES/PKCS services when used.
- Test renewal and replacement.
- Remove obsolete certificates carefully.

10. Browser Settings Profile: Overview and Assignment


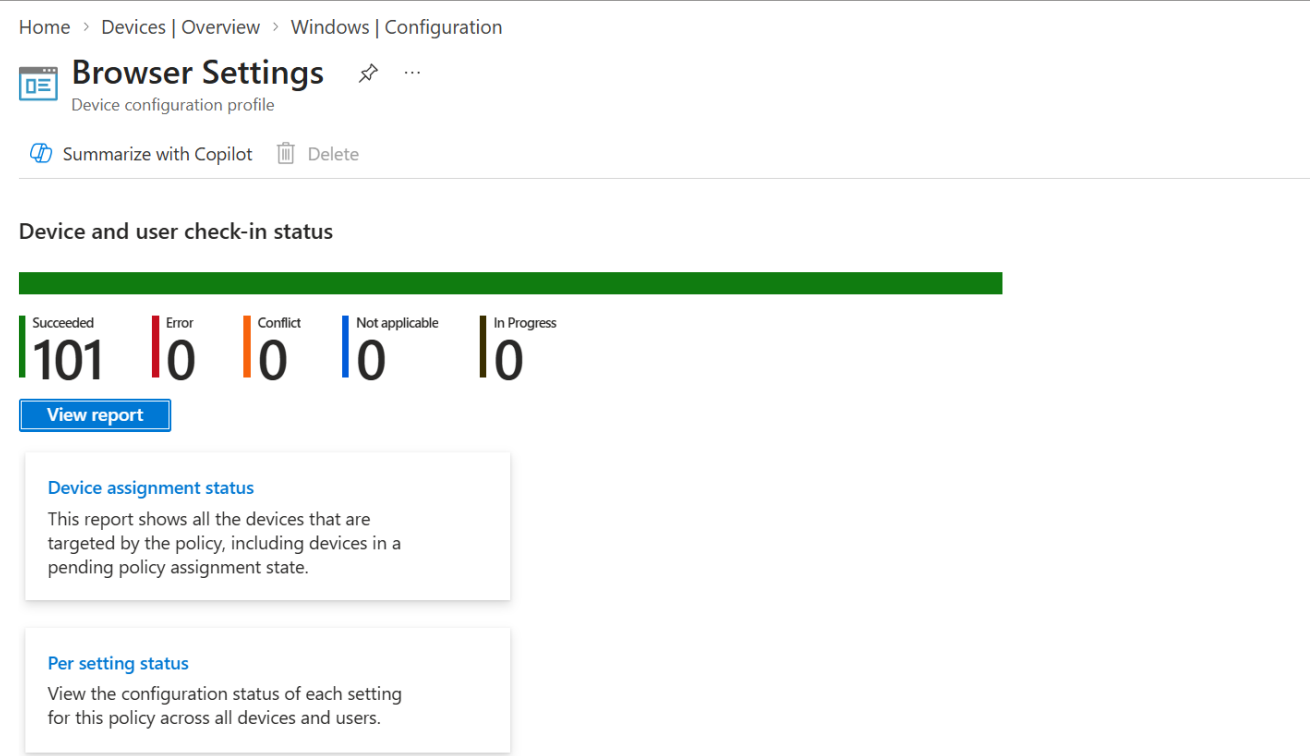


Figure 13. Browser Settings profile overview with device and user check-in status.

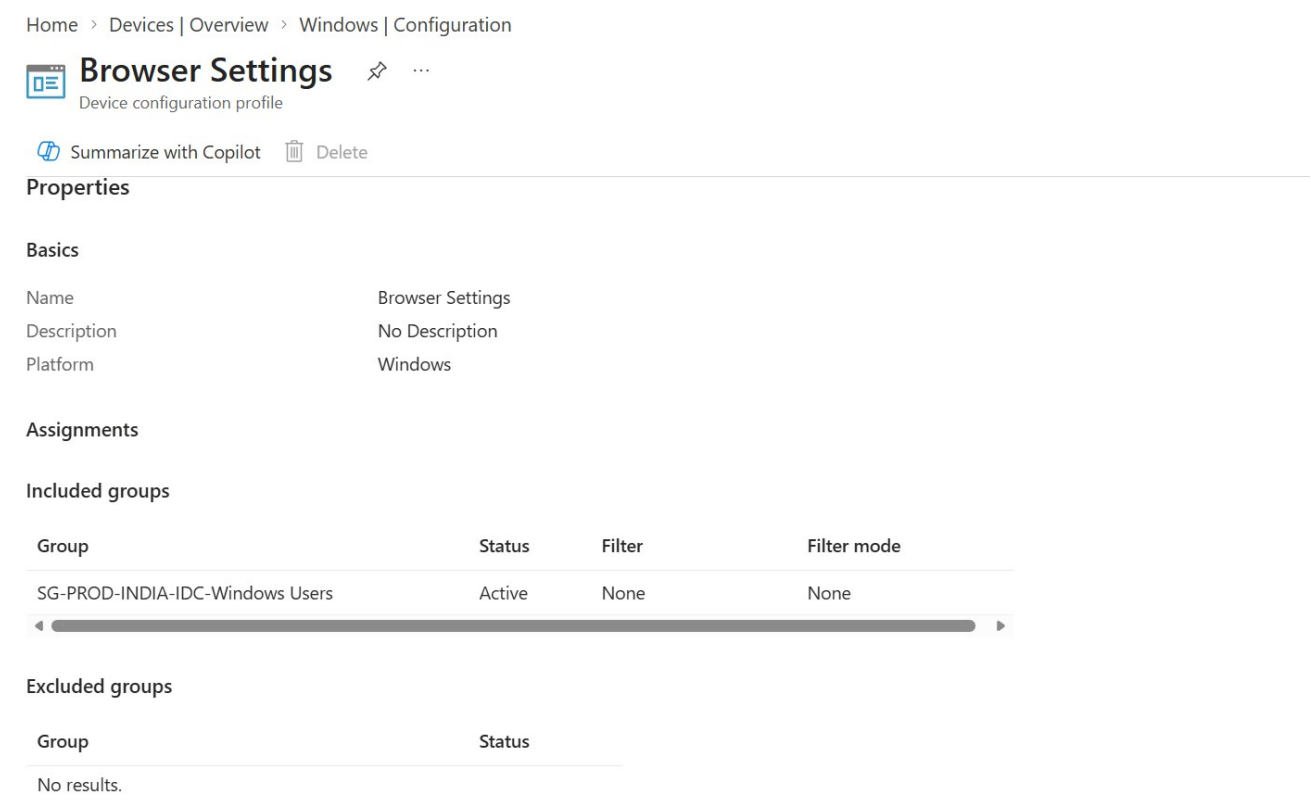

10.1 What this profile demonstrates

A single Settings Catalog profile can configure Google Chrome and Microsoft Edge settings. This can simplify browser governance, but combining many products in one profile increases blast radius. Separate profiles may be better when Chrome and Edge have different owners or release cycles.

10.2 Assignment decisions

Question	Design choice
Device or user settings?	Assign according to the scope shown in the setting name. Settings marked User apply in user context.
One profile or separate?	Separate by product or risk when ownership and rollback differ.
Pilot scope?	Use a small IT/browser pilot group before broad deployment.
Conflicts?	Check imported ADMX, Settings Catalog, GPO, and browser cloud management.

10.3 Validation

- Open profile status.
- Confirm target devices/users received the profile.
- Open browser policy page such as `edge://policy` or `chrome://policy` on a test device.
- Confirm source, level, value, and status.
- Test the user experience.

11. Google Chrome and Microsoft Edge Settings Deep Dive

Home > Devices | Overview > Windows | Configuration



Browser Settings

Device configuration profile



Summarize with Copilot



Delete



Configuration settings

^ Google

Google Chrome

Allow download restrictions (User) Enabled

Download restrictions (User)

Block malicious downloads. Recommended.

Browser sign in settings (User) Enabled

Browser sign in settings (User)

Disable browser sign-in

Enable showing full-tab promotional content (User)

Disabled

Google Chrome > Password manager

Figure 15. Browser Settings configuration for Google Chrome sign-in, password manager, and related categories.

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Enable showing full-tab promotional content (User)   Disabled

Google Chrome > Password manager

Enable saving passwords to the password manager (User)   Disabled

Google Chrome > Safe Browsing settings

Safe Browsing Protection Level (User)  Safe Browsing is active in the standard mode.

Safe Browsing Protection Level (User)  Enabled 

Microsoft Edge

Figure 16. Chrome password manager and Safe Browsing settings plus Microsoft Edge categories.

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Microsoft Edge

Automatically import another browser's data and settings at first run (User)  Disabled 

Browser sign-in settings (User)   Enabled

Browser sign-in settings (User)  Force users to sign-in to use the browser

Force synchronization of browser data and do not show the sync consent prompt (User)   Enabled

Hide the First-run experience and splash screen (User)   Enabled

Figure 17. Microsoft Edge browser sign-in settings.

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Browser sign-in settings (User)   Enabled

Browser sign-in settings (User)  Force users to sign-in to use the browser

Force synchronization of browser data and do not show the sync consent prompt (User)   Enabled

Hide the First-run experience and splash screen (User)   Enabled

Password manager and protection

Enable saving passwords to the password manager (User)   Disabled

Figure 18. Browser sign-in policy configured to require sign-in.

11.1 Browser sign-in

Choice	Effect	Use case
Disable sign-in	Prevents browser profile sign-in	Shared or restricted devices
Enable sign-in	Allows user choice	Standard managed browser
Force sign-in	Requires organizational browser sign-in	Managed sync and identity-aligned browsing

11.2 Password manager

- Decide whether the built-in password manager is permitted.
- Coordinate with enterprise password manager policy.
- Avoid conflicting Chrome, Edge, and third-party browser controls.
- Explain user impact before disabling stored passwords.

11.3 Safe Browsing and security

- Use vendor-supported security controls.

- Coordinate browser baseline, SmartScreen/Safe Browsing, download restrictions, and Defender web protection.
- Pilot to avoid blocking required business sites or downloads.

11.4 Real-world example

Scenario

The organization requires Edge sign-in and disables consumer profile usage while allowing Chrome only for a legacy application. Separate profiles are used: Edge Corporate Standard and Chrome Legacy Restricted. Each has different assignments and rollback.

12. Browser Extension Governance

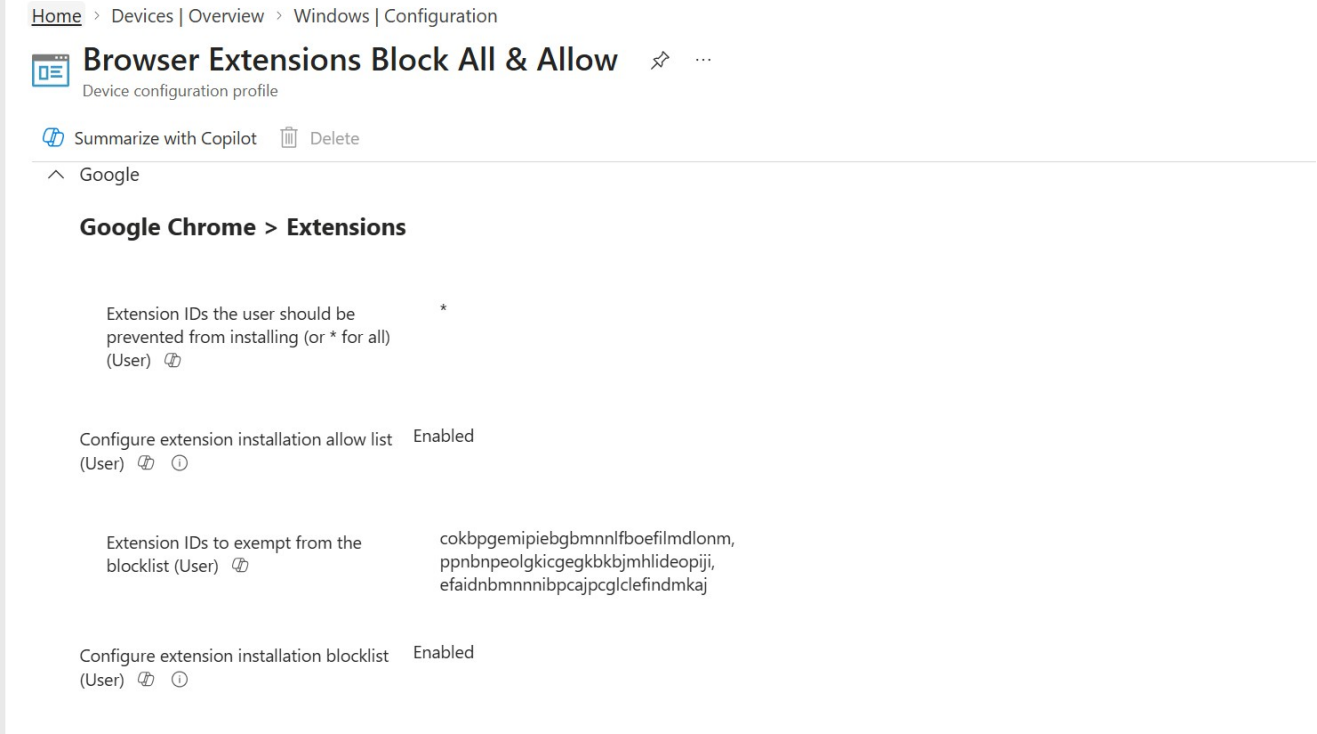


Figure 19. Chrome extension policy using block-all and allow-list controls.


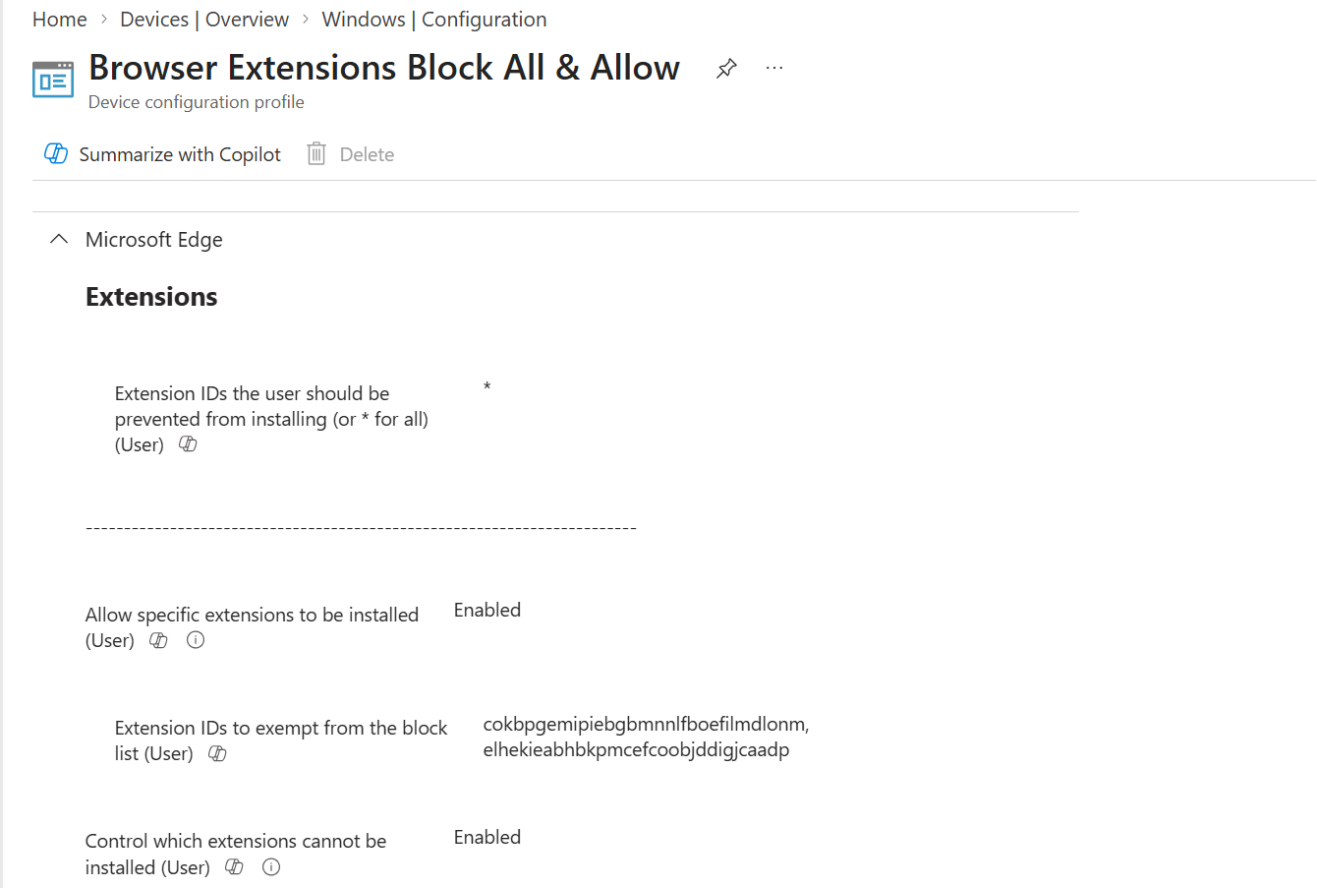


Figure 20. Microsoft Edge extension controls.

12.1 Extension control model

Control	Purpose
Block list	Prevents listed extensions; wildcard can block all by default
Allow list	Permits approved extensions when a broad block exists
Force install	Installs required security or business extension
External extensions	Controls potentially unmanaged extension sources

12.2 Secure design flow

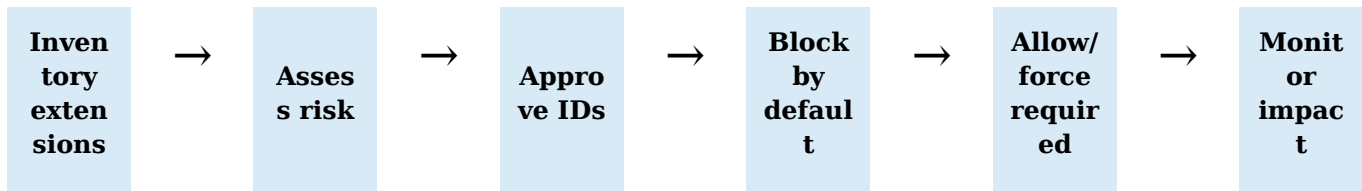

12.3 Common errors

- Using extension display name instead of extension ID.
- Blocking all without allow-listing security and business extensions.
- Force-installing an extension unavailable in the selected store.
- Combining Chrome ADMX, Settings Catalog, and browser-cloud policy without ownership.

12.4 Real-world example

Scenario

A data-loss-prevention browser extension must be force-installed. The engineer pilots the extension, confirms the store URL and ID, adds the extension to allow and force-install policies, validates chrome://policy and edge://policy, and confirms there is no browsing performance impact.

13. OneDrive Custom Configuration Profile


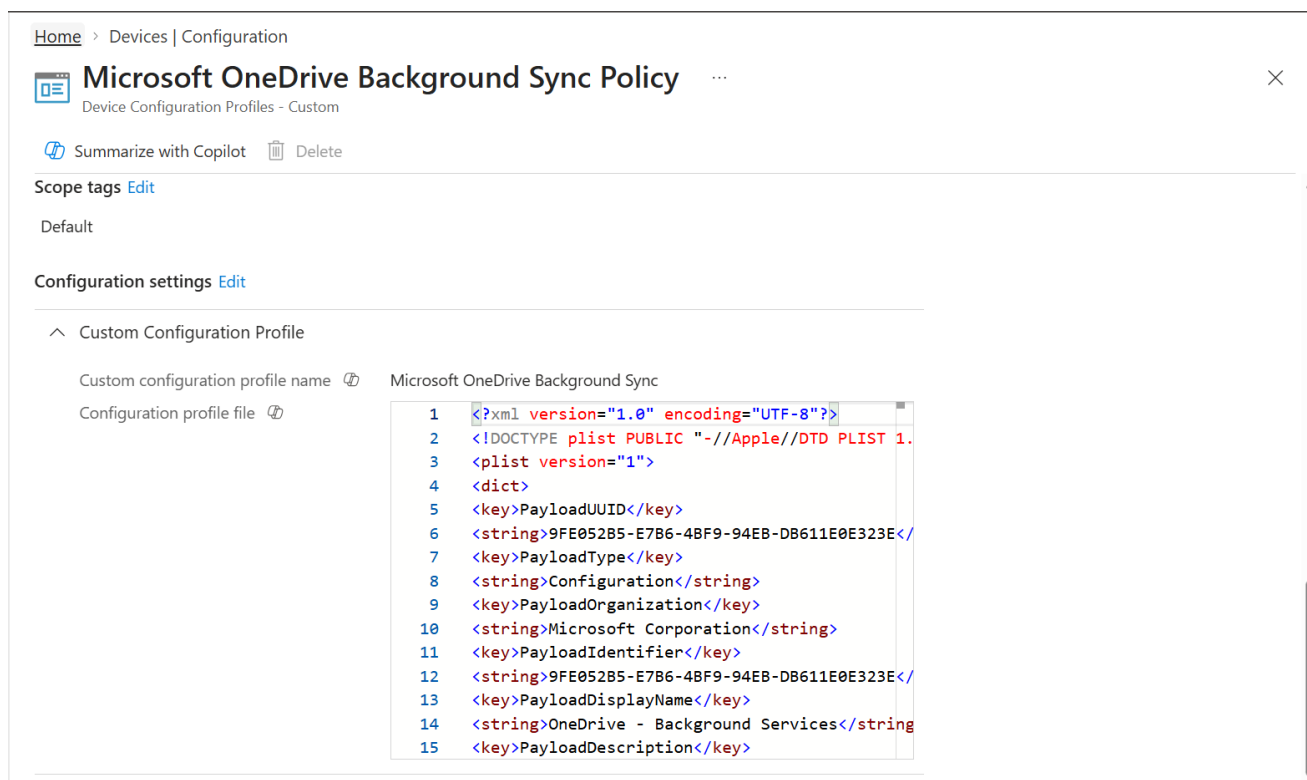


Figure 21. Microsoft OneDrive Background Sync Policy using a Custom configuration profile and uploaded configuration content.

13.1 What the screenshot shows

The profile uses a Custom configuration payload rather than ordinary Settings Catalog fields. Custom profiles can deliver platform-specific configuration content, but require exact format, schema, identifiers, and vendor documentation.

13.2 Preferred design order

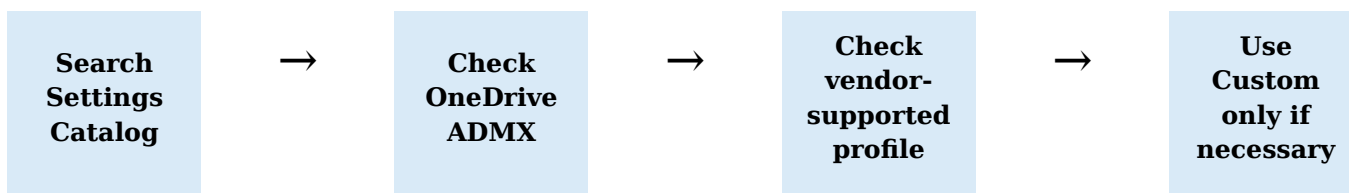

13.3 OneDrive management areas

- Silent account configuration.
- Known Folder Move.
- Files On-Demand.
- Sync restrictions and tenant allow-list.
- Background service behavior.
- Update ring and sync health.

13.4 Validation procedure

- Confirm the package/file format and schema.
- Assign to a pilot group.
- Sync the device.
- Review Intune status.
- Confirm OneDrive process and sign-in.
- Verify policy in registry or application diagnostics according to vendor documentation.
- Test background sync, file hydration, and Known Folder Move.

13.5 Real-world example

Scenario

A remote user signs in to Windows through Autopilot. OneDrive silently signs in, Known Folder Move redirects Desktop/Documents/Pictures, and Files On-Demand limits initial bandwidth. The engineer validates tenant ID, sync state, and user communication.

14. Wireless Profile Architecture and Reporting

Home > Devices | Configuration > Wireless Profile - India IDC

Wireless Profile - India IDC

Due to the amount of data, this report might take some time to generate and will expire after 72 hours.

Assignment status

5 selected

Generate report

Cancel

Export Columns

0 items

Search

Device name	Last active user	Assignment st...	Last report mo...	Intune Device ID	Microsoft Entr...	Model	Platform
-------------	------------------	------------------	-------------------	------------------	-------------------	-------	----------

Figure 22. Wireless Profile - India IDC assignment status report.

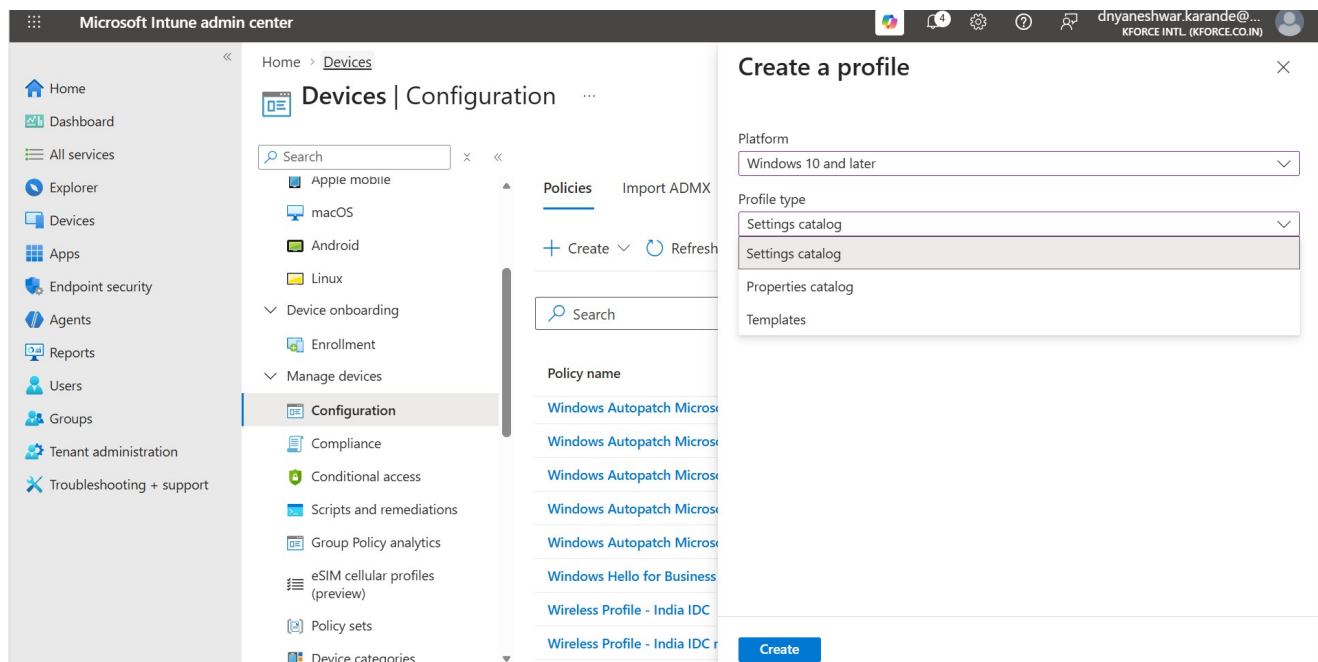


Figure 23. Wireless Profile properties with Settings Catalog, Templates, and assignment context.

14.1 Create Wi-Fi profile


Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and

later > Templates > Wi-Fi

- Choose Basic or Enterprise Wi-Fi based on authentication.
- Enter SSID exactly.
- Configure hidden network and auto-connect behavior.
- For Enterprise Wi-Fi, configure EAP type and certificate authentication.
- Deploy trusted root and SCEP/PKCS certificates first.
- Assign to a pilot device/user group according to certificate scope.
- Validate on corporate network.

14.2 Wi-Fi dependency flow

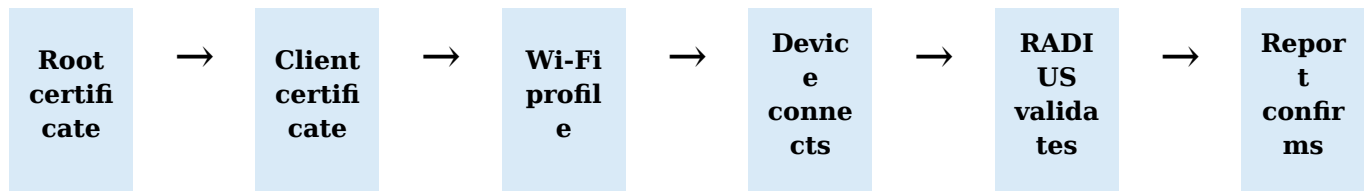

14.3 Real-world failure

Scenario

The Wi-Fi profile succeeds in Intune but the device cannot connect. Investigation shows the device certificate is missing because SCEP assignment was user-scoped. The architect aligns certificate and Wi-Fi scope, reissues the certificate, and validates RADIUS logs.

15. Custom OMA-URI and CSP Deep Dive

15.1 When Custom is justified

- The setting is explicitly documented in a Microsoft CSP.
- No Settings Catalog or template setting provides the same requirement.
- The target Windows edition and version support the CSP.
- The OMA-URI path, scope, data type, and allowed value are known.
- A rollback method is documented.

15.2 Create Custom profile

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and later > Templates > Custom

- Enter Name and Description.
- Select Add for a custom setting.
- Enter a clear setting name and description.
- Enter the exact OMA-URI path.
- Select the documented data type.
- Enter or upload the value exactly as required.
- Add scope tags and pilot assignments.
- Review and create.

15.3 Data types

Type	Example use
Boolean	Enable/disable a CSP setting
Integer	Numeric limit or enum value
String	Text value, path, identifier
String XML	XML payload for a CSP setting
Base64/File	Payload where explicitly documented

15.4 Troubleshooting


- Check OMA-URI spelling and ./Vendor/MSFT prefix.
- Check user vs device scope.
- Check data type and XML escaping.
- Check edition/build support.
- Review MDM diagnostic report and event logs.
- Set a rollback value or remove assignment after validation.

16. Administrative Templates Migration Strategy

16.1 Why migrate

Microsoft documents the older Administrative Templates profile type as deprecated and read-only. Existing profiles need inventory and controlled migration into Settings Catalog, not blind recreation.

16.2 Migration flow

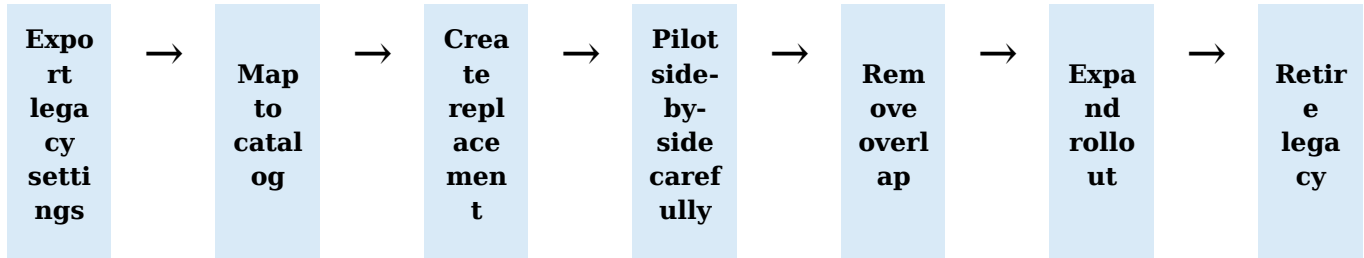

16.3 Validation matrix

Check	Evidence
Setting scope	User or device matches legacy behavior
Registry/CSP effect	Same effective value
Assignment	Same included/excluded users/devices
Filters	Equivalent filtering
Reporting	No errors/conflicts
Rollback	Legacy profile can be restored if needed

16.4 Common migration mistake

Mistake

Assigning the new Settings Catalog policy while the legacy profile still configures the same setting can create duplicate sources or conflicts. Plan a staged swap and verify effective behavior.

17. Profile Monitoring and Status Interpretation

17.1 Profile path

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Policies > select profile > Monitor

Report	Purpose
Device and user check-in status	Overall state by device/user
Device assignment status	Assignment-level status
Per-setting status	Exact setting error/conflict
Assignment failures	Policies with failed assignments
Encryption report	Readiness and encryption status
Certificates	Certificate inventory and expiry
Restricted apps	Restricted application detections

17.2 Status interpretation

Status	Meaning	Action
Succeeded	Intune reports success	Validate actual device behavior
Error	Setting processing failure	Open per-setting status and collect logs
Conflict	Competing policy settings	Find all policy sources
Not applicable	Unsupported platform/edition/context	Validate requirements and scope
Pending	Awaiting check-in or processing	Check last sync and network

17.3 Sync paths

- Windows Settings > Accounts > Access work or school > connected work account > Info > Sync.
- Company Portal > Settings > Sync.
- Intune admin center > Devices > Windows > select device > Sync.

18. Client-Side Troubleshooting

18.1 Commands

```
dsregcmd /status
gpresult /h C:\Temp\gpresult.html
mdmDiagnosticstool.exe -area DeviceProvisioning -cab C:\Temp\MDM Diag.cab
certutil -store My
manage-bde -status
```


18.2 Event Viewer

- Applications and Services Logs > Microsoft > Windows > DeviceManagement-Enterprise-Diagnostics-Provider > Admin.
- Applications and Services Logs > Microsoft > Windows > User Device Registration > Admin.
- Applications and Services Logs > Microsoft > Windows > AAD > Operational where available.

18.3 Browser validation

```
edge://policy
chrome://policy
edge://management
chrome://management
```

18.4 Policy troubleshooting order

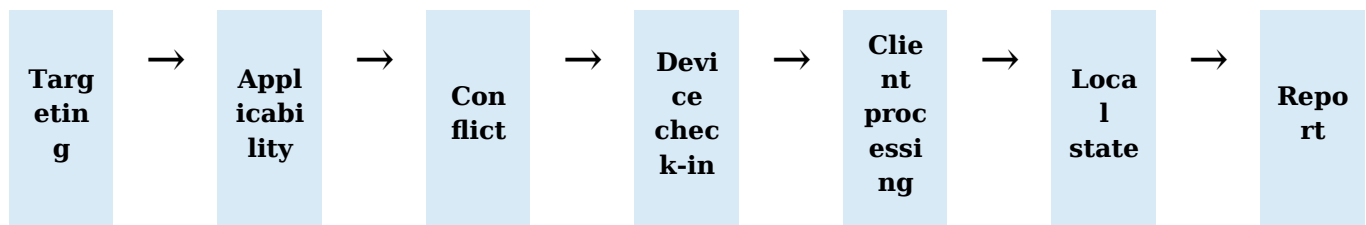

19. Real-World Configuration Profile Catalog

Profile	Recommended type	Core settings
Browser Corporate Standard	Settings Catalog	Sign-in, sync, password manager, Safe Browsing
Browser Extensions	Settings Catalog/ADMX	Block, allow, force-install
OneDrive Corporate	Settings Catalog/ADMX	Silent sign-in, KFM, Files On-Demand
Corporate Wi-Fi	Wi-Fi template	SSID, EAP, certificates
VPN	VPN template	Connection, authentication, routes
Certificate Roots	Trusted certificate template	Root/intermediate trust
Certificate Enrollment	SCEP/PKCS template	Client authentication cert
Device Restrictions	Settings Catalog	OS/user restrictions
Windows Hello	Account protection / Settings Catalog	PIN, biometric, trust model
Custom CSP	Custom template	Only documented unsupported-in-catalog CSP

19.1 Separation principle

- Separate different owners.
- Separate high-risk changes.
- Separate device and user scope when practical.
- Separate browser product policies.
- Keep profile size manageable.
- Avoid one giant all-settings profile.

20. Architecture Patterns for Enterprise Scale

20.1 Multi-country design

- Global baseline profiles for common settings.
- Regional overlays only for genuine regional differences.
- Scope tags for delegated administration.
- Assignment filters for supported device attributes.
- Central naming and change control.

20.2 Pilot and production rings

Ring	Purpose
Lab	Validate syntax and local behavior
IT pilot	Validate supportability and reporting
Business pilot	Validate applications, network, and user experience
Production wave	Controlled rollout by region/department
Broad	Standard estate after exit criteria

20.3 Conflict prevention

- One authoritative owner per setting family.
- Policy catalog documenting where each setting is configured.
- Avoid duplicate Settings Catalog, baseline, GPO, and Custom settings.
- Use per-setting reporting before adding another policy.
- Retire old profiles after migration.

21. Governance, Naming, and Change Control

21.1 Naming examples

```
WIN-SC-Edge-Corporate-v1
WIN-SC-Chrome-Restricted-v1
WIN-TPL-WiFi-India-IDC-v1
WIN-SC-OneDrive-KFM-v1
WIN-CUSTOM-<CSP-Purpose>-v1
```

21.2 Policy naming convention template

Standard pattern

<Platform>-<ProfileType>-<Workload>-<ScopeOrRegion>-<Environment>-v<Major>.<Minor>

Token	Allowed examples	Purpose
Platform	WIN, MAC, IOS, AND, LNX	Identifies the managed operating system
ProfileType	SC, TPL, ADMX, CUSTOM, SEC	Settings Catalog, Template, imported ADMX, Custom, or security profile
Workload	Edge, Chrome, OneDrive, WiFi, VPN, Cert, Restrictions	Describes the primary managed workload
ScopeOrRegion	Global, India, Pune, Sales, Kiosk	Identifies genuine scope or regional variation
Environment	LAB, PILOT, PROD	Identifies rollout stage when parallel objects are required
Version	v1.0, v1.1, v2.0	Tracks controlled revisions

21.3 Naming rules

- Use short, stable tokens documented in the policy catalog.
- Do not place user names, ticket numbers, dates, or temporary project names in the permanent policy name.
- Use Description for owner, requirement, ticket, review date, assignments, dependencies, and rollback.
- Use a major version for architecture or behavior changes and a minor version for controlled setting adjustments.
- Avoid cloning with names such as Copy, New, Final, Final2, or Test unless the object is a short-lived laboratory policy.
- Retire and archive superseded names after the replacement is validated.

21.4 Ready-to-copy templates

```
WIN-SC-<Workload>-<Scope>-<Environment>-v1.0
WIN-TPL-<Workload>-<Scope>-<Environment>-v1.0
WIN-ADMX-<VendorOrWorkload>-<Scope>-<Environment>-v1.0
WIN-CUSTOM-<CSPPurpose>-<Scope>-<Environment>-v1.0
MAC-SC-<Workload>-<Scope>-<Environment>-v1.0
```


Example

WIN-SC-Edge-Global-PROD-v2.0 = Windows Settings Catalog profile for the global Microsoft Edge production standard, major architecture version 2.

21.5 Required documentation

- Business and technical owner.
- Requirement and source documentation.
- Platform/edition/version support.
- Profile type and settings.
- Groups, exclusions, filters, and scope tags.
- Pilot evidence.
- User impact and communication.
- Rollback.
- Support and monitoring path.
- Change ticket and approval.

21.6 Change flow

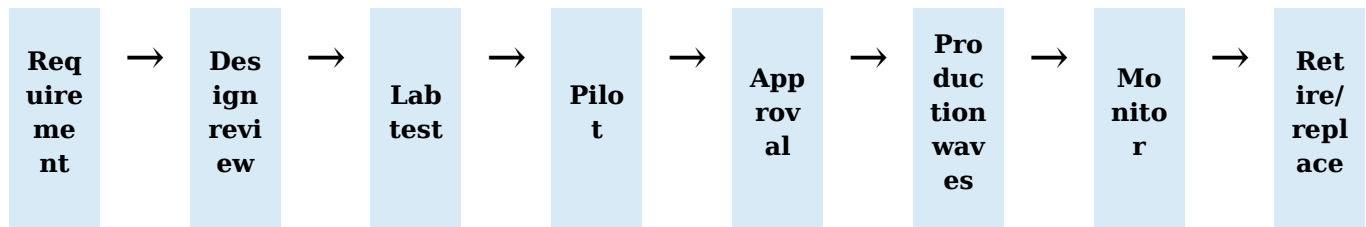

22. Troubleshooting Matrix

Symptom	Likely cause	Action
Policy not received	Assignment or sync issue	Confirm group/filter and force sync
Not applicable	Unsupported edition/build/scope	Review setting support and user/device context
Conflict	Multiple profiles/GPO/baseline	Use per-setting status and policy inventory
Custom OMA-URI error	Wrong path/type/value	Validate CSP documentation and event log
Browser policy missing	Wrong scope or competing browser management	Check browser policy page and source
OneDrive not silent	Tenant ID/user sign-in/profile conflict	Review OneDrive policy and client logs
Wi-Fi fails	Certificate/EAP/RADIUS dependency	Validate cert chain, scope, and RADIUS logs
Certificate missing	Connector/template/assignment issue	Review connector and profile status
Encryption report mismatch	Report delay or policy/key issue	Check local BitLocker and key escrow
Assignment failure	Unsupported target or invalid payload	Open detailed failure and client logs

23. Interview and Expert Reference

Question	Strong answer
Settings Catalog vs Templates?	Settings Catalog is the unified searchable platform; templates are purpose-built experiences for specific workloads.
What is OMA-URI?	The path used by MDM to configure a CSP setting; it requires exact path, type, and value.
What is ADMX-backed policy?	A policy based on Administrative Template definitions, typically mapping to registry-backed application/Windows settings.
Why avoid giant profiles?	They increase blast radius, ownership ambiguity, and troubleshooting complexity.
Succeeded but behavior wrong?	Validate local effective state, scope, conflicts, and application-specific policy pages.
User vs device setting?	User settings apply in signed-in user context; device settings apply to the device.
How do you troubleshoot conflicts?	Use per-setting status, inventory every policy source, GPO, baseline, and custom CSP.
How do certificates affect Wi-Fi?	Enterprise Wi-Fi often depends on trusted roots and user/device authentication certificates.
Why migrate Admin Templates?	The legacy profile type is deprecated/read-only; new ADMX policies should use Settings Catalog.
What is scope tag?	An RBAC visibility/delegation control, not a deployment assignment.

24. Reusable Design and Incident Records

24.1 Profile design record

Field	Record
Profile name/version	
Owner	
Requirement	
Profile type	
Settings/source	
Platform support	
Groups/filters	
Scope tags	
Pilot evidence	
User impact	
Rollback	
Ticket/approval	

24.2 Incident record

Field	Record
Device/user	
Profile/setting	
Status/error	
Assignment	
Local evidence	
Root cause	
Remediation	
Validation	


Field	Record
Owner/date	

25. Advanced Assignment Filters and Scope Tags

25.1 Assignment filters

Assignment filters refine an included group at deployment time. Filters do not replace Microsoft Entra group design. Use filters for stable device attributes when creating a separate group would add unnecessary operational overhead.

25.2 Safe filter workflow

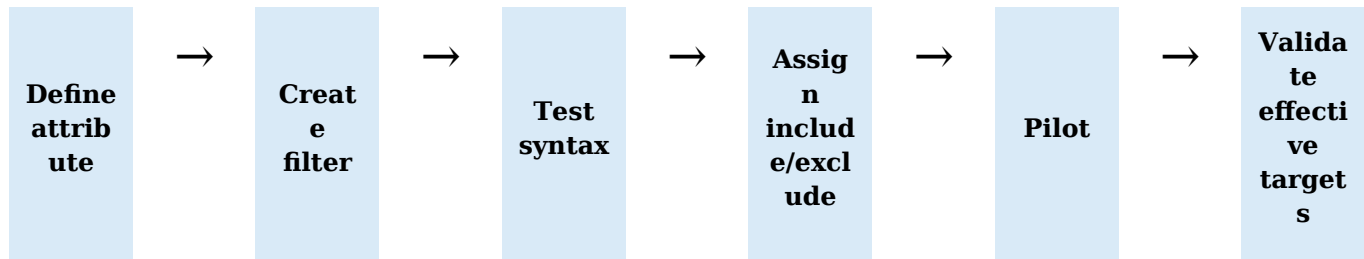

25.3 Scope tags

Scope tags control which Intune administrators can see and manage objects. Scope tags do not deploy a policy to devices. Combine scope tags with RBAC role assignments and administrative groups.

25.4 Real-world example

Scenario

The Pune service desk can view and manage India Wi-Fi and certificate profiles but cannot edit global browser security. Scope tags and RBAC provide administrative separation, while Entra groups provide deployment targeting.

26. VPN Profile Architecture


Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and later > Templates > VPN

26.1 Design inputs

- VPN type and vendor.
- Server and DNS endpoints.
- User or device tunnel.
- Authentication based on certificate, user credentials, or modern authentication.
- Split or force tunneling.
- Always On and trusted-network detection.
- Proxy and route requirements.

26.2 Dependency flow

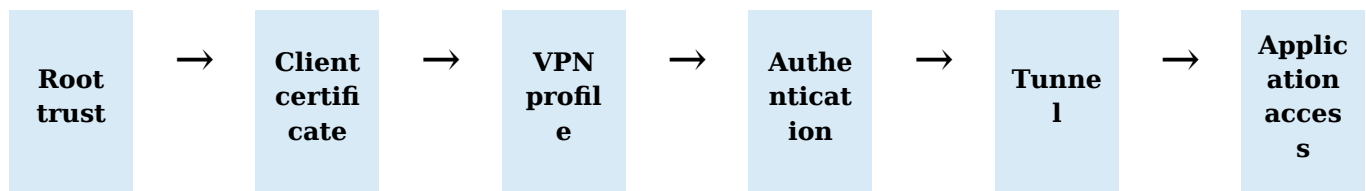

26.3 Real-world example

Scenario

A remote Autopilot device needs VPN before accessing a legacy application. The architect deploys trusted roots, a device certificate, and a device tunnel profile, then validates pre-logon connectivity and conditional-access exclusions.

27. Trusted Certificate, SCEP, and PKCS Profiles

27.1 Trusted root profile

Trusted certificate profiles deliver root or intermediate certificates. A trusted root profile does not issue a client certificate.

27.2 SCEP and PKCS

Method	Typical use	Dependency
SCEP	Scalable certificate enrollment via NDES/SCEP	Certificate connector, NDES, CA template
PKCS	Certificate issuance through Intune Certificate Connector	CA and connector
Imported PFX	Specific supported certificate scenarios	Secure PFX handling

27.3 Validation

```
certutil -store Root
certutil -store My
```

27.4 Real-world example

Scenario

A certificate appears under Trusted Root but Wi-Fi still fails because no client certificate exists in Personal. The engineer distinguishes trust delivery from identity certificate enrollment and fixes the SCEP assignment.

28. Device Restrictions Architecture


28.1 Common control areas

- Windows experience and consumer features.
- Control Panel and Settings access.
- Camera, Bluetooth, removable storage, and screen capture.
- Microsoft Store and application controls.
- Cloud content, search, and telemetry options.

28.2 Design caution

Restrictions can affect productivity and support. Group settings by business outcome, document user impact, and avoid mixing low-risk cosmetic settings with high-impact device restrictions.

28.3 Rollout

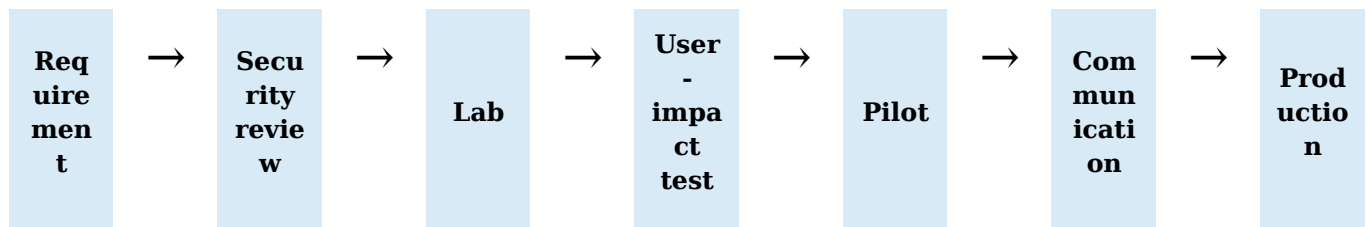

29. Windows Hello for Business and Account Protection

29.1 Architecture choices

- Cloud Kerberos trust, key trust, or certificate trust where applicable.
- PIN complexity and biometric availability.
- User registration experience.
- Break-glass and recovery procedures.
- Interaction with Conditional Access and passwordless strategy.

29.2 Profile placement

Use the dedicated Account protection workload or supported Settings Catalog settings according to the tenant design. Avoid configuring the same Windows Hello behavior through multiple policy surfaces.

29.3 Real-world example

Scenario

Autopilot users are prompted for Windows Hello registration. A pilot validates PIN reset, biometrics, Cloud Kerberos access, and help-desk recovery before broad rollout.

30. Shared, Kiosk, and Multi-User Device Profiles

30.1 Design differences

Device type	Configuration focus
Shared laptop	Shared PC policies, account cleanup, storage, user experience
Kiosk	Assigned access, app allow-list, auto-logon/identity design
Conference room	Power, display, updates, peripheral stability
Lab	Reset behavior, restrictions, local data cleanup

30.2 Assignment

Use device groups for shared/kiosk behavior and avoid user-targeted dependencies that require a primary user. Validate sign-in, application launch, reset, and offline behavior.

31. macOS Configuration Profiles Overview

31.1 Intune profile approaches

- Settings Catalog where available.
- Templates for device restrictions, certificates, Wi-Fi, VPN, and privacy preferences.
- Preference file profiles for supported application preferences.
- Custom profiles using valid Apple configuration-profile payloads.

31.2 Validation

- Confirm payload identifier uniqueness.
- Confirm user versus device channel.
- Validate signing where required.
- Check installed profiles locally.
- Test Apple silicon and current macOS support.

31.3 Command


```
profiles show -type configuration
profiles status -type enrollment
```

32. Policy Conflict Architecture

32.1 Conflict sources

- Settings Catalog vs Settings Catalog.
- Settings Catalog vs Endpoint security.
- Intune vs Group Policy.
- Imported ADMX vs browser cloud management.
- Custom OMA-URI vs native catalog setting.

32.2 Conflict resolution flow

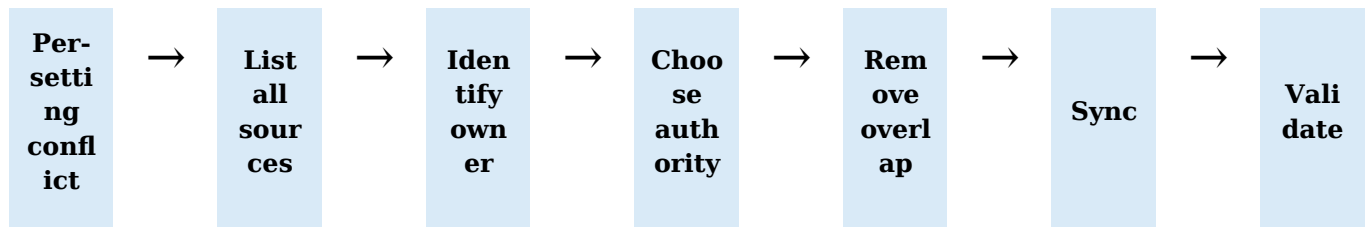

32.3 Real-world example

Scenario

Edge password manager is Enabled by a legacy Administrative Template and Disabled by a new Settings Catalog profile. Per-setting status reports Conflict. The owner migrates the legacy setting and retires the old assignment.

33. Policy Rollback and Emergency Change

33.1 Rollback methods

Policy type	Rollback
Settings Catalog	Set Not configured or remove assignment after testing
ADMX-backed	Use Not configured when supported and understand tattooing behavior
Custom OMA-URI	Apply documented inverse/delete value or remove assignment
Certificate	Remove only after dependent Wi-Fi/VPN migration
Wi-Fi/VPN	Keep fallback access pathway

33.2 Emergency procedure

- Open incident/change record.
- Identify exact policy and assignment.
- Capture current settings and device status.
- Remove or exclude smallest affected scope.
- Deploy rollback.
- Sync pilot device.
- Validate service restoration.
- Document root cause before re-release.

34. Profile Versioning and Lifecycle

34.1 Lifecycle states



34.2 Versioning model

- Keep stable profile names with a version suffix only when your change process requires parallel testing.
- Record settings export or configuration record.
- Do not clone endlessly without retiring old versions.
- Maintain an owner and review date.

34.3 Retirement

- Remove assignments.
- Confirm replacement applies.
- Monitor for regression.
- Delete only after retention and audit requirements are satisfied.

35. Graph Automation and Export Strategy

35.1 When automation helps

- Policy inventory and reporting.
- Backup/export for change review.
- Standardized policy creation across environments.
- Assignment verification.

35.2 Controls

- Prefer Microsoft Graph v1.0 when available.
- Use least-privilege permissions.
- Do not store secrets in scripts.
- Review JSON before write operations.
- Test in lab tenant or pilot scope.
- Log change ID and response.

35.3 Limitation

Graph resources and schemas can vary by policy platform. Confirm current Microsoft Graph documentation before automation.

36. Reporting and Executive Summary Design

36.1 Operational metrics

Metric	Interpretation
Assigned devices/users	Scope expected to receive policy
Succeeded	Policy processing success
Error	Requires technical investigation
Conflict	Architecture/design issue
Not applicable	Support/scope mismatch
Pending	Check-in or processing delay

36.2 Management summary

- Profiles changed this period.
- Success and error rates without inventing unsupported totals.
- Top failure categories.
- High-impact conflicts.
- Certificates nearing expiry.
- Encryption readiness gaps.
- Open risks and owners.

37. Browser Policy Architecture Blueprint

37.1 Separate policy domains

Profile	Settings
Edge Identity	Sign-in, sync, profile behavior
Edge Security	SmartScreen, downloads, site isolation
Edge Extensions	Block/allow/force install
Chrome Identity	Sign-in and sync
Chrome Security	Safe Browsing and downloads
Chrome Extensions	Block/allow/force install

37.2 Benefit


Separation allows independent ownership, pilot groups, rollback, and troubleshooting. It also prevents a browser extension change from rewriting unrelated sign-in policy.

38. OneDrive Architecture Blueprint

38.1 Policy domains

Domain	Settings
Identity	Silent account configuration, tenant restrictions
Files	Files On-Demand
Known folders	KFM silent move and prompts
Sync restrictions	File types, bandwidth, tenant allow-list
Health	Sync client status and user remediation

38.2 Deployment flow

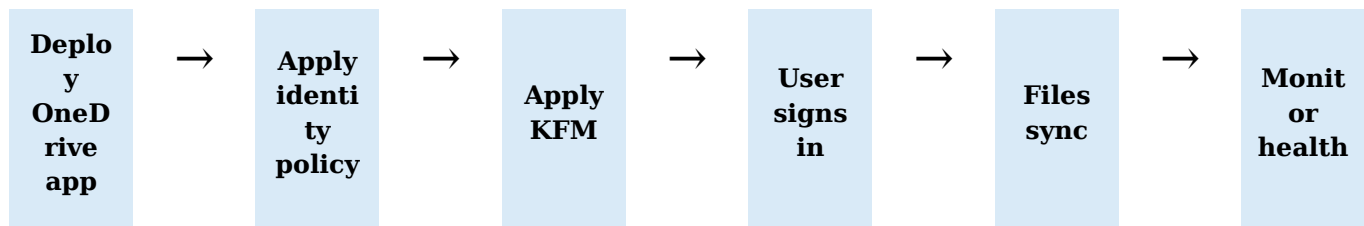

38.3 User impact

- Initial upload bandwidth.
- Folder-path changes.
- Unsupported file names.
- Disk-space behavior.
- Communication and support guidance.

39. Wi-Fi and Certificate Architecture Blueprint

39.1 Device certificate model



39.2 User certificate model



39.3 Decision


Choose device certificates when pre-logon/device connectivity is required. Choose user certificates when access must follow the authenticated user. Validate RADIUS mapping and certificate subject/SAN requirements.

40. Autopilot Integration with Configuration Profiles

40.1 Timing

- Device-targeted profiles can apply during device setup.
- User-targeted profiles generally require user context.
- Certificates, Wi-Fi, VPN, browser, and OneDrive can have dependencies on apps and identity.
- ESP blocking should include only essential, reliable workloads.

40.2 Design flow

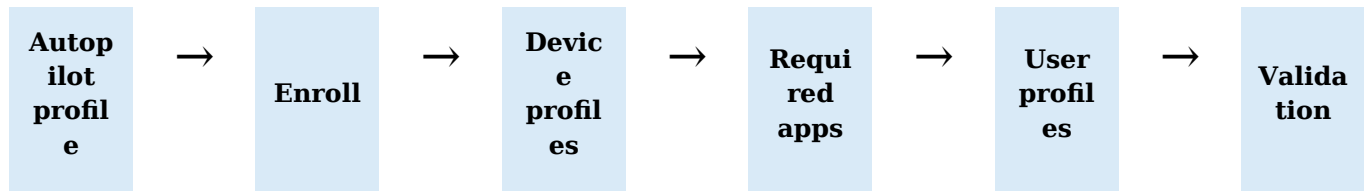

40.3 Real-world example

Scenario

A laptop enrolls remotely. Device restrictions and BitLocker apply during device setup; after user sign-in, Edge and OneDrive user settings apply. No corporate Wi-Fi dependency is required for remote enrollment.

41. Architecture Review Checklist

- Requirement maps to a supported policy surface.
- No duplicate setting owner.
- Platform/edition/build support confirmed.
- User/device scope confirmed.
- Dependencies documented.
- Pilot group and exit criteria defined.
- Rollback tested.
- Monitoring/report path known.
- Help-desk runbook ready.
- Owner and review date recorded.

42. Final Architect Quick Reference

42.1 Five questions before creating any profile

- Is the setting available in Settings Catalog?
- Is the setting user-scoped or device-scoped?
- Which other policy sources configure the same behavior?
- What dependency, pilot, and rollback are required?
- How will the endpoint and report be validated?

42.2 Five checks when a policy fails

- Targeting and effective group membership.
- Platform, edition, build, and setting applicability.
- Conflict with Settings Catalog, baseline, GPO, ADMX, or Custom CSP.
- Device check-in, MDM enrollment, and client event logs.
- Actual local state after remediation and sync.

42.3 Architecture rule

Rule

Prefer the most native supported management surface, keep one authoritative owner per setting, assign through controlled rings, validate actual device behavior, and maintain rollback.

43. Expanded Official References and Maintenance

- Microsoft Learn: Configure ADMX settings using Settings Catalog - <https://learn.microsoft.com/intune/device-configuration/settings-catalog/configure-admx-templates-windows>
- Microsoft Learn: Import custom ADMX and ADML templates - <https://learn.microsoft.com/intune/device-configuration/settings-catalog/import-custom-admx-templates>

Maintenance rule

Review this SOP after Intune navigation changes, Settings Catalog updates, ADMX import changes, Windows CSP changes, Windows releases, browser policy updates, certificate infrastructure changes, or organizational design changes.