

Intune SME / SCCM-Intune Administrator L2

JD-Aligned All-in-One Architecture and Interview Preparation Guide

Objective

One consolidated preparation file covering the complete attached job description: enterprise Intune administration, Windows/Apple/Android app management, MDM and MAM, advanced Windows policies, Entra ID, EMS, Azure/monitoring concepts, PowerShell, SCCM, networking, security/compliance, troubleshooting, integration, mentoring, and global scale operations.

JD field	Details
Role	Intune SME
Technical skill	Intune Specialist
Experience stated in JD	8-10 years desired; minimum 6 years primary Intune administration
Scale stated in JD	Minimum 5,000+ globally distributed devices
Location	India
Good-to-have	Microsoft 365 certification

Integrity note

Use the technical answers and frameworks in this guide, but describe only experience you have actually performed. For scale, tools, and leadership examples that are not part of your own history, present the answer as your design approach rather than claiming delivery.

JD Coverage Matrix

JD requirement	Covered modules
Enterprise Intune administration	1-18, 31-38
Apple and Android app packaging/deployment	19-23
MDM policies and advanced Windows management	5-12 plus Configuration Profiles appendix
Design and group-level security	3, 8-15, Endpoint Security appendix
Azure AD / Entra, EMS, Azure monitoring	2-4, 28-30
PowerShell and automation	24-27
SCCM / MECM	39-46
Networking VPN/DNS/DHCP	47-50
GDPR/HIPAA and compliance	13-15, 51-52
Jamf / Workspace ONE awareness	53
Logs and performance data	33-38, 54
Defender / Device Guard	Endpoint Security appendix
Mentoring and global scale	55-57
Interview preparation	58-63

1. Intune Service Architecture


Concept and architecture

Microsoft Intune is a cloud endpoint-management service combining device management, application management, security, compliance, reporting, and automation. The interview expectation is to connect tenant, identity, enrollment, policy, apps, monitoring, and support into one operating model.

End-to-end process

1. Define business and security requirements.
2. Confirm licensing, identity, supported platforms, and network access.
3. Configure tenant-wide enrollment and governance controls.
4. Create platform groups, profiles, apps, and compliance policies.
5. Pilot, monitor, troubleshoot, and expand.
6. Operate lifecycle, reporting, change, and retirement.

Architecture flow

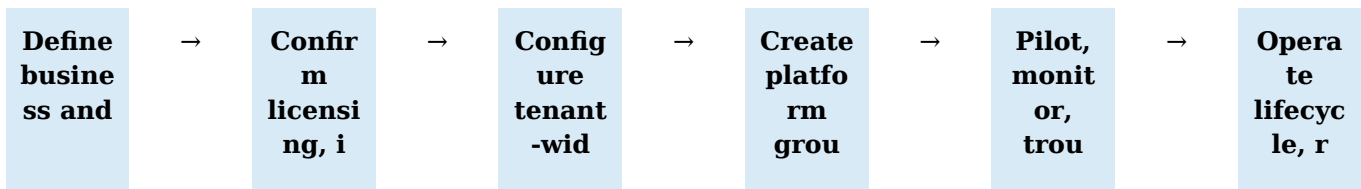

Real-world scenario

Scenario

A new region must be onboarded without creating a separate uncontrolled policy set. Use global standards with regional overlays, delegated RBAC, pilot rings, and central reporting.

Interview answer framework

I explain Intune as a policy and app orchestration layer anchored in Entra identity. I describe enrollment, assignment, device processing, reporting, and governance as one lifecycle.

Validation and troubleshooting

- Confirm MDM authority and licensing.
- Validate tenant status, connectors, audit logs, and admin roles.

2. Microsoft Entra ID for Intune


Concept and architecture

Entra ID supplies users, groups, device identities, authentication, roles, Conditional Access, enterprise applications, and device registration used by Intune.

End-to-end process

7. Design user/device security groups.
8. Define dynamic rules only for stable attributes.
9. Configure device settings and enrollment scope.
10. Assign least-privilege roles.
11. Integrate Conditional Access after compliance validation.
12. Review sign-in and audit logs.

Architecture flow

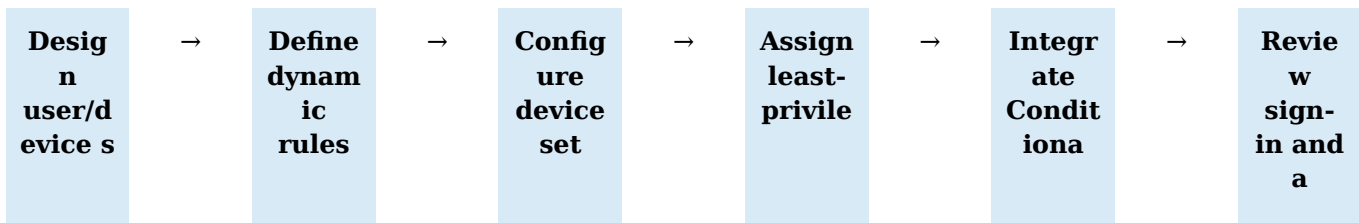

Real-world scenario

Scenario

An Autopilot device imports successfully but receives no profile because the Group Tag dynamic rule is incorrect. Validate physical IDs, rule syntax, membership, and profile assignment.

Interview answer framework

I separate identity, device object, Intune managed device, and Autopilot record. I then trace group membership and policy targeting.

Validation and troubleshooting

- Use Entra audit logs and sign-in logs.
- Check device ID linkage and duplicate/stale objects.

3. Enterprise Group and Assignment Design


Concept and architecture

Assignments turn architecture into production scope. Poor group design causes policy gaps, overlaps, and support incidents.

End-to-end process

13. Define global, regional, platform, ownership, and rollout dimensions.
14. Create small assigned pilot groups.
15. Use production dynamic groups only after validation.
16. Apply include/exclude logic and filters.
17. Document every policy-to-group mapping.
18. Review stale groups and unintended overlap.

Architecture flow



Real-world scenario

Scenario

A device belongs to two update rings and receives conflicting deadlines. Remove overlapping membership and establish one ring authority.

Interview answer framework

My answer emphasizes assigned pilot groups, limited dynamic logic, exclusions, filters, naming, ownership, and change review.

Validation and troubleshooting

- Export assignments periodically.
- Review effective targeting during incidents.

4. RBAC, Scope Tags, Audit, and Governance


Concept and architecture

Enterprise Intune needs separation of duties, least privilege, delegated scope, auditability, and documented change control.

End-to-end process

19. Map personas to required actions.
20. Use built-in or custom least-privilege roles.
21. Use scope tags for object visibility.
22. Use admin groups and approval workflows.
23. Review audit logs and privileged access.
24. Recertify roles and exceptions.

Architecture flow

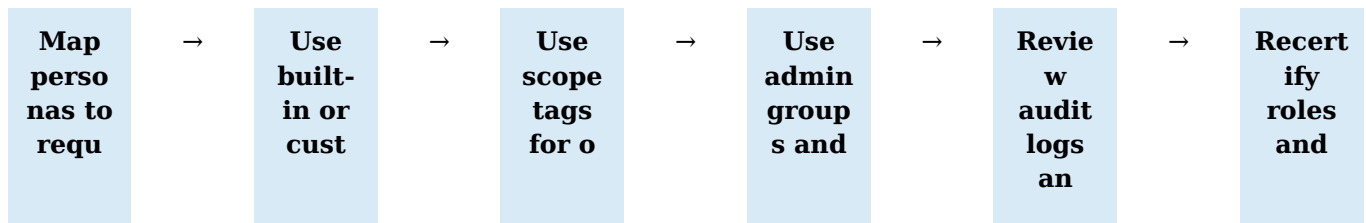

Real-world scenario

Scenario

Regional help desk can sync and retire regional devices but cannot edit global security policies. Implement scoped role assignment and scope tags.

Interview answer framework

I explain that scope tags control administrative visibility, whereas Entra group assignments control deployment.

Validation and troubleshooting

- Test each role with a nonproduction admin account.
- Review high-impact device actions and policy modifications.

5. Windows Enrollment and Autopilot


Concept and architecture

Windows enrollment connects Entra identity and Intune management. Autopilot customizes OOB, joins identity, enrolls, and applies apps and policies.

End-to-end process

25. Validate licensing, automatic enrollment, network, and restrictions.
26. Register device through OEM or hardware hash.
27. Apply Group Tag and device group.
28. Assign deployment profile and ESP.
29. Run user-driven, self-deploying, or pre-provisioning flow.
30. Validate Intune, Entra, apps, encryption, compliance, and asset record.

Architecture flow

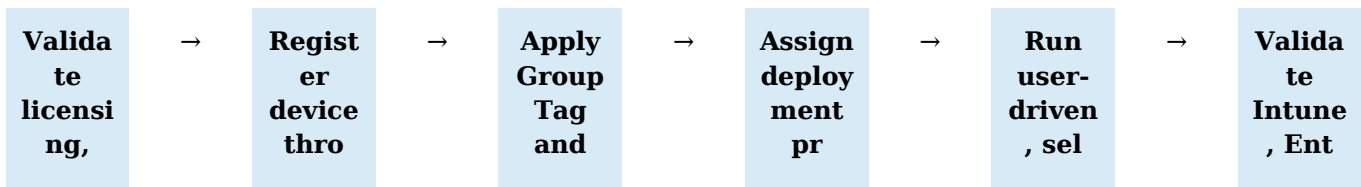

Real-world scenario

Scenario

A new laptop shows consumer OOB. Confirm profile Assigned, internet, clean OOB, registration, group membership, and tenant ownership.

Interview answer framework

I troubleshoot Autopilot in layers: registration, profile targeting, network, Entra join, MDM enrollment, ESP, app/policy processing, and post-deployment validation.

Validation and troubleshooting

- Collect Autopilot and enrollment diagnostics before reset.
- Check dsregcmd /status and Intune/Entra objects.

6. Enrollment Restrictions and Device Limits


Concept and architecture

Restrictions govern permitted platforms, versions, ownership types, and enrollment methods. They prevent unmanaged or unsupported devices entering production.

End-to-end process

31. Define supported platforms and ownership.
32. Configure default and priority restriction profiles.
33. Set version and device-limit policy.
34. Assign to pilot users.
35. Test corporate and personal scenarios.
36. Monitor failures and exceptions.

Architecture flow

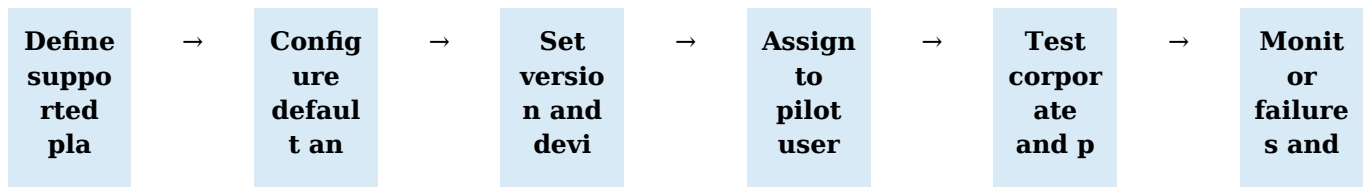

Real-world scenario

Scenario

A user cannot enroll a replacement phone because the device limit is reached. Validate Intune and Entra records, retire stale devices, and retest.

Interview answer framework

I review enrollment restrictions, user licensing, MDM scope, device limit, platform version, ownership, and Conditional Access.

Validation and troubleshooting

- Do not delete active records blindly.
- Document exception expiry.

7. Windows Application Management


Concept and architecture

Intune supports Win32, Microsoft Store, Microsoft 365 Apps, LOB, and Enterprise App Management scenarios. Reliable deployment depends on packaging, silent commands, detection, requirements, dependencies, supersedence, and assignments.

End-to-end process

37. Collect source, vendor documentation, and security approval.
38. Package Win32 content as .intunewin where applicable.
39. Define install/uninstall commands and context.
40. Create requirements, detection, dependencies, and return codes.
41. Pilot required and available assignments.
42. Monitor installation and remediate failures.

Architecture flow



Real-world scenario

Scenario

Installer returns success but Intune reports failed because the detection rule checks the wrong registry hive. Correct detection and test install/uninstall lifecycle.

Interview answer framework

I explain that detection is the source of truth for Intune app state. I validate commands under the same context, return codes, reboot behavior, and supersedence.

Validation and troubleshooting

- Review IME logs and app workload logs.
- Validate 32-bit versus 64-bit registry/filesystem.

8. Win32 Packaging Architecture


Concept and architecture

Packaging converts software into unattended, repeatable, detectable, reversible, and supportable deployments.

End-to-end process

43. Analyze installer technology and prerequisites.
44. Build silent install and uninstall.
45. Remove hard-coded user paths and credentials.
46. Package source and content.
47. Define detection and requirements.
48. Test clean install, upgrade, repair, uninstall, and rollback.

Architecture flow

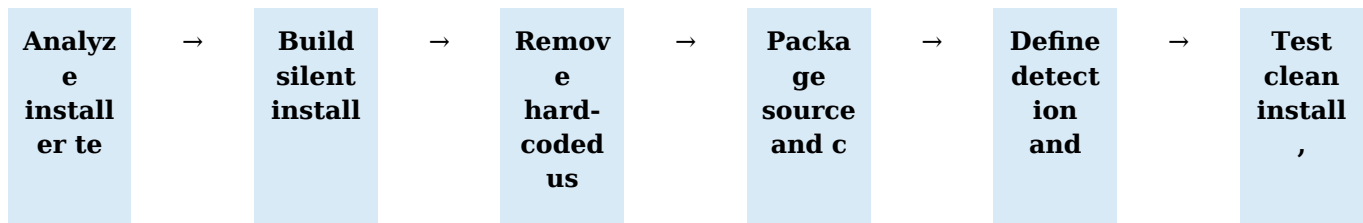

Real-world scenario

Scenario

A legacy MSI needs a transform and prerequisite runtime. Package the runtime as dependency, MSI with MST parameters, and version-aware detection.

Interview answer framework

I describe packaging quality criteria: silent, idempotent, least privilege, deterministic detection, meaningful logs, and clean uninstall.

Validation and troubleshooting

- Use vendor-supported switches.
- Do not claim PSADT knowledge unless actually used; describe approach honestly.

9. Application Assignment, Dependencies, and Supersedence


Concept and architecture

Assignments control who gets an app and how; dependencies establish prerequisites; supersedence manages replacement and upgrade.

End-to-end process

49. Classify Required, Available, Uninstall, or ESP-blocking intent.
50. Assign to pilot user/device group.
51. Configure dependencies.
52. Configure supersedence and uninstall-previous behavior where appropriate.
53. Monitor status during rollout.
54. Retire previous versions after evidence.

Architecture flow

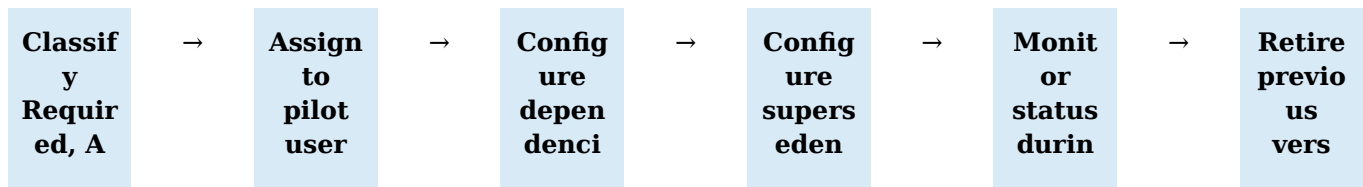

Real-world scenario

Scenario

Chrome update must replace an old version without user disruption. Pilot supersedence, validate browser restart behavior, detection, and rollback.

Interview answer framework

I distinguish dependency from supersedence and explain required versus available assignment impacts.

Validation and troubleshooting

- Avoid include/exclude overlap.
- Track application ownership and version lifecycle.

10. Configuration Profiles and Settings Catalog


Concept and architecture

Configuration profiles apply device and user settings through Settings Catalog, templates, ADMX-backed settings, and Custom CSP.

End-to-end process

55. Identify requirement and authoritative setting source.
56. Prefer Settings Catalog when supported.
57. Separate user/device scope and high-risk workloads.
58. Assign to lab/pilot.
59. Validate local effective state and portal status.
60. Resolve conflicts before production.

Architecture flow

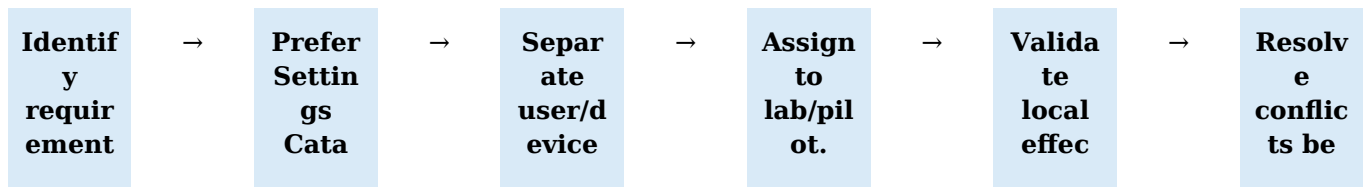

Real-world scenario

Scenario

Edge password manager is configured differently by legacy template and Settings Catalog. Use per-setting status, choose owner, remove overlap, and sync.

Interview answer framework

I explain one authoritative owner per setting, policy separation by workload, pilot rings, local validation, and rollback.

Validation and troubleshooting

- See appended Configuration Profiles Architect Edition.

11. Windows Security Configuration


Concept and architecture

Advanced Windows management includes BitLocker, Defender, Firewall, LAPS, Windows Hello, ASR, EDR, App Control, browser hardening, certificates, and restrictions.

End-to-end process

61. Map controls to security requirements.
62. Choose Endpoint Security or Settings Catalog owner.
63. Pilot settings and user impact.
64. Monitor per-setting and security telemetry.
65. Connect compliance and Conditional Access after validation.
66. Review incidents and exceptions.

Architecture flow

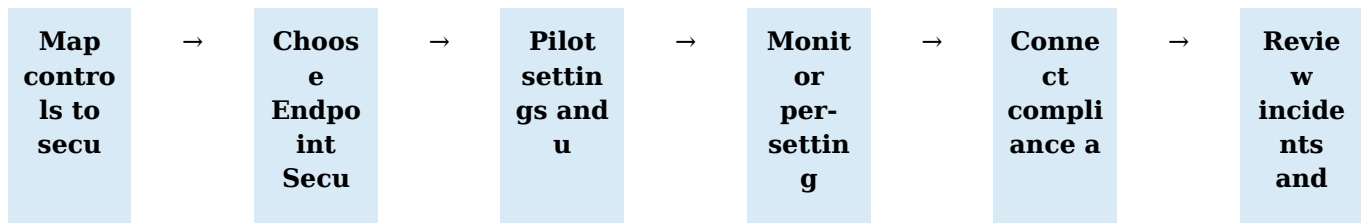

Real-world scenario

Scenario

An ASR rule blocks a finance macro process. Use audit telemetry, validate business need, create narrow approved exclusion, then retest Block.

Interview answer framework

I emphasize staged security deployment: audit, analyze, pilot, enforce, monitor, and improve.

Validation and troubleshooting

- See appended Endpoint Security Architect Edition.

12. Update Management and Windows Autopatch


Concept and architecture

Update rings control client behavior; feature, quality, and driver policies control update targeting. Autopatch can provide service-managed orchestration for eligible environments.

End-to-end process

67. Create Test, pilot, broad, and critical-device rings.
68. Configure deadlines, grace, restart, and notifications.
69. Control feature version separately.
70. Manage quality expedite and driver approval.
71. Monitor releases, errors, safeguards, and restarts.
72. Pause/resume only through incident/change process.

Architecture flow

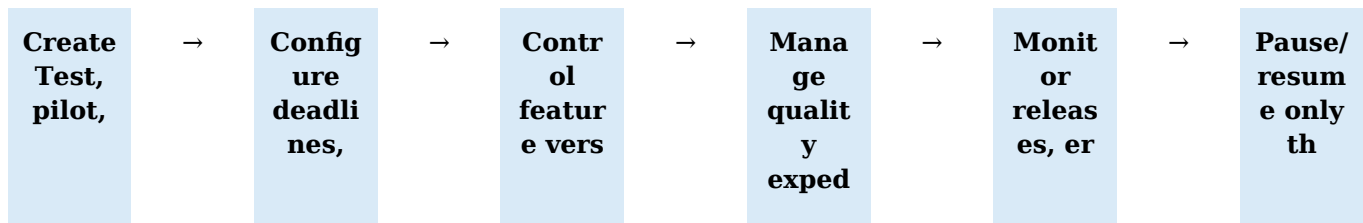

Real-world scenario

Scenario

A quality update breaks a VPN client in pilot. Pause affected scope, validate vendor fix, update the client, test, and resume.

Interview answer framework

I distinguish deferral from deadline and update ring from feature-update policy.

Validation and troubleshooting

- Review Windows Update logs and policy conflicts.

13. Compliance Policies


Concept and architecture

Compliance evaluates device state and can feed access decisions. It does not configure BitLocker, firewall, antivirus, or OS settings.

End-to-end process

73. Define supported requirements and remediation profiles.
74. Create platform compliance policy.
75. Configure actions, grace, and notification.
76. Pilot without blocking access.
77. Review not-evaluated and false noncompliance.
78. Connect Conditional Access in report-only then enforce.

Architecture flow

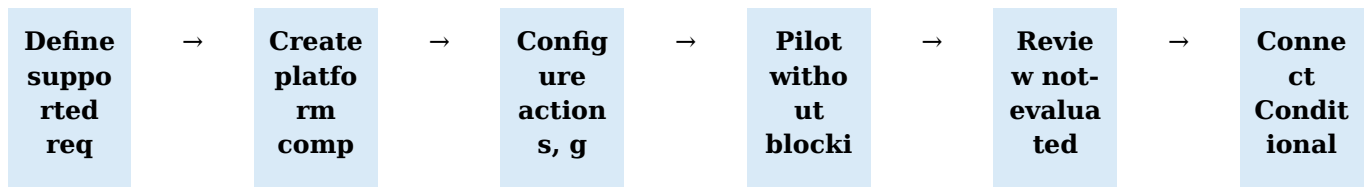

Real-world scenario

Scenario

BitLocker compliance fails because encryption policy was never assigned. Deploy remediation policy, validate key escrow, sync, and re-evaluate.

Interview answer framework

I clearly separate configure, evaluate, and enforce: Endpoint/configuration policy, compliance, then Conditional Access.

Validation and troubleshooting

- Review per-setting compliance and last check-in.

14. Conditional Access Integration


Concept and architecture

Conditional Access makes identity access decisions using users, apps, conditions, device state, and grant controls.

End-to-end process

79. Define protected resources and identities.
80. Exclude emergency access accounts.
81. Require compliant or approved device state as designed.
82. Start report-only.
83. Review sign-in impact and remediation.
84. Pilot and phase enforcement.

Architecture flow

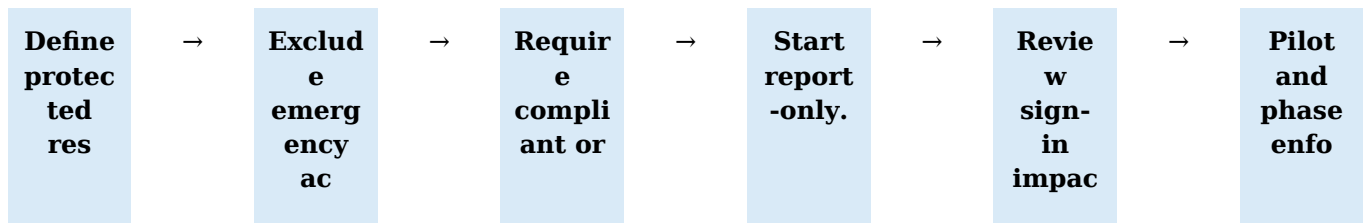

Real-world scenario

Scenario

A broad compliance requirement blocks enrollment. Correct policy scope and exclude enrollment/bootstrap flows according to approved architecture.

Interview answer framework

I focus on report-only evidence, emergency access, unsupported platforms, and user remediation.

Validation and troubleshooting

- Use What If and sign-in logs.

15. Custom Compliance and Scripts


Concept and architecture

Custom compliance extends built-in evaluation using a discovery script and JSON rules on supported platforms.

End-to-end process

85. Define measurable device condition.
86. Write safe discovery script returning expected JSON.
87. Create matching JSON rule and remediation message.
88. Test locally and in pilot.
89. Monitor errors and not-evaluated state.
90. Use in access decisions only after stability.

Architecture flow

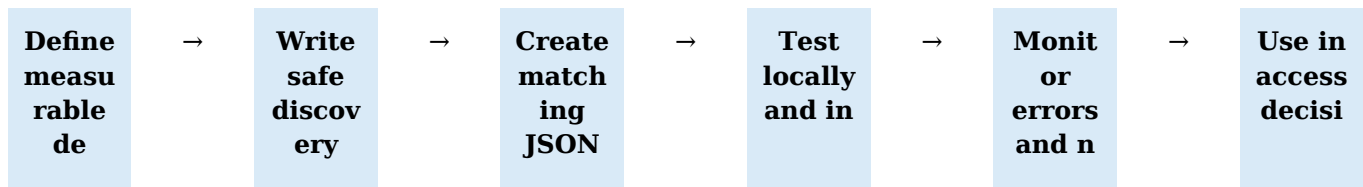

Real-world scenario

Scenario

A custom check reports error because script output includes extra text before JSON. Return only compressed JSON and match data types.

Interview answer framework

I explain script discovery, JSON expectation, remediation text, pilot, and error handling.

Validation and troubleshooting

- Never include secrets.
- Code review and sign scripts where organizational standards require.

16. Apple Enrollment Architecture


Concept and architecture

Apple management uses Apple Business Manager integration, Automated Device Enrollment, enrollment profiles, APNs certificate, VPP/Apps and Books, and platform configuration.

End-to-end process

91. Maintain APNs certificate continuity.
92. Connect ABM location token and Apps and Books.
93. Synchronize devices and apps.
94. Create ADE enrollment profile.
95. Assign configuration, compliance, security, and apps.
96. Validate activation, supervision, ownership, and inventory.

Architecture flow

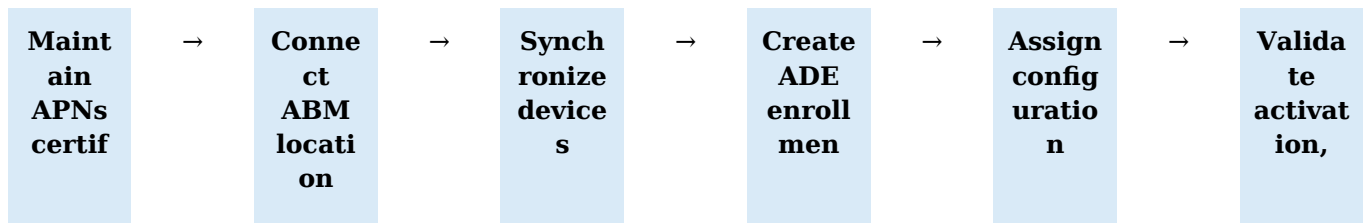

Real-world scenario

Scenario

A renewed APNs certificate was created with a different Apple account, breaking continuity. Use the original account and renewal process, not a new certificate.

Interview answer framework

I explain APNs, ABM/ADE, supervision, token lifecycle, licensing, assignment, and troubleshooting.

Validation and troubleshooting

- Track token/certificate expiry and ownership.

17. iOS and iPadOS Application Deployment


Concept and architecture

Apple apps can be delivered through Apps and Books, App Store, web clips, and LOB apps with managed app configuration and app protection.

End-to-end process

97. Acquire or upload app through approved method.
98. Sync token and app inventory.
99. Configure licensing and install behavior.
100. Assign Required, Available, or Uninstall.
101. Apply app configuration and protection where required.
102. Monitor device/user install status and licensing.

Architecture flow

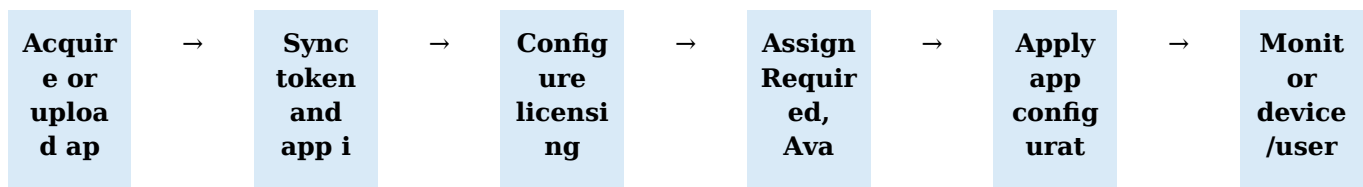

Real-world scenario

Scenario

VPP app remains pending because no license is available in the synced location. Validate token, location, licenses, assignment type, and device check-in.

Interview answer framework

I trace app source, token, license, assignment, install command managed by platform, and user/device state.

Validation and troubleshooting

- Validate supervised-device requirements and Apple ID dependency.

18. macOS Application Packaging and Deployment


Concept and architecture

macOS deployment supports DMG, PKG, LOB, shell scripts, Store/VPP, and managed preferences.

End-to-end process

103. Validate package signature, architecture, minimum OS, and install location.
104. Select supported Intune app type.
105. Define bundle ID/version detection.
106. Assign to a macOS pilot group.
107. Review install status and Intune agent logs.
108. Test upgrades and uninstall/remediation.

Architecture flow

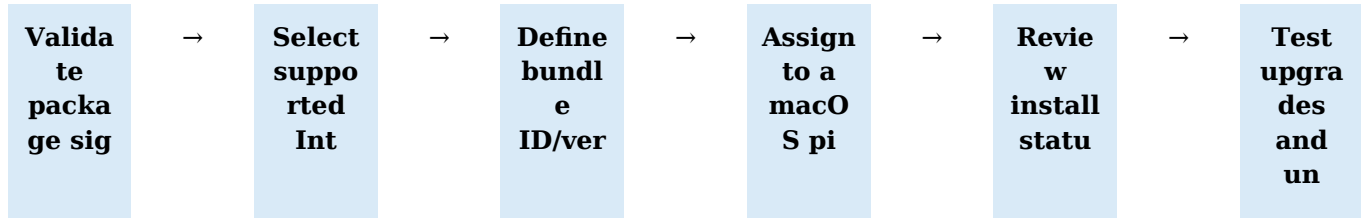

Real-world scenario

Scenario

A universal PKG installs but detection uses a wrong bundle ID. Inspect installed application metadata and correct detection.

Interview answer framework

I discuss signed PKG/DMG, Apple silicon, bundle identifiers, privacy permissions, dependencies, and update ownership.

Validation and troubleshooting

- Test Apple silicon and current macOS.

19. Android Enterprise Enrollment


Concept and architecture

Android Enterprise includes work profile, fully managed, corporate-owned work profile, and dedicated device scenarios.

End-to-end process

109. Connect Managed Google Play.
110. Select ownership and enrollment scenario.
111. Create enrollment profile/token.
112. Configure restrictions, compliance, Wi-Fi/VPN, and apps.
113. Enroll pilot device.
114. Validate work profile or fully managed behavior.

Architecture flow

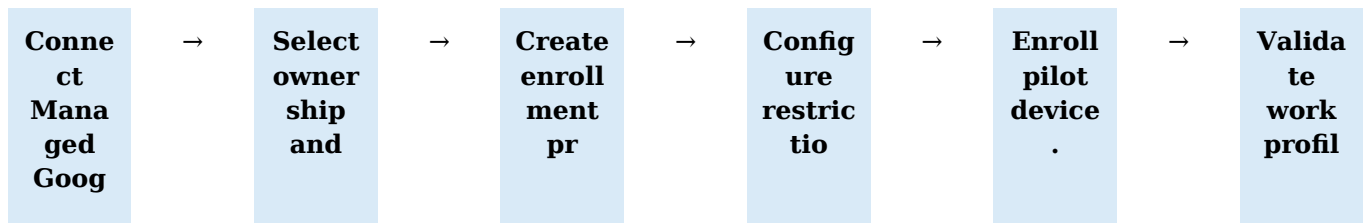

Real-world scenario

Scenario

Corporate-owned device was enrolled as personal work profile. Retire and re-enroll through the correct corporate enrollment scenario.

Interview answer framework

I choose enrollment type based on ownership, user association, privacy, kiosk needs, and reset lifecycle.

Validation and troubleshooting

- Review OEM and Android version support.

20. Android Application Deployment


Concept and architecture

Managed Google Play provides public, private, web, and managed configuration apps; Android LOB deployment supports approved APK scenarios.

End-to-end process

115. Approve/add app in Managed Google Play.
116. Sync to Intune.
117. Configure managed app settings and permissions.
118. Assign Required, Available, or Uninstall.
119. Validate user/device eligibility.
120. Monitor installation and managed configuration.

Architecture flow

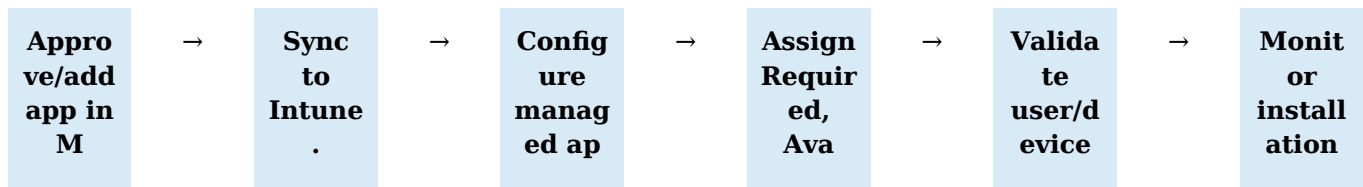

Real-world scenario

Scenario

App installs but cannot sign in because managed configuration has a wrong tenant URL. Correct configuration and retest.

Interview answer framework

I explain app source, approval, sync, assignment, managed configuration, work-profile context, and troubleshooting.

Validation and troubleshooting

- Check Play services, account, network, and device compliance.

21. MAM and App Protection


Concept and architecture

Mobile Application Management protects corporate data inside apps on enrolled or unenrolled devices.

End-to-end process

121. Identify protected apps and data boundaries.
122. Create iOS/Android app protection policy.
123. Configure PIN, encryption, data transfer, save-as, copy/paste, and conditional launch.
124. Deploy app configuration.
125. Pilot managed and unmanaged scenarios.
126. Connect Conditional Access if required.

Architecture flow

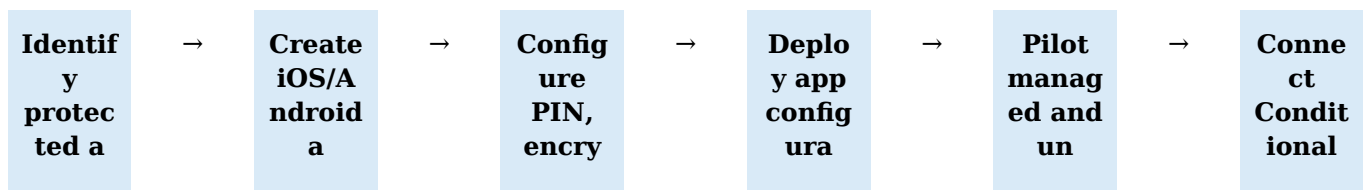

Real-world scenario

Scenario

User can open Outlook but cannot save attachments to personal storage because policy correctly restricts data transfer. Communicate expected behavior and approved destinations.

Interview answer framework

I differentiate MDM from MAM and explain selective wipe, broker requirements, and conditional launch.

Validation and troubleshooting

- Test personal and corporate accounts separately.

22. PowerShell for Intune Administration


Concept and architecture

PowerShell automates inventory, reporting, packaging, policy operations, and remediation. Microsoft Graph is the modern service interface for many Intune resources.

End-to-end process

127. Define read or write objective.
128. Use least-privilege authentication.
129. Query a small pilot scope.
130. Validate object IDs and pagination.
131. Log inputs, outputs, errors, and change ID.
132. Add safeguards before write/delete.

Architecture flow

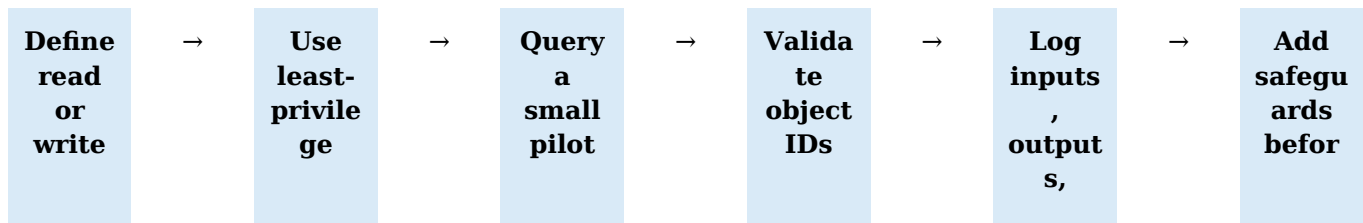

Real-world scenario

Scenario

A script loops through stale devices. First export findings and require review; do not automate deletion without lifecycle approval.

Interview answer framework

I describe safe automation, Graph permissions, error handling, idempotency, throttling, logging, and rollback.

Validation and troubleshooting

- Never hard-code credentials or secrets.

23. PowerShell Interview Patterns


Concept and architecture

Interviewers expect practical data handling, error control, functions, logging, and API awareness rather than memorized syntax.

End-to-end process

133. Build parameterized function.
134. Validate input.
135. Use try/catch and meaningful errors.
136. Write structured output.
137. Support WhatIf for changes.
138. Document permissions and rollback.

Architecture flow

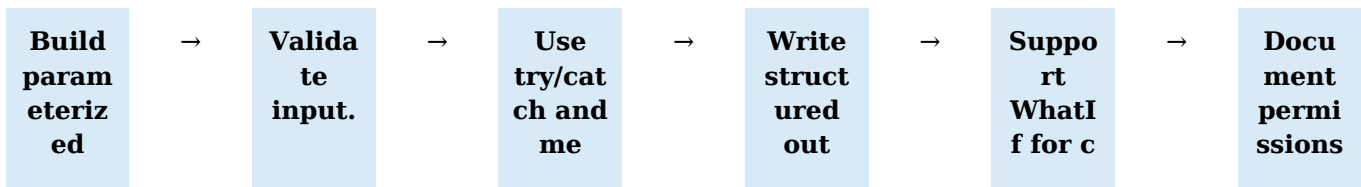

Real-world scenario

Scenario

Create a report of noncompliant Windows devices with user, OS, last check-in, and export date; do not fabricate missing values.

Interview answer framework

I explain approach, data source, security, pagination, error handling, output, and validation before showing code.

Validation and troubleshooting

- Practice arrays, objects, filters, loops, functions, JSON, CSV, REST/Graph.

24. SCCM / MECM Architecture


Concept and architecture

Configuration Manager manages on-premises endpoints through sites, roles, clients, boundaries, content distribution, collections, applications, updates, compliance, and reporting.

End-to-end process

139. Understand hierarchy and site roles.
140. Design boundaries and boundary groups.
141. Deploy and health-check clients.
142. Build collections and application deployments.
143. Distribute content and validate DP health.
144. Monitor deployments, logs, and reports.

Architecture flow

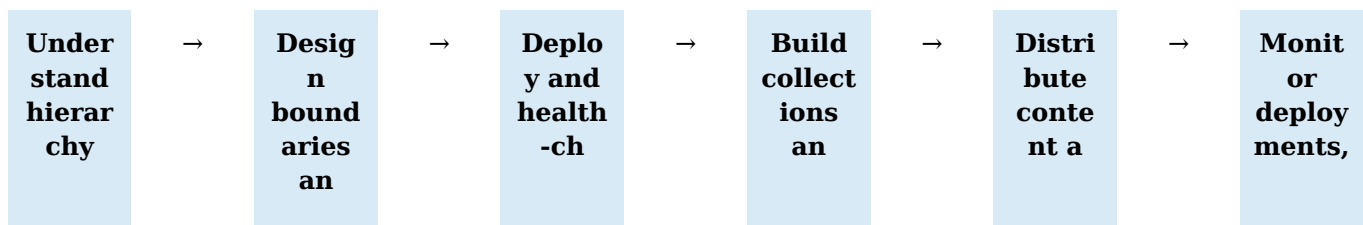

Real-world scenario

Scenario

Application shows content download failure. Check boundary group, DP content, distribution status, client location, CAS/ContentTransferManager/DataTransferService logs.

Interview answer framework

I troubleshoot SCCM in layers: targeting, policy, content location, download, execution, detection, state messages, and reporting.

Validation and troubleshooting

- Know client and server log locations.

25. SCCM Application Model


Concept and architecture

Applications use deployment types, requirements, dependencies, detection, content, and user/device targeting. Packages/programs are simpler legacy constructs.

End-to-end process

145. Create application and metadata.
146. Create deployment type.
147. Set content and commands.
148. Configure detection, requirements, dependencies, and user experience.
149. Distribute to DP.
150. Deploy to pilot collection and monitor.

Architecture flow

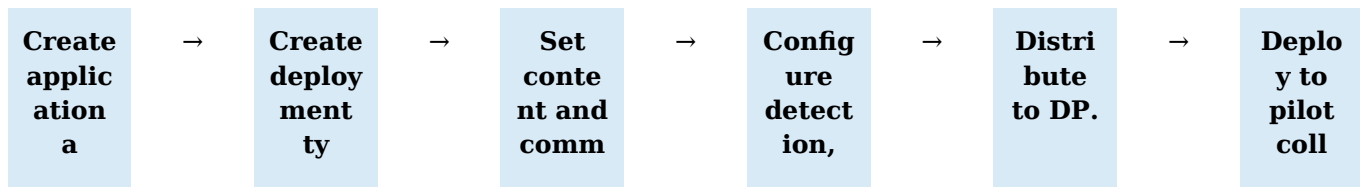

Real-world scenario

Scenario

Application installs manually but SCCM reports failed because detection method is incorrect. Correct detection and update content/version.

Interview answer framework

I compare Application Model with package/program and explain detection-driven state.

Validation and troubleshooting

- Review AppDiscovery, AppEnforce, CAS, and ContentTransferManager logs.

26. SCCM Software Updates


Concept and architecture

Software Update Point integrates WSUS metadata with SCCM to synchronize, group, deploy, and report updates.

End-to-end process

151. Configure SUP and products/classifications.
152. Synchronize and review updates.
153. Create ADR or manual software update group.
154. Distribute deployment package.
155. Deploy to collections with deadlines and maintenance windows.
156. Monitor compliance and remediate scan/deployment errors.

Architecture flow

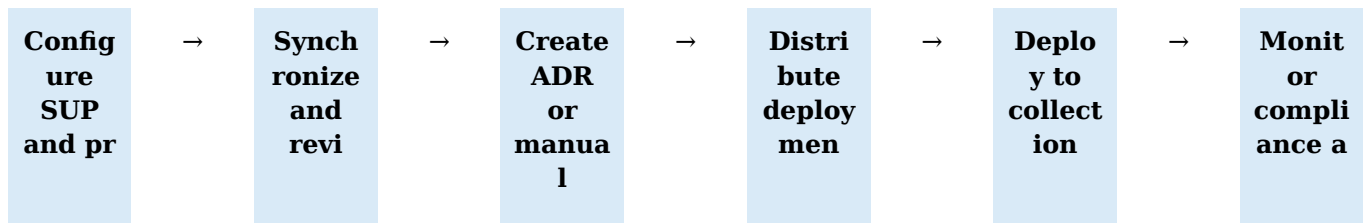

Real-world scenario

Scenario

Clients are unknown because scan failed. Review WUAHandler, ScanAgent, UpdatesDeployment, WindowsUpdate logs, boundary and SUP connectivity.

Interview answer framework

I explain sync, scan, applicability, content, deployment, installation, restart, and compliance reporting.

Validation and troubleshooting

- Separate pilot and production collections.

27. SCCM Operating System Deployment


Concept and architecture

OSD uses boot images, task sequences, drivers, content, PXE/media, and state/process controls.

End-to-end process

157. Prepare supported boot and OS images.
158. Create task sequence.
159. Add drivers, apps, domain/Entra/co-management steps as required.
160. Distribute content.
161. Deploy to unknown/pilot collection.
162. Monitor smsts.log and validate post-build state.

Architecture flow

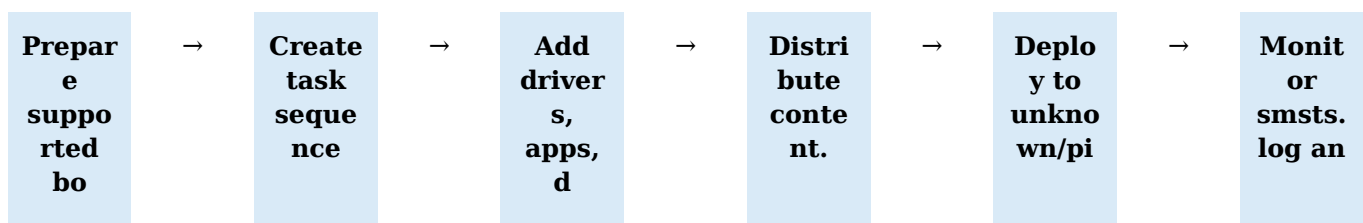

Real-world scenario

Scenario

PXE starts but task sequence cannot find content. Check boundaries, DP/PXE role, content distribution, network, and smsts.log.

Interview answer framework

I describe preflight, WinPE, partition/apply OS, drivers, setup, configuration, apps, and validation.

Validation and troubleshooting

- Use safe collection/deployment controls.

28. Co-management and Cloud Attach


Concept and architecture

Co-management lets Windows devices be managed by Configuration Manager and Intune with workload authority transitioned deliberately.

End-to-end process

163. Meet identity, licensing, client, and enrollment prerequisites.
164. Configure cloud attach/co-management.
165. Pilot automatic Intune enrollment.
166. Choose workload sliders and pilot collection.
167. Validate authoritative policy source.
168. Move workloads in phases and monitor.

Architecture flow

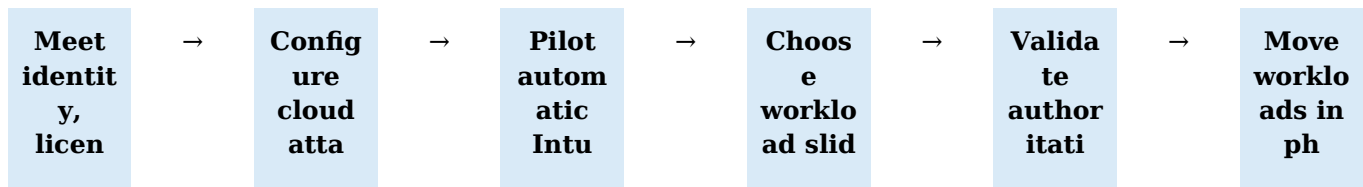

Real-world scenario

Scenario

Compliance workload moved to Intune but duplicate configuration remains in GPO/SCCM. Inventory sources and remove overlap.

Interview answer framework

I explain workload authority, pilot collection, enrollment, tenant attach, and conflict prevention.

Validation and troubleshooting

- Have rollback for workload movement.

29. Entra, EMS, and Microsoft 365 Integration


Concept and architecture

EMS commonly combines identity, endpoint management, information protection, and security capabilities. The architect connects Intune with Entra, Defender, Conditional Access, Microsoft 365 apps, and monitoring.

End-to-end process

169. Map service dependencies and licensing.
170. Establish identity and security connectors.
171. Create governance and emergency-access model.
172. Deploy controls through pilot groups.
173. Use logs and reports across portals.
174. Review security and operational ownership.

Architecture flow

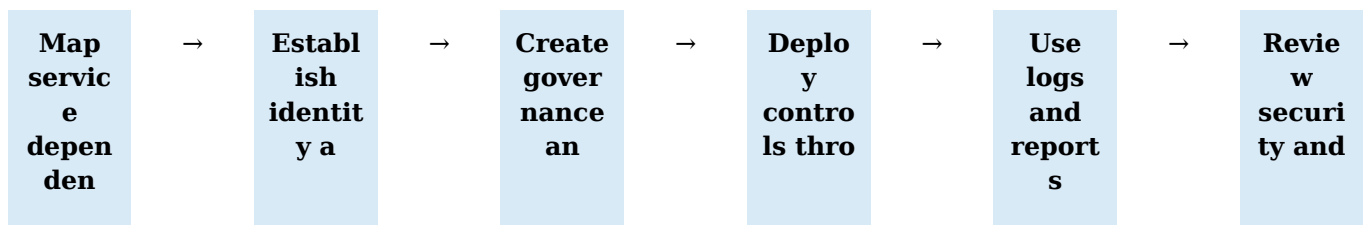

Real-world scenario

Scenario

Sign-in fails after device becomes noncompliant. Correlate Intune compliance, Entra sign-in logs, Conditional Access result, device identity, and Defender risk.

Interview answer framework

I follow the transaction across services rather than troubleshooting each portal in isolation.

Validation and troubleshooting

- Document cross-team handoffs.

30. Azure Monitoring and Log Analysis Concepts


Concept and architecture

Azure Monitor and Log Analytics concepts include data collection, workspaces, queries, alerts, workbooks, retention, access control, and correlation. Intune also exposes native reports and audit logs.

End-to-end process

175. Define the question and authoritative data source.
176. Collect supported telemetry.
177. Normalize timestamps and device identity.
178. Query and correlate events.
179. Create alert or workbook if operationally justified.
180. Document retention, access, and privacy.

Architecture flow

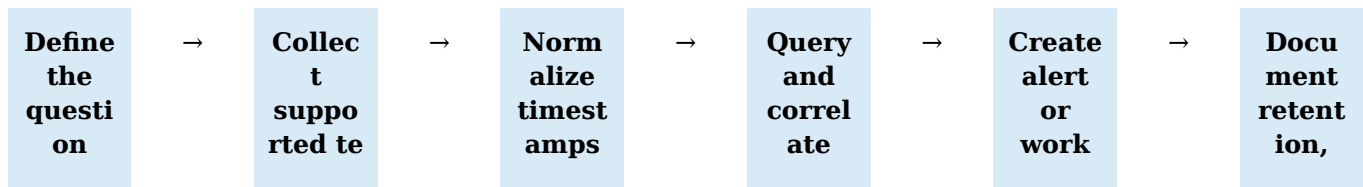

Real-world scenario

Scenario

A troubleshooting dashboard shows stale data. Validate ingestion time, source check-in, query time range, identity joins, and retention.

Interview answer framework

I distinguish device check-in, report refresh, log ingestion, and alert evaluation.

Validation and troubleshooting

- Avoid claiming unsupported Intune log export paths.

31. Networking Fundamentals for Endpoint Management


Concept and architecture

MDM, app delivery, identity, VPN, certificates, and patching depend on DNS, DHCP, routing, proxies, TLS, firewall, and reliable time.

End-to-end process

181. Confirm IP configuration and DHCP lease.
182. Validate DNS resolution.
183. Validate route and proxy.
184. Validate TLS/certificate chain and system time.
185. Test required service endpoints.
186. Correlate network and application logs.

Architecture flow

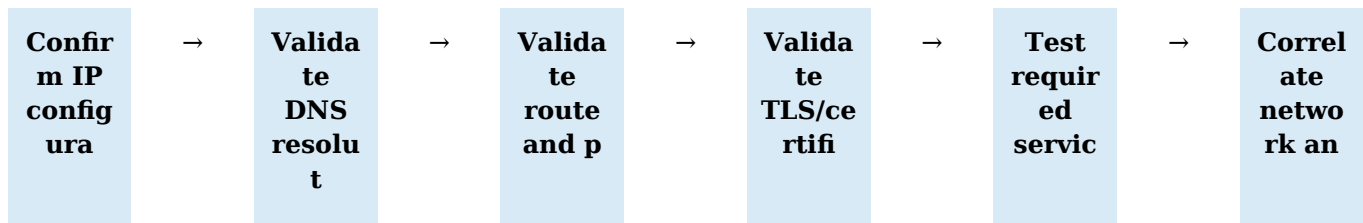

Real-world scenario

Scenario

Device can browse internet but cannot enroll behind TLS inspection. Validate certificate trust, proxy authentication, and Microsoft service endpoint handling.

Interview answer framework

I troubleshoot network in layers: local interface, IP/DHCP, DNS, route/proxy, TLS, service endpoint, application authentication.

Validation and troubleshooting

- Use ipconfig, nslookup/Resolve-DnsName, Test-NetConnection, route print.

32. VPN Architecture


Concept and architecture

VPN design covers tunnel type, user/device identity, certificates, DNS, routes, split tunnel, trusted network detection, and pre-logon requirements.

End-to-end process

187. Define user or device tunnel.
188. Choose authentication and certificate model.
189. Deploy trust and client certificate dependencies.
190. Deploy VPN profile and application.
191. Validate DNS, routes, Conditional Access, and failover.
192. Monitor connection and support logs.

Architecture flow

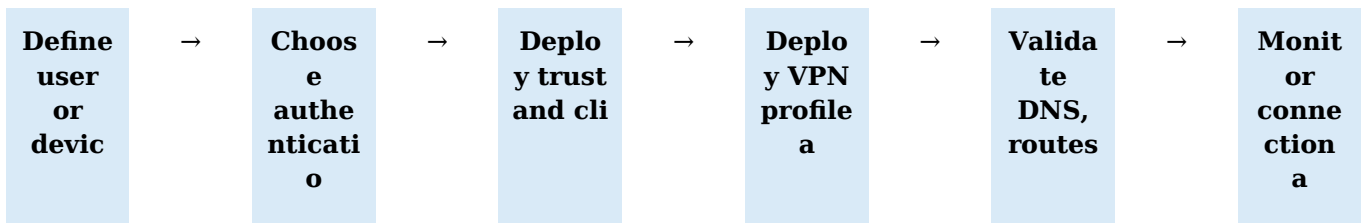

Real-world scenario

Scenario

Remote Autopilot user needs access to on-prem application after sign-in. Deploy user VPN and certificates without making OOB depend on inaccessible internal services.

Interview answer framework

I explain tunnel identity, profile, certificate, routes, DNS, application dependency, and troubleshooting.

Validation and troubleshooting

- Test home networks and captive portals.

33. DNS and DHCP for Device Management


Concept and architecture

DHCP provides address configuration; DNS resolves service names. Failures can look like enrollment, app, VPN, or update problems.

End-to-end process

193. Check DHCP lease, gateway, DNS servers, suffix.
194. Resolve public and internal names.
195. Compare expected record and server response.
196. Flush/re-register only when justified.
197. Validate VPN DNS and split-brain behavior.
198. Document network ownership and evidence.

Architecture flow

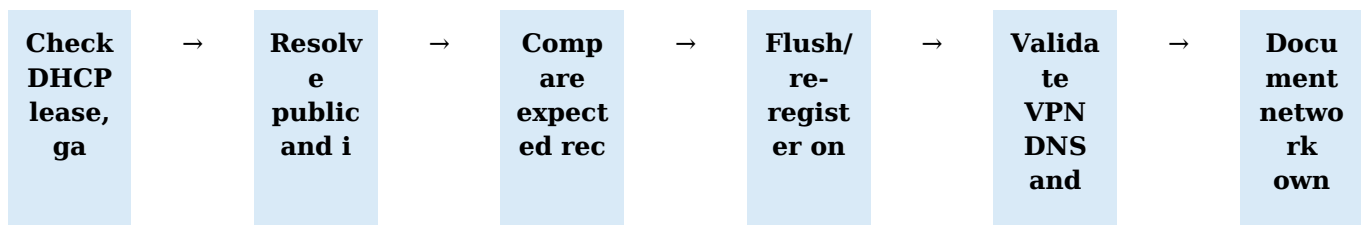

Real-world scenario

Scenario

VPN connects but internal app fails because DNS suffix/search or conditional forwarding is incorrect. Validate name resolution and route.

Interview answer framework

I separate reachability from name resolution and trace client, server, record, cache, and route.

Validation and troubleshooting

- Do not change enterprise DNS without network-team approval.

34. Security and Compliance Standards


Concept and architecture

Interviewers may ask how GDPR, HIPAA, or industry standards influence endpoint controls. The correct approach is to map organizational/legal requirements to approved technical and procedural controls, not claim universal compliance from a single Intune setting.

End-to-end process

199. Identify applicable requirement with legal/security owner.
200. Map to device, identity, app, data, logging, retention, and incident controls.
201. Implement approved technical controls.
202. Collect evidence and test effectiveness.
203. Manage exceptions and remediation.
204. Review periodically.

Architecture flow

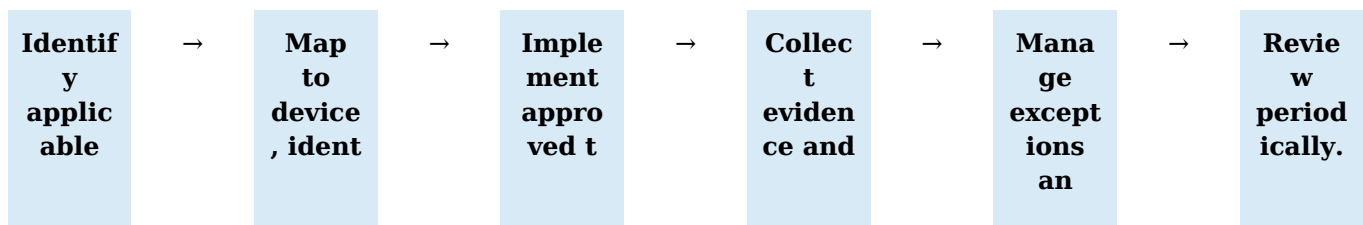

Real-world scenario

Scenario

A policy requires encryption and managed access. Deploy encryption, key escrow, compliance, Conditional Access, and documented recovery process.

Interview answer framework

I avoid saying Intune makes an organization compliant; Intune implements and evidences selected controls within a broader program.

Validation and troubleshooting

- Protect personal data in reports and exports.

35. Troubleshooting Methodology


Concept and architecture

Senior engineers use a repeatable method that prevents random changes and evidence loss.

End-to-end process

205. Clarify symptom, scope, timing, and expected result.
206. Identify user/device/app/policy IDs.
207. Check service health and recent changes.
208. Trace assignment, applicability, delivery, processing, local state, and reporting.
209. Collect logs before destructive action.
210. Fix smallest root cause and validate.

Architecture flow

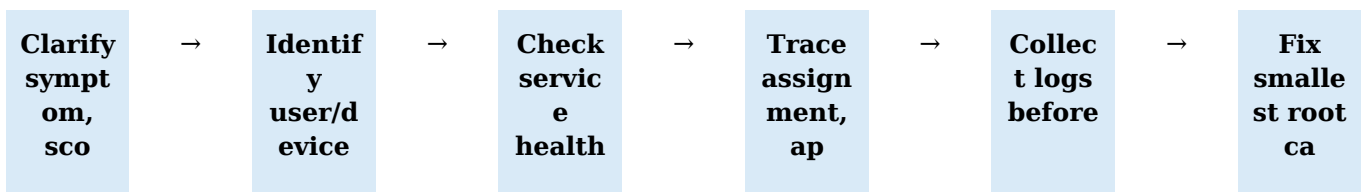

Real-world scenario

Scenario

A policy shows error on 3 of 5,000 devices. Compare affected devices by OS, model, enrollment, ownership, and last check-in before changing global policy.

Interview answer framework

My troubleshooting answer is layered, evidence-driven, reversible, and scoped.

Validation and troubleshooting

- Record error code, timestamp, user, network, and last successful step.

36. Intune Logs and Diagnostics


Concept and architecture

Key evidence includes device diagnostics, MDM event logs, IME logs, Company Portal, browser policy pages, dsregcmd, app status, and portal audit/monitoring.

End-to-end process

211. Capture portal device and policy status.
212. Collect diagnostics before reset.
213. Review DeviceManagement Enterprise Diagnostics Provider.
214. Review IME logs for Win32/scripts.
215. Validate Entra join with dsregcmd.
216. Correlate UTC timestamps across sources.

Architecture flow

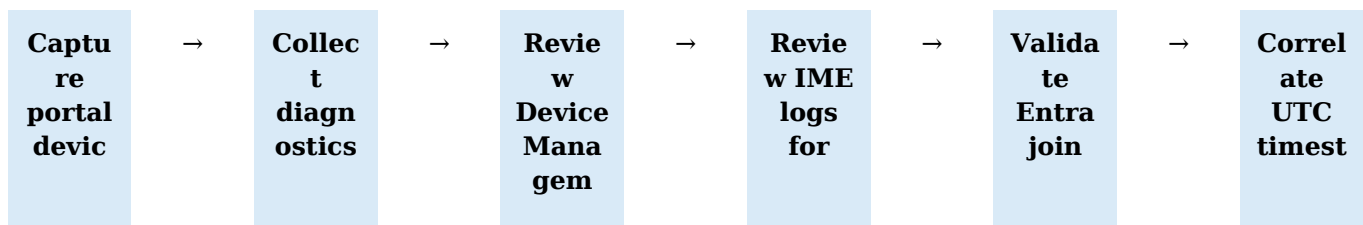

Real-world scenario

Scenario

Win32 app fails only on one model. Compare IME logs, requirements, architecture, disk, security agent, and installer log.

Interview answer framework

I name the log based on workload and explain what I expect to find.

Validation and troubleshooting

- Avoid collecting unnecessary personal data.

37. Global Scale: 5,000+ Devices


Concept and architecture

At scale, architecture must reduce blast radius, automate reporting, delegate safely, and standardize policy/app lifecycle.

End-to-end process

217. Create platform and ownership inventory.
218. Use standard naming, owners, versions, and lifecycle.
219. Deploy rings and regional waves.
220. Automate read-only inventory and exception reporting.
221. Track service KPIs and incidents.
222. Review stale devices, assignments, and exceptions.

Architecture flow

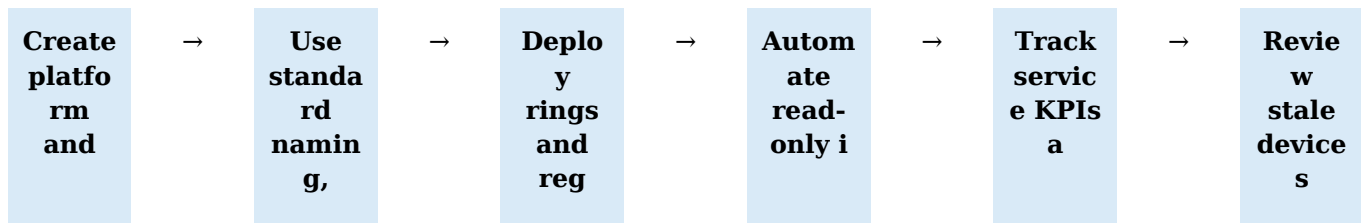

Real-world scenario

Scenario

A policy must reach 5,000 devices globally. Use lab, IT pilot, representative business pilot, phased regions, monitored thresholds, rollback, and communications.

Interview answer framework

If I have not personally managed 5,000 devices, I say: My design for that scale is... and explain controls rather than claiming unsupported experience.

Validation and troubleshooting

- Define success/error thresholds through organizational policy.

38. Mentoring and Team Leadership


Concept and architecture

The JD expects coaching less experienced engineers. Strong answers demonstrate structured guidance, review, documentation, and accountability.

End-to-end process

- 223. Create SOP and practical lab.
- 224. Explain architecture and risk, not only clicks.
- 225. Pair on first implementation.
- 226. Use peer review and change template.
- 227. Give engineer ownership with guardrails.
- 228. Review outcome and lessons learned.

Architecture flow

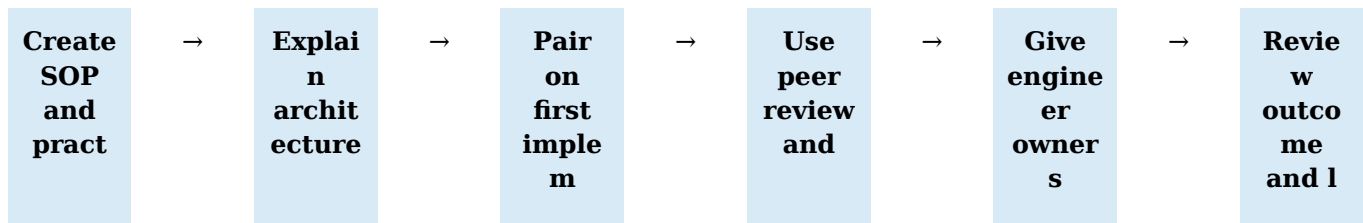

Real-world scenario

Scenario

A junior engineer proposes assigning a new firewall policy to All devices. Coach the engineer to build pilot scope, validation and rollback evidence.

Interview answer framework

I mentor through context, demonstration, supervised ownership, review, and reusable documentation.

Validation and troubleshooting

- Use blameless incident review and clear escalation.

39. Jamf and Workspace ONE Awareness


Concept and architecture

The JD asks familiarity with other endpoint tools. A valid interview answer compares concepts without pretending deep production experience.

End-to-end process

229. Map enrollment, profiles, apps, compliance, inventory, scripts, and remote actions.
230. Identify platform strengths and ownership.
231. Plan coexistence or migration boundaries.
232. Export inventory and requirement mapping.
233. Pilot migration.
234. Retire old management authority carefully.

Architecture flow

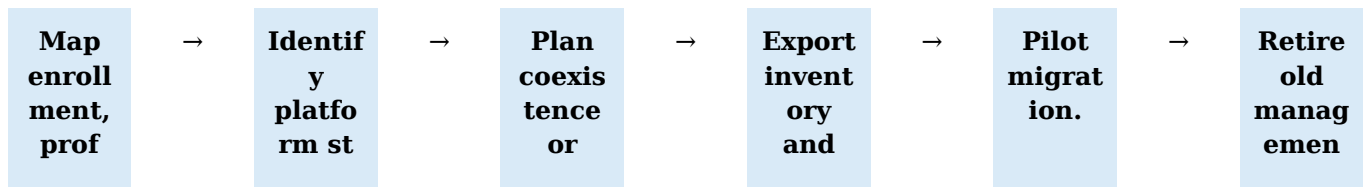

Real-world scenario

Scenario

macOS is managed by Jamf while Windows/mobile use Intune. Define identity, compliance, Conditional Access, inventory, and support integration without dual-managing the same setting.

Interview answer framework

I state my actual level and compare common UEM concepts, migration, integration, and conflict risks.

Validation and troubleshooting

- Never claim tool-depth not actually held.

40. Certification and Learning Plan


Concept and architecture

Microsoft 365 certification is preferred. Certification should support, not replace, hands-on architecture, troubleshooting, scripting, and change experience.

End-to-end process

235. Map JD gaps to learning objectives.
236. Build lab tenant and test devices.
237. Practice official learning modules.
238. Create evidence: SOPs, scripts, diagrams, and incident write-ups.
239. Use mock interviews.
240. Maintain learning log and renewal plan.

Architecture flow

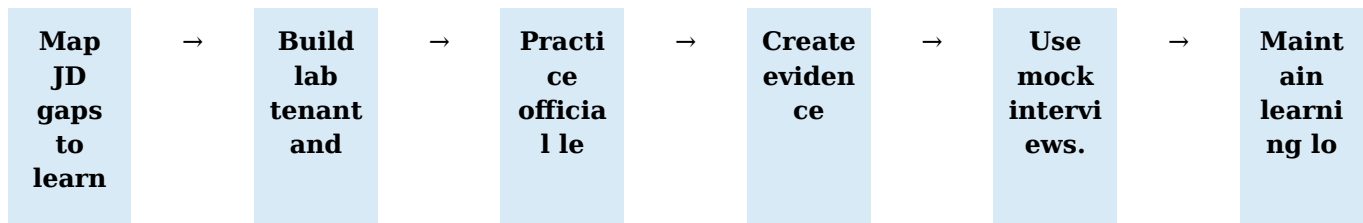

Real-world scenario

Scenario

Create a portfolio with sanitized policy designs, app packaging logic, troubleshooting flows, and PowerShell reports.

Interview answer framework

I connect certification study to real operating tasks and honest hands-on examples.

Validation and troubleshooting

- Do not expose tenant-sensitive screenshots externally.

41. Interview Bank: Intune Architecture

Explain Intune architecture.

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you design for 5,000 devices?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you avoid policy conflicts?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you delegate administration?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you approach tenant migration?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

42. Interview Bank: Enrollment and Autopilot

Registration vs enrollment?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

Why profile not assigned?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

ESP stuck on app?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

User-driven vs self-deploying?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you transfer device ownership?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

43. Interview Bank: Applications

How do Win32 detection rules work?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

Dependency vs supersedence?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

System vs user context?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you troubleshoot 0x errors?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you deploy macOS/Android/iOS apps?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

44. Interview Bank: Security

Compliance vs configuration?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

Baseline vs Endpoint security?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you roll out ASR?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you validate BitLocker?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How does MDE risk affect access?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

45. Interview Bank: SCCM

Application vs package?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do clients locate content?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

Which logs for app deployment?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How does co-management work?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you troubleshoot software updates?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

46. Interview Bank: Automation and Operations

How do you secure Graph automation?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you handle pagination and throttling?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you report stale devices?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you lead an incident?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

How do you mentor engineers?

Answer in four parts: define the concept, describe the architecture or process, give a truthful real example or design example, and finish with validation/troubleshooting evidence.

STAR preparation

Part	Prompt
Situation	What environment, symptom, scale, and risk?
Task	What responsibility and outcome?
Action	What exact analysis, design, change, and collaboration?
Result	What verified outcome and lesson?

47. Mock Scenario: Intune app deployment fails globally after a new version

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

48. Mock Scenario: Autopilot deployment fails during ESP

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

49. Mock Scenario: Conditional Access unexpectedly blocks executives

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

50. Mock Scenario: macOS application is installed but not detected

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

51. Mock Scenario: Android managed app configuration is ignored

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

52. Mock Scenario: SCCM client cannot download content

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

53. Mock Scenario: Update compliance drops after patch Tuesday

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

54. Mock Scenario: Defender connector shows no onboarded devices

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

55. Mock Scenario: VPN and Wi-Fi certificate authentication fails

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

56. Mock Scenario: PowerShell automation produced incomplete report

Expected response structure

- Confirm scope, timing, identifiers, and business impact.
- Check service health and recent change.
- Trace assignment, dependency, delivery, processing, local state, and reporting.
- Collect logs and compare working versus failing endpoints.
- Implement the smallest reversible fix.
- Validate technical and user outcome.
- Document root cause, prevention, and communication.

What interviewers evaluate

- Structured reasoning.
- Technical depth.
- Risk and rollback awareness.
- Cross-team communication.
- Honesty about evidence and limits.

57. Core Glossary

Term	Meaning
MDM	Device enrollment and device-level management
MAM	Application data protection and management
IME	Intune Management Extension for Win32 apps, scripts, and related workloads
CSP	Windows Configuration Service Provider
ESP	Enrollment Status Page
ADE	Apple Automated Device Enrollment
VPP / Apps and Books	Apple volume app and content licensing
MDE	Microsoft Defender for Endpoint
ASR	Attack Surface Reduction
EDR	Endpoint Detection and Response
SUP	SCCM Software Update Point
DP	SCCM Distribution Point
ADR	Automatic Deployment Rule
RBAC	Role-based access control

58. Final 30-Day Preparation Plan

Week	Focus	Deliverable
1	JD mapping, Intune/Entra fundamentals, enrollment, groups	Architecture diagram and 20 oral answers
2	Apps across Windows/macOS/iOS/Android, policies, compliance	Packaging and troubleshooting notes
3	SCCM, co-management, networking, PowerShell	Log map, scripts, migration scenarios
4	Security, scale, mentoring, mock interviews	STAR stories and final mock interview

Daily method

Read one module, explain it aloud without notes, perform or diagram the workflow, answer five questions, and record one troubleshooting scenario.

59. Final Interview Checklist

- Prepare a truthful two-minute introduction aligned to Intune SME responsibilities.
- Prepare 8-10 STAR stories: app deployment, enrollment, security, outage, automation, SCCM, stakeholder, mentoring, scale.
- Know exact logs and troubleshooting layers.
- Explain architecture before portal clicks.
- State assumptions clearly.
- Do not claim unsupported scale, tools, or certifications.
- Ask interview questions about tenant size, platforms, co-management, security ownership, on-call, automation, and success metrics.

60. Official Reference Map

- Microsoft Learn Intune documentation hub
- Microsoft Learn Application management
- Microsoft Learn Windows Autopilot
- Microsoft Learn Device configuration and Settings Catalog
- Microsoft Learn Compliance and Conditional Access
- Microsoft Learn Endpoint Security
- Microsoft Learn Configuration Manager and co-management
- Microsoft Learn Microsoft Graph and PowerShell

Maintenance

Update this guide when Microsoft changes portal navigation, support, licensing, baselines, app types, enrollment models, or Graph resources.

Microsoft Intune Configuration Profiles

Architect Edition: Zero-to-Advanced Master SOP

**Settings Catalog | Templates | ADMX | Custom OMA-URI | Browser | OneDrive |
Wi-Fi | Reports | Architecture**

Purpose

A deeply explained, screenshot-based architecture and operations guide. Each screenshot is expanded with what the screen shows, why the feature is used, how to configure it, real-world examples, design choices, common mistakes, validation, and troubleshooting. This replaces a screenshot-only reference with a practical knowledge base.

Document field	Value
Owner	Endpoint Management / IT Operations
Platform	Microsoft Intune
Topics	Windows Configuration Profiles, Settings Catalog, ADMX, Templates, Custom Profiles
Source screenshots	Configuration Profiles.docx
Edition	Architect Edition 1.1
Prepared date	25 September 2026
Classification	Internal use

Executive Summary


Architecture, operations, and governance at a glance

Microsoft Intune configuration profiles apply managed settings through Settings Catalog, purpose-built templates, imported ADMX, and Custom OMA-URI. The recommended design is to use the most native supported policy surface, maintain one authoritative owner for each setting family, deploy through controlled rings, validate actual endpoint behavior, and keep a tested rollback path.

Executive priorities

Priority	Required control
Standardize	Use approved profile types, naming convention, ownership, versions, and policy records
Reduce risk	Lab and pilot first; prevent overlap; separate high-risk settings and rollback domains
Validate	Check local endpoint behavior, dependencies, user impact, and portal reporting
Operate	Monitor errors, conflicts, certificate expiry, encryption readiness, and stale assignments

Architecture decision flow

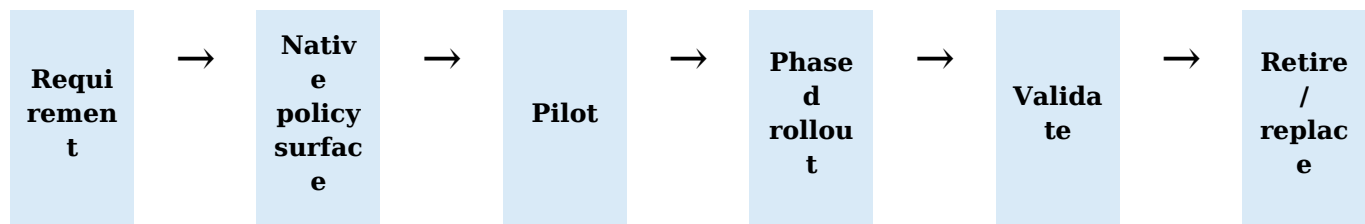

Mandatory architect decisions

- Prefer Settings Catalog when the required Windows setting is available.
- Use workload templates for Wi-Fi, VPN, certificates, Domain Join, and supported Custom scenarios.
- Use imported ADMX only for trusted settings that are not available natively, with dependencies reviewed first.
- Use Custom OMA-URI only when path, scope, data type, supported editions, value, and rollback are documented.
- Prevent overlap across Settings Catalog, Endpoint security, baselines, GPO, browser-cloud management, imported ADMX, and Custom CSP policies.

Executive control point


Succeeded confirms policy processing, not the intended business outcome. Production acceptance requires endpoint validation, dependency testing, user-impact review, and monitoring evidence.

1. Configuration Profiles Fundamentals

1.1 What a configuration profile is

A configuration profile is a collection of device or user settings that Intune delivers to managed endpoints. A profile can configure Windows features, browsers, security options, Wi-Fi, VPN, certificates, OneDrive, restrictions, and application preferences. The profile is assigned to Microsoft Entra groups and processed by the device through MDM or related management channels.

1.2 Processing flow

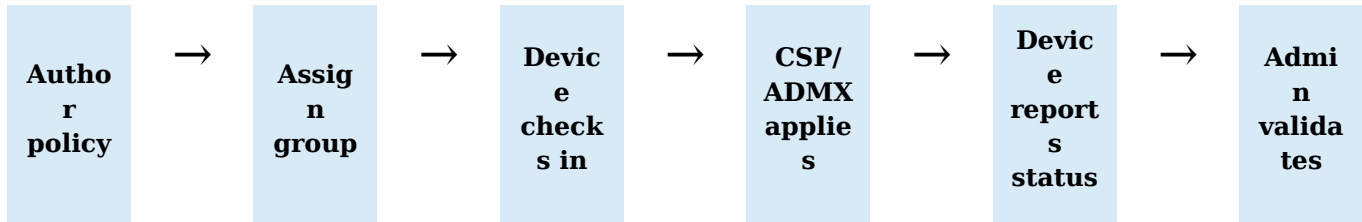

1.3 Configuration vs compliance vs endpoint security

Area	Primary purpose	Example
Configuration profile	Apply a setting	Enable OneDrive silent sign-in
Compliance policy	Evaluate state	Require encryption or minimum OS
Endpoint security policy	Apply security-focused configuration	Configure BitLocker or Firewall
Security baseline	Apply a Microsoft-recommended bundle	Windows or Edge baseline
Application policy	Install/configure application content	Deploy Chrome/Zoom app

1.4 Architectural layers

Layer	Role
Intune policy object	Stores settings, assignments, scope tags, filters
Microsoft Entra group	Defines targeted users/devices
MDM/CSP or ADMX channel	Translates policy to Windows configuration
Device registry/configuration store	Holds effective local state
Reporting	Shows assignment and setting results

Layer	Role
Operations	Investigates conflicts, errors, and lifecycle

Key principle

A policy showing Succeeded means Intune processed the profile. Always validate the actual device behavior, particularly for browser, OneDrive, certificate, Wi-Fi, and Custom OMA-URI settings.

2. Choose the Correct Profile Type

Profile type	Use when	Preferred position
Settings Catalog	The required setting is available in the unified catalog	First choice for new Windows policies
Template	A purpose-built template exists, such as Wi-Fi, VPN, Domain Join, or Custom	Use when the template matches the scenario
Administrative Templates in Settings Catalog	Managing ADMX-backed Windows/application settings	Use the unified Settings Catalog experience
Imported ADMX	A trusted third-party setting is unavailable natively	Use after dependency and vendor review
Custom OMA-URI	A supported CSP setting is unavailable in catalog/template	Last-resort expert option
Endpoint security policy	Security workload is available under Endpoint security	Prefer for security ownership and reporting

2.1 Decision flowchart



2.2 Do not choose Custom first

- Settings Catalog provides searchable metadata, supported values, and clearer reporting.
- Templates reduce typing and path errors.
- Imported ADMX can present vendor policy settings in the portal.
- Custom OMA-URI requires exact CSP path, data type, value, scope, and edition support.

3. Navigate to Configuration Profiles

Exact portal path

Microsoft Intune admin center > Devices > Configuration

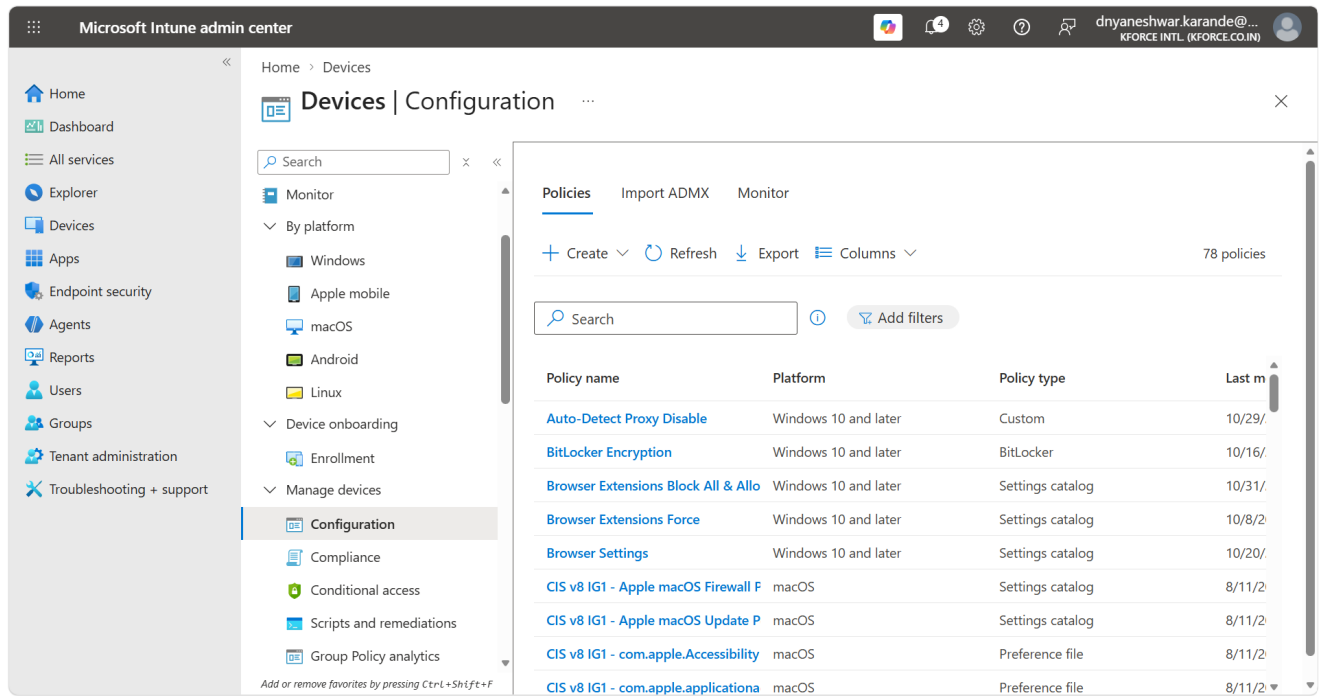


Figure 1. Devices > Configuration overview. This is the central workspace for policies, ADMX import, monitoring, encryption, certificates, assignment failures, and restricted-app reports.

3.1 What this screen is used for

- Create and manage device configuration policies.
- Import approved ADMX/ADML templates.
- Open operational reports.
- Review encryption and certificate inventory.
- Investigate assignment failures.
- Review restricted app detections.

Home > Devices

Devices | Configuration

Policies
Import ADMX
Monitor

+ Create
Refresh
Export
Columns
78 policies

Search
Add filters

Policy name	Platform	Policy type	Last modified	Scope tag
CIS v8 IG2 - com.apple.contraints	macOS	Preference file	8/11/2026, 8:17:50 PM	Default
CIS v8 IG2 - com.apple.Terminal	macOS	Preference file	8/11/2026, 8:18:48 PM	Default
CIS v8 IG2 - com.apple.timed	macOS	Preference file	8/11/2026, 8:19:31 PM	Default
Delivery Optimization - India IDC	Windows 10 and later	Delivery Optimization	10/16/2025, 9:48:44 PM	Default
Device Settings	Windows 10 and later	Settings catalog	11/11/2025, 10:34:55 PM	Default
Enterprise Apple macOS Platform S	macOS	Settings catalog	8/11/2026, 6:22:31 PM	Default
Enterprise Privilege Management E	Windows 10 and later	Elevation settings policy	11/17/2025, 8:51:54 PM	Default
Google Chrome Browser Configurat	macOS	Preference file	9/15/2026, 1:40:31 AM	Default
Google Chrome Browser Configurat	macOS	Preference file	8/11/2026, 9:59:01 PM	Default

Figure 2. Configuration navigation from Devices and platform pages.

3.2 Architect interpretation

The Configuration workspace is not only a policy list. It is the operational center for policy lifecycle: design, creation, assignment, monitoring, failure analysis, encryption posture, and certificate visibility. An architect should link every profile to an owner and a validation report.

4. Policy Inventory and Imported ADMX

The screenshot shows the 'Policies' tab in the Intune console. The breadcrumb is 'Home > Devices'. The page title is 'Devices | Configuration'. There are three tabs: 'Policies' (selected), 'Import ADMX', and 'Monitor'. Below the tabs are actions: '+ Create', 'Refresh', 'Export', and 'Columns'. A search bar and 'Add filters' button are present. The table lists 78 policies. The visible policies are:

Policy name	Platform	Policy type	Last modified	Scope tag
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:28 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:28 PM	Default
Windows Autopatch Microsoft 365	Windows 10 and later	Settings catalog	5/5/2026, 7:28:27 PM	Default
Windows Hello for Business	Windows 10 and later	Settings catalog	11/18/2025, 2:09:05 AM	Default
Wireless Profile - India IDC	Windows 10 and later	Wi-Fi	10/23/2025, 9:07:23 PM	Default
Wireless Profile - India IDC macOS	macOS	Wi-Fi	9/16/2026, 11:21:36 PM	Default
Zscaler Windows Firewall Rule	Windows 10 and later	Windows Firewall Rules	1/28/2026, 11:43:50 PM	Default

Figure 3. Policies, Import ADMX, and Monitor tabs with Create, Refresh, and Export actions.

The screenshot shows the 'Monitor' tab in the Intune console. The breadcrumb is 'Home > Devices'. The page title is 'Devices | Configuration'. There are three tabs: 'Policies', 'Import ADMX', and 'Monitor' (selected). Below the tabs is a 'Refresh' button. The section 'Configuration policy assignment failures' shows 'Policies with error or conflict' with a count of 1. The 'Additional monitoring reports' section includes three cards:

- Devices with restricted apps**: View a list of devices on which users have installed one or more restricted apps.
- Device encryption status**: View encryption details, including encryption readiness, encryption status, and TPM version.
- Certificates**: Review info on certificates, including thumbprints, issuance info, and status.

Figure 4. Import ADMX inventory and administrative-template management area.

4.1 Policy inventory procedure

- Open Policies.

- Export the policy list before major redesign or migration.
- Record name, platform, profile type, assignments, last modified date, and owner.
- Identify duplicates and legacy Administrative Templates.
- Map each profile to business purpose and support team.
- Do not delete a policy until replacement behavior is validated.

4.2 Import ADMX procedure

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Import ADMX > Import

- Download ADMX and matching en-US ADML from the trusted vendor.
- Open the ADMX in a text editor and identify namespace dependencies.
- Import dependency files first.
- Select ADMX and ADML files.
- Add a clear description and upload.
- Wait until Status is Available.
- Create a Settings Catalog profile and locate the imported Administrative Template settings.
- Pilot before production.

4.3 Current Microsoft limitations

Microsoft documents imported ADMX/ADML as a Windows feature in public preview. Microsoft states a maximum of 20 ADMX files, each ADMX up to 1 MB, one ADML per ADMX, and en-US as the supported language. Dependencies must be imported first.

Current platform change

Microsoft states the older Templates > Administrative Templates profile type became deprecated and read-only starting with the December 2412 release. Build new ADMX-backed Windows policies through Settings Catalog and plan controlled migration of legacy profiles.

5. Create a Settings Catalog Profile from Scratch

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy

5.1 Platform and profile type

- Set Platform to Windows 10 and later.
- Set Profile type to Settings catalog.
- Select Create.
- On Basics, enter a unique Name.
- Enter a Description with owner, purpose, scope, version, ticket, and risk.
- Select Next.

5.2 Select settings

- Select Add settings.
- Search by plain-language keyword, CSP family, or Administrative Templates category.
- Open setting help text and confirm supported editions and scope.
- Select only settings required for this policy.
- Close the picker.
- Configure each setting value.
- Remove accidental duplicate or conflicting settings.


5.3 Scope tags and assignments

- Apply Scope tags if help-desk or regional RBAC requires them.
- Assign to a small pilot group first.
- Use device groups for device-scoped settings and user groups for user-scoped settings.
- Use assignment filters only with documented include/exclude logic.
- Review included and excluded groups.

5.4 Review and create

- Review every configured value.
- Confirm policy name and assignments.
- Select Create.
- Open the new policy.
- Confirm device and user check-in status.
- Validate actual endpoint behavior.

5.5 Creation flowchart

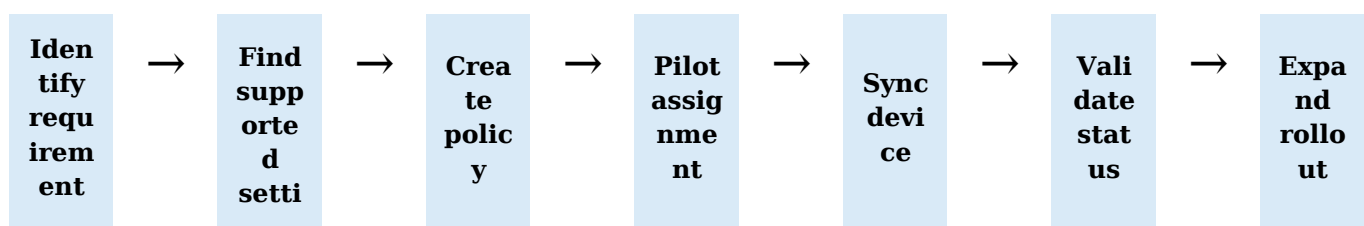

ng

6. Monitoring Architecture and Assignment Failures

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Monitor

Home > Devices | Configuration

Assignment failures (preview)

This report may be delayed in showing the most recent information.

Refresh Export Columns

1 item

Search Add filters

Policy name	Policy type	Policy source	Platform	Devices with errors	Devices with conflict
CIS v8 IG1 - Apple macOS Update P	Settings Catalog	Device Configu...	MacOS	1	0

Figure 5. Assignment failures report. The report lists policies that have one or more failed assignments and helps prioritize operational investigation.

Home > Devices | Configuration > Assignment failures (preview)

Assignment failures - CIS v8 IG1 - Apple macOS Update Policy DDM

Configuration policies with one or more failed device assignments.

This report may be delayed in showing the most recent information.

Refresh Export Columns

1 item

Search Add filters

Device name	User principal name	Deployment status	Last check-in
IN-GX537H96GD	morty.smith@kforce.co.in	Error	09/18/2026, 08:16:12 PM


Figure 6. Assignment failure detail for an Apple macOS update policy, showing the failed policy record.

6.1 How to investigate assignment failure

- Open Assignment failures.
- Filter by policy, platform, user, or device.
- Open the failed policy.
- Confirm the assignment group and effective membership.
- Confirm platform and OS support.

- Check whether the setting is device-scoped or user-scoped.
- Review per-setting status.
- Verify network and device check-in.
- Collect client logs and local state.
- Document root cause and resolution.

6.2 Failure flowchart

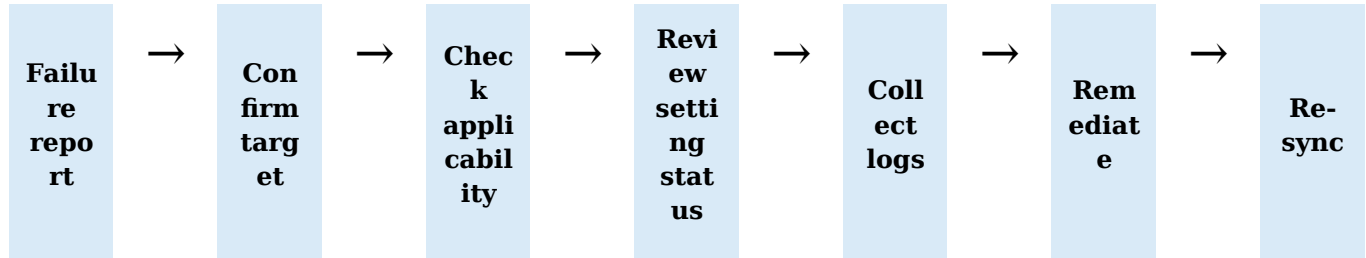

6.3 Common causes

Cause	Example	Resolution
Wrong scope	User setting assigned only to device without user session	Use correct user/device group
Unsupported OS/edition	CSP not supported on installed edition	Adjust requirement or use supported scope
Conflict	Two profiles configure different values	Consolidate ownership and remove overlap
Data/config error	Invalid OMA-URI or value	Correct path/data type/value
Dependency	Certificate or ADMX dependency missing	Deploy dependency first
Stale device	Device has not checked in	Restore connectivity and sync

7. Devices with Restricted Apps

Home > Devices | Configuration

Devices with restricted apps ...



Refresh Export Columns

Search ⓘ

Device name	Email address	Profile name	Platform	State	Restricted apps
-------------	---------------	--------------	----------	-------	-----------------

**No data found**

Figure 7. Devices with restricted apps report, showing device and user identifiers.

7.1 What the report means

This report identifies devices where an application restriction policy detected restricted applications. It is useful for validating allowed/blocked application governance, but it does not replace application inventory, Defender discovery, or software asset management.

7.2 Investigation procedure

- Open the report.
- Export results for audit evidence.
- Confirm the source configuration profile and restriction definition.
- Identify device, user, application, detection time, and ownership.
- Validate whether the application is truly prohibited or falsely matched.
- Coordinate remediation with user, manager, security, and software governance.
- Remove or allow the application through approved change.
- Re-sync and confirm the report clears.

7.3 Real-world example

Scenario

A prohibited remote-access utility appears on a corporate laptop. The endpoint engineer confirms the device and user, validates the exact app, opens a security ticket, removes the app, blocks reinstallation using the organization's approved security control, and records the evidence.

8. Encryption Report and BitLocker Architecture

Home > Devices | Configuration

Encryption report

Use this report to track the status of encryption on your devices. The readiness column reports whether or not a device meets the requirements to enable encryption. To learn more about macOS and Windows 10 or later encryption policies and their requirements, see the Intune documentation. [Learn more](#)

Recently updated information can take up to 24 hours to be available in this report.

Refresh Export Columns 110 items

Search Add filters

Device name ↑	OS	OS version	TPM version	Encryption readiness	Encryption status	User principal name
APP8GB-APF5C69V	Windows	10.0.26200.9448	2.0	Ready	Not encrypted	
APP8GB-NN1AT8NS	Windows	10.0.26200.9448	2.0	Ready	Not encrypted	
IN-5CD5249872	Windows	10.0.26100.9448	2.0	Ready	Encrypted	manish.hiwase@kforce.co.
IN-5CD524987D	Windows	10.0.26100.9445	2.0	Ready	Encrypted	sonika.katariya@kforce.co
IN-5CD524987L	Windows	10.0.26100.9445	2.0	Ready	Encrypted	sakshi.sharma@kforce.co.i
IN-5CD52498H5	Windows	10.0.26200.9106	2.0	Ready	Encrypted	procheta.ganguly@kforce.
IN-5CD524B9V4	Windows	10.0.26100.9106	2.0	Ready	Encrypted	shaurya.deshmukh@kfor

Figure 8. Encryption report showing encryption status and readiness across devices.

Home > Devices | Configuration

Encryption report

Use this report to track the status of encryption on your devices. The readiness column reports whether or not a device meets the requirements to enable encryption. To learn more about macOS and Windows 10 or later encryption policies and their requirements, see the Intune documentation. [Learn more](#)

Recently updated information can take up to 24 hours to be available in this report.

Refresh Export Columns

Search Add filters

Device name ↑	OS	OS version	TPM version	Encryption readiness
IN-5CD5390VVX	Windows	10.0.26200.9445	2.0	Ready
IN-5CD5390VX4	Windows	10.0.26200.9448	2.0	Ready
IN-5CD5390VX9	Windows	10.0.26200.9106	2.0	Ready
IN-5CD5390VZJ	Windows	10.0.26100.9106	2.0	Ready
IN-5CD5391HNB	Windows	10.0.26200.9106	2.0	Ready
IN-5CD5391HQ8	Windows	10.0.26200.9445	2.0	Ready
IN-5CD539CZX5	Windows	10.0.26200.9106	Unknown	Not ready

Device encryption status

IN-5CD5390VX9

Device name
IN-5CD5390VX9

Encryption readiness
Ready

Encryption status
Encrypted

Profiles
BitLocker Encryption


Profile state summary
Succeeded

Status details
Success

8.1 What the report provides

- Encryption status.
- Readiness to enable encryption.
- Platform and OS context.
- TPM-related information where reported.
- Operational visibility across Windows and macOS encryption policies.

8.2 Configuration vs report

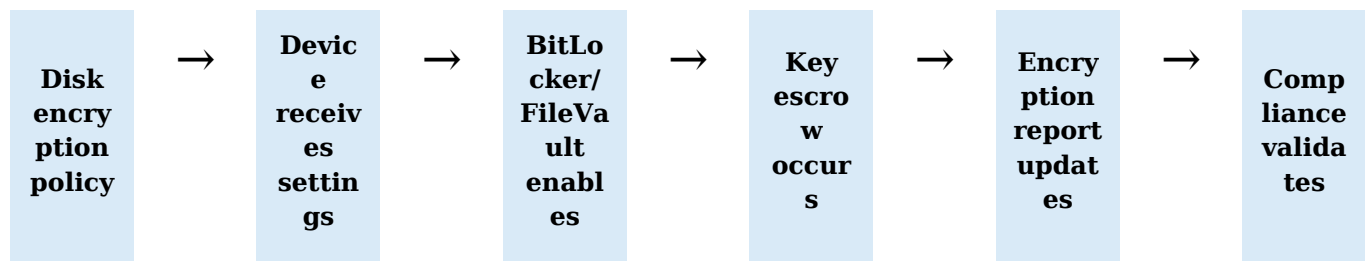

8.3 Real-world example

Scenario

A device reports Ready but Not encrypted. The engineer checks the Endpoint security disk-encryption profile assignment, per-setting status, TPM state, edition, reboot requirements, and recovery-key escrow. The engineer does not treat readiness as proof of encryption.

8.4 Troubleshooting

- Check encryption policy assignment.
- Check TPM state and BIOS.
- Check local encryption status.
- Check recovery key in Intune/Entra.
- Review per-setting conflicts.
- Review last check-in and report latency notice.
- Validate device ownership and user context.

9. Certificate Inventory and Lifecycle

Microsoft Intune Center

Home > Devices | Configuration

Certificates

This report may be delayed in showing the most recent information.

Refresh Export Columns 205 items

Search

Device name	User name	Thumbprint	Serial number	Subject name	Issuer	Key usage	Extended key ...
DESKTOP-3ATR...		D6D73114FE44...	3DCB5E8C651A...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
DESKTOP-9VC...		A67D77ADFC6...	5CEE782EFA1...	CN=Kforce International Issuing CA, O=Kforce International, C=US			1.3.6.1.5.5.7.3.2
DESKTOP-I6I9G...		196952F4F7D6...	18E373F264F2...				1.3.6.1.5.5.7.3.2
DESKTOP-N84I...		78B937F54458...	008B2408E17C...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
DESKTOP-OKD...		575DDECA1071...	6CDA9178BC6...	CN=DESKTOP-...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD5249872		AC40BB3BD08B...	00EDC9029837...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD524987D		0C0D73E7411E...	00D9A50FB16F...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD524987D		B92DBBC573D...	00CA3A957E8A...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2

Figure 10. Certificates report with certificate inventory, device, user, and issuance details.

Home > Devices | Configuration

Certificates

This report may be delayed in showing the most recent information.

Refresh Export Columns 205 items

Search

Device name	User name	Thumbprint	Serial number	Subject name	Issuer	Key usage	Extended key ...
IN-5CD52498H5		B9C91C47DDE...	68303EDAF5F1...	CN=IN-5CD524...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52498H5		50134CD0304C...	0D7193910CEB...	CN=Kforce International Issuing CA, O=Kforce International, C=US			1.3.6.1.5.5.7.3.2
IN-5CD524B9V4		14A7F0655959...	15848745AEE1...				1.3.6.1.5.5.7.3.2
IN-5CD52933X7		2BBCA021F341...	00BFA73DAACE...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X7		B53916E2D0A1...	00D453826F92...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X7		9FF97A43B0A8...	00B0BCB29658...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X8		B913A99D50E6...	00D69DB64D8...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2
IN-5CD52933X9		E9F979A54C9D...	00F2B3660117E...	CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2

Figure 11. Certificates report with additional records and expiration information.

Certificates

ⓘ This report may be delayed in showing the most recent information. ✕

🔄 Refresh ⬇️ Export 📄 Columns 205 items

🔍 Search ⓘ


Subject name	Issuer	Key usage	Extended key ...	Certificate issu...	Certificate expi...	Certificate status	Policy Id
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	02/03/2026, 10:01	02/03/2027, 12:00	Revoked	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	05/04/2026, 06:28	05/04/2027, 12:00	Issued	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	04/27/2026, 12:36	04/27/2027, 12:00	Revoked	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	01/08/2026, 07:25	01/08/2027, 12:00	Revoked	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/16/2026, 05:37	07/16/2027, 12:00	Issued	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	12/15/2025, 03:11	12/15/2026, 12:00	Issued	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	12/15/2025, 02:23	12/15/2026, 12:00	Revoked	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/07/2026, 07:05	07/07/2027, 12:00	Revoked	29c3adfc-6aa5-...
.. CN=IN-5CD529...	CN=Kforce Inte...	160	1.3.6.1.5.5.7.3.2	07/01/2026, 12:57	07/01/2027, 12:00	Revoked	29c3adfc-6aa5-...

Figure 12. Certificate report filtered or continued for operational review.

9.1 Why certificate visibility matters

Certificates support Wi-Fi, VPN, S/MIME, authentication, and device trust. Expired, missing, duplicated, or mis-scoped certificates can break access even when a configuration profile reports success.

9.2 Certificate architecture

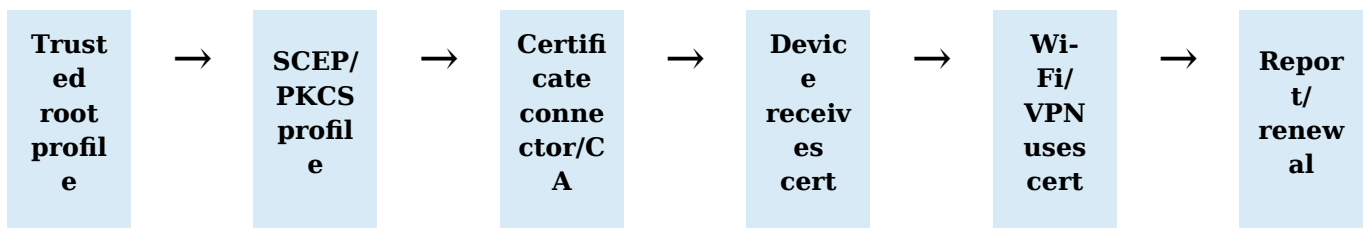

9.3 Real-world example

Scenario

Corporate Wi-Fi fails after a certificate renewal. The engineer checks the trusted root chain, SCEP profile assignment, connector health, certificate subject/SAN, expiry, user/device scope, and Wi-Fi EAP configuration.

9.4 Operational checks

- Export certificate inventory.
- Track expiry before outage.
- Confirm chain and issuing CA.

- Confirm certificate is user or device scoped as intended.
- Confirm connectors and NDES/PKCS services when used.
- Test renewal and replacement.
- Remove obsolete certificates carefully.

10. Browser Settings Profile: Overview and Assignment


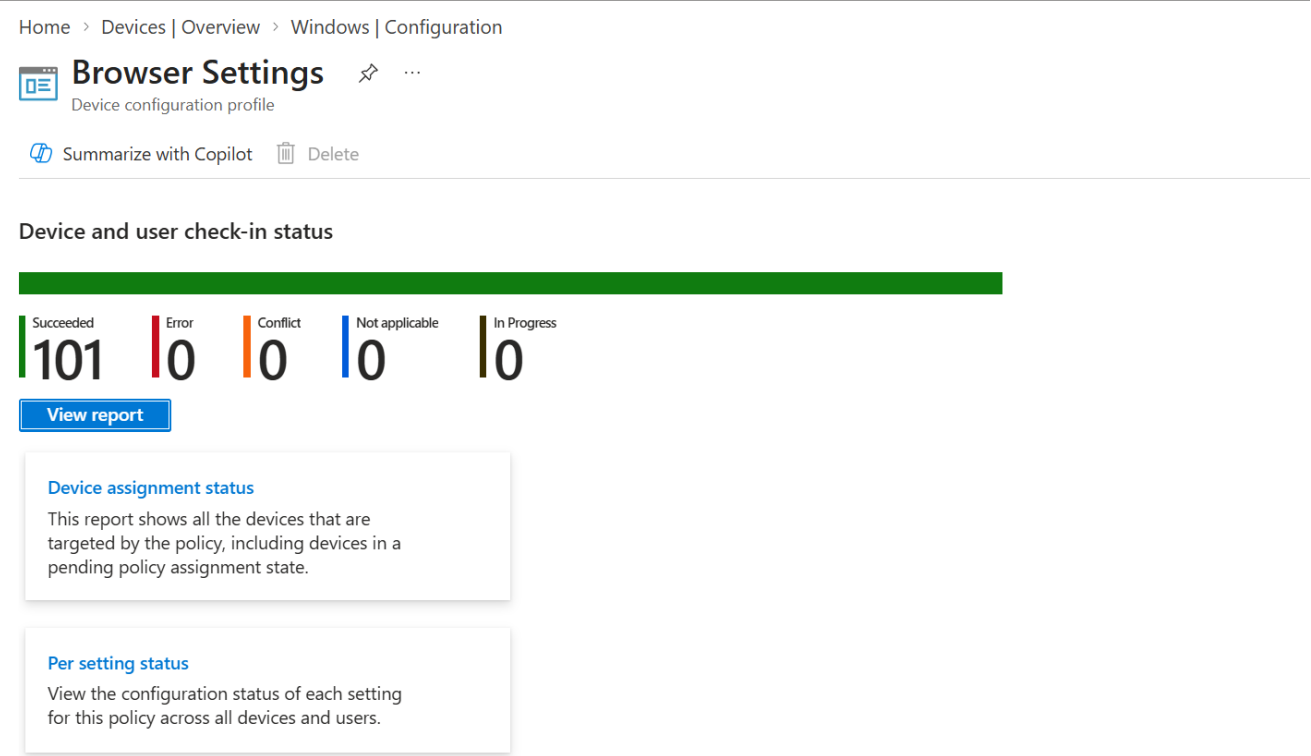


Figure 13. Browser Settings profile overview with device and user check-in status.

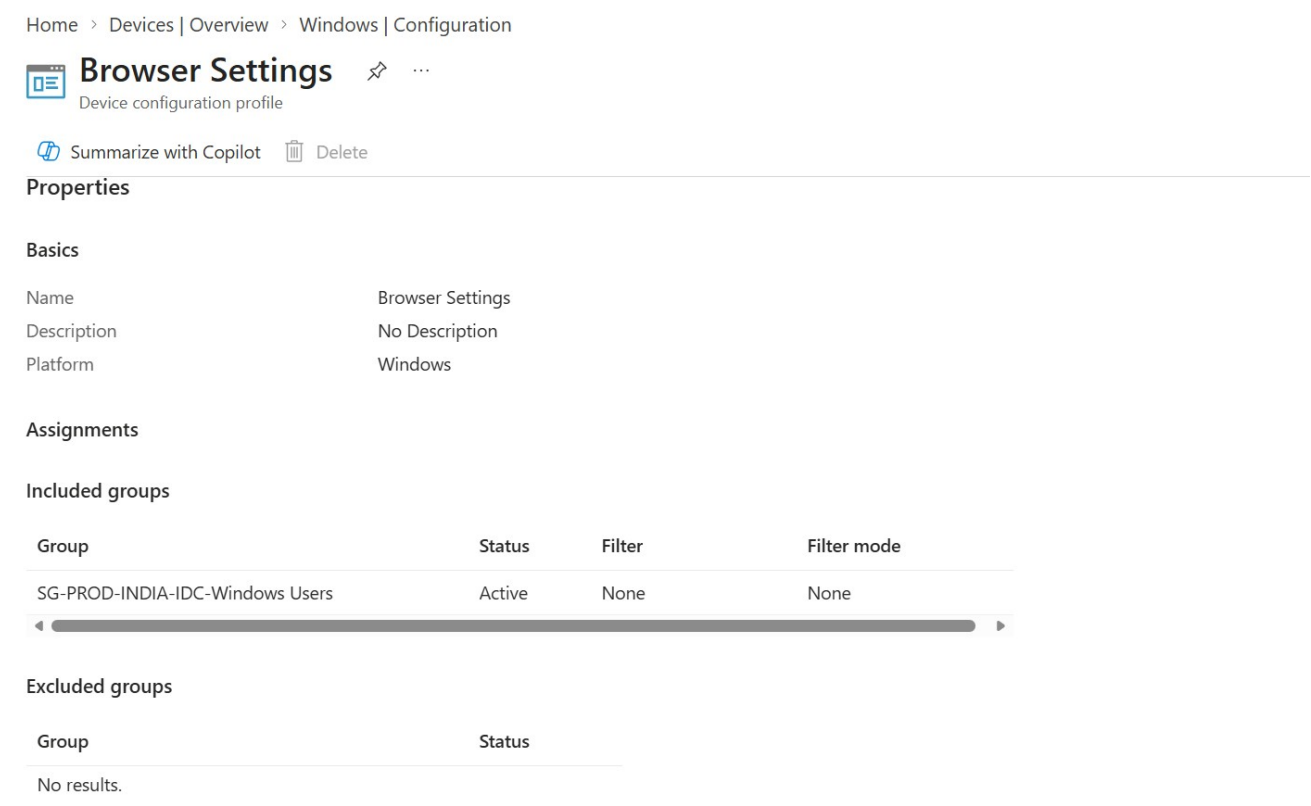

10.1 What this profile demonstrates

A single Settings Catalog profile can configure Google Chrome and Microsoft Edge settings. This can simplify browser governance, but combining many products in one profile increases blast radius. Separate profiles may be better when Chrome and Edge have different owners or release cycles.

10.2 Assignment decisions

Question	Design choice
Device or user settings?	Assign according to the scope shown in the setting name. Settings marked User apply in user context.
One profile or separate?	Separate by product or risk when ownership and rollback differ.
Pilot scope?	Use a small IT/browser pilot group before broad deployment.
Conflicts?	Check imported ADMX, Settings Catalog, GPO, and browser cloud management.

10.3 Validation

- Open profile status.
- Confirm target devices/users received the profile.
- Open browser policy page such as `edge://policy` or `chrome://policy` on a test device.
- Confirm source, level, value, and status.
- Test the user experience.

11. Google Chrome and Microsoft Edge Settings Deep Dive

Home > Devices | Overview > Windows | Configuration



Browser Settings

Device configuration profile



Summarize with Copilot



Delete



Configuration settings

^ Google

Google Chrome

Allow download restrictions (User) Enabled

Download restrictions (User)

Block malicious downloads. Recommended.

Browser sign in settings (User) Enabled

Browser sign in settings (User)

Disable browser sign-in

Enable showing full-tab promotional content (User)

Disabled

Google Chrome > Password manager

Figure 15. Browser Settings configuration for Google Chrome sign-in, password manager, and related categories.

Home > Devices | Overview > Windows | Configuration

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Enable showing full-tab promotional content (User)   Disabled

Google Chrome > Password manager

Enable saving passwords to the password manager (User)   Disabled

Google Chrome > Safe Browsing settings

Safe Browsing Protection Level (User)  Safe Browsing is active in the standard mode.

Safe Browsing Protection Level (User)  Enabled 

Microsoft Edge

Figure 16. Chrome password manager and Safe Browsing settings plus Microsoft Edge categories.

Home > Devices | Overview > Windows | Configuration

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Microsoft Edge

Automatically import another browser's data and settings at first run (User)  Disabled 

Browser sign-in settings (User)   Enabled

Browser sign-in settings (User)  Force users to sign-in to use the browser

Force synchronization of browser data and do not show the sync consent prompt (User)   Enabled

Hide the First-run experience and splash screen (User)   Enabled

Figure 17. Microsoft Edge browser sign-in settings.

Browser Settings ...

Device configuration profile

 Summarize with Copilot  Delete

Browser sign-in settings (User)   Enabled

Browser sign-in settings (User)  Force users to sign-in to use the browser

Force synchronization of browser data and do not show the sync consent prompt (User)   Enabled

Hide the First-run experience and splash screen (User)   Enabled

Password manager and protection

Enable saving passwords to the password manager (User)   Disabled

Figure 18. Browser sign-in policy configured to require sign-in.

11.1 Browser sign-in

Choice	Effect	Use case
Disable sign-in	Prevents browser profile sign-in	Shared or restricted devices
Enable sign-in	Allows user choice	Standard managed browser
Force sign-in	Requires organizational browser sign-in	Managed sync and identity-aligned browsing

11.2 Password manager

- Decide whether the built-in password manager is permitted.
- Coordinate with enterprise password manager policy.
- Avoid conflicting Chrome, Edge, and third-party browser controls.
- Explain user impact before disabling stored passwords.

11.3 Safe Browsing and security

- Use vendor-supported security controls.

- Coordinate browser baseline, SmartScreen/Safe Browsing, download restrictions, and Defender web protection.
- Pilot to avoid blocking required business sites or downloads.

11.4 Real-world example

Scenario

The organization requires Edge sign-in and disables consumer profile usage while allowing Chrome only for a legacy application. Separate profiles are used: Edge Corporate Standard and Chrome Legacy Restricted. Each has different assignments and rollback.

12. Browser Extension Governance

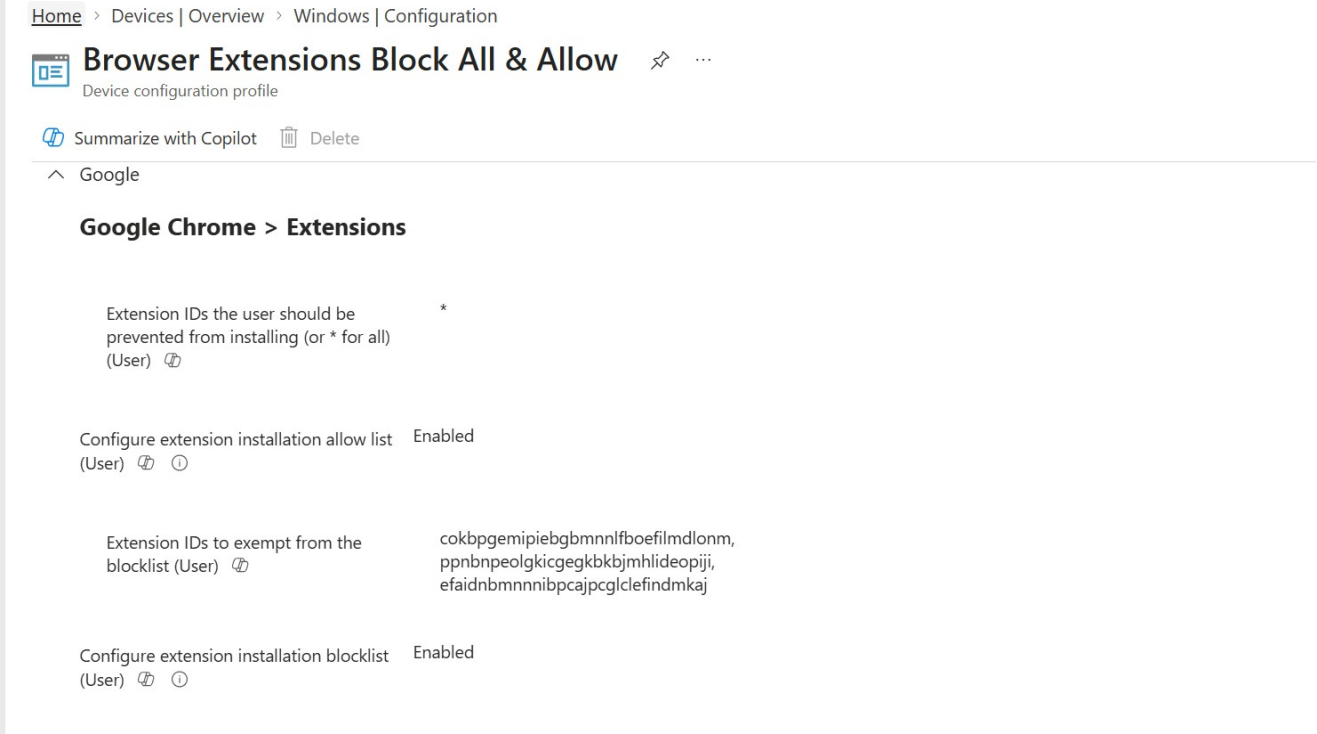


Figure 19. Chrome extension policy using block-all and allow-list controls.


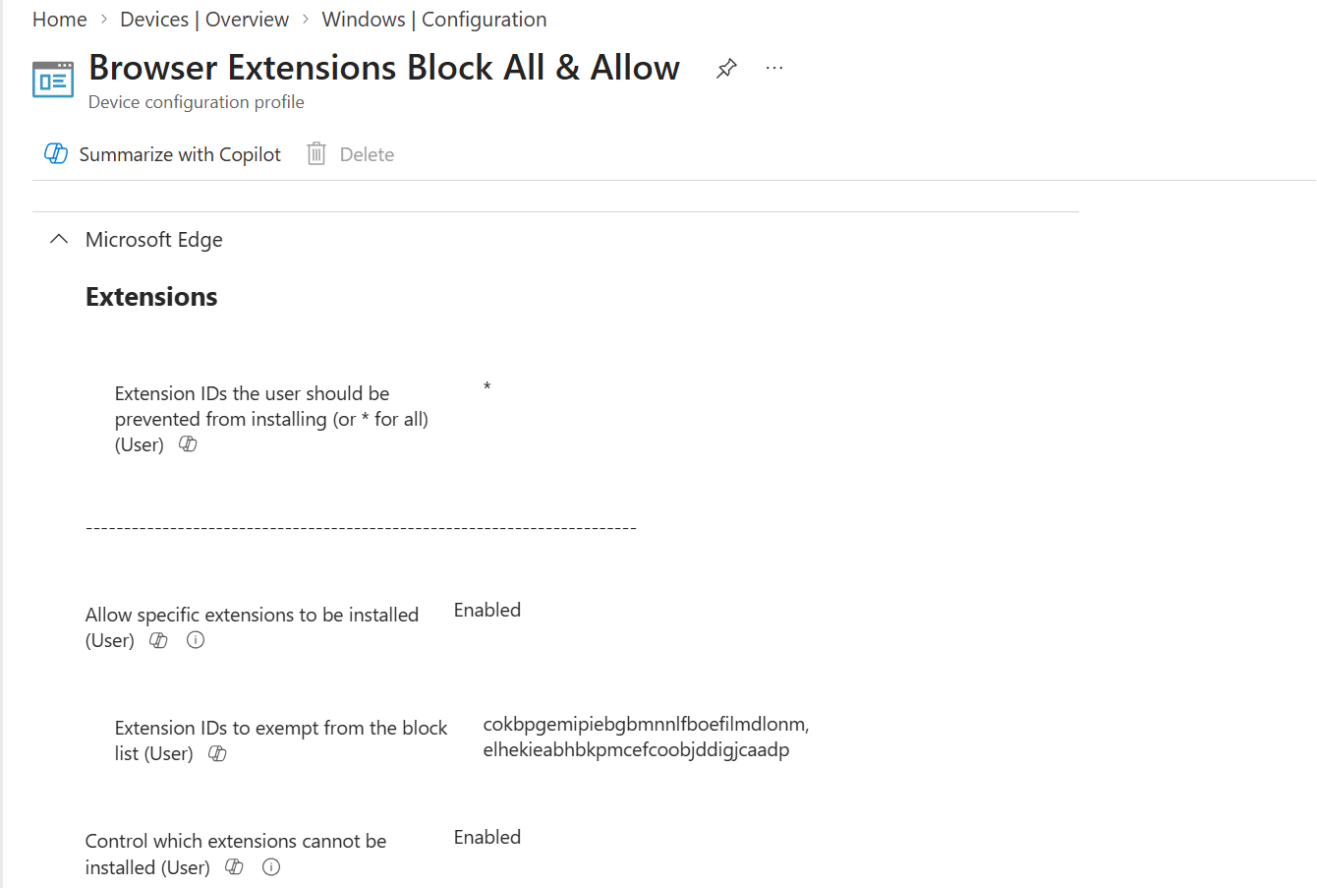


Figure 20. Microsoft Edge extension controls.

12.1 Extension control model

Control	Purpose
Block list	Prevents listed extensions; wildcard can block all by default
Allow list	Permits approved extensions when a broad block exists
Force install	Installs required security or business extension
External extensions	Controls potentially unmanaged extension sources

12.2 Secure design flow

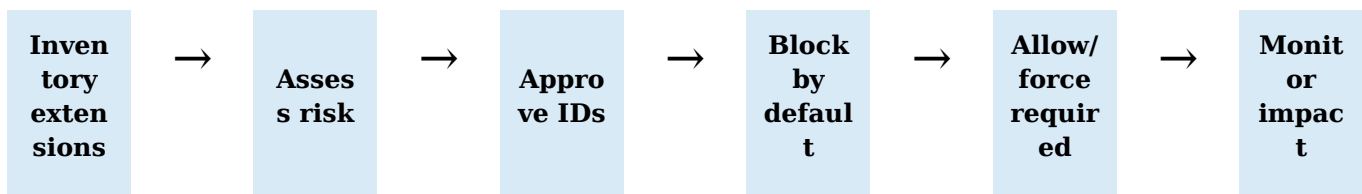

12.3 Common errors

- Using extension display name instead of extension ID.
- Blocking all without allow-listing security and business extensions.
- Force-installing an extension unavailable in the selected store.
- Combining Chrome ADMX, Settings Catalog, and browser-cloud policy without ownership.

12.4 Real-world example

Scenario

A data-loss-prevention browser extension must be force-installed. The engineer pilots the extension, confirms the store URL and ID, adds the extension to allow and force-install policies, validates chrome://policy and edge://policy, and confirms there is no browsing performance impact.

13. OneDrive Custom Configuration Profile


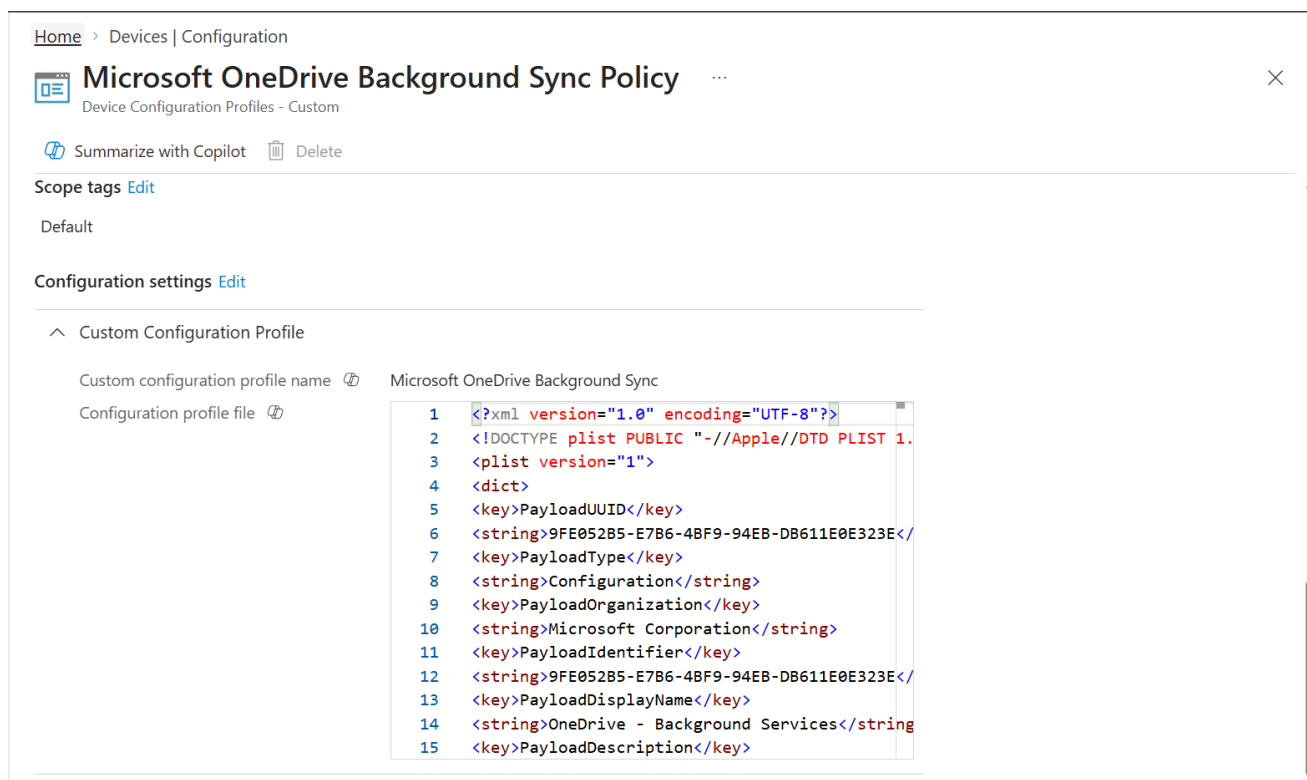


Figure 21. Microsoft OneDrive Background Sync Policy using a Custom configuration profile and uploaded configuration content.

13.1 What the screenshot shows

The profile uses a Custom configuration payload rather than ordinary Settings Catalog fields. Custom profiles can deliver platform-specific configuration content, but require exact format, schema, identifiers, and vendor documentation.

13.2 Preferred design order

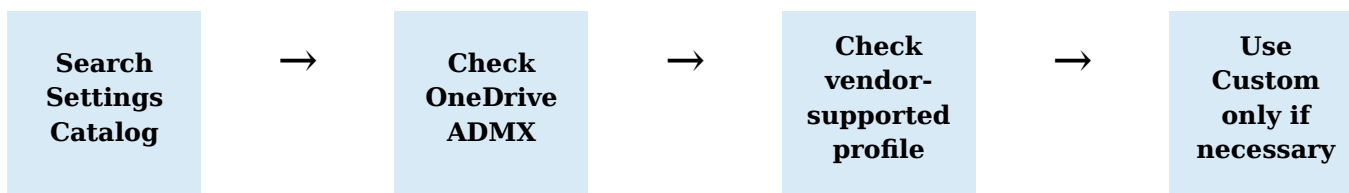

13.3 OneDrive management areas

- Silent account configuration.
- Known Folder Move.
- Files On-Demand.
- Sync restrictions and tenant allow-list.
- Background service behavior.
- Update ring and sync health.

13.4 Validation procedure

- Confirm the package/file format and schema.
- Assign to a pilot group.
- Sync the device.
- Review Intune status.
- Confirm OneDrive process and sign-in.
- Verify policy in registry or application diagnostics according to vendor documentation.
- Test background sync, file hydration, and Known Folder Move.

13.5 Real-world example

Scenario

A remote user signs in to Windows through Autopilot. OneDrive silently signs in, Known Folder Move redirects Desktop/Documents/Pictures, and Files On-Demand limits initial bandwidth. The engineer validates tenant ID, sync state, and user communication.

14. Wireless Profile Architecture and Reporting

Home > Devices | Configuration > Wireless Profile - India IDC

Wireless Profile - India IDC

Due to the amount of data, this report might take some time to generate and will expire after 72 hours.

Assignment status

5 selected

Generate report

Cancel

Export Columns

0 items

Search

Device name	Last active user	Assignment st...	Last report mo...	Intune Device ID	Microsoft Entr...	Model	Platform
-------------	------------------	------------------	-------------------	------------------	-------------------	-------	----------

Figure 22. Wireless Profile - India IDC assignment status report.

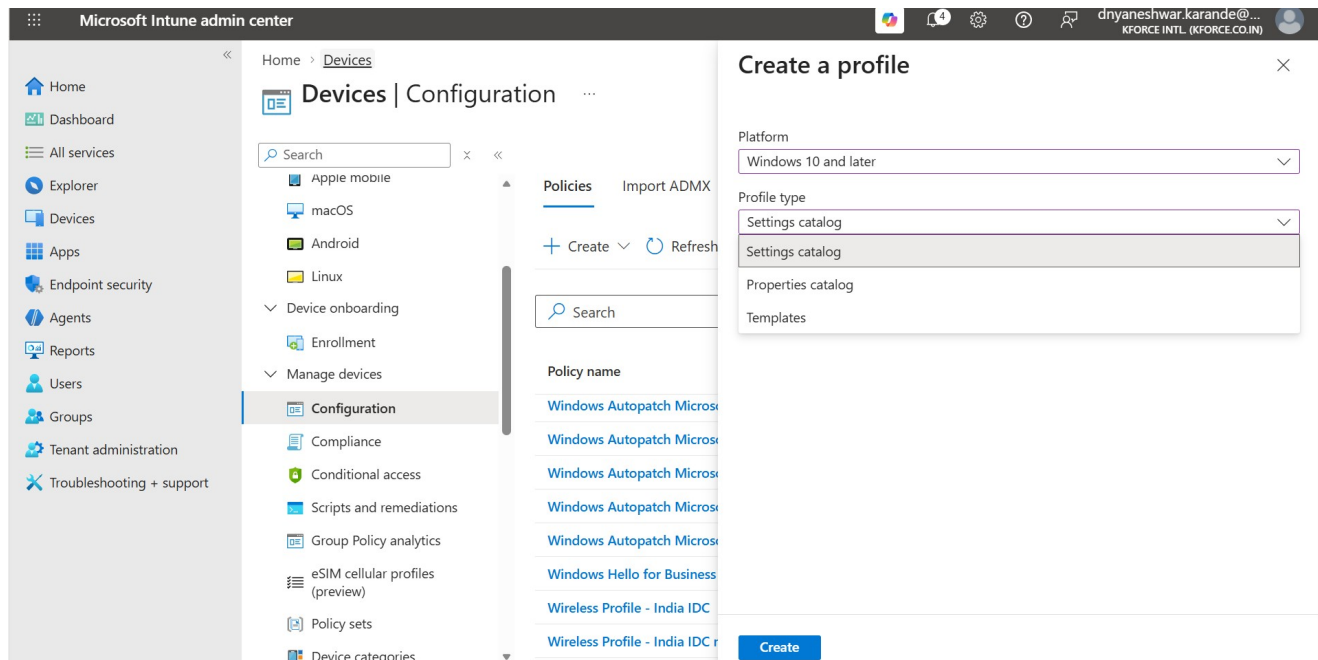


Figure 23. Wireless Profile properties with Settings Catalog, Templates, and assignment context.

14.1 Create Wi-Fi profile


Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and

later > Templates > Wi-Fi

- Choose Basic or Enterprise Wi-Fi based on authentication.
- Enter SSID exactly.
- Configure hidden network and auto-connect behavior.
- For Enterprise Wi-Fi, configure EAP type and certificate authentication.
- Deploy trusted root and SCEP/PKCS certificates first.
- Assign to a pilot device/user group according to certificate scope.
- Validate on corporate network.

14.2 Wi-Fi dependency flow

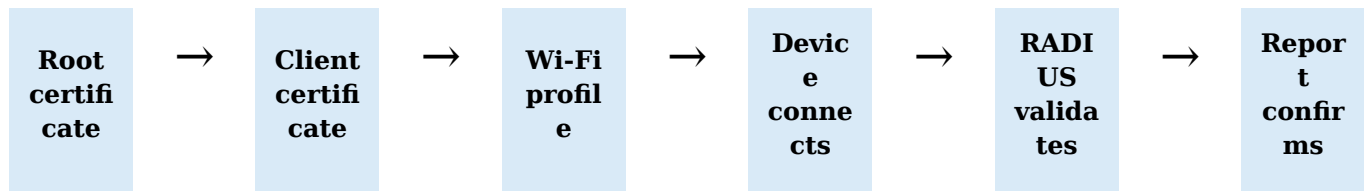

14.3 Real-world failure

Scenario

The Wi-Fi profile succeeds in Intune but the device cannot connect. Investigation shows the device certificate is missing because SCEP assignment was user-scoped. The architect aligns certificate and Wi-Fi scope, reissues the certificate, and validates RADIUS logs.

15. Custom OMA-URI and CSP Deep Dive

15.1 When Custom is justified

- The setting is explicitly documented in a Microsoft CSP.
- No Settings Catalog or template setting provides the same requirement.
- The target Windows edition and version support the CSP.
- The OMA-URI path, scope, data type, and allowed value are known.
- A rollback method is documented.

15.2 Create Custom profile

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and later > Templates > Custom

- Enter Name and Description.
- Select Add for a custom setting.
- Enter a clear setting name and description.
- Enter the exact OMA-URI path.
- Select the documented data type.
- Enter or upload the value exactly as required.
- Add scope tags and pilot assignments.
- Review and create.

15.3 Data types

Type	Example use
Boolean	Enable/disable a CSP setting
Integer	Numeric limit or enum value
String	Text value, path, identifier
String XML	XML payload for a CSP setting
Base64/File	Payload where explicitly documented

15.4 Troubleshooting


- Check OMA-URI spelling and ./Vendor/MSFT prefix.
- Check user vs device scope.
- Check data type and XML escaping.
- Check edition/build support.
- Review MDM diagnostic report and event logs.
- Set a rollback value or remove assignment after validation.

16. Administrative Templates Migration Strategy

16.1 Why migrate

Microsoft documents the older Administrative Templates profile type as deprecated and read-only. Existing profiles need inventory and controlled migration into Settings Catalog, not blind recreation.

16.2 Migration flow

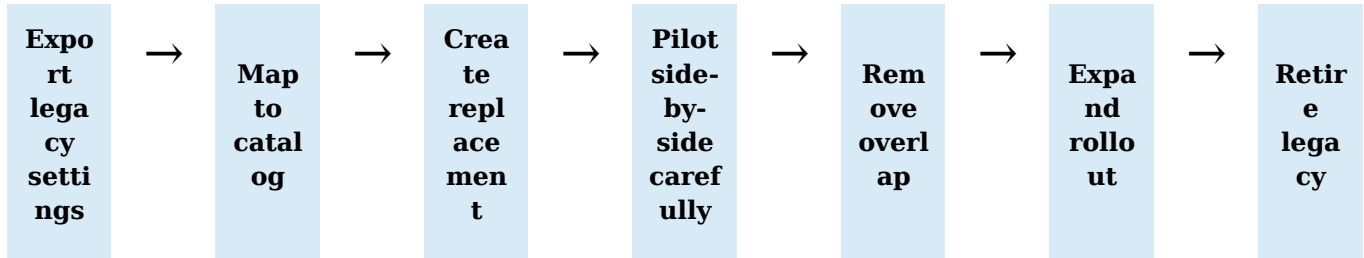

16.3 Validation matrix

Check	Evidence
Setting scope	User or device matches legacy behavior
Registry/CSP effect	Same effective value
Assignment	Same included/excluded users/devices
Filters	Equivalent filtering
Reporting	No errors/conflicts
Rollback	Legacy profile can be restored if needed

16.4 Common migration mistake

Mistake

Assigning the new Settings Catalog policy while the legacy profile still configures the same setting can create duplicate sources or conflicts. Plan a staged swap and verify effective behavior.

17. Profile Monitoring and Status Interpretation

17.1 Profile path

Exact portal path

Microsoft Intune admin center > Devices > Configuration > Policies > select profile > Monitor

Report	Purpose
Device and user check-in status	Overall state by device/user
Device assignment status	Assignment-level status
Per-setting status	Exact setting error/conflict
Assignment failures	Policies with failed assignments
Encryption report	Readiness and encryption status
Certificates	Certificate inventory and expiry
Restricted apps	Restricted application detections

17.2 Status interpretation

Status	Meaning	Action
Succeeded	Intune reports success	Validate actual device behavior
Error	Setting processing failure	Open per-setting status and collect logs
Conflict	Competing policy settings	Find all policy sources
Not applicable	Unsupported platform/edition/context	Validate requirements and scope
Pending	Awaiting check-in or processing	Check last sync and network

17.3 Sync paths

- Windows Settings > Accounts > Access work or school > connected work account > Info > Sync.
- Company Portal > Settings > Sync.
- Intune admin center > Devices > Windows > select device > Sync.

18. Client-Side Troubleshooting

18.1 Commands

```
dsregcmd /status
gpresult /h C:\Temp\gpresult.html
mdmDiagnosticstool.exe -area DeviceProvisioning -cab C:\Temp\MDMdiag.cab
certutil -store My
manage-bde -status
```


18.2 Event Viewer

- Applications and Services Logs > Microsoft > Windows > DeviceManagement-Enterprise-Diagnostics-Provider > Admin.
- Applications and Services Logs > Microsoft > Windows > User Device Registration > Admin.
- Applications and Services Logs > Microsoft > Windows > AAD > Operational where available.

18.3 Browser validation

```
edge://policy
chrome://policy
edge://management
chrome://management
```

18.4 Policy troubleshooting order

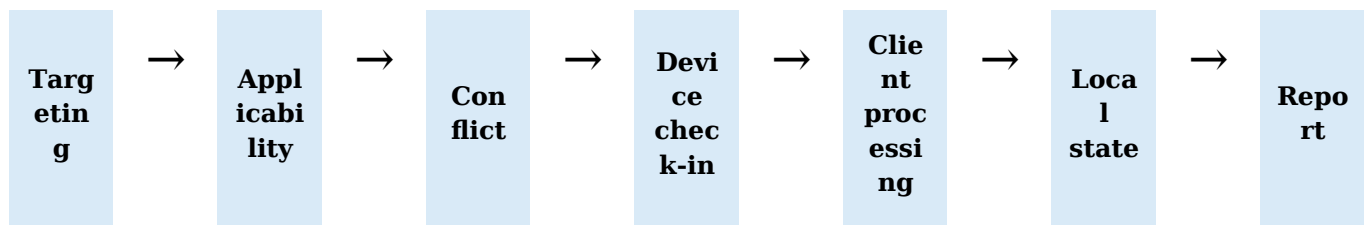

19. Real-World Configuration Profile Catalog

Profile	Recommended type	Core settings
Browser Corporate Standard	Settings Catalog	Sign-in, sync, password manager, Safe Browsing
Browser Extensions	Settings Catalog/ADMX	Block, allow, force-install
OneDrive Corporate	Settings Catalog/ADMX	Silent sign-in, KFM, Files On-Demand
Corporate Wi-Fi	Wi-Fi template	SSID, EAP, certificates
VPN	VPN template	Connection, authentication, routes
Certificate Roots	Trusted certificate template	Root/intermediate trust
Certificate Enrollment	SCEP/PKCS template	Client authentication cert
Device Restrictions	Settings Catalog	OS/user restrictions
Windows Hello	Account protection / Settings Catalog	PIN, biometric, trust model
Custom CSP	Custom template	Only documented unsupported-in-catalog CSP

19.1 Separation principle

- Separate different owners.
- Separate high-risk changes.
- Separate device and user scope when practical.
- Separate browser product policies.
- Keep profile size manageable.
- Avoid one giant all-settings profile.

20. Architecture Patterns for Enterprise Scale

20.1 Multi-country design

- Global baseline profiles for common settings.
- Regional overlays only for genuine regional differences.
- Scope tags for delegated administration.
- Assignment filters for supported device attributes.
- Central naming and change control.

20.2 Pilot and production rings

Ring	Purpose
Lab	Validate syntax and local behavior
IT pilot	Validate supportability and reporting
Business pilot	Validate applications, network, and user experience
Production wave	Controlled rollout by region/department
Broad	Standard estate after exit criteria

20.3 Conflict prevention

- One authoritative owner per setting family.
- Policy catalog documenting where each setting is configured.
- Avoid duplicate Settings Catalog, baseline, GPO, and Custom settings.
- Use per-setting reporting before adding another policy.
- Retire old profiles after migration.

21. Governance, Naming, and Change Control

21.1 Naming examples

```
WIN-SC-Edge-Corporate-v1
WIN-SC-Chrome-Restricted-v1
WIN-TPL-WiFi-India-IDC-v1
WIN-SC-OneDrive-KFM-v1
WIN-CUSTOM-<CSP-Purpose>-v1
```

21.2 Policy naming convention template

Standard pattern

<Platform>-<ProfileType>-<Workload>-<ScopeOrRegion>-<Environment>-v<Major>.<Minor>

Token	Allowed examples	Purpose
Platform	WIN, MAC, IOS, AND, LNX	Identifies the managed operating system
ProfileType	SC, TPL, ADMX, CUSTOM, SEC	Settings Catalog, Template, imported ADMX, Custom, or security profile
Workload	Edge, Chrome, OneDrive, WiFi, VPN, Cert, Restrictions	Describes the primary managed workload
ScopeOrRegion	Global, India, Pune, Sales, Kiosk	Identifies genuine scope or regional variation
Environment	LAB, PILOT, PROD	Identifies rollout stage when parallel objects are required
Version	v1.0, v1.1, v2.0	Tracks controlled revisions

21.3 Naming rules

- Use short, stable tokens documented in the policy catalog.
- Do not place user names, ticket numbers, dates, or temporary project names in the permanent policy name.
- Use Description for owner, requirement, ticket, review date, assignments, dependencies, and rollback.
- Use a major version for architecture or behavior changes and a minor version for controlled setting adjustments.
- Avoid cloning with names such as Copy, New, Final, Final2, or Test unless the object is a short-lived laboratory policy.
- Retire and archive superseded names after the replacement is validated.

21.4 Ready-to-copy templates

```
WIN-SC-<Workload>-<Scope>-<Environment>-v1.0
WIN-TPL-<Workload>-<Scope>-<Environment>-v1.0
WIN-ADMX-<VendorOrWorkload>-<Scope>-<Environment>-v1.0
WIN-CUSTOM-<CSPPurpose>-<Scope>-<Environment>-v1.0
MAC-SC-<Workload>-<Scope>-<Environment>-v1.0
```


Example

WIN-SC-Edge-Global-PROD-v2.0 = Windows Settings Catalog profile for the global Microsoft Edge production standard, major architecture version 2.

21.5 Required documentation

- Business and technical owner.
- Requirement and source documentation.
- Platform/edition/version support.
- Profile type and settings.
- Groups, exclusions, filters, and scope tags.
- Pilot evidence.
- User impact and communication.
- Rollback.
- Support and monitoring path.
- Change ticket and approval.

21.6 Change flow

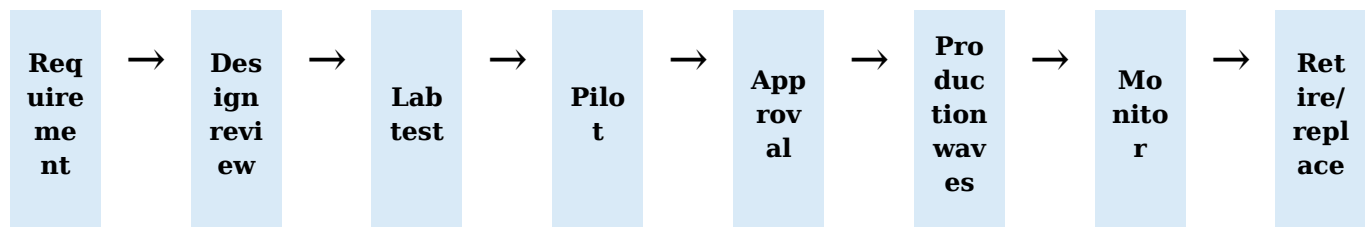

22. Troubleshooting Matrix

Symptom	Likely cause	Action
Policy not received	Assignment or sync issue	Confirm group/filter and force sync
Not applicable	Unsupported edition/build/scope	Review setting support and user/device context
Conflict	Multiple profiles/GPO/baseline	Use per-setting status and policy inventory
Custom OMA-URI error	Wrong path/type/value	Validate CSP documentation and event log
Browser policy missing	Wrong scope or competing browser management	Check browser policy page and source
OneDrive not silent	Tenant ID/user sign-in/profile conflict	Review OneDrive policy and client logs
Wi-Fi fails	Certificate/EAP/RADIUS dependency	Validate cert chain, scope, and RADIUS logs
Certificate missing	Connector/template/assignment issue	Review connector and profile status
Encryption report mismatch	Report delay or policy/key issue	Check local BitLocker and key escrow
Assignment failure	Unsupported target or invalid payload	Open detailed failure and client logs

23. Interview and Expert Reference

Question	Strong answer
Settings Catalog vs Templates?	Settings Catalog is the unified searchable platform; templates are purpose-built experiences for specific workloads.
What is OMA-URI?	The path used by MDM to configure a CSP setting; it requires exact path, type, and value.
What is ADMX-backed policy?	A policy based on Administrative Template definitions, typically mapping to registry-backed application/Windows settings.
Why avoid giant profiles?	They increase blast radius, ownership ambiguity, and troubleshooting complexity.
Succeeded but behavior wrong?	Validate local effective state, scope, conflicts, and application-specific policy pages.
User vs device setting?	User settings apply in signed-in user context; device settings apply to the device.
How do you troubleshoot conflicts?	Use per-setting status, inventory every policy source, GPO, baseline, and custom CSP.
How do certificates affect Wi-Fi?	Enterprise Wi-Fi often depends on trusted roots and user/device authentication certificates.
Why migrate Admin Templates?	The legacy profile type is deprecated/read-only; new ADMX policies should use Settings Catalog.
What is scope tag?	An RBAC visibility/delegation control, not a deployment assignment.

24. Reusable Design and Incident Records

24.1 Profile design record

Field	Record
Profile name/version	
Owner	
Requirement	
Profile type	
Settings/source	
Platform support	
Groups/filters	
Scope tags	
Pilot evidence	
User impact	
Rollback	
Ticket/approval	

24.2 Incident record

Field	Record
Device/user	
Profile/setting	
Status/error	
Assignment	
Local evidence	
Root cause	
Remediation	
Validation	


Field	Record
Owner/date	

25. Advanced Assignment Filters and Scope Tags

25.1 Assignment filters

Assignment filters refine an included group at deployment time. Filters do not replace Microsoft Entra group design. Use filters for stable device attributes when creating a separate group would add unnecessary operational overhead.

25.2 Safe filter workflow

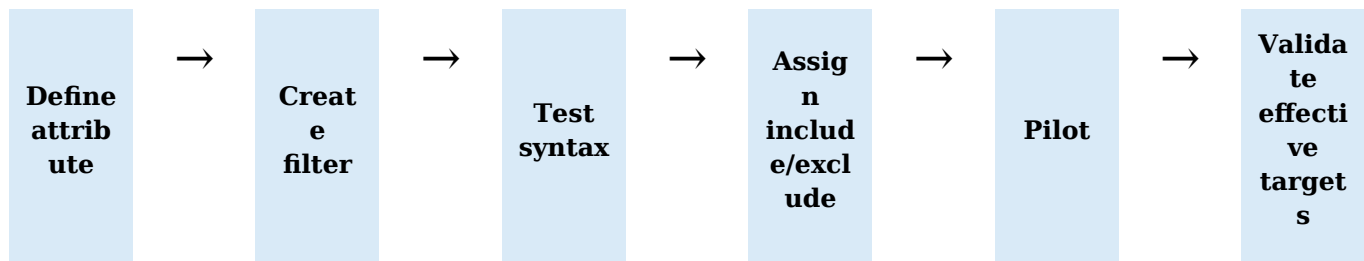

25.3 Scope tags

Scope tags control which Intune administrators can see and manage objects. Scope tags do not deploy a policy to devices. Combine scope tags with RBAC role assignments and administrative groups.

25.4 Real-world example

Scenario

The Pune service desk can view and manage India Wi-Fi and certificate profiles but cannot edit global browser security. Scope tags and RBAC provide administrative separation, while Entra groups provide deployment targeting.

26. VPN Profile Architecture


Exact portal path

Microsoft Intune admin center > Devices > Configuration > Create > New policy > Windows 10 and later > Templates > VPN

26.1 Design inputs

- VPN type and vendor.
- Server and DNS endpoints.
- User or device tunnel.
- Authentication based on certificate, user credentials, or modern authentication.
- Split or force tunneling.
- Always On and trusted-network detection.
- Proxy and route requirements.

26.2 Dependency flow

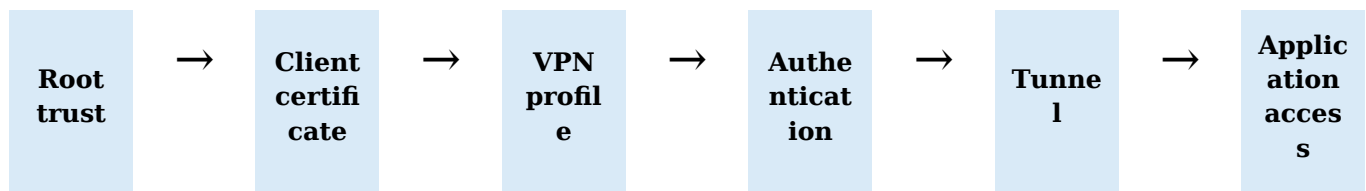

26.3 Real-world example

Scenario

A remote Autopilot device needs VPN before accessing a legacy application. The architect deploys trusted roots, a device certificate, and a device tunnel profile, then validates pre-logon connectivity and conditional-access exclusions.

27. Trusted Certificate, SCEP, and PKCS Profiles

27.1 Trusted root profile

Trusted certificate profiles deliver root or intermediate certificates. A trusted root profile does not issue a client certificate.

27.2 SCEP and PKCS

Method	Typical use	Dependency
SCEP	Scalable certificate enrollment via NDES/SCEP	Certificate connector, NDES, CA template
PKCS	Certificate issuance through Intune Certificate Connector	CA and connector
Imported PFX	Specific supported certificate scenarios	Secure PFX handling

27.3 Validation

```
certutil -store Root
certutil -store My
```

27.4 Real-world example

Scenario

A certificate appears under Trusted Root but Wi-Fi still fails because no client certificate exists in Personal. The engineer distinguishes trust delivery from identity certificate enrollment and fixes the SCEP assignment.

28. Device Restrictions Architecture


28.1 Common control areas

- Windows experience and consumer features.
- Control Panel and Settings access.
- Camera, Bluetooth, removable storage, and screen capture.
- Microsoft Store and application controls.
- Cloud content, search, and telemetry options.

28.2 Design caution

Restrictions can affect productivity and support. Group settings by business outcome, document user impact, and avoid mixing low-risk cosmetic settings with high-impact device restrictions.

28.3 Rollout

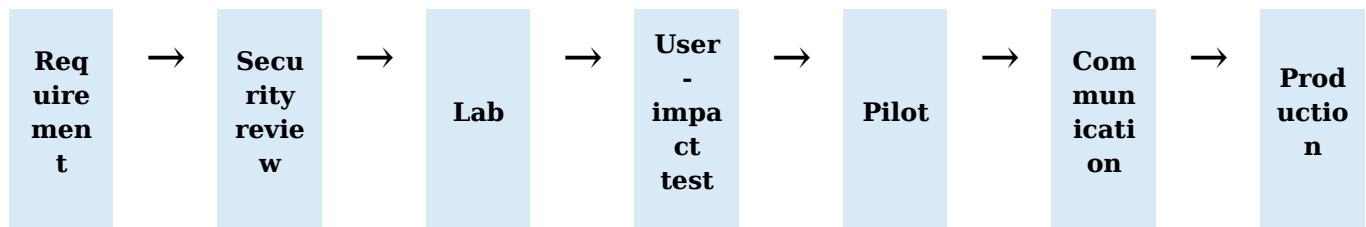

29. Windows Hello for Business and Account Protection

29.1 Architecture choices

- Cloud Kerberos trust, key trust, or certificate trust where applicable.
- PIN complexity and biometric availability.
- User registration experience.
- Break-glass and recovery procedures.
- Interaction with Conditional Access and passwordless strategy.

29.2 Profile placement

Use the dedicated Account protection workload or supported Settings Catalog settings according to the tenant design. Avoid configuring the same Windows Hello behavior through multiple policy surfaces.

29.3 Real-world example

Scenario

Autopilot users are prompted for Windows Hello registration. A pilot validates PIN reset, biometrics, Cloud Kerberos access, and help-desk recovery before broad rollout.

30. Shared, Kiosk, and Multi-User Device Profiles

30.1 Design differences

Device type	Configuration focus
Shared laptop	Shared PC policies, account cleanup, storage, user experience
Kiosk	Assigned access, app allow-list, auto-logon/identity design
Conference room	Power, display, updates, peripheral stability
Lab	Reset behavior, restrictions, local data cleanup

30.2 Assignment

Use device groups for shared/kiosk behavior and avoid user-targeted dependencies that require a primary user. Validate sign-in, application launch, reset, and offline behavior.

31. macOS Configuration Profiles Overview

31.1 Intune profile approaches

- Settings Catalog where available.
- Templates for device restrictions, certificates, Wi-Fi, VPN, and privacy preferences.
- Preference file profiles for supported application preferences.
- Custom profiles using valid Apple configuration-profile payloads.

31.2 Validation

- Confirm payload identifier uniqueness.
- Confirm user versus device channel.
- Validate signing where required.
- Check installed profiles locally.
- Test Apple silicon and current macOS support.

31.3 Command


```
profiles show -type configuration
profiles status -type enrollment
```

32. Policy Conflict Architecture

32.1 Conflict sources

- Settings Catalog vs Settings Catalog.
- Settings Catalog vs Endpoint security.
- Intune vs Group Policy.
- Imported ADMX vs browser cloud management.
- Custom OMA-URI vs native catalog setting.

32.2 Conflict resolution flow

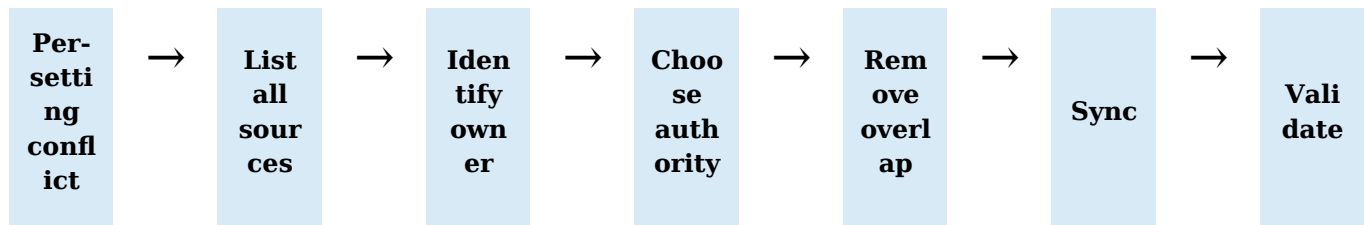

32.3 Real-world example

Scenario

Edge password manager is Enabled by a legacy Administrative Template and Disabled by a new Settings Catalog profile. Per-setting status reports Conflict. The owner migrates the legacy setting and retires the old assignment.

33. Policy Rollback and Emergency Change

33.1 Rollback methods

Policy type	Rollback
Settings Catalog	Set Not configured or remove assignment after testing
ADMX-backed	Use Not configured when supported and understand tattooing behavior
Custom OMA-URI	Apply documented inverse/delete value or remove assignment
Certificate	Remove only after dependent Wi-Fi/VPN migration
Wi-Fi/VPN	Keep fallback access pathway

33.2 Emergency procedure

- Open incident/change record.
- Identify exact policy and assignment.
- Capture current settings and device status.
- Remove or exclude smallest affected scope.
- Deploy rollback.
- Sync pilot device.
- Validate service restoration.
- Document root cause before re-release.

34. Profile Versioning and Lifecycle

34.1 Lifecycle states



34.2 Versioning model

- Keep stable profile names with a version suffix only when your change process requires parallel testing.
- Record settings export or configuration record.
- Do not clone endlessly without retiring old versions.
- Maintain an owner and review date.

34.3 Retirement

- Remove assignments.
- Confirm replacement applies.
- Monitor for regression.
- Delete only after retention and audit requirements are satisfied.

35. Graph Automation and Export Strategy

35.1 When automation helps

- Policy inventory and reporting.
- Backup/export for change review.
- Standardized policy creation across environments.
- Assignment verification.

35.2 Controls

- Prefer Microsoft Graph v1.0 when available.
- Use least-privilege permissions.
- Do not store secrets in scripts.
- Review JSON before write operations.
- Test in lab tenant or pilot scope.
- Log change ID and response.

35.3 Limitation

Graph resources and schemas can vary by policy platform. Confirm current Microsoft Graph documentation before automation.

36. Reporting and Executive Summary Design

36.1 Operational metrics

Metric	Interpretation
Assigned devices/users	Scope expected to receive policy
Succeeded	Policy processing success
Error	Requires technical investigation
Conflict	Architecture/design issue
Not applicable	Support/scope mismatch
Pending	Check-in or processing delay

36.2 Management summary

- Profiles changed this period.
- Success and error rates without inventing unsupported totals.
- Top failure categories.
- High-impact conflicts.
- Certificates nearing expiry.
- Encryption readiness gaps.
- Open risks and owners.

37. Browser Policy Architecture Blueprint

37.1 Separate policy domains

Profile	Settings
Edge Identity	Sign-in, sync, profile behavior
Edge Security	SmartScreen, downloads, site isolation
Edge Extensions	Block/allow/force install
Chrome Identity	Sign-in and sync
Chrome Security	Safe Browsing and downloads
Chrome Extensions	Block/allow/force install

37.2 Benefit


Separation allows independent ownership, pilot groups, rollback, and troubleshooting. It also prevents a browser extension change from rewriting unrelated sign-in policy.

38. OneDrive Architecture Blueprint

38.1 Policy domains

Domain	Settings
Identity	Silent account configuration, tenant restrictions
Files	Files On-Demand
Known folders	KFM silent move and prompts
Sync restrictions	File types, bandwidth, tenant allow-list
Health	Sync client status and user remediation

38.2 Deployment flow

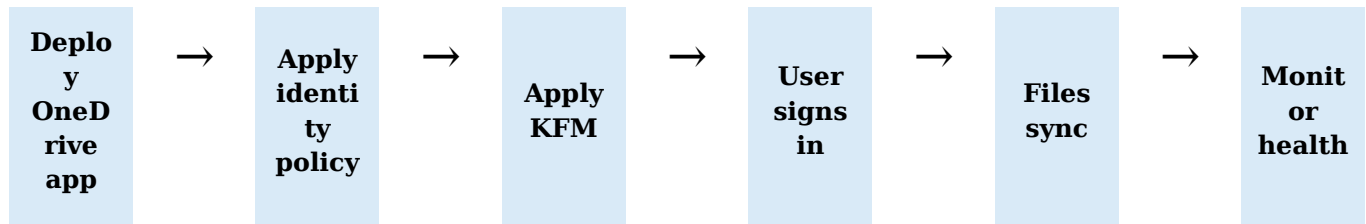

38.3 User impact

- Initial upload bandwidth.
- Folder-path changes.
- Unsupported file names.
- Disk-space behavior.
- Communication and support guidance.

39. Wi-Fi and Certificate Architecture Blueprint

39.1 Device certificate model



39.2 User certificate model



39.3 Decision


Choose device certificates when pre-logon/device connectivity is required. Choose user certificates when access must follow the authenticated user. Validate RADIUS mapping and certificate subject/SAN requirements.

40. Autopilot Integration with Configuration Profiles

40.1 Timing

- Device-targeted profiles can apply during device setup.
- User-targeted profiles generally require user context.
- Certificates, Wi-Fi, VPN, browser, and OneDrive can have dependencies on apps and identity.
- ESP blocking should include only essential, reliable workloads.

40.2 Design flow

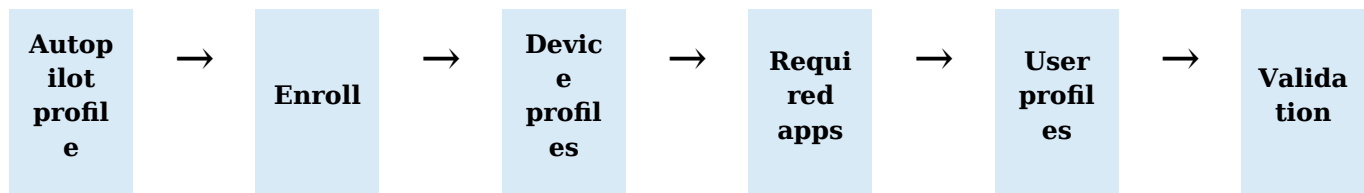

40.3 Real-world example

Scenario

A laptop enrolls remotely. Device restrictions and BitLocker apply during device setup; after user sign-in, Edge and OneDrive user settings apply. No corporate Wi-Fi dependency is required for remote enrollment.

41. Architecture Review Checklist

- Requirement maps to a supported policy surface.
- No duplicate setting owner.
- Platform/edition/build support confirmed.
- User/device scope confirmed.
- Dependencies documented.
- Pilot group and exit criteria defined.
- Rollback tested.
- Monitoring/report path known.
- Help-desk runbook ready.
- Owner and review date recorded.

42. Final Architect Quick Reference

42.1 Five questions before creating any profile

- Is the setting available in Settings Catalog?
- Is the setting user-scoped or device-scoped?
- Which other policy sources configure the same behavior?
- What dependency, pilot, and rollback are required?
- How will the endpoint and report be validated?

42.2 Five checks when a policy fails

- Targeting and effective group membership.
- Platform, edition, build, and setting applicability.
- Conflict with Settings Catalog, baseline, GPO, ADMX, or Custom CSP.
- Device check-in, MDM enrollment, and client event logs.
- Actual local state after remediation and sync.

42.3 Architecture rule

Rule

Prefer the most native supported management surface, keep one authoritative owner per setting, assign through controlled rings, validate actual device behavior, and maintain rollback.

43. Expanded Official References and Maintenance

- Microsoft Learn: Configure ADMX settings using Settings Catalog - <https://learn.microsoft.com/intune/device-configuration/settings-catalog/configure-admx-templates-windows>
- Microsoft Learn: Import custom ADMX and ADML templates - <https://learn.microsoft.com/intune/device-configuration/settings-catalog/import-custom-admx-templates>

Maintenance rule

Review this SOP after Intune navigation changes, Settings Catalog updates, ADMX import changes, Windows CSP changes, Windows releases, browser policy updates, certificate infrastructure changes, or organizational design changes.

Microsoft Intune Endpoint Security

Zero-to-Advanced Architect Edition Master SOP

Antivirus | Firewall | Disk Encryption | Account Protection | ASR | EDR | App Control | Baselines | Defender

Purpose

A deeply explained screenshot-based architecture and operations guide. Every source screenshot is mapped to a concept, operational path, security objective, deployment procedure, validation evidence, troubleshooting approach, and real-world scenario. The document is designed as a reusable Endpoint Management reference rather than a screenshot collection.

Document field	Value
Owner	Endpoint Management / IT Operations
Platform	Microsoft Intune and Microsoft Defender for Endpoint
Scope	Endpoint security architecture, policies, monitoring, troubleshooting, governance
Source screenshots	Endpoint security.docx
Edition	Architect Edition 1.0
Prepared date	25 September 2026
Classification	Internal use

Executive Summary

Intune Endpoint security centralizes focused security workloads for managed endpoints. A production architecture should layer preventive controls, protection, detection, response, compliance, and access decisions while avoiding duplicate ownership of the same setting across baselines, endpoint security policies, configuration profiles, Group Policy, and Defender security settings management.

Layer		Primary controls	
Prevent		Security baselines, App Control, ASR, account protection, least privilege	
Protect		Antivirus, firewall, disk encryption, controlled folder access	
Detect		EDR sensor, Defender for Endpoint, antivirus telemetry	
Respond		Security tasks, investigation, isolation/remediation processes	
Enforce		Compliance, Conditional Access, device risk	
Govern		RBAC, scope tags, pilot rings, evidence, rollback	

Asse
ss
risk

→

Choo
se
cont
rol

→

Crea
te
polic
y

→

Pilot

→

Moni
tor

→

Enfo
rce

→

Resp
ond
and
impr
ove

Architect control


Do not deploy security settings blindly. Confirm licensing, platform support, dependencies, user impact, policy overlap, audit evidence, rollback, and incident ownership.

1. Endpoint Security Architecture

Endpoint security policies are purpose-built profiles grouped by security workload. They can coexist with configuration profiles and baselines, but all policy sources are equal configuration sources. Different values for the same setting can create conflicts.

Workload	Security objective	Typical evidence
Antivirus	Prevent and remediate malware	Agent health, signatures, detections, scan state
Firewall	Control network traffic	Profile state, rules, logs, check-in status
Disk encryption	Protect data at rest	Encryption status and recovery-key escrow
Account protection	Protect credentials and local privilege	Hello, Credential Guard, LAPS/EPM state
ASR	Reduce exploitable behaviors	Rule mode and event telemetry
EDR	Detect and respond to advanced threats	Onboarding and sensor health
App Control	Allow trusted code and block unapproved code	Policy state and code-integrity events
Security baselines	Apply recommended hardening bundle	Versioned profile and per-setting state

1.1 Architecture flow

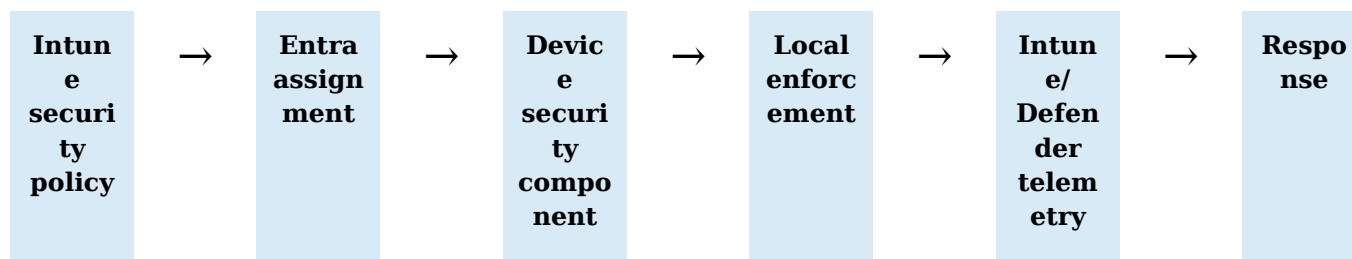

1.2 Policy-source hierarchy

No automatic priority exists merely because a setting comes from Endpoint security. Establish one authoritative owner for each setting family and remove overlap.

2. Endpoint Security Overview Dashboard

Exact portal path

Microsoft Intune admin center > Endpoint security > Overview

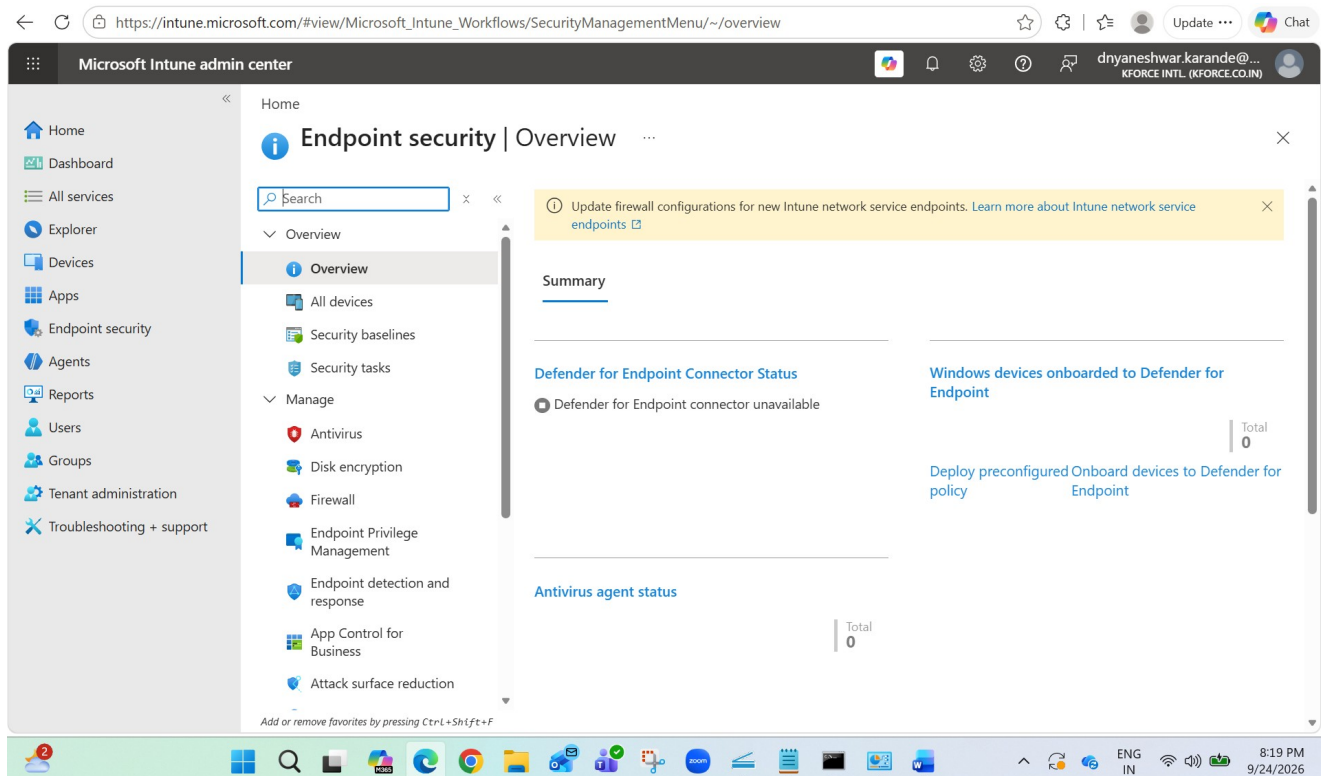


Figure 1. Endpoint security Overview displays connector status, Windows onboarding, antivirus agent status, navigation to security workloads, security baselines, tasks, and monitored controls.

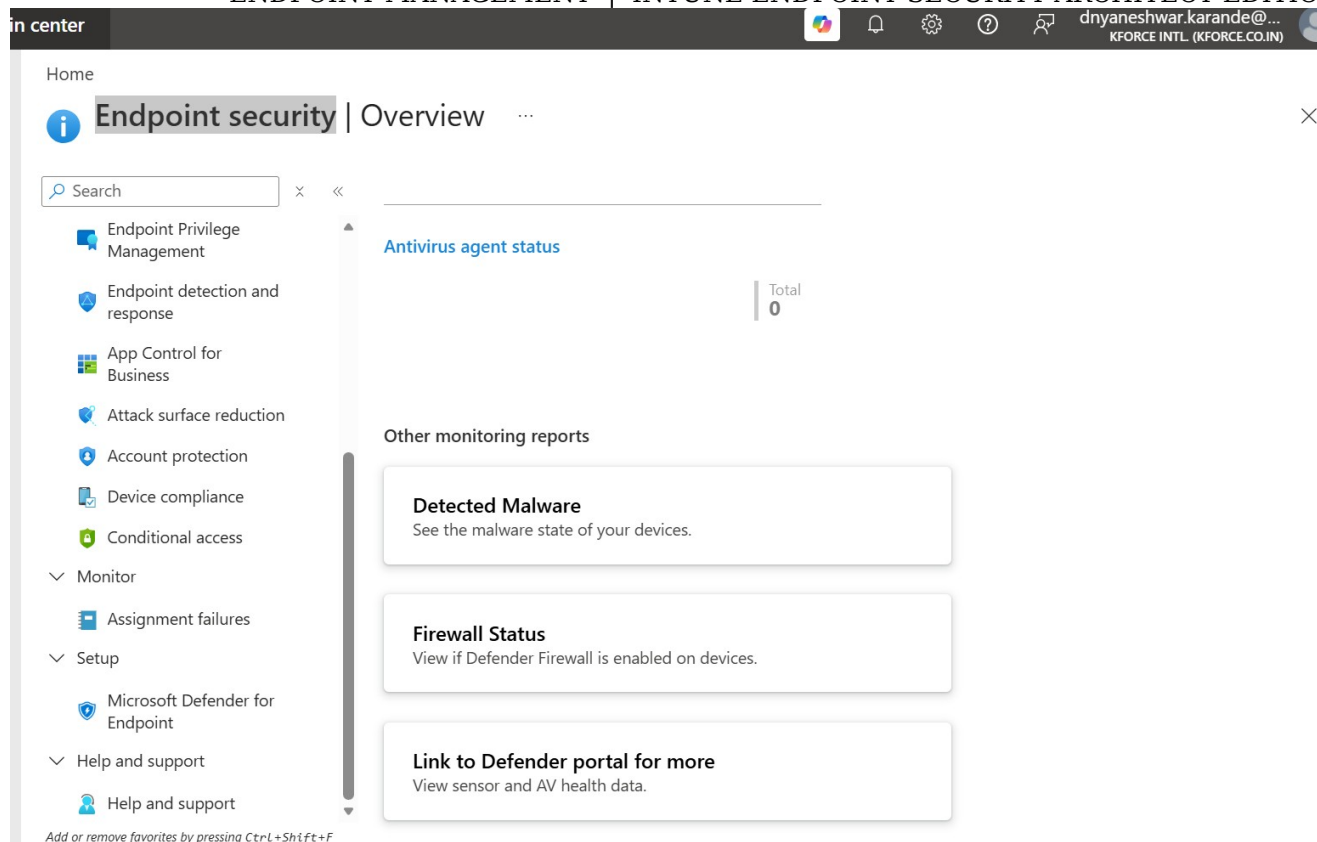


Figure 2. The lower Overview area exposes detected malware, firewall status, and a link to the Defender portal.

2.1 How to use the dashboard

- Review Defender for Endpoint connector status.
- Review onboarded-device visibility.
- Open antivirus or firewall reports for detail.
- Review security tasks and assignment failures.
- Do not use dashboard totals as the only acceptance evidence.

2.2 Real-world example

Scenario

The dashboard shows no active health data. The engineer validates connector status, policy assignment, device onboarding, licensing, and last check-in before assuming the environment is healthy or empty.

3. Microsoft Defender Antivirus Architecture

Exact portal path

Microsoft Intune admin center > Endpoint security > Antivirus

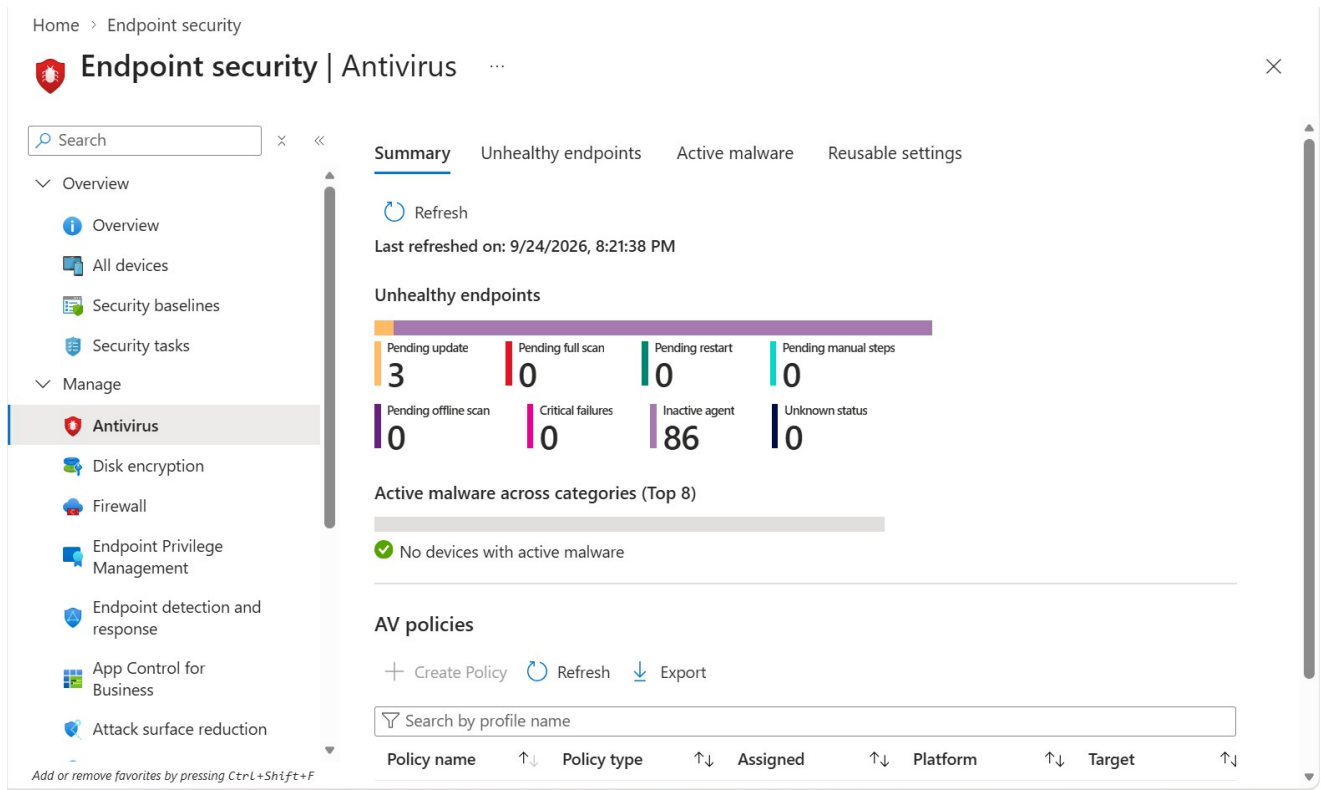


Figure 3. Antivirus Summary shows unhealthy endpoints, active malware, reusable settings, and antivirus policy inventory.

3.1 Create Antivirus policy

- Select Create Policy.
- Choose the supported platform.
- Select Microsoft Defender Antivirus profile.
- Enter name, description, scope tags, and settings.
- Assign to a pilot device group.
- Review and create.
- Monitor device and per-setting status.

3.2 Core control domains

Domain	Examples
Real-time protection	Behavior monitoring, downloaded file scanning, scripts
Cloud protection	Cloud-delivered protection and sample

Domain	Examples
	submission
Updates	Security intelligence update channel and cadence
Scans	Quick/full scan schedules and catch-up behavior
Exclusions	Approved process/path/file exclusions
Tamper protection	Protect security settings from unauthorized changes

4. Antivirus Health and Unhealthy Endpoints

Home > Endpoint security

Endpoint security | Antivirus

Search

Overview

- Overview
- All devices
- Security baselines
- Security tasks

Manage

- Antivirus**
- Disk encryption
- Firewall
- Endpoint Privilege Management
- Endpoint detection and response
- App Control for Business
- Attack surface reduction

Summary **Unhealthy endpoints** Active malware Reusable settings

Refresh Columns Export Restart Quick Scan Full Scan Sync

Search Device Signature update overdue : All Managed by: All

Showing 1 to 20 of 89 records

Select	Device name	Managed by	Malware protecti...	Signature update...
☐	APP-7TSNSN4ZAA4	Intune	Disabled	False
☐	APP8GB-4BV3KQNR	Intune	Enabled	True
☐	APP8GB-4JFNRF CG	Intune	Enabled	True
☐	APP8GB-APF5C69V	Intune	Disabled	False
☐	APP8GB-NN1AT8NS	Intune	Disabled	False
☐	IN-5CD5249872	Intune	Disabled	False
☐	IN-5CD524987D	Intune	Disabled	False
☐	IN-5CD52498H5	Intune	Disabled	False
☐	IN-5CD524B9V4	Intune	Disabled	False
☐	IN-5CD52933X7	Intune	Disabled	False

Add or remove favorites by pressing Ctrl+Shift+F

Figure 4. Antivirus Summary highlights pending updates, pending restart, pending full scan, recently scanned endpoints, and policy list.

Home > Endpoint security

Endpoint security | Antivirus

Summary **Unhealthy endpoints** Active malware Reusable settings

Refresh Columns Export Restart Quick Scan Full Scan Sync Update signatures

Search Device Signature update overdue : All Managed by: All

Showing 1 to 20 of 89 records

Device name	Managed by	Malware protecti...	Signature update...	State	Real-time protect...	Product st
APP-7TSNSN4ZAA4	Intune	Disabled	False	Clean	Disabled	No iss
APP8GB-4BV3KQNR	Intune	Enabled	True	Clean	Enabled	No sta
APP8GB-4JFNRF CG	Intune	Enabled	True	Clean	Enabled	No sta
APP8GB-APF5C69V	Intune	Disabled	False	Clean	Disabled	No iss
APP8GB-NN1AT8NS	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD5249872	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD524987D	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD52498H5	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD524B9V4	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD52933X7	Intune	Disabled	False	Clean	Disabled	No iss
IN-5CD52933X8	Intune	Disabled	False	Clean	Disabled	No iss

Figure 5. Unhealthy endpoints report lists device, management authority, malware protection, and signature status.

Home > Endpoint security

Endpoint security | Antivirus

Summary **Unhealthy endpoints** Active malware Reusable settings

Refresh Columns Export Restart Quick Scan Full Scan Sync Update signatures

Search Device Signature update overdue : All Managed by: All

Showing 1 to 20 of 89 records

Product status	Tamper protection ↑↓	Virtual machine ↑↓	Network protecti... ↑↓	Device reboot re... ↑↓	Full scan required ↑↓	Full scan
✓ No issues	Disabled	False	Disabled	False	False	False
⚠ No status flags set	Disabled	True	Enabled	False	False	False
⚠ No status flags set	Disabled	True	Enabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False
✓ No issues	Disabled	False	Disabled	False	False	False

Figure 6. Additional endpoint columns show real-time protection, state, product status, and scan requirements.

Home > Endpoint security

Endpoint security | Antivirus

Summary **Unhealthy endpoints** Active malware Reusable settings

Refresh Columns Export Restart Quick Scan Full Scan Sync Update signatures

Search Device Signature update overdue : All Managed by: All

Showing 1 to 20 of 89 records

cti... ↑↓	Device reboot re... ↑↓	Full scan required ↑↓	Full scan overdue ↑↓	Last check-in ↑↓	MDE Sense Runn... ↑↓	MDE Onboarding... ↑↓
False	False	False	2026-09-24T06:26:08	False	Not onboarded	
False	False	False	2026-05-01T15:34:59	False	Not onboarded	
False	False	False	2026-05-01T16:45:21	False	Not onboarded	
False	False	False	2026-09-24T13:37:12	False	Not onboarded	
False	False	False	2026-09-24T05:35:14	False	Not onboarded	
False	False	False	2026-09-24T09:11:46	False	Not onboarded	
False	False	False	2026-09-24T04:45:05	False	Not onboarded	
False	False	False	2026-09-24T09:27:36	False	Not onboarded	
False	False	False	2026-09-24T12:51:11	False	Not onboarded	
False	False	False	2026-09-24T13:04:54	False	Not onboarded	

Figure 7. Health report continuation includes last check-in and MDE onboarding attributes.

ENDPOINT MANAGEMENT | INTUNE ENDPOINT SECURITY ARCHITECT EDITION


	A	B	C	D	E	F	G	H	I	J
	DeviceName	ManagedBy	ManagedBy_loc	MalwareProtectionEnabled	SignatureUpdateOverdue	DeviceState	DeviceState_loc	RealTimeProtectionEnabled	ProductStatus	TamperProtectionEnabled
2	IN-5CG44513CN	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
3	IN-5CG5242YT4	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
4	IN-5CD52933XB	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
5	IN-5CG3025T0Z	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
6	IN-5CG5242YS3	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
7	IN-5CG52503N7	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
8	APP8GB-APF5C69V	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
9	IN-5CG5250343	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
10	IN-5CG54914CN	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
11	IN-5CD52933X7	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
12	IN-5CG44513CK	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
13	IN-5CD539GG44	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
14	IN-5CD5391HQ8	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
15	IN-5CD52933XP	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
16	IN-5CD539GGVG	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
17	IN-5CG44513CB	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
18	IN-5CD5390T7K	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
19	IN-5CD5390TFQ	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
20	IN-5CG5242YVM	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
21	IN-5CG44513CL	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
22	IN-5CD5390VF4	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
23	IN-5CG44513CF	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE
24	IN-5CG44513CJ	Intune	Intune	FALSE	FALSE	0 Clean		FALSE	0	FALSE

Figure 8. Exported unhealthy Defender agent report opened in Excel for analysis.

	A	J	K	L	M	N	O	P	Q	R	S
	DeviceName	TamperProtectionEnabled	IsVirtualMachine	NetworkInspectionSystemEnabled	RebootRequired	FullScanRequired	FullScanOverdue	LastReportedDate	IsWDATPSenseRunning	WDATPOnboardingStatus	
2	IN-5CG44513CN	0	FALSE	FALSE	FALSE	FALSE	FALSE	01:08.0	FALSE	0	
3	IN-5CG5242YT4	0	FALSE	FALSE	FALSE	FALSE	FALSE	43:12.8	FALSE	0	
4	IN-5CD52933XB	0	FALSE	FALSE	FALSE	FALSE	FALSE	22:21.6	FALSE	0	
5	IN-5CG3025T0Z	0	FALSE	FALSE	FALSE	FALSE	FALSE	34:00.7	FALSE	0	
6	IN-5CG5242YS3	0	FALSE	FALSE	FALSE	FALSE	FALSE	29:48.1	FALSE	0	
7	IN-5CG52503N7	0	FALSE	FALSE	FALSE	FALSE	FALSE	30:37.1	FALSE	0	
8	APP8GB-APF5C69V	0	FALSE	FALSE	FALSE	FALSE	FALSE	37:12.9	FALSE	0	
9	IN-5CG5250343	0	FALSE	FALSE	FALSE	FALSE	FALSE	19:06.2	FALSE	0	
10	IN-5CG54914CN	0	FALSE	FALSE	FALSE	FALSE	FALSE	22:52.1	FALSE	0	
11	IN-5CD52933X7	0	FALSE	FALSE	FALSE	FALSE	FALSE	04:54.7	FALSE	0	
12	IN-5CG44513CK	0	FALSE	FALSE	FALSE	FALSE	FALSE	56:47.7	FALSE	0	
13	IN-5CD539GG44	0	FALSE	FALSE	FALSE	FALSE	FALSE	19:42.5	FALSE	0	
14	IN-5CD5391HQ8	0	FALSE	FALSE	FALSE	FALSE	FALSE	22:34.6	FALSE	0	
15	IN-5CD52933XP	0	FALSE	FALSE	FALSE	FALSE	FALSE	57:35.3	FALSE	0	
16	IN-5CD539GGVG	0	FALSE	FALSE	FALSE	FALSE	FALSE	35:29.7	FALSE	0	
17	IN-5CG44513CB	0	FALSE	FALSE	FALSE	FALSE	FALSE	30:21.7	FALSE	0	
18	IN-5CD5390T7K	0	FALSE	FALSE	FALSE	FALSE	FALSE	25:44.1	FALSE	0	
19	IN-5CD5390TFQ	0	FALSE	FALSE	FALSE	FALSE	FALSE	17:45.5	FALSE	0	
20	IN-5CG5242YVM	0	FALSE	FALSE	FALSE	FALSE	FALSE	27:51.0	FALSE	0	
21	IN-5CG44513CL	0	FALSE	FALSE	FALSE	FALSE	FALSE	21:00.8	FALSE	0	
22	IN-5CD5390VF4	0	FALSE	FALSE	FALSE	FALSE	FALSE	53:36.2	FALSE	0	
23	IN-5CG44513CF	0	FALSE	FALSE	FALSE	FALSE	FALSE	18:17.3	FALSE	0	
24	IN-5CG44513CJ	0	FALSE	FALSE	FALSE	FALSE	FALSE	14:55.3	FALSE	0	

Figure 9. Export continuation with protection, scan, signature, and version fields.

4.1 Investigation order

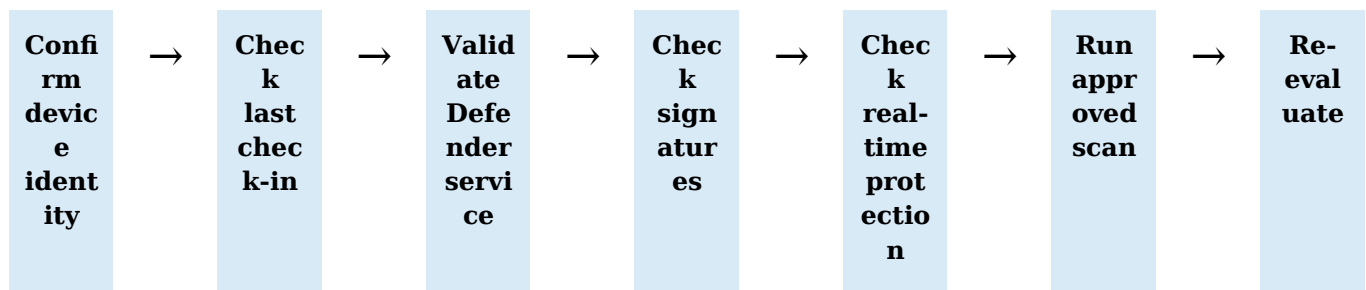

4.2 Real-world example

Scenario

A device shows signature update overdue and real-time protection disabled. The engineer confirms whether a third-party antivirus is authoritative, validates passive/active mode, updates security intelligence, restarts if required, and records the final health state.

5. Active Malware and Reusable Settings

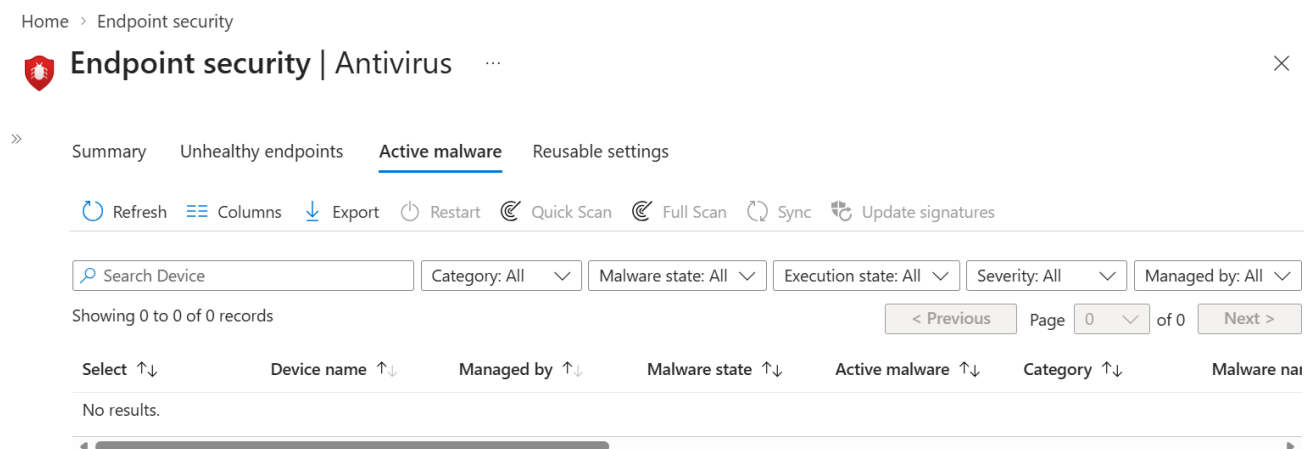


Figure 10. Active malware view with category, malware state, execution state, severity, and management filters.

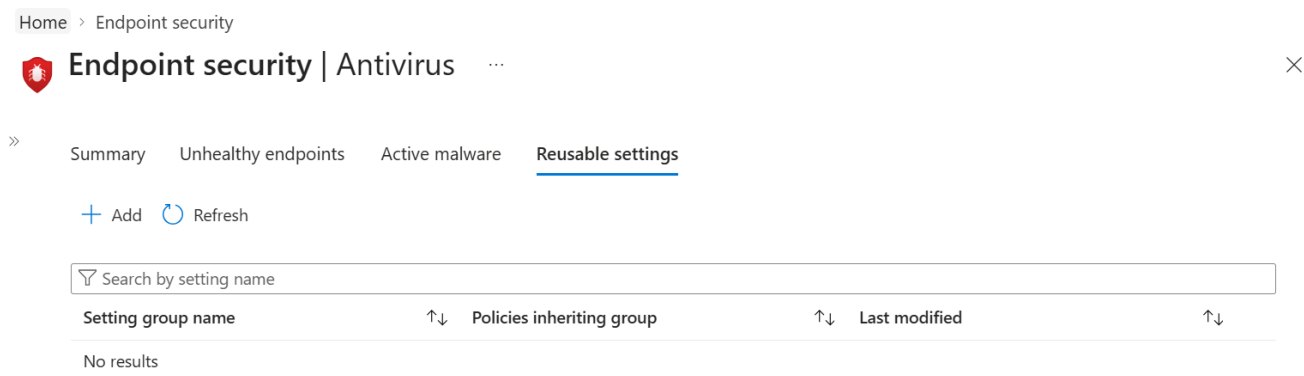


Figure 11. Reusable settings inventory for shared security configuration objects.

5.1 Malware response

- Confirm detection name, severity, device, user, and timestamp in Defender.
- Check remediation state and whether the device requires restart or scan.
- Follow the security incident process for isolation, evidence, and escalation.
- Do not delete evidence or suppress detections without security approval.

5.2 Reusable settings

Reusable settings reduce duplication for supported endpoint-security scenarios. Changes can affect every policy that references the shared object, so apply change control.

6. Microsoft Defender for Endpoint Connector

Exact portal path

Microsoft Intune admin center > Endpoint security > Microsoft Defender for Endpoint

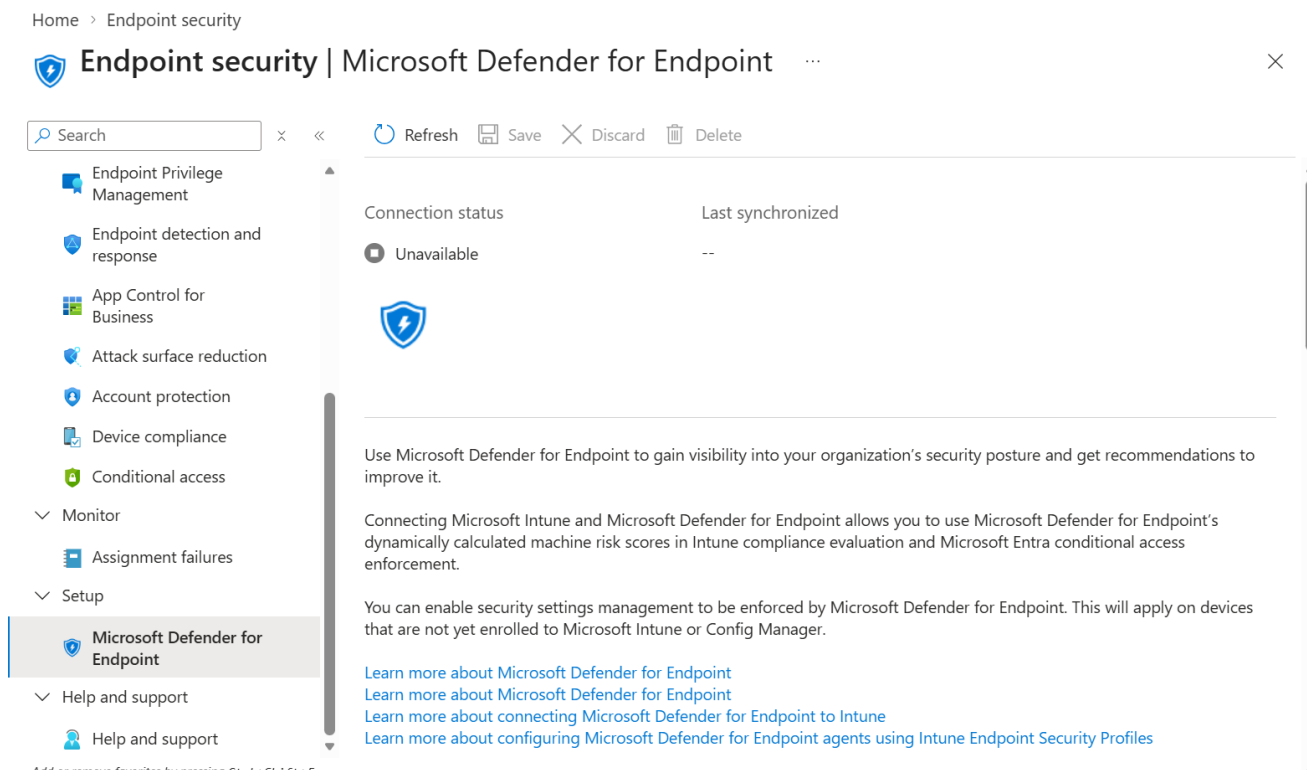


Figure 12. Defender for Endpoint connector overview with connection status and synchronization state.

Home > Endpoint security

Endpoint security | Microsoft Defender for Endpoint

Search

Refresh Save Discard Delete

Configuring Microsoft Defender for Endpoint

1. Setup a connection to Intune via the Microsoft Defender Security Center: [Connect Microsoft Defender for Endpoint to Microsoft Intune in the Microsoft Defender Security Center](#)
2. After a connection is established, click "Refresh" at the top of this section to hide this guide and enable the settings below.
3. Configure the settings below.

Connector settings

Endpoint Security Profile Settings

Allow Microsoft Defender for Endpoint to enforce Endpoint Security Configurations

Compliance policy evaluation

Figure 13. Connector setup guidance and Endpoint Security Profile Settings toggle.

Home > Endpoint security

Endpoint security | Microsoft Defender for Endpoint

Search

Refresh Save Discard Delete

Compliance policy evaluation

Connect Android devices version 6.0.0 and above to Microsoft Defender for Endpoint

Connect iOS/iPadOS devices version 13.0 and above to Microsoft Defender for Endpoint

Connect Windows devices version 10.0.15063 and above to Microsoft Defender for Endpoint

Enable App Sync (sending application inventory) for iOS/iPadOS devices

Send full application inventory data on personally owned iOS/iPadOS devices

Block unsupported OS versions

App protection policy evaluation

Connect Android devices to Microsoft Defender for Endpoint

Connect iOS/iPadOS devices to Microsoft Defender for Endpoint

Mobile Threat Defense role

Grant MTD role permissions to Microsoft Defender for Endpoint on enrolled Android AM API personally owned with work profile, fully managed, and corporate owned with work profile devices

Figure 14. Compliance policy evaluation connector settings for Android and iOS/iPadOS.


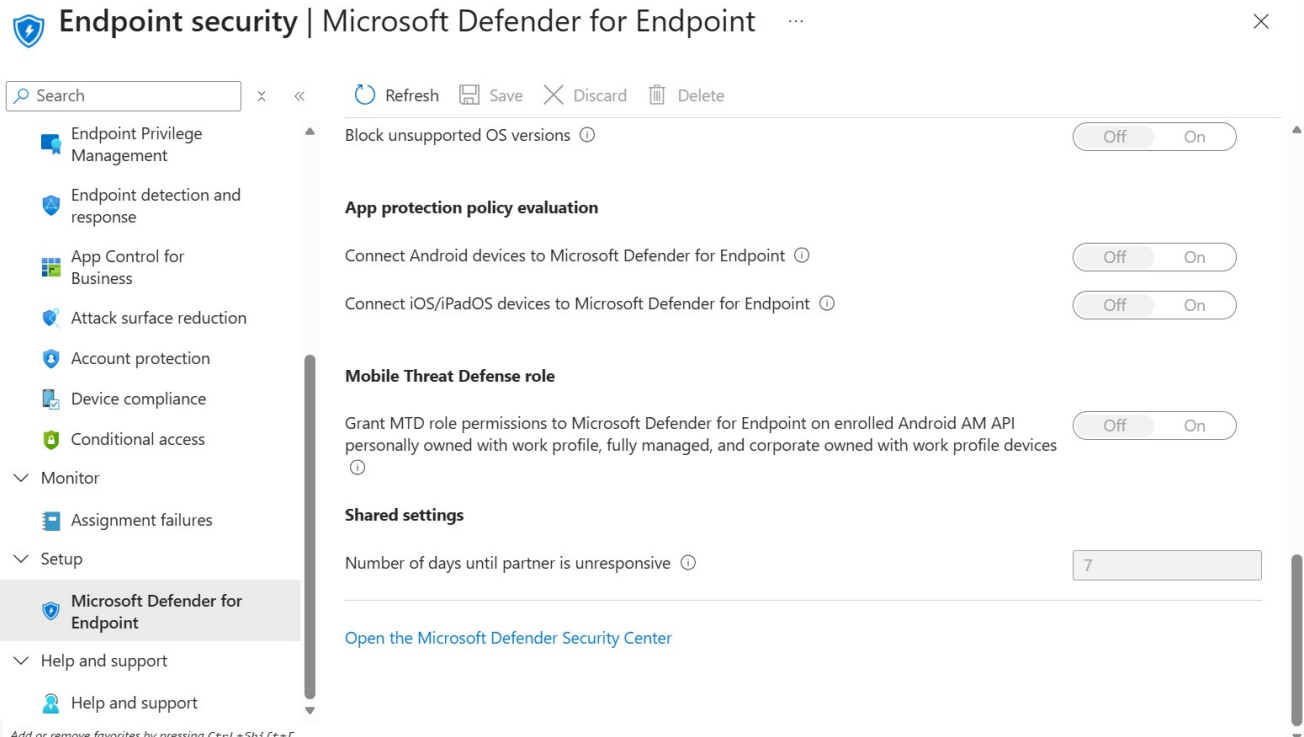


Figure 15. App protection, Mobile Threat Defense, unsupported OS, and shared connector settings.

6.1 Connector flow

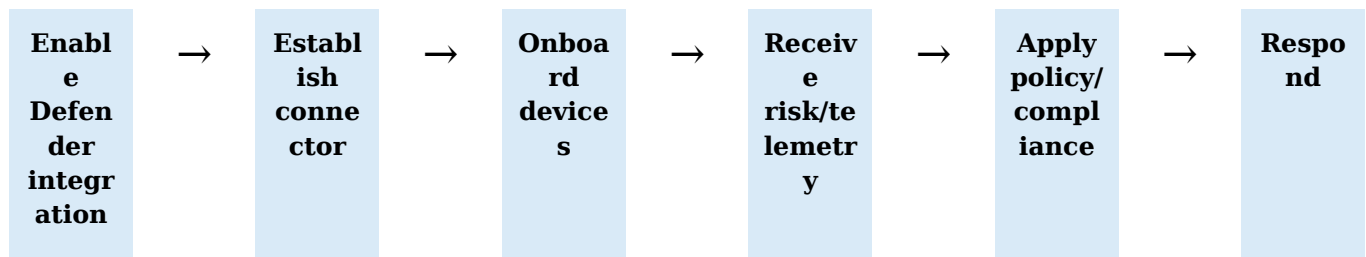

6.2 Design notes

- Configure only settings supported by licensing and platform design.
- Understand the difference between Intune enrollment and Defender security settings management.
- Use machine risk in compliance only after the connector and device onboarding are validated.
- Test mobile platform connectors separately.

7. Windows Firewall Architecture

Exact portal path

Microsoft Intune admin center > Endpoint security > Firewall

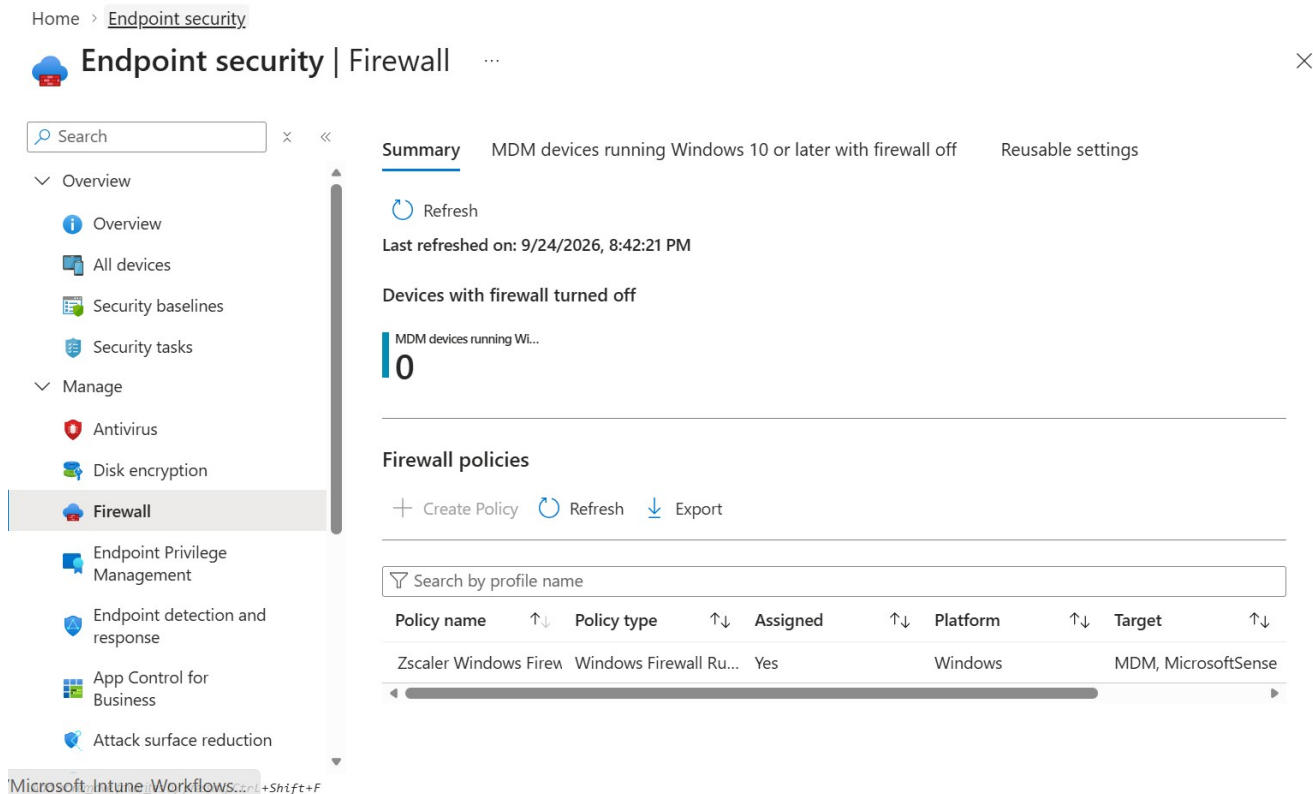


Figure 16. Firewall Summary with devices whose firewall is off and firewall policy inventory.

7.1 Policy layers

Layer	Purpose
Microsoft Defender Firewall profile	Configure domain/private/public profile behavior
Windows Firewall Rules	Create granular inbound/outbound rules
Reusable settings	Share endpoint groups where supported
Local policy merge	Controls whether local rules combine with managed rules

7.2 Create firewall policy

- Select Create Policy.
- Choose Windows platform and firewall profile.
- Configure profile state, default actions, notifications, logging, and merging according to standard.
- Assign to pilot devices.
- Validate each network profile and business application.

8. Zscaler Firewall Rule: Status and Assignment

Home > Endpoint security | Firewall



Zscaler Windows Firewall Rule



Windows Firewall Rules



Summarize with Copilot



Delete

Device and user check-in status



Device assignment status

This report shows all the devices that are targeted by the policy, including devices in a pending policy assignment state.

Per setting status

View the configuration status of each setting for this policy across all devices and users.

Properties

Figure 17. Zscaler Windows Firewall Rule check-in status shows successful assignments with no errors or conflicts.

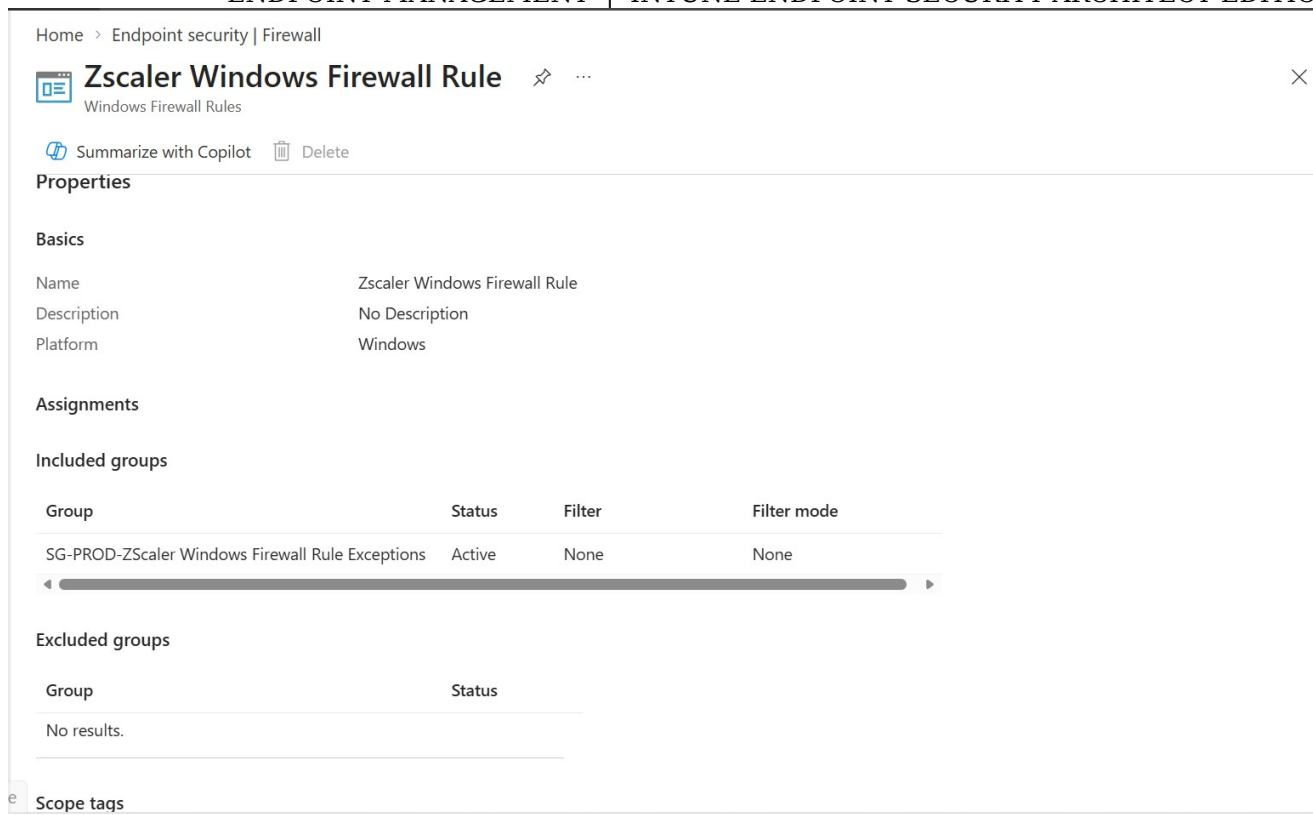


Figure 18. Policy properties show platform, included group, exclusions, scope tags, and assignments.

8.1 Interpretation

- Succeeded indicates policy processing, not complete application connectivity.
- Confirm the assigned pilot/production group is correct.
- Review exclusions and filters.
- Use per-setting status for failures.

8.2 Real-world example

Scenario

Zscaler service is installed but cannot establish a tunnel. The engineer confirms firewall policy assignment, program path, architecture, service status, destination ranges, ports, and local firewall logging.

9. Zscaler Firewall Rule: Ports, Protocols, and Programs

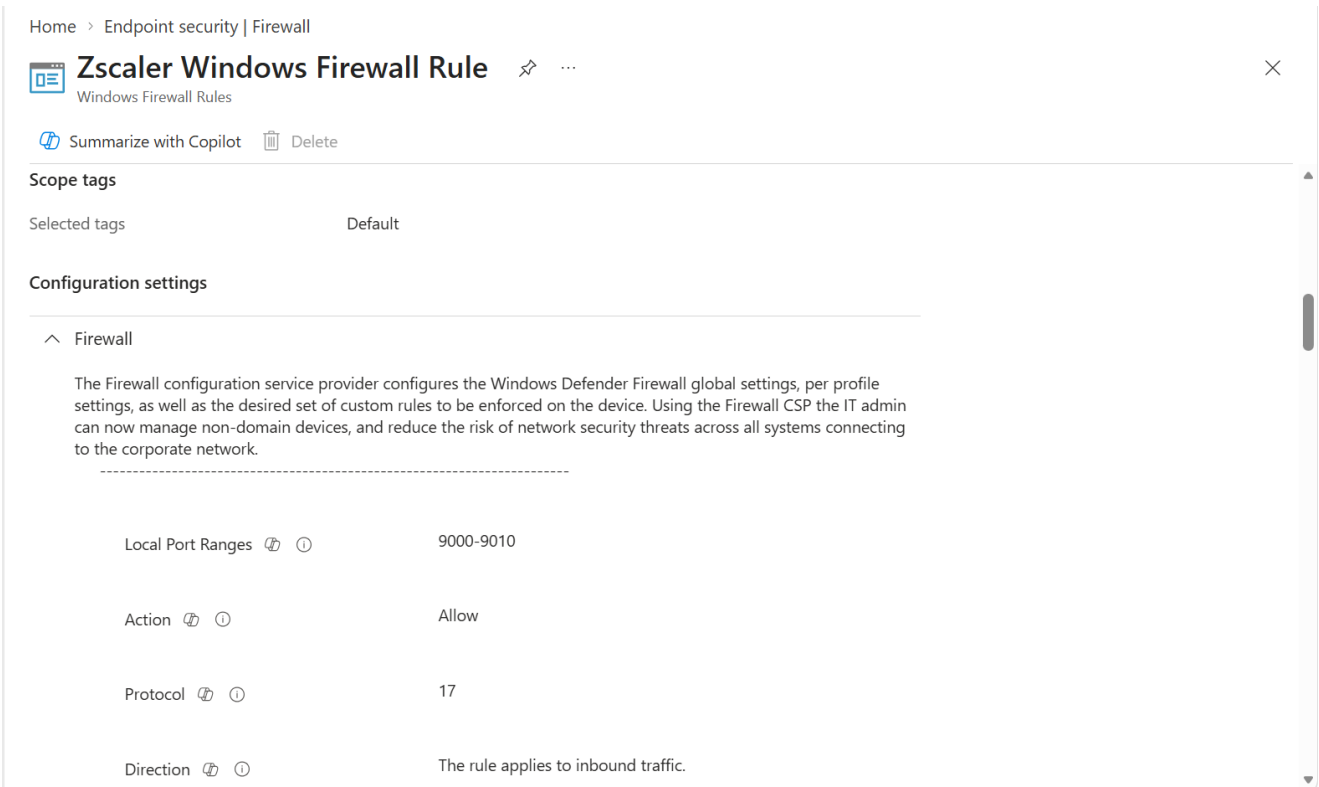


Figure 19. UDP rule configuration includes local port range, allow action, protocol 17, inbound direction, address range, and network profiles.

Home > Endpoint security | Firewall

 Zscaler Windows Firewall Rule

Windows Firewall Rules

 Summarize with Copilot  Delete

Direction  	The rule applies to inbound traffic.
Remote Address Ranges  	100.64.0.0/10
Enabled  	Enabled
Name  	Zscaler - UDP 9000-9010
Interface Types  	All
Network Types  	FW_PROFILE_TYPE_ALL: This value represents all these network sets and any future network sets.

Figure 20. UDP rule continuation with direction, remote address range, rule name, interfaces, and all network types.

Home > Endpoint security | Firewall

Zscaler Windows Firewall Rule

Windows Firewall Rules

Summarize with Copilot

Delete

Enabled

Name

Interface Types

Network Types

Local Port Ranges

Action

Protocol

Direction

Enabled

Zscaler - TCP 9000-9010

All

FW_PROFILE_TYPE_ALL: This value represents all these network sets and any future network sets.

9000-9010

Allow

6

The rule applies to inbound traffic

Figure 21. TCP rule uses protocol 6 and the approved port range.

Home > Endpoint security | Firewall



Zscaler Windows Firewall Rule

Windows Firewall Rules





 Summarize with Copilot

 Delete

Direction  	The rule applies to inbound traffic.
Remote Address Ranges  	100.64.0.0/10
Enabled  	Enabled
Name  	Zscaler – ZSATunnel – Outbound Allow (x86)
Interface Types  	All
File Path  	%ProgramFiles(x86)%\Zscaler\ZSATunnel\ZSATunnel.exe
Network Types  	FW_PROFILE_TYPE_ALL: This value represents all these network sets and any future network sets.

Figure 22. x86 ZSATunnel program rule shows file path and remote address scope.

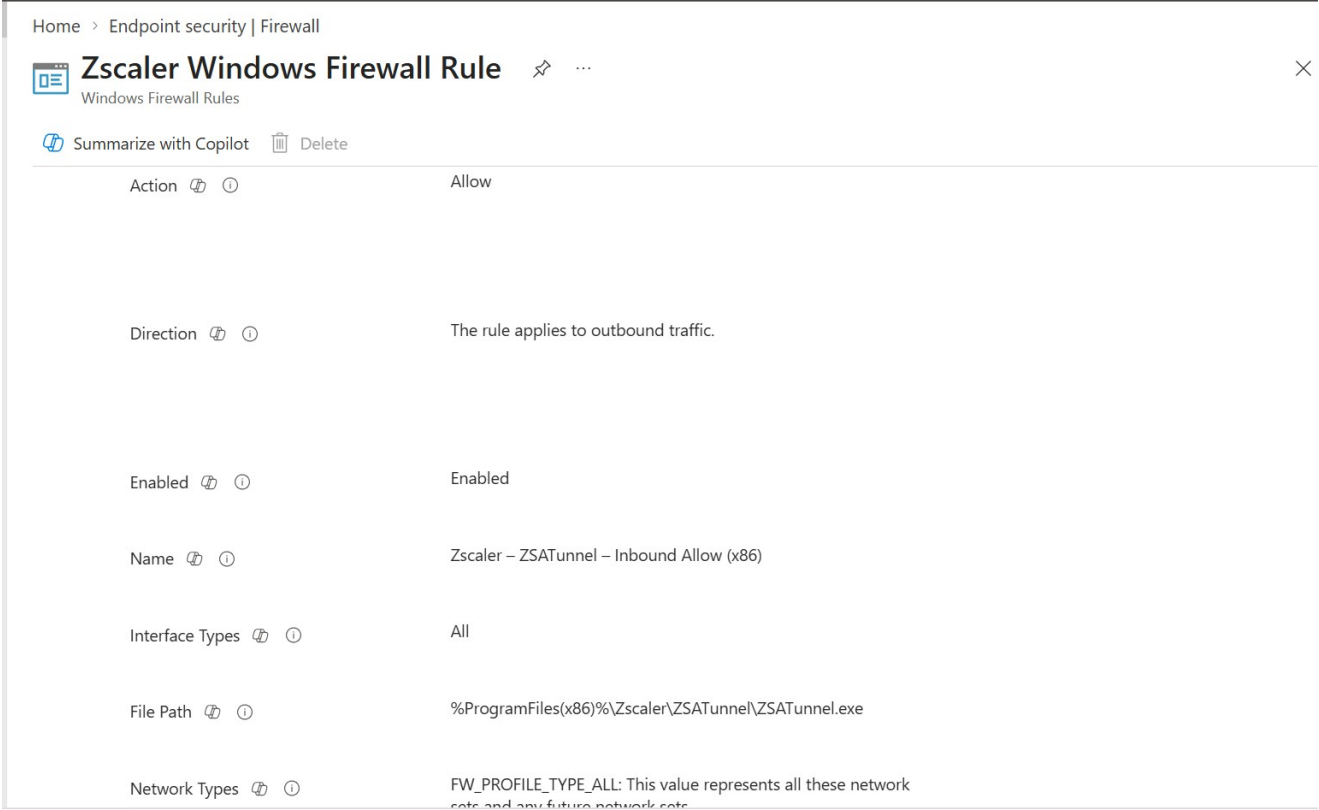


Figure 23. A related x86 program rule shows outbound direction and executable path.

Home > Endpoint security | Firewall

Zscaler Windows Firewall Rule

Windows Firewall Rules

Summarize with Copilot

Delete

Network Types

FW_PROFILE_TYPE_ALL: This value represents all these network sets and any future network sets.

Action

Allow

Direction

The rule applies to inbound traffic.

Enabled

Enabled

Name

Zscaler – ZSATunnel – Outbound Allow (x64)

Interface Types

All

Figure 24. x64 ZSATunnel rule configuration for inbound traffic.

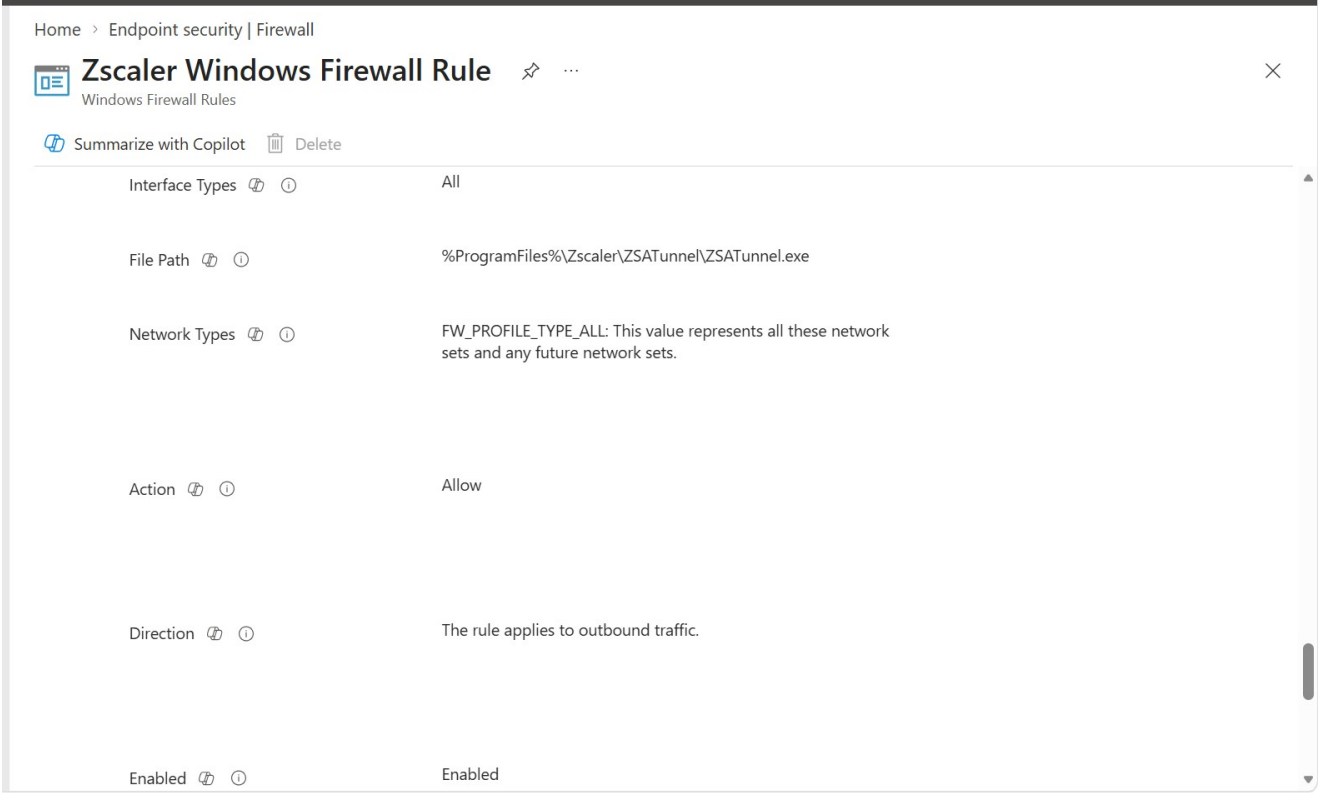


Figure 25. x64 program path and profile scope continuation.



Zscaler Windows Firewall Rule



Windows Firewall Rules



Summarize with Copilot



Delete

Enabled	Enabled
Name	Zscaler – ZSATunnel – Inbound Allow (x64)
Interface Types	All
File Path	%ProgramFiles%\Zscaler\ZSATunnel\ZSATunnel.exe
Network Types	FW_PROFILE_TYPE_ALL: This value represents all these network sets and any future network sets.
Action	Allow
Direction	The rule applies to inbound traffic.

Figure 26. Additional Zscaler firewall rule properties retained from the source tenant.

Zscaler Windows Firewall Rule



Device configuration profile

Refresh Columns Export

Search by device name, U

Check-in status == all



Showing 1 to 6 of 6 records

< Previous Page 1 of 1 Next >

Device name ↑↓	Logged in user ↑↓	Check-in status ↑↓	Filter	Last report modification time ↑↓
IN-5CG3025T0Z	System account	Success		Tue Sep 01 2026 04:03:10 GMT+0530 (In...
IN-5CG3025T0Z	morty.smith@kforce.co.in	Success		Tue Sep 01 2026 16:54:49 GMT+0530 (In...
IN-5CG44513C6	romil.khowal@kforce.co.in	Success		Tue Sep 22 2026 14:41:47 GMT+0530 (In...
IN-5CG44513C6	System account	Success		Tue Sep 22 2026 14:37:58 GMT+0530 (In...
IN-5CG44513C8	System account	Success		Wed Sep 23 2026 10:02:07 GMT+0530 (In...
IN-5CG44513C8	abhishek.shivdekar@kforce.co.in	Success		Wed Sep 23 2026 15:26:33 GMT+0530 (In...

Figure 27. Firewall rule detail with action, direction, protocol, address, and program constraints.

IN-5CG3025T0Z - Policy Settings

This report may be delayed in showing the most recent information.

Refresh

Columns

0 items

Search

Add filters

Name	Status	Error code
------	--------	------------

Figure 28. Firewall policy continuation retained for rule-level review.

10. Firewall Rule Design Principles

Field	Architect question
Direction	Is the flow inbound or outbound?
Action	Allow or block, and why?
Protocol	TCP 6, UDP 17, or documented requirement?
Local/remote ports	Are ranges minimal and vendor-documented?
Local/remote addresses	Can scope be narrowed?
Program path	Does x86/x64 path match installation?
Profiles	Domain, private, public, or all?
Interface types	LAN, wireless, remote access, or all?

10.1 Rule validation

```
Get-NetFirewallRule -PolicyStore ActiveStore
Get-NetFirewallPortFilter
Get-NetFirewallApplicationFilter
```

Least exposure

Create the narrowest rule that permits the required business flow. Avoid broad Any/All rules unless the vendor requirement and security approval explicitly support them.

11. Disk Encryption Architecture

Exact portal path

Microsoft Intune admin center > Endpoint security > Disk encryption

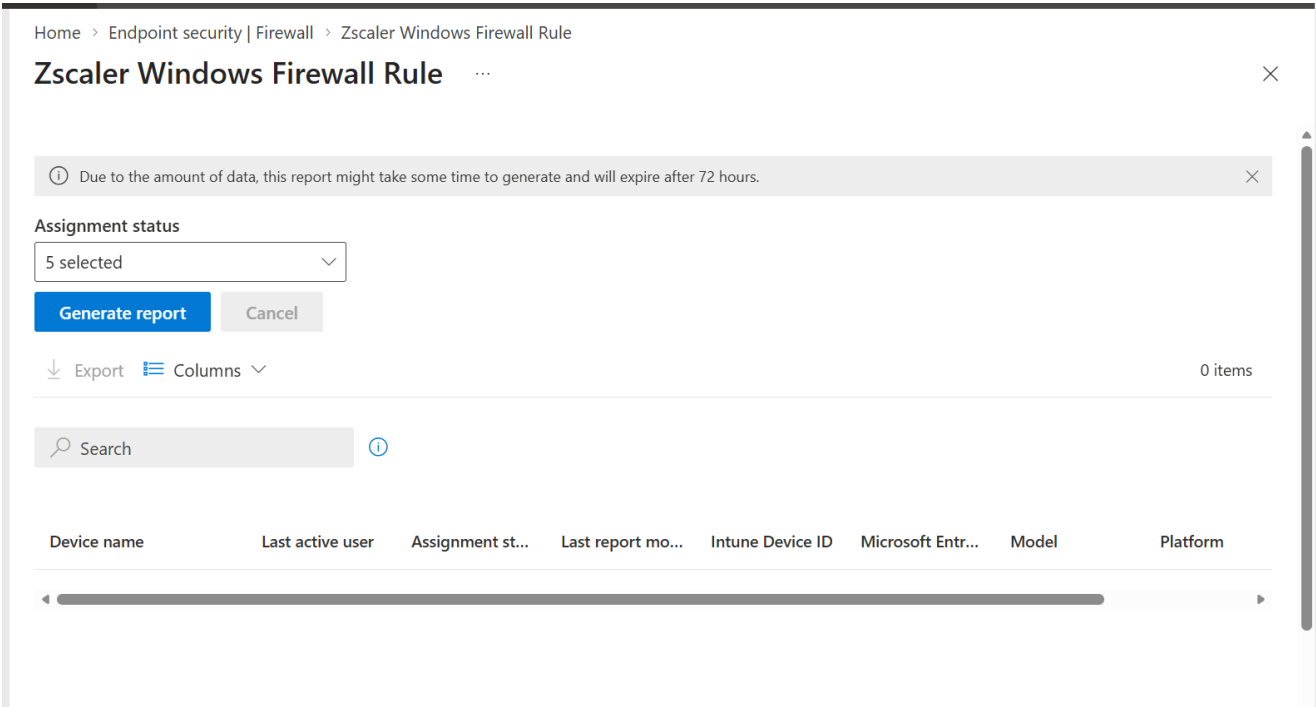


Figure 29. Disk encryption policy area and encrypted-device monitoring.



Endpoint security | Firewall



Search

Overview

Overview

All devices

Security baselines

Security tasks

Manage

Antivirus

Disk encryption

Firewall

Summary

MDM devices running Windows 10 or later with firewall off

Reusable settings

Refresh Columns Export Restart Sync

Search Device name, User principal name

Showing 0 to 0 of 0 records

< Previous Page 0 of 0 Next >

Select Device name Firewall status User Principal Na... Target

No results.

Figure 30. Disk encryption policy properties and assignment reference.

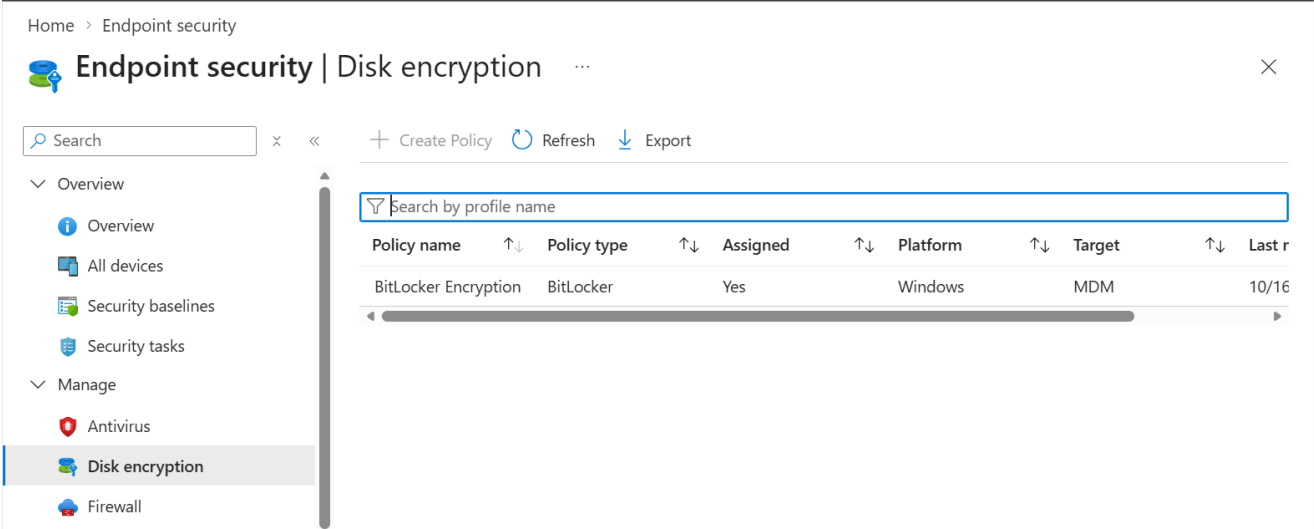


Figure 31. BitLocker/FileVault configuration settings reference.

 BitLocker Encryption

BitLocker

 Summarize with Copilot  Delete

Device and user check-in status



Device assignment status

This report shows all the devices that are targeted by the policy, including devices in a pending policy assignment state.

Per setting status

View the configuration status of each setting for this policy across all devices and users.

Properties

Figure 32. Disk encryption device status and reporting reference.

 BitLocker Encryption

BitLocker

 Summarize with Copilot

 Delete

Properties

Basics

Name	BitLocker Encryption
Description	No Description
Platform	Windows

Assignments

Included groups


Group	Status	Filter	Filter mode
SG-PROD-INDIA-IDC-Windows Devices	Active	None	None

Excluded groups

Group	Status
No results.	

Figure 33. Recovery and encryption configuration continuation.

11.1 Encryption flow

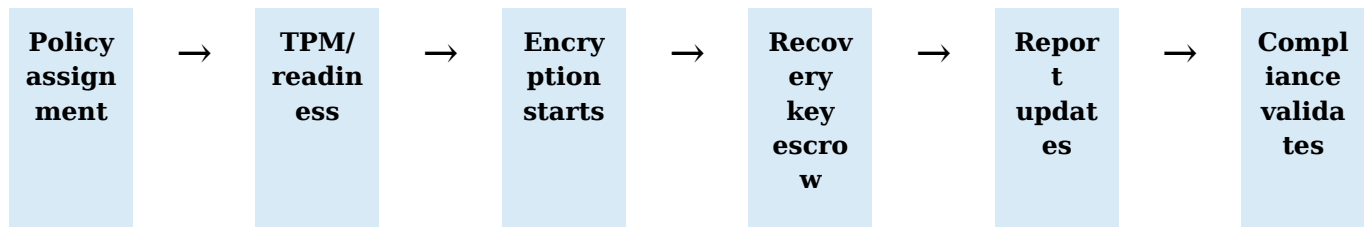

11.2 Windows design

- Choose encryption method and strength according to security standard.
- Configure silent enablement requirements.
- Escrow recovery information before high-impact enforcement where required.
- Control removable-drive behavior.
- Validate TPM, Secure Boot, Windows edition, and recovery process.

11.3 Real-world example

Scenario

A device is managed but remains unencrypted. The engineer reviews BitLocker profile status, TPM readiness, conflicting policy, reboot requirements, local manage-bde output, and recovery-key escrow.

12. Account Protection Architecture

Exact portal path

Microsoft Intune admin center > Endpoint security > Account protection

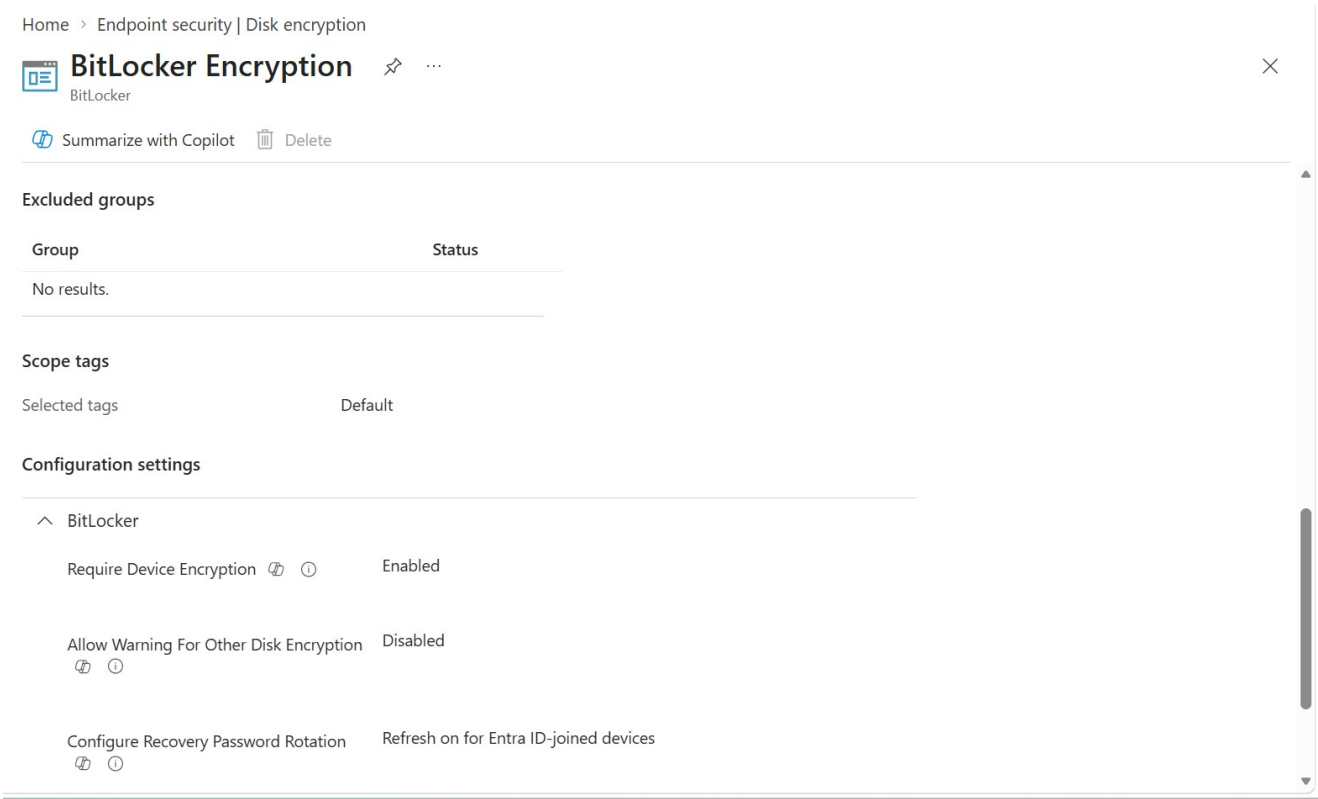


Figure 34. Account protection policy workspace.

Home > Endpoint security | Disk encryption

 BitLocker Encryption

BitLocker

 Summarize with Copilot

 Delete

Configure Recovery Password Rotation  

Refresh on for Entra ID-joined devices

Allow Standard User Encryption  

Enabled

^ Administrative Templates

BitLocker Drive Encryption

Choose drive encryption method and
cipher strength (Windows 10 [Version
1511] and later)  

Enabled

BitLocker Drive Encryption > Operating System Drives

Enforce drive encryption type on
operating system drives  

Enabled

Figure 35. Account protection properties and assignment reference.

Home > Endpoint security | Disk encryption

 BitLocker Encryption

BitLocker

 Summarize with Copilot  Delete

Require additional authentication at startup  

Enabled

Enable use of BitLocker authentication requiring preboot keyboard input on slates  

Enabled

Choose how BitLocker-protected operating system drives can be recovered  

Enabled

BitLocker Drive Encryption > Fixed Data Drives

Enforce drive encryption type on fixed data drives  

Enabled

Figure 36. Windows Hello or credential-protection settings reference.

 BitLocker Encryption

BitLocker

 Summarize with Copilot  Delete

Choose how BitLocker-protected fixed drives can be recovered   Enabled

Deny write access to fixed drives not protected by BitLocker   Disabled

BitLocker Drive Encryption > Removable Data Drives

Select the encryption method for removable data drives:  AES-CBC 128-bit (default)

Select the encryption method for operating system drives:  XTS-AES 256-bit

Select the encryption method for fixed data drives:  XTS-AES 256-bit

Select the encryption type:  Full encryption

Figure 37. Local account or privilege-protection configuration reference.

**BitLocker Encryption**

BitLocker





 Summarize with Copilot

 Delete

Select the encryption type: 	Full encryption
Configure TPM startup key: 	Do not allow startup key with TPM
Configure TPM startup key and PIN: 	Do not allow startup key and PIN with TPM
Allow BitLocker without a compatible TPM (requires a password or a startup key on a USB flash drive) 	False
Configure TPM startup: 	Require TPM
Configure TPM startup PIN: 	Do not allow startup PIN with TPM
Omit recovery options from the BitLocker setup wizard 	True
OSRecoveryKeyUsageDropDown_Name	Allow 256-bit recovery key

Figure 38. Account protection policy status reference.

12.1 Controls

Control	Purpose
Windows Hello for Business	Phishing-resistant user sign-in with device-bound credentials
Credential Guard	Protect derived credentials using virtualization-based security
Local users/groups	Control local group membership
Windows LAPS	Rotate and securely store local administrator passwords
Endpoint Privilege Management	Allow standard users approved elevation workflows

12.2 Real-world example

Scenario

A support application requires elevation. Instead of making the user a permanent local administrator, security and endpoint teams create a controlled EPM elevation rule with publisher/file evidence and audit monitoring.

13. Attack Surface Reduction Architecture

Exact portal path

Microsoft Intune admin center > Endpoint security > Attack surface reduction

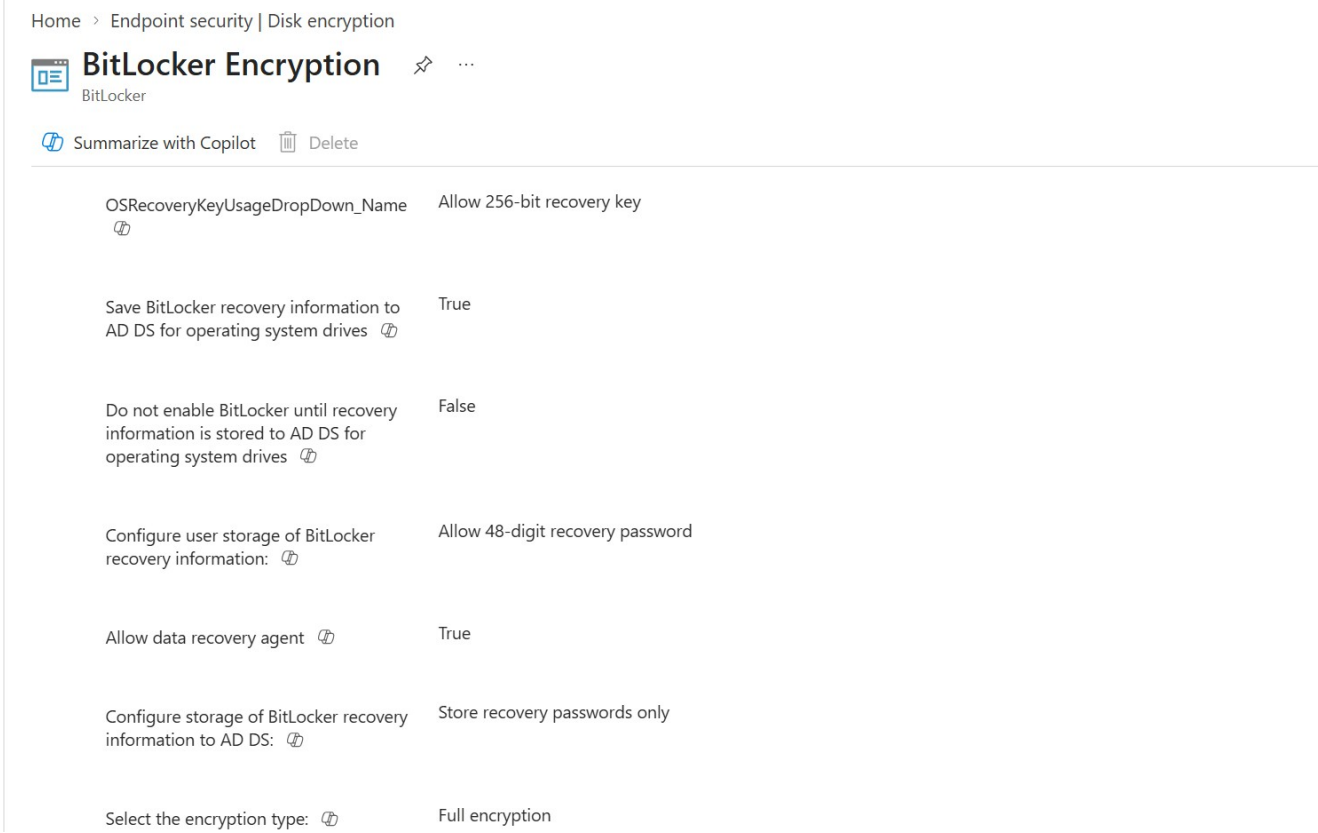


Figure 39. ASR policy workspace.

 BitLocker Encryption

BitLocker



 Summarize with Copilot

 Delete

Select the encryption type: 	Full encryption
Do not enable BitLocker until recovery information is stored to AD DS for fixed data drives 	True
Allow data recovery agent 	True
Configure storage of BitLocker recovery information to AD DS: 	Backup recovery passwords and key packages
FDVRecoveryKeyUsageDropDown_Name 	Allow 256-bit recovery key
Omit recovery options from the BitLocker setup wizard 	False
Save BitLocker recovery information to AD DS for fixed data drives 	True

Figure 40. ASR policy/profile reference.

 BitLocker Encryption

BitLocker

 Summarize with Copilot

 Delete

Allow data recovery agent 	True
Configure storage of BitLocker recovery information to AD DS: 	Backup recovery passwords and key packages
FDVRecoveryKeyUsageDropDown_Name 	Allow 256-bit recovery key
Omit recovery options from the BitLocker setup wizard 	False
Save BitLocker recovery information to AD DS for fixed data drives 	True
Configure user storage of BitLocker recovery information: 	Allow 48-digit recovery password

Figure 41. ASR rule configuration reference.

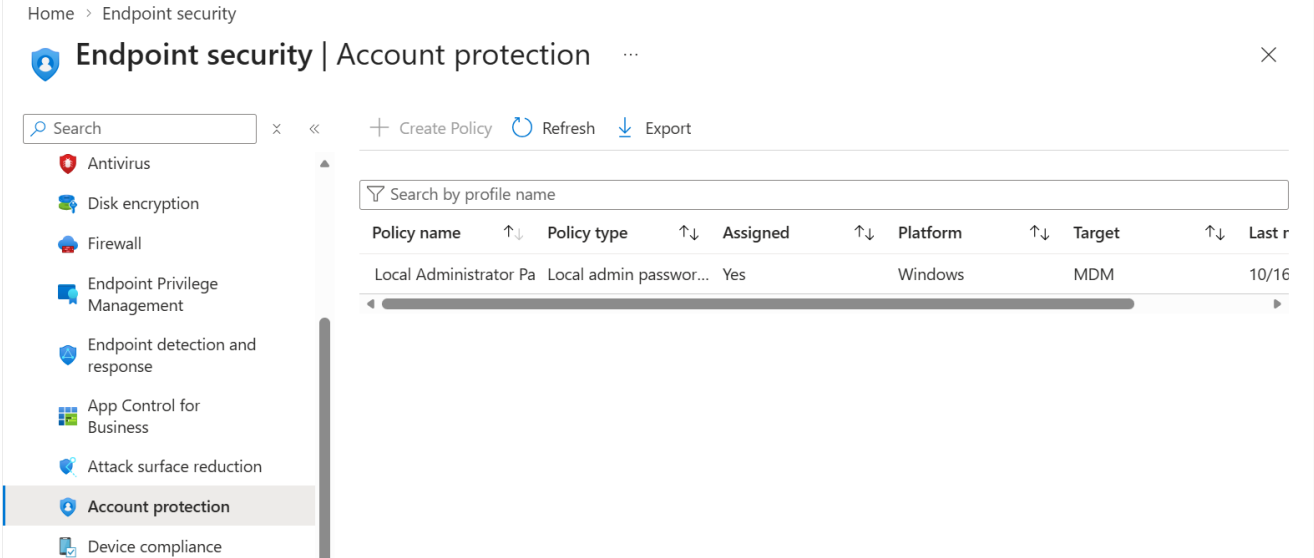


Figure 42. ASR rule modes and settings reference.

Home > Endpoint security | Account protection



Local Administrator Password Solution



Local admin password solution (Windows LAPS)



Summarize with Copilot



Delete

Device and user check-in status



[View report](#)

Device assignment status

This report shows all the devices that are targeted by the policy, including devices in a pending policy assignment state.

Per setting status

View the configuration status of each setting for this policy across all devices and users.

Properties

Figure 43. Device control or exploit-protection reference.

 Local Administrator Password Solution

Local admin password solution (Windows LAPS)

 Summarize with Copilot  Delete

Properties

Basics

Name	Local Administrator Password Solution
Description	Creates local admin account and managed password
Platform	Windows

Assignments

Included groups

Group	Status	Filter	Filter mode
SG-PROD-INDIA-IDC-Windows Devices	Active	None	None
SG-PROD-KIOSK-Glider Devices	Active	None	None



Excluded groups

Group	Status
No results.	

Figure 44. Web protection or network protection reference.

 Local Administrator Password Solution

Local admin password solution (Windows LAPS)

 Summarize with Copilot  Delete

Group	Status
No results.	

Scope tags

Selected tags	Default
---------------	---------

Configuration settings

^ LAPS		
Backup Directory	 	Backup the password to Microsoft Entra ID only
Password Complexity	 	Large letters + small letters + numbers + special characters (improved readability)
Password Length	 	15
Post Authentication Actions	 	Reset the password and logoff the managed account: upon expiry of the password, the managed account password will be reset and the user will be required to log on again.

Figure 45. Controlled folder access reference.

 Local Administrator Password Solution

Local admin password solution (Windows LAPS)

 Summarize with Copilot

 Delete

Post Authentication Actions  	Reset the password and logoff the managed account: upon expiry of the grace period, the managed account password will be reset and any interactive logon sessions using the managed account will terminated.
Post Authentication Reset Delay   4	
Automatic Account Management Enabled  	The target account will be automatically managed
Password Age Days   30	
Automatic Account Management Randomize Name  	The name of the target account will use a random numeric suffix.
Automatic Account Management Name Or Prefix  	Gatekeeper
Automatic Account Management Target  	Manage a new custom administrator account

Figure 46. Device control configuration reference.

Local Administrator Password Solution ...

Local admin password solution (Windows LAPS)

 Summarize with Copilot  Delete

Automatic Account Management Enabled  ⓘ	The target account will be automatically managed
Password Age Days  ⓘ	30
Automatic Account Management Randomize Name  ⓘ	The name of the target account will use a random numeric suffix.
Automatic Account Management Name Or Prefix  ⓘ	Gatekeeper
Automatic Account Management Target  ⓘ ⓘ	Manage a new custom administrator account
Automatic Account Management Enable Account  ⓘ ⓘ	The target account will be enabled

Figure 47. ASR assignment/status reference.

Local Administrator Password Solution



Device configuration profile

Refresh Columns Export

Search by device name, ...

Check-in status == all

Succeeded **194**
Error **0**
Conflict **0**
Not applicable **0**
In Progress **0**

Showing 1 to 50 of 194 records

< Previous

Page

1 of 4

Next >

Device name ↑↓	Logged in user ↑↓	Check-in status ↑↓	Filter	Last report modification time ↑↓
IN-5CD5249872	System account	Success		Tue Aug 25 2026 09:54:16 GMT+0530 (India Sta...
IN-5CD5249872	manish.hiwase@kforce.co.in	Success		Wed Sep 23 2026 10:16:16 GMT+0530 (India St...
IN-5CD524987D	sonika.katariya@kforce.co.in	Success		Wed Sep 23 2026 10:40:39 GMT+0530 (India St...
IN-5CD524987D	System account	Success		Thu Sep 17 2026 09:35:36 GMT+0530 (India Sta...
IN-5CD524987L	System account	Success		Tue Sep 22 2026 10:26:10 GMT+0530 (India Sta...
IN-5CD524987L	sakshi.sharma@kforce.co.in	Success		Wed Sep 23 2026 22:06:07 GMT+0530 (India St...
IN-5CD52498H5	procheta.ganguly@kforce.co.in	Success		Tue Sep 22 2026 15:27:09 GMT+0530 (India Sta...
IN-5CD52498H5	System account	Success		Tue Sep 15 2026 09:57:58 GMT+0530 (India Sta...

Figure 48. ASR policy continuation.

Local Administrator Password Solution

...

×

ⓘ Due to the amount of data, this report might take some time to generate and will expire after 72 hours.

×

Assignment status

5 selected

Generate report

Cancel

↓ Export

☰ Columns

0 items

🔍 Search

ⓘ

Device name	Last active user	Assignment st...	Last report mo...	Intune Device ID	Microsoft Entr...	Model	Platform
-------------	------------------	------------------	-------------------	------------------	-------------------	-------	----------

Figure 49. ASR monitoring/reference view.

Home > Endpoint security

Endpoint security | Attack surface reduction

×

Search

×

<<

Antivirus

Disk encryption

Firewall

Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Account protection

Device compliance

Conditional access

Policies

Reusable settings

Attack surface reduction policies help reduce your attack surfaces by minimizing the places where your organization is vulnerable to cyberthreats and attacks. [Learn more about attack surface reduction](#)

Attack surface reduction policies

+ Create Policy

↻ Refresh

↓ Export

Search by profile name

Policy name	↑↓	Policy type	↑↓	Assigned	↑↓	Platform	↑↓	Target	↑↓
No results									

Figure 50. Attack surface reduction Policies and Reusable settings tabs.

Endpoint security | Attack surface reduction

Search

Antivirus

Disk encryption

Firewall

Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Account protection

Device compliance

Policies

Reusable settings

Create setting groups containing a reusable list of one or more endpoints to protect. Device control policies created in the 'Policies' tab can refer to this setting group. Each device control policy can allow or block access to all specified endpoints. Changes made to these settings automatically apply to policies that refer to them. Note: Devices defined here must be onboarded to Microsoft Defender for Endpoint (MDE). [Learn more about reusable setting groups](#)

+ Add

Refresh

Search by setting name


Setting group name	↑↓	Policies inheriting group	↑↓	Last modified	↑↓
No results					

Figure 51. Reusable setting groups for endpoints used by device-control policies.

13.1 Deployment modes

Mode	Use
Audit	Collect impact evidence without blocking
Warn	Prompt user where supported and collect telemetry
Block	Enforce after exclusions and business validation
Disabled/Not configured	No enforcement from that policy

13.2 Safe rollout

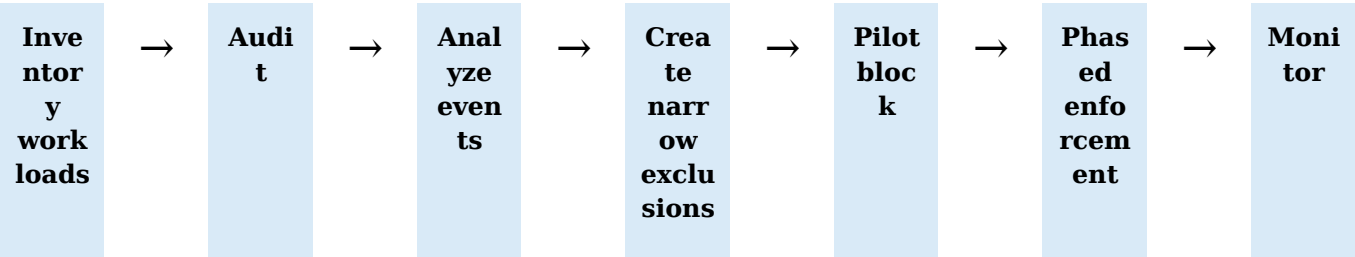

13.3 Real-world example

Scenario

An ASR rule in Audit identifies a finance macro workflow. Security validates the signed application and business process, creates the narrowest approved exclusion, retests, and only then enables Block for the pilot ring.

14. Endpoint Detection and Response

Exact portal path

Microsoft Intune admin center > Endpoint security > Endpoint detection and response

The screenshot shows the Microsoft Intune admin center interface. The breadcrumb path is **Home > Endpoint security**. The main header is **Endpoint security | Endpoint detection and response**. The left sidebar contains a search bar and a list of navigation items: **Endpoint Privilege Management**, **Endpoint detection and response** (selected), **App Control for Business**, **Attack surface reduction**, **Account protection**, **Device compliance**, **Conditional access**, **Monitor** (with sub-items **Assignment failures** and **Setup**), **Microsoft Defender for Endpoint**, and **Help and support**.

The main content area has two tabs: **Summary** (selected) and **EDR Onboarding Status**. Under the **Summary** tab, there is a section titled **Defender for Endpoint Connector Status** with a status indicator showing **Defender for Endpoint connector unavailable**.

Below this, there is a section titled **Windows devices onboarded to Defender for Endpoint** with a progress bar showing **0 / 0**. A table below the progress bar shows the onboarding status:

Onboarded	Not Onboarded	Total
0	0	0

At the bottom, there is a section titled **Endpoint detection and response (EDR) policies** with buttons for **Create policy**, **Refresh**, **Export**, and **Columns**.

Figure 52. EDR Summary shows connector status and onboarding visibility.

Home > Endpoint security

Endpoint security | Endpoint detection and response

Search

- Endpoint Privilege Management
- Endpoint detection and response**
- App Control for Business
- Attack surface reduction
- Account protection
- Device compliance
- Conditional access
- Monitor
 - Assignment failures
- Setup
 - Microsoft Defender for Endpoint
- Help and support
 - Help and support

Summary **EDR Onboarding Status**

Create an Endpoint detection and response policy to onboard devices to Microsoft Defender for Endpoint. Other options can be found in the [Defender Portal](#). For devices that are on premises, [learn more about deploying Defender for Endpoint](#).

Refresh Export Columns Deploy preconfigured policy

Search Add filters

0 / 0

Onboarded	Not Onboarded	Total
0	0	0

Device name	Managed by	Defender sensor state	Onboardi

Figure 53. EDR Onboarding Status and policy creation guidance.

https://security.microsoft.com/homepage?tid=dd72a2d2-8ec1-4f74-9b3a-e66f079e7fd4

Microsoft Defender

Home

Get your SIEM and XDR in one place

Work faster with less complexity. Run SIEM and XDR from one portal to investigate threats faster, automate response, and avoid tool switching with built-in AI, unified search, and threat intelligence.

Connect a workspace

Guided tour What's new? Community Add cards

Microsoft Secure Score

Secure Score: 55.42%

151.31/273 points achieved

Microsoft Secure Score is a representation of your

Action center

No actions pending approval

Last 30 days

Threat analytics

0 threats require action

Active Alerts Resolved Alerts No Alerts

12:45 AM 9/25/2026

Figure 54. Microsoft Defender portal home, the investigation and response destination for incidents and alerts.

14.1 EDR flow





14.2 Create EDR policy

- Select Create Policy.
- Choose supported platform and Endpoint detection and response profile.
- Configure onboarding package/connector-based settings shown by the portal.
- Assign to a pilot device group.
- Review and create.
- Confirm sensor health and onboarding in Intune and Defender portal.

14.3 Real-world example

Scenario

Intune reports the EDR policy succeeded but Defender portal does not show the device. The engineer checks connector health, licensing, sensor service, onboarding state, proxy/network endpoints, duplicate device records, and last telemetry.

15. Security Baselines

Exact portal path

Microsoft Intune admin center > Endpoint security > Security baselines


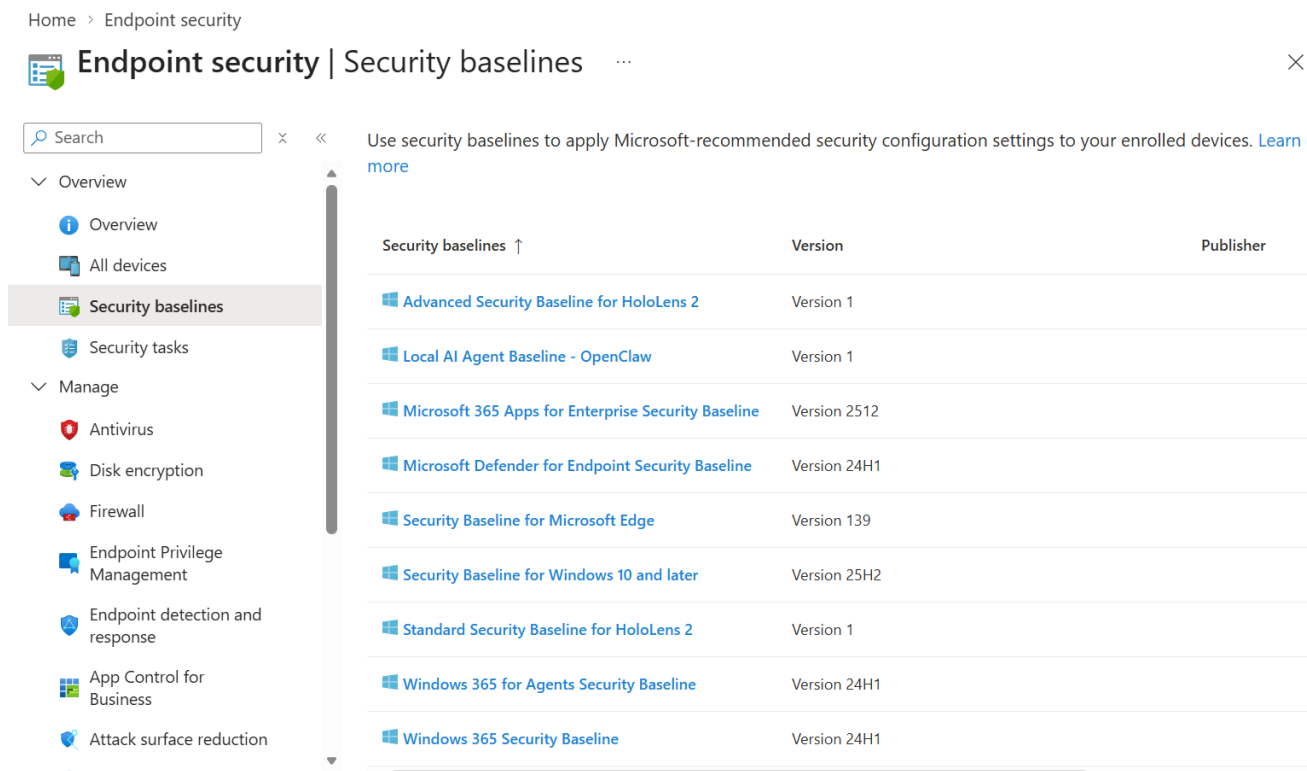


Figure 55. Security baselines inventory with baseline names, versions, and publishers.

15.1 Baseline lifecycle

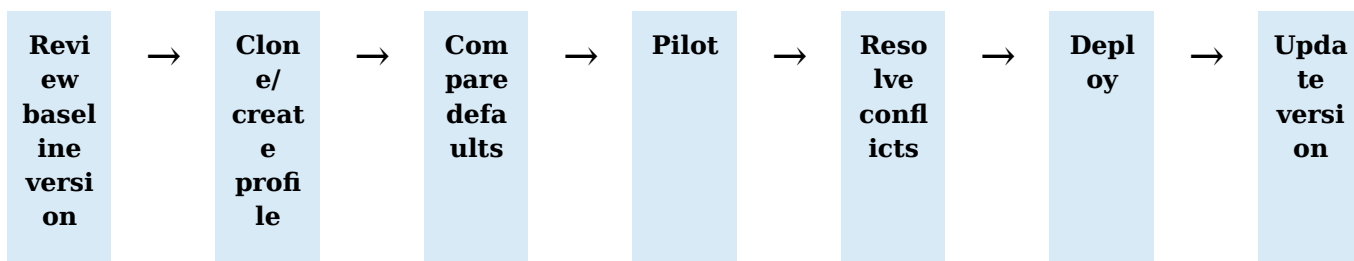

15.2 Design rules

- Treat the baseline as a starting point, not an automatic production answer.
- Map settings to organizational controls.
- Review user/application impact.
- Avoid configuring the same settings through other policy surfaces.
- When a new baseline version is published, compare and test before updating.

Microsoft documents that a new baseline version replaces the previous version and older profile instances become read-only for setting configuration until updated.



Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Account protection

Device compliance

Conditional access

Monitor

Assignment failures

Setup

Microsoft Defender for Endpoint

Help and support

Help and support

Search

Refresh Save Discard Delete

Configuring Microsoft Defender for Endpoint

1. Setup a connection to Intune via the Microsoft Defender Security Center: [Connect Microsoft Defender for Endpoint to Microsoft Intune in the Microsoft Defender Security Center](#)

2. After a connection is established, click "Refresh" at the top of this section to hide this guide and enable the settings below.

3. Configure the settings below.

Connector settings

Some toggles are disabled and acting as "off" because Microsoft Defender for Endpoint is not actively communicating with Intune for this account. Please check the state of the connection in the Microsoft Defender for Endpoint admin console.

When the connection has returned to a healthy status (Active or Provisioned), the toggles will be re-enabled and any pre-existing setting state will be restored.

Endpoint Security Profile Settings

Allow Microsoft Defender for Endpoint to enforce Endpoint Security Configurations ⓘ

Off On

Figure 57. Connector configuration and Endpoint Security Profile Settings.

Internal Master SOP | Endpoint Security Page 62

Home > Endpoint security

Endpoint security | Microsoft Defender for Endpoint

Search

Refresh

Save

Discard

Delete

Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Account protection

Device compliance

Conditional access

Monitor

Assignment failures

Setup

Microsoft Defender for Endpoint

Help and support

Help and support

Compliance policy evaluation

Connect Android devices version 6.0.0 and above to Microsoft Defender for Endpoint

Off On

Connect iOS/iPadOS devices version 13.0 and above to Microsoft Defender for Endpoint

Off On

Connect Windows devices version 10.0.15063 and above to Microsoft Defender for Endpoint

Off On

Enable App Sync (sending application inventory) for iOS/iPadOS devices

Off On

Send full application inventory data on personally owned iOS/iPadOS devices

Off On

Block unsupported OS versions

Off On

App protection policy evaluation

Connect Android devices to Microsoft Defender for Endpoint

Off On

Connect iOS/iPadOS devices to Microsoft Defender for Endpoint

Off On

Mobile Threat Defense role

Figure 58. Compliance and app-protection evaluation connector options.

Endpoint security | Microsoft Defender for Endpoint

Search

Refresh

Save

Discard

Delete

Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Account protection

Device compliance

Conditional access

Monitor

Assignment failures

Setup

Microsoft Defender for Endpoint

Help and support

Help and support

App protection policy evaluation

Connect Android devices to Microsoft Defender for Endpoint

Off On

Connect iOS/iPadOS devices to Microsoft Defender for Endpoint

Off On

Mobile Threat Defense role

Grant MTD role permissions to Microsoft Defender for Endpoint on enrolled Android AM API personally owned with work profile, fully managed, and corporate owned with work profile devices

Off On

Shared settings

Number of days until partner is unresponsive

7

[Open the Microsoft Defender Security Center](#)

Add or remove favorites by pressing Ctrl+Shift+F

Figure 59. Mobile Threat Defense and shared settings continuation.

Internal Master SOP | Endpoint Security Page 64

16.1 Security settings management


Defender for Endpoint security settings management can extend selected Intune endpoint security policies to supported devices that are onboarded to Defender but not enrolled in Intune. Enrolled Intune devices continue to use Intune MDM policy management.

16.2 Governance

- Define whether each device is Intune-managed or Defender-security-settings-managed.
- Use Entra groups appropriate to the management channel.
- Prevent duplicate policy targeting.
- Monitor status in both Intune and Defender portals.

17. App Control for Business Architecture

App Control for Business manages application control policies so that only trusted code can run according to the organization design. Use audit before enforcement and validate line-of-business applications, installers, scripts, drivers, and update mechanisms.

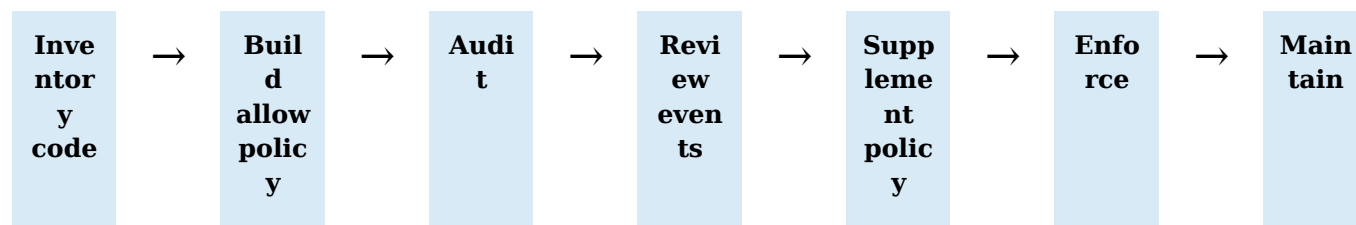

Real-world example

A line-of-business updater is blocked during pilot. The team validates signer and file reputation, creates a supplemental allow rule, retests upgrades, then resumes phased enforcement.

18. Endpoint Privilege Management Architecture

Endpoint Privilege Management supports least privilege by allowing standard users to run approved processes elevated under controlled rules.

Rule evidence		Example	
Publisher		Signed corporate/vendor application	
File hash		Exact immutable binary	
File name/path		Use cautiously with additional evidence	
User confirmation		Business reason or authentication where supported	

Stand
ard
user

→

Elevat
ion
reque
st

→

Rule
evalua
tion

→

Appro
ved
elevat
ion

→


Audit
event

→

Revie
w


19. Security Tasks and Vulnerability Remediation

Security tasks connect Defender vulnerability findings with Intune remediation activity. Establish ownership between security operations and endpoint engineering.

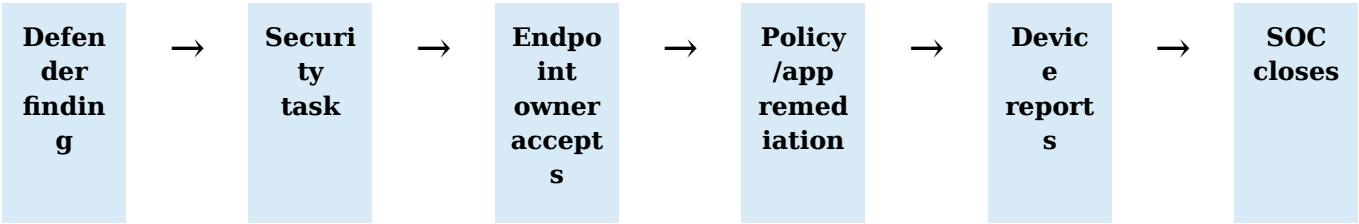

- Record affected devices and exposure.
- Validate recommended remediation and user impact.
- Pilot configuration or application change.
- Monitor exposure reduction.
- Close only with evidence.

20. Compliance and Conditional Access Integration

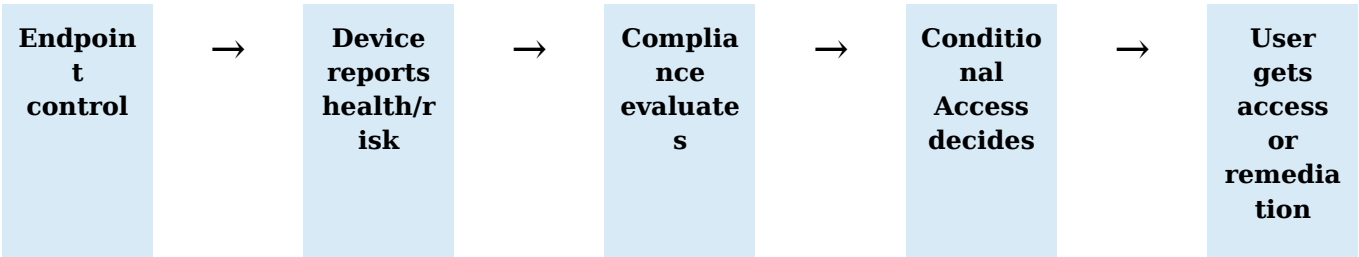

- Deploy and validate controls before enforcing access.
- Use Defender machine risk only after connector and onboarding validation.
- Start Conditional Access in report-only mode.
- Exclude emergency access accounts per governance.
- Provide user remediation and support route.

21. Policy Naming Convention

Standard pattern

<Platform>-<Workload>-<Control>-<Scope>-<Environment>-v<Major>.<Minor>

Token	Examples
Platform	WIN, MAC, IOS, AND, LNX
Workload	AV, FW, ENC, ASR, EDR, APPCTRL, ACCT, BASELINE
Control	Realtime, Zscaler, BitLocker, Onboarding, Corporate
Scope	Global, India, Pune, Kiosk
Environment	LAB, PILOT, PROD
Version	v1.0, v1.1, v2.0

WIN-AV-Defender-Global-PROD-v1.0
 WIN-FW-Zscaler-India-PROD-v1.0
 WIN-ENC-BitLocker-Global-PROD-v2.0
 WIN-ASR-Corporate-Global-PILOT-v1.0
 WIN-EDR-Onboarding-Global-PROD-v1.0

22. Assignment, Filters, Scope Tags, and RBAC

- Use Entra groups for deployment scope.
- Use assignment filters only for stable supported attributes.
- Scope tags control administrator visibility, not deployment.
- Use Endpoint Security Manager or a least-privilege custom role.
- Separate policy creation, approval, and production assignment duties where required.



23. Production Rollout Model

Ring	Purpose	Exit evidence
Lab	Validate syntax and platform support	Local state and no critical errors
Security/IT pilot	Validate telemetry and operations	SOC/help-desk readiness
Business pilot	Validate applications and user impact	Accepted exclusions and low incident volume
Production waves	Controlled expansion	Status and incident thresholds met
Broad	Standard estate	Ongoing monitoring and review

24. Conflict Architecture

Conflict source		Example	
Baseline vs endpoint policy		Different Defender or firewall value	
Configuration profile vs endpoint policy		Duplicate BitLocker setting	
Group Policy vs Intune		Domain GPO sets firewall differently	
Multiple endpoint policies		Opposing ASR mode	
Third-party security tool		Defender active/passive-mode assumptions	

Per-
settin
g
confli
ct

→

Identi
fy
every
sourc
e

→

Choos
e
autho
rity

→

Remo
ve
overla
p

→

Sync

→

Valida
te
local
state

25. Incident Response Runbook

1. Confirm alert/detection and device identity.
2. Preserve evidence and follow SOC instructions.
3. Determine whether isolation or containment is approved.
4. Review active malware, EDR, firewall, user, and timeline.
5. Remediate malware/vulnerability or policy gap.
6. Validate sensor/agent health.
7. Restore access only after security approval.
8. Document root cause and preventive change.

26. Troubleshooting Matrix

Symptom	Likely area	Action
AV unhealthy	Service, signatures, passive mode, tamper	Check Defender status and authority
Firewall off	Profile conflict/service/third party	Review profiles and local state
Rule succeeds but app fails	Path, direction, address, port	Validate executable and traffic
Encryption pending	TPM, policy, reboot, recovery escrow	Check local BitLocker and profile
ASR breaks app	Rule mode or exclusion	Audit events and narrow exclusion
EDR not onboarded	Connector, sensor, network, license	Validate both portals and service
Baseline conflict	Duplicate settings	Use per-setting status and choose owner
No Defender data	Connector or onboarding gap	Confirm synchronization and telemetry

26.1 Commands

```
Get-MpComputerStatus
Get-MpPreference
Update-MpSignature
Start-MpScan -ScanType QuickScan
Get-NetFirewallProfile
Get-NetFirewallRule -PolicyStore ActiveStore
manage-bde -status
dsregcmd /status
```

27. Monitoring and Evidence

Evidence	Location
Antivirus health	Endpoint security > Antivirus
Firewall status/rules	Endpoint security > Firewall
Encryption state	Endpoint security > Disk encryption / device recovery keys
EDR onboarding	Endpoint security > EDR and Defender portal
ASR events	Defender portal and Windows event logs
Policy status	Policy > Device and user check-in / per-setting
Security tasks	Endpoint security > Security tasks

27.1 Evidence pack

```
EndpointSecurity/YYYY-MM/
  PolicyExports/
  AssignmentStatus/
  AntivirusHealth/
  FirewallRules/
  EncryptionAndKeys/
  EDRAndASR/
  Incidents/
  Exceptions/
  ExecutiveSummary/
```

28. Real-World Architecture Scenarios

Scenario	Architecture response
Remote laptop	EDR, AV, firewall, BitLocker, cloud compliance, no LAN dependency
Kiosk/shared device	Device-targeted controls, App Control, restricted privilege, no user dependency
Developer workstation	ASR audit, approved exclusions, EPM, App Control pilot
Third-party AV	Define Defender mode and reporting authority; avoid duplicate active engines
Zscaler client	Minimal program/port firewall rules, pilot x86/x64 path, telemetry validation
Server security settings management	Use supported Defender security settings management design and separate groups

29. Interview and Expert Reference

Question	Strong answer
Why Endpoint security policies?	Purpose-built workload profiles with focused settings and reporting.
Baseline vs endpoint policy?	Baseline is a versioned recommended bundle; endpoint policy is focused on a workload.
How prevent conflicts?	One owner per setting and full policy-source inventory.
Audit vs Block for ASR?	Audit measures impact; Block enforces after validation and exclusions.
What does EDR onboarding do?	Connects the endpoint sensor to Defender for telemetry, detection, and response.
Compliance vs security policy?	Security policy configures; compliance evaluates and can feed access decisions.
How validate firewall rule?	Check policy status, local active rule, application path, traffic direction, protocol, ports, addresses, and logs.
Why recovery-key escrow?	Allows approved recovery when protected devices require access restoration.

30. Reusable Design and Incident Records

30.1 Policy record

Field	Record
Policy name/version	
Owner/workload	
Security objective	
Settings and source	
Assignments/exclusions	
Dependencies	
Pilot evidence	
User impact	
Rollback	
Ticket/approval	

30.2 Incident record

Field	Record
Device/user	
Detection/error	
Policy/workload	
Timeline	
Containment	
Root cause	
Remediation	
Validation	
Owner/date	

31. Architect Review Checklist

- Licensing and roles verified.
- Connector and management authority clear.
- No duplicate setting owner.
- Platform and OS support confirmed.
- Pilot and rollback defined.
- AV/firewall/encryption/EDR dependencies validated.
- User and application impact tested.
- Monitoring and incident ownership assigned.
- Exceptions time-bound and approved.
- Evidence and review date recorded.

32. Official References and Maintenance

- Microsoft Learn: Endpoint security in Microsoft Intune - <https://learn.microsoft.com/intune/device-security/endpoint-security-policies>
- Microsoft Learn: Manage endpoint security policies - <https://learn.microsoft.com/intune/device-configuration/endpoint-security/manage-policies>
- Microsoft Learn: Defender security settings management - <https://learn.microsoft.com/intune/device-security/microsoft-defender/security-settings-management>
- Microsoft Learn: Defender for Endpoint security baseline reference - <https://learn.microsoft.com/intune/device-security/security-baselines/ref-defender-settings>

Maintenance rule

Review this SOP after Intune or Defender portal changes, baseline versions, OS support changes, security incidents, connector changes, licensing changes, or major control redesign.

Windows Update Rings & Patch Management

Update Rings

The screenshot displays the Microsoft Intune admin center interface. The left sidebar contains navigation options: Home, Dashboard, All services, Explorer, Devices, Apps, Endpoint security, Agents, Reports, Users, Groups, Tenant administration, and Troubleshooting + support. The main content area is titled 'Windows | Windows updates' and includes a search bar and a list of update management options: Windows devices, Monitor, Device onboarding, Enrollment, Manage devices, Configuration, Compliance, Scripts and remediations, Group Policy analytics, eSIM cellular profiles (preview), and Manage Windows 365 Cloud PCs. The 'Manage Windows 365 Cloud PCs' section is expanded, showing 'Cloud PC Overview', 'Monitor Cloud PCs (preview)', and 'All Cloud PCs'. The right pane shows the 'Windows updates' configuration page. It features a 'Hotpatch Enablement' notification, tabs for Releases, Update rings, Feature updates, Quality updates, Driver updates, and Monitor. The 'Releases' tab is active, displaying a table of updates. A yellow banner indicates that Windows 10 reached end of support on October 14, 2025. The table shows two quality updates and two feature updates, both with a deployment status of 'In Progress' and a first deployment date of 9/8/2026.

Microsoft Intune admin center

Home > Devices | Overview > Windows

Windows | Windows updates

Search

Windows devices

Monitor

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Scripts and remediations

Group Policy analytics

eSIM cellular profiles (preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs (preview)

All Cloud PCs

Add or remove favorites by pressing Ctrl+Shift+F

Hotpatch Enablement To secure devices faster, eligible devices will start receiving Hotpatch updates automatically after May 12th. If you have already configured Hotpatch updates using a quality update policy, devices assigned to that policy will honor your configuration. [Learn more about getting secure faster with Hotpatch](#) Opt out

Releases Update rings Feature updates Quality updates Driver updates Monitor

Select a release to see deployment information across your policies. Data does not include expedited quality update releases for policies that aren't in an Autopatch group.

Windows 10 reached end of support on October 14, 2025. To stay protected, upgrade to Windows 11 or purchase [Extended Se...](#)

Quality updates 2 Feature updates 2

Refresh Export Columns 4 items

Search Add filters

Release	Update type	Deployment status	First depl
2026.09 B	Quality	In Progress	9/8/2026

1:20 AM 9/24/2026

Home > Devices | Overview > Windows

Windows | Windows updates

Search

Windows devices

Monitor

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Scripts and remediations

Group Policy analytics

eSIM cellular profiles (preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs (preview)

releases for policies that aren't in an Autopatch group.

Quality updates2

Feature updates2

Refresh

Export

Columns

4 items

Search

Add filters

Release	Update type	Deployment status	First deployment
2026.09 B	Quality	In Progress	9/8/2026
2026.09 OOB	Quality	In Progress	9/14/2026
Windows 11, version 24H2	Feature	In Progress	10/11/2026
Windows 11, version 25H2	Feature	In Progress	3/20/2026

Microsoft Intune admin center

Home > Devices | Overview > Windows

Windows | Windows updates

Search

Windows devices

Monitor

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Scripts and remediations

Group Policy analytics

eSIM cellular profiles (preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs (preview)

All Cloud PCs

Releases

Update rings

Feature updates

Quality updates

Driver updates

Monitor

View your policy settings and make changes as needed. With Autopatch groups, you can manage rollouts across multiple deployment rings.

Create profile

Refresh

Export

Columns

Pause

Resume

5 policies

Search

Add filters

Name	Object type	Quality
☐ Windows Autopatch Update Policy - Autopatch - Last	Update rings fo...	Running
☐ Windows Autopatch Update Policy - Autopatch - Ring1	Update rings fo...	Running
☐ Windows Autopatch Update Policy - Autopatch - Ring2	Update rings fo...	Running
☐ Windows Autopatch Update Policy - Autopatch - Ring3	Update rings fo...	Running
☐ Windows Autopatch Update Policy - Autopatch - Test	Update rings fo...	Running

Add or remove favorites by pressing Ctrl+Shift+F

Create profile

Refresh

Export

Columns

Pause

Resume

5 policies

Search

Add filters

Name	Object type ↑	Quality	Feature	Quality de
☐ Windows Autopatch Up...	Update rings fo...	Running	Running	10 days
☐ Windows Autopatch Up...	Update rings fo...	Running	Running	2 days
☐ Windows Autopatch Up...	Update rings fo...	Running	Running	7 days
☐ Windows Autopatch Up...	Update rings fo...	Running	Running	14 days
☐ Windows Autopatch Up...	Update rings fo...	Running	Running	0 days

Microsoft Intune admin center

Home

Dashboard

All services

Explorer

Devices

Apps

Endpoint security

Agents

Reports

Users

Groups

Tenant administration

Troubleshooting + support

Home > Devices | Overview > Windows | Windows updates

Windows Autopatch Update Policy - Autopatch - Ring1

Update ring for Windows 10 and later

Delete

Pause

Resume

Extend

Uninstall

Essentials

Created

10/11/25, 01:29:23 AM

Feature

Running

Last modified

05/05/26, 07:28:23 PM

Quality

Running

Groups assigned

1

Device and user check-in status

Succeeded

0

Error

0

Conflict

0

Not applicable

0

View report

Device assignment status

This report shows all the devices that are targeted by the policy, including devices in a pending policy assignment state.



Windows Autopatch Update Policy - Autopatch - Ring1



Update ring for Windows 10 and later

Delete Pause Resume Extend Uninstall

Properties

Basics

Name	Windows Autopatch Update Policy - Autopatch - Ring1
Description	No Description

Update ring settings

Update settings	
Microsoft product updates	Allow
Windows drivers	Allow
Quality update deferral period (days)	2
Feature update deferral period (days)	0
Upgrade Windows 10 devices to Latest Windows 11 release	No
Set feature update uninstall period (2 - 60 days)	30
Servicing channel	General Availability channel
User experience settings	
Automatic update behavior	Reset to default
Option to pause Windows updates	Disable



Windows Autopatch Update Policy - Autopatch - Ring1



Update ring for Windows 10 and later

Delete Pause Resume Extend Uninstall

Option to check for Windows updates	notConfigured
Change notification update level	Use the default Windows Update notifications
Use deadline settings	Allow
Deadline for feature updates	5
Deadline for quality updates	3
Grace period	1
Auto reboot before deadline	Yes

Assignments

Included groups

Group	Status	Filter	Filter mode
Autopatch - Ring1	Active	None	None

Excluded groups

Group	Status
No results.	



Windows Autopatch Update Policy - Autopatch - Ring2 ...

Update ring for Windows 10 and later

Delete Pause Resume Extend Uninstall

^ Essentials

Created	Feature
10/11/25, 01:29:23 AM	Running
Last modified	Quality
05/05/26, 07:28:23 PM	Running
Groups assigned	
1	

Device and user check-in status



Device assignment status

This report shows all the devices that are targeted by the policy, including devices in a pending policy assignment state.



Windows Autopatch Update Policy - Autopatch - Ring2

Update ring for Windows 10 and later

Delete Pause Resume Extend Uninstall

Properties

Basics

Name	Windows Autopatch Update Policy - Autopatch - Ring2
Description	No Description

Update ring settings

Update settings

Microsoft product updates	Allow
Windows drivers	Allow
Quality update deferral period (days)	7
Feature update deferral period (days)	0
Upgrade Windows 10 devices to Latest Windows 11 release	No
Set feature update uninstall period (2 - 60 days)	30
Servicing channel	General Availability channel
User experience settings	
Automatic update behavior	Reset to default
Option to pause Windows updates	Disable
Option to check for Windows updates	notConfigured



Windows Autopatch Update Policy - Autopatch - Ring2

Update ring for Windows 10 and later

Delete Pause Resume Extend Uninstall

Option to check for Windows updates	notConfigured
Change notification update level	Use the default Windows Update notifications
Use deadline settings	Allow
Deadline for feature updates	5
Deadline for quality updates	3
Grace period	1
Auto reboot before deadline	Yes

Assignments

Included groups

Group	Status	Filter	Filter mode
Autopatch - Ring2	Active	None	None

Excluded groups

Group	Status
No results.	

Windows Autopatch Update Policy - Autopatch - Ring3

Device configuration profile

Refresh Columns Export

Search by device name, U

Check-in status == all

Succeeded 128 Error 0 Conflict 0 Not applicable 0 In Progress 0

Showing 1 to 50 of 128 records

< Previous Page 1 of 3 Next >

Device name ↑↓	Logged in user ↑↓	Check-in status ↑↓	Filter	Last report modification time ↑↓
IN-5CD524987D	System account	Success		Thu Sep 17 2026 09:35:36 GMT+0530...
IN-5CD524987D	sonika.katariya@kforce.co.in	Success		Tue Sep 22 2026 09:56:06 GMT+0530...
IN-5CD524987L	System account	Success		Tue Sep 22 2026 10:26:10 GMT+0530...
IN-5CD524987L	sakshi.sharma@kforce.co.in	Success		Tue Sep 22 2026 00:11:36 GMT+0530...
IN-5CD52498H5	System account	Success		Tue Sep 15 2026 09:57:58 GMT+0530...
IN-5CD52498H5	procheta.ganguly@kforce.co.in	Success		Tue Sep 22 2026 15:27:09 GMT+0530...
IN-5CD52489V4	System account	Success		Mon Sep 07 2026 18:43:53 GMT+0530...
IN-5CD52489V4	shaurya.deshmukh@kforce.co.in	Success		Mon Sep 21 2026 22:44:15 GMT+0530...

n center



2

dnyaneshwar.karande@...
KFORCE INTL (KFORCE.CO.IN)

Home > Devices | Overview > Windows | Windows updates > Windows Autopatch Update Policy - Autopatch - Ring3

Windows Autopatch Update Policy - Autopatch - Ring3

Device configuration profile

 Refresh

 Columns

 Export

 Search by device name, ...

 Check-in status == all

Succeeded

128

Error

0

Conflict

0

Not applicable

0

In Progress

0

Showing 51 to 100 of 128 records

< Previous

Page 2 of 3

Next >

Device name ↑↓	Logged in user ↑↓	Check-in status ↑↓	Filter	Last report modification time ↑↓
IN-5CD5390VF4	yash.notani@kforce.co.in	Success		Tue Sep 22 2026 11:51:00 GMT+0530...
IN-5CD5390VF4	System account	Success		Mon Aug 31 2026 11:03:25 GMT+053...
IN-5CD5390VXX	divyani.parche@kforce.co.in	Success		Tue Sep 22 2026 11:22:25 GMT+0530...
IN-5CD5390VXX	System account	Success		Tue Sep 15 2026 09:55:21 GMT+0530...
IN-5CD5390VX9	System account	Success		Thu Sep 03 2026 10:58:26 GMT+0530...
IN-5CD5390VX9	dnyaneshwar.karande@kforce.co.in	Success		Tue Sep 22 2026 10:47:03 GMT+0530...
IN-5CD5390VZJ	System account	Success		Fri Aug 28 2026 10:03:56 GMT+0530 ...
IN-5CD5390VZJ	shubhangi.wable@kforce.co.in	Success		Tue Sep 22 2026 16:29:11 GMT+0530...



ENG IN



1:27 AM
9/24/2026

Home > Devices | Overview > Windows | Windows updates

 Windows Autopatch Update Policy - Autopatch - Ring3

Update ring for Windows 10 and later

 Delete

 Pause

 Resume

 Extend

 Uninstall

Properties

Basics

Name

Windows Autopatch Update Policy - Autopatch - Ring3

Description

No Description

Update ring settings

Update settings

Microsoft product updates

Allow

Windows drivers

Allow

Quality update deferral period (days)

14

Feature update deferral period (days)

0

Upgrade Windows 10 devices to Latest Windows 11 release

No

Set feature update uninstall period (2 - 60 days)

30

Servicing channel

General Availability channel

User experience settings

Automatic update behavior

Reset to default

Option to pause Windows updates

Disable

Option to check for Windows updates

Not configured

 Windows Autopatch Update Policy - Autopatch - Ring3 ...

Update ring for Windows 10 and later

 Delete |  Pause ▾ |  Resume ▾ |  Extend ▾ |  Uninstall ▾

Option to pause Windows updates	Disable
Option to check for Windows updates	notConfigured
Change notification update level	Use the default Windows Update notifications
Use deadline settings	Allow
Deadline for feature updates	5
Deadline for quality updates	3
Grace period	1
Auto reboot before deadline	Yes

Assignments

Included groups

Group	Status	Filter	Filter mode
Autopatch - Ring3	Active	None	None

Excluded groups

Group	Status
No results.	

 Windows | Windows updates ...

 Search

-  Group Policy analytics
-  eSIM cellular profiles (preview)
- ▼ Manage Windows 365 Cloud PCs

 Cloud PC Overview

 Monitor Cloud PCs (preview)

 All Cloud PCs

 All Cloud Apps

 Provision Cloud PCs

 Cloud PC Settings
- ▼ Manage updates

 **Windows updates**

▼ Organize devices

 Device clean-up rules

 Assignment filters

Add or remove favorites by pressing Ctrl+Shift+F

 **Hotpatch Enablement** To secure devices faster, eligible devices will start receiving Hotpatch updates automatically after May 12th. If you have already configured Hotpatch updates using a quality update policy, devices assigned to that policy will honor your configuration. [Learn more about getting secure faster with Hotpatch](#)

Opt out

Releases | Update rings | **Feature updates** | Quality updates | Driver updates | Monitor

▼ Autopatch update readiness

Proactively identify and resolve feature update issues to keep your Windows devices secure and productive. [Learn more about Autopatch update readiness](#)



Feature update readiness checkup



Devices managed for feature updates



Alerts and remediations

Windows | Windows updates

Group Policy analytics

eSIM cellular profiles
(preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs
(preview)

All Cloud PCs

All Cloud Apps

Provision Cloud PCs

Cloud PC Settings

Manage updates

Windows updates

Organize devices

Device clean-up rules

Assignment filters

Add or remove favorites by pressing Ctrl+Shift+F



Devices managed for feature updates



Alerts and remediations

View your Windows feature update policy settings and create new feature update releases.

[+ Create profile](#) [↻ Refresh](#) [↓ Export](#) [≡ Columns](#) [v](#)

2 policies

[Add filters](#)

Name	Object Type	Feature update version	Deployment Status
Windows 11, version 25H2	Feature update policy	Windows 11, version 25...	In progress
Windows Autopatch - Feature Update Anchor	Feature update policy	Windows 11, version 24...	In progress

Windows Autopatch - Feature Update Anchor Policy - Autopatch | Properties

Overview

Manage

Properties

Deployment settings

Name	Windows Autopatch - Feature Update Anchor Policy - Autopatch
Description	No Description
Feature deployment settings	
Name	Windows 11, version 24H2
Rollout options	ImmediateStart
Required or optional update	Required

Scope tags

Default

Assignments

Included groups

Group	Status
Autopatch - Test	Active
Autopatch - Ring2	Active
Autopatch - Ring1	Active
Autopatch - Ring3	Active

Add or remove favorites by pressing Ctrl+Shift+F

Windows | Windows updates



Search

Group Policy analytics

eSIM cellular profiles
(preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs
(preview)

All Cloud PCs

All Cloud Apps

Provision Cloud PCs

Cloud PC Settings

Manage updates

Windows updates

Organize devices

Device clean-up rules

Assignment filters

Add or remove favorites by pressing Ctrl+Shift+F

Hotpatch Enablement To secure devices faster, eligible devices will start receiving Hotpatch updates automatically after May 12th. If you have already configured Hotpatch updates using a quality update policy, devices assigned to that policy will honor your configuration. [Learn more about getting secure faster with Hotpatch](#)

Opt out

Releases Update rings Feature updates **Quality updates** Driver updates Monitor

Autopatch update readiness

Proactively identify and resolve quality update issues to keep your Windows devices secure and productive. [Learn more about Autopatch update readiness](#)

Quality update readiness checkup **Alerts and remediations**

+ Create Refresh Export Columns

0 items

Windows | Windows updates



Search

Group Policy analytics

eSIM cellular profiles
(preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs
(preview)

All Cloud PCs

All Cloud Apps

Provision Cloud PCs

Cloud PC Settings

Manage updates

Windows updates

Organize devices

Device clean-up rules

Assignment filters

Releases Update rings Feature updates Quality updates **Driver updates** Monitor

Select a policy to manage its drivers. Windows Autopatch will apply your driver update settings to releases as they become available.

+ Create profile Refresh Export Columns

5 policies

Search



Add filters

> Name	Object type ↑	Drivers to rev...	Deferra
Windows Autopatch Driver Update Policy - Autopatch - Test	Driver update policy	✓ 0 to review	0 days
Windows Autopatch Driver Update Policy - Autopatch - Ring1	Driver update policy	✓ 0 to review	5 days
Windows Autopatch Driver Update Policy - Autopatch - Ring2	Driver update policy	✓ 0 to review	10 days
Windows Autopatch Driver Update Policy - Autopatch - Ring3	Driver update policy	✓ 0 to review	15 days
Windows Autopatch Driver Update Policy - Autopatch - Last	Driver update policy	✓ 0 to review	10 days

Home > Devices | Overview > Windows

Windows | Windows updates

Search

Group Policy analytics

eSIM cellular profiles (preview)

Manage Windows 365 Cloud PCs

Cloud PC Overview

Monitor Cloud PCs (preview)

All Cloud PCs

All Cloud Apps

Provision Cloud PCs

Cloud PC Settings

Manage updates

Windows updates

Organize devices

Device clean-up rules

Assignment filters

Add or remove favorites by pressing Ctrl+Shift+F

Hotpatch Enablement

To secure devices faster, eligible devices will start receiving Hotpatch updates automatically after May 12th. If you have already configured Hotpatch updates using a quality update policy, devices assigned to that policy will honor your configuration. [Learn more about getting secure faster with Hotpatch](#)

Opt out

Releases

Update rings

Feature updates

Quality updates

Driver updates

Monitor

Refresh

Deployment status per Windows update ring

Devices with error

0

Devices with conflict

0

Feature update policies with alerts

Devices with error

0

Expedited quality update policies with alerts

Devices with error

0

Driver update policies with alerts

Devices with error

5

Home > Devices | Windows > Windows | Windows devices

IN-5CD5390VX9

HP ProBook 4 G11R 14 inch Notebook PC

Search

Monitor

Properties

Device details

Device action status

Overview

Tools

Device diagnostics

Device inventory

Device query

BitLocker recovery keys

Local admin password

Remediations

Reports

All apps

App configuration

Discovered apps

Device compliance

Device configuration

Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

Device configuration policies status

Total: 44

Succeeded: 44

Device compliance status

Total: 2

Compliant: 2

Managed apps

IN-5CD5390VX9

HP ProBook 4 G11R 14 inch Notebook PC

Overview

Tools

- Device diagnostics
- Device inventory
- Device query
- BitLocker recovery keys
- Local admin password
- Remediations

Reports

- All apps
- App configuration
- Discovered apps
- Device compliance
- Device configuration
- Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

DK Dnyaneshwar Karande
dnyaneshwar.karande@kforce.co.in

5CD5390VX
9

Remote assistance

Remote Help

Monitor Properties Device details Device action status

A set of modifiable device properties. [Learn more about device details in Intune](#)

Basics Edit

Device name	IN-5CD5390VX9
Management name	dnyaneshwar.karande_Windows_4/27/2026_8:53 AM
Device category	Unassigned
Ownership	Corporate
Primary user	DK Dnyaneshwar Karande dnyaneshwar.karande@kforce.co.in
Notes	Not available

IN-5CD5390VX9

HP ProBook 4 G11R 14 inch Notebook PC

Overview

Tools

- Device diagnostics
- Device inventory
- Device query
- BitLocker recovery keys
- Local admin password
- Remediations

Reports


- All apps
- App configuration
- Discovered apps
- Device compliance
- Device configuration
- Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F



Managed apps

Total: 41



Endpoint Analytics score

User experience

81.32 / 100



Home > Devices

Devices | Compliance

Search

Monitor

By platform

Windows

Apple mobile

macOS

Android

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Create policy

Refresh

Export

Columns

2 policies

Search

Add filters

Policy name	Platform or OS	Policy type	Last modified
macOS Default Compliance Policy	macOS	Mac compliance policy	08/11/2026
Windows Compliance	Windows 10 and later	Windows 10/11 compliance policy	10/10/2025

Home > Devices | Compliance

Windows Compliance

Compliance policy - Windows 10 and later

Delete

Copilot

Summarize this policy

Describe the impact of this policy on security

Describe the impact of this policy on users

Monitor Properties

Device status



Additional monitoring reports

Per-setting status

View the compliance status of each setting for this policy across all devices and users.

Windows Compliance

Compliance policy -Windows 10 and later

 Delete

 Copilot

Summarize this policy

Describe the impact of this policy on security

Describe the impact of this policy on use

Monitor

Properties

Basics

Name

Windows Compliance

Description

--

Platform

Windows 10 and later

Profile type

Windows 10/11 compliance policy

Compliance settings

Device Health

Bitlocker



Required

System Security

Windows Compliance

Compliance policy -Windows 10 and later

Bitlocker



Required

System Security

Firewall



Required

Trusted Platform Module (TPM)



Required

Antivirus



Required

Actions for noncompliance

Action	Schedule	Message template	Additional recipients (via email)
Mark device noncompliant	7Days		None selected

Scope tags

Default

Assignments



Devices | Compliance ...



Search

Apple mobile

macOS

Android

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Scripts and remediations

Group Policy analytics

eSIM cellular profiles
(preview)

Policy sets

Device categories

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Save Discard

These settings configure the way the compliance service treats devices. Each device evaluates these as a "Built-in Device Compliance Policy", which is reflected in device monitoring.

Mark devices with no compliance
policy assigned as ⓘ



Compliant

Compliance status validity period
(days) ⓘ

30



Devices | Compliance ...

Search

Apple mobile

macOS

Android

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Scripts and remediations

Group Policy analytics

eSIM cellular profiles
(preview)

Policy sets

Device categories

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Refresh

Device compliance status

Noncompliant devices
8Devices not evaluated
0

Additional monitoring reports


Noncompliant devices

Identify noncompliant devices and investigate their compliance details

Policies with noncompliant and error devices

View policies with one or more noncompliant devices or devices with errors.



Compliance Policies

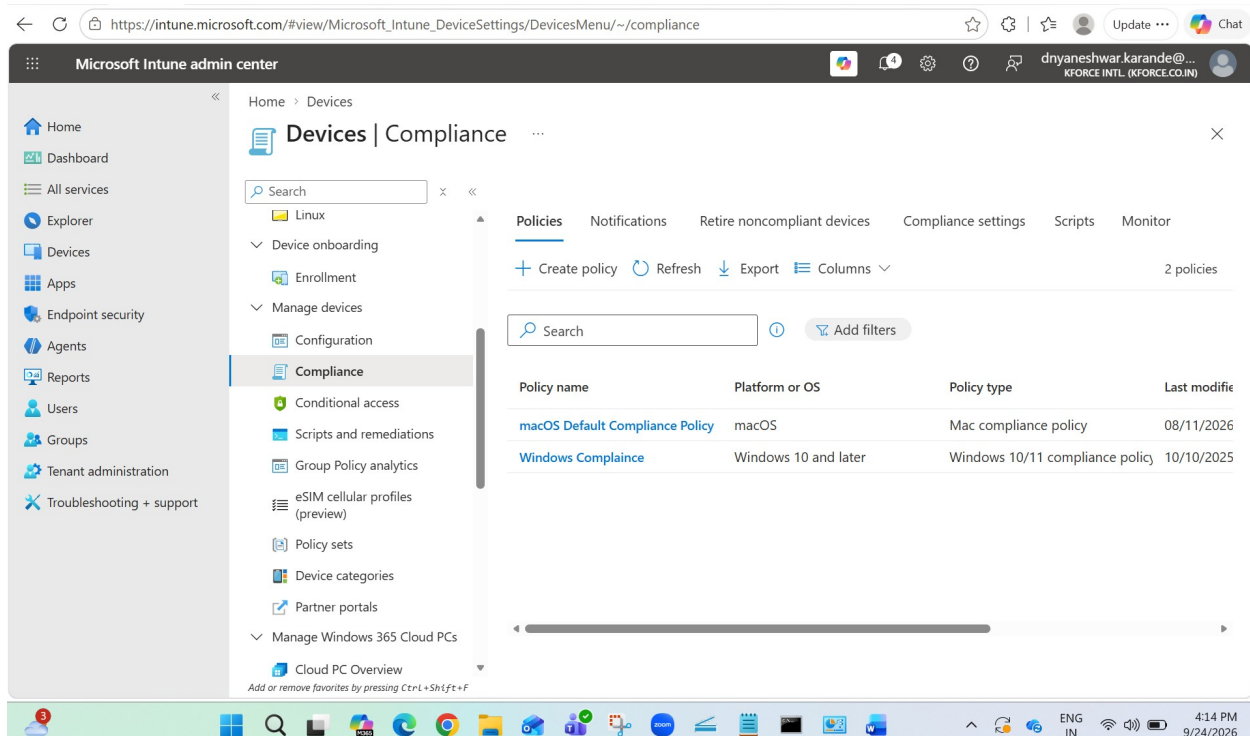

The screenshot shows the Microsoft Intune admin center interface. The left sidebar contains navigation options: Home, Dashboard, All services, Explorer, Devices, Apps, Endpoint security, Agents, Reports, Users, Groups, Tenant administration, and Troubleshooting + support. The main content area is titled 'Devices | Compliance' and includes a search bar and a list of policies. The 'Policies' tab is active, showing a table of compliance policies.

Policy name	Platform or OS	Policy type	Last modified
macOS Default Compliance Policy	macOS	Mac compliance policy	08/11/2026
Windows Compliance	Windows 10 and later	Windows 10/11 compliance policy	10/10/2025

Create policy:

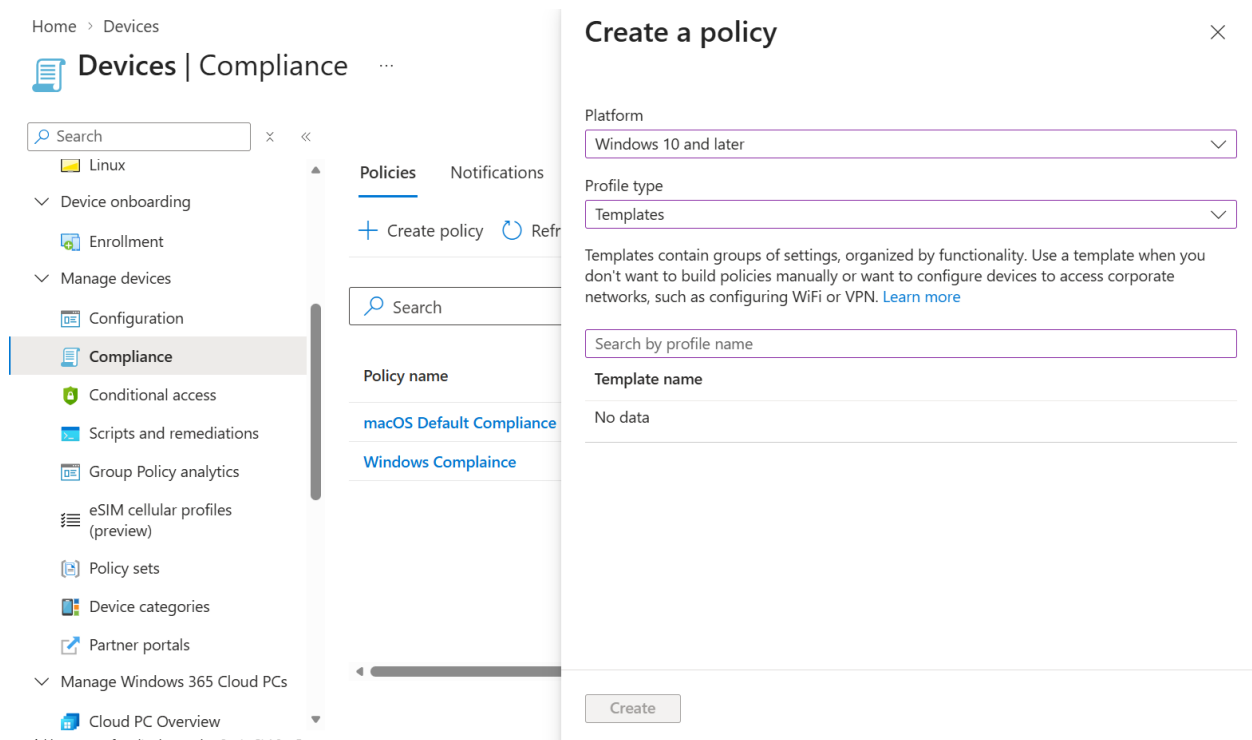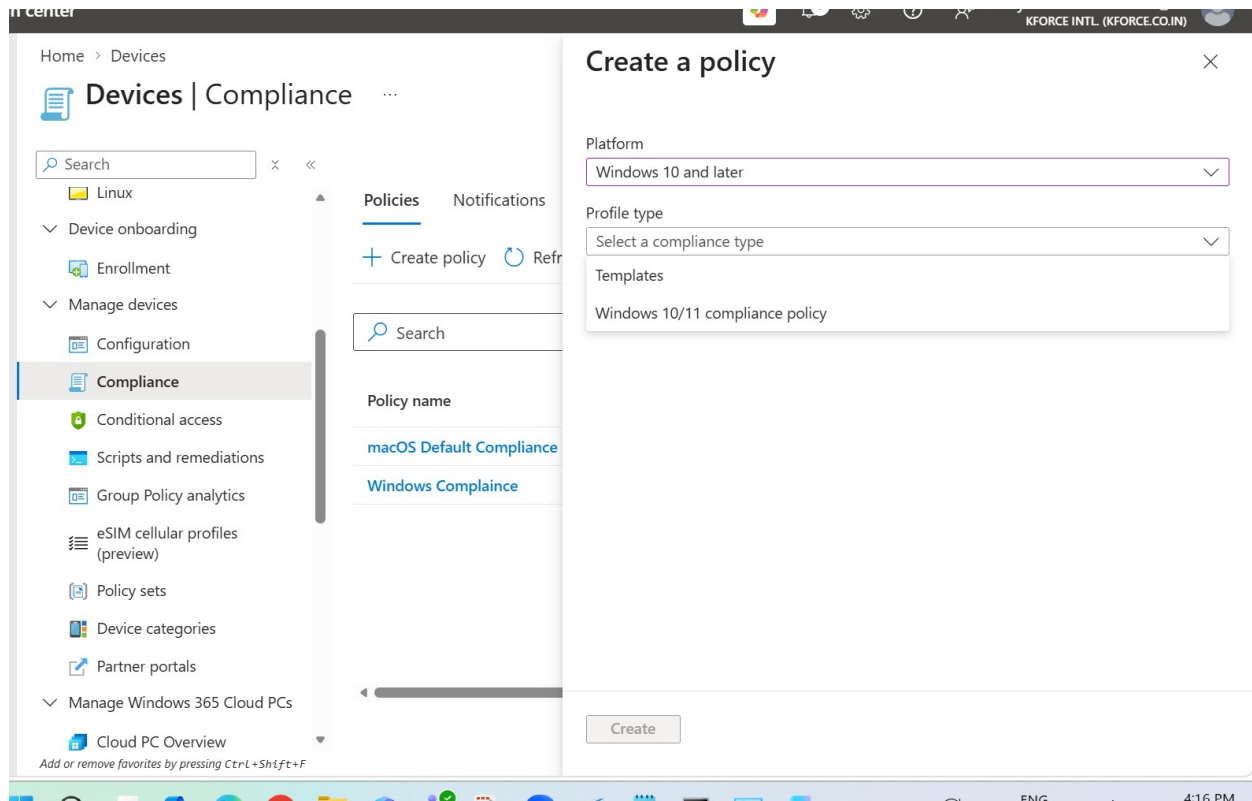

Windows Compliance

Compliance policy - Windows 10 and later



Delete

Copilot

Summarize this policy

Describe the impact of this policy on security

Describe the impact of this policy on users

Monitor Properties

Device status



View report

Additional monitoring reports

[Per-setting status](#)

View the compliance status of each setting for this policy across all devices and users.

Windows Compliance

Compliance policy - Windows 10 and later



Delete

Copilot

Summarize this policy

Describe the impact of this policy on security

Describe the impact of this policy on users

Monitor Properties

Basics

Name	Windows Compliance
Description	--
Platform	Windows 10 and later
Profile type	Windows 10/11 compliance policy

Compliance settings

Device Health

Bitlocker	Required
-----------	----------

System Security

Home > Devices

Devices | Compliance

Search

- Overview
- All devices
- Device query
- Monitor
- By platform
 - Windows
 - Apple mobile
 - macOS
 - Android
 - Linux
- Device onboarding

Policies **Notifications** Retire noncompliant devices Compliance settings Scripts Monitor

Create or edit notification message templates.

+ Create notification Refresh Export Columns Showing 0 records

Search

Display name	Last modified	Scope tags
--------------	---------------	------------

Create notification:

Home > Devices | Compliance

Create a noncompliance notification

1 Basics 2 Header and footer settings 3 Notification message templates 4 Review + create

Name *

Previous Next

Create a noncompliance notification ...

- ✓ Basics **2 Header and footer settings** 3 Notification message templates 4 Review + create

Email Header

Email header and footer settings for email notifications rely on Customization settings within the Tenant admin node in Intune.
[Configure Customization settings](#)

Show company logo

Enable Disable

Tenant Value

Email Footer

Show company name

Enable Disable

Previous

Next

Create a noncompliance notification ...

Email Footer

Show company name

Enable Disable

Tenant Value

Show contact information

Enable Disable

Tenant Value

Show company portal website link

Enable Disable

Tenant Value

<https://portal.manage.microsoft.com/devices/{deviceId}>

Previous

Next

Create a noncompliance notification ...

✓ Basics ✓ Header and footer settings **3 Notification message templates** 4 Review + create

+ Add

Locale	Subject	Message	Is Default
No results.			

Create a noncompliance notification ...

✓ Basics ✓ Header and footer settings **3 Notification message templates**

+ Add

Locale	Subject	Message
No results.		

Add row

Locale *

Select locale

Subject *

Enter a subject

Message ⓘ

Raw HTML editor ⓘ

☒ Off

1

Set to default locale

☐

Previous

Next

Save

Cancel

Windows Compliance

Compliance policy - Windows 10 and later

System Security

Firewall	Required
Trusted Platform Module (TPM)	Required
Antivirus	Required

Actions for noncompliance

Action	Schedule	Message template	Additional recipients (via email)
Mark device noncompliant	7Days		None selected

Scope tags

Default

Assignments

Included groups

Home > Devices

Devices | Compliance

Search

Overview

All devices

Device query

Monitor

By platform

Windows

Apple mobile

macOS

Android

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Refresh

Export

Columns

Clear all devices retire state

0 items

Search

Add filters

Device name

Complianc...

OS

Ownership

Managem...

Intune devi

No retire noncompliant devices found

Home > Devices

Devices | Compliance

Search

Overview

All devices

Device query

Monitor

By platform

Windows

Apple mobile

macOS

Android

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Compliance

Add or remove favorites by pressing Ctrl+Shift+F

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Save

Discard

These settings configure the way the compliance service treats devices. Each device evaluates these as a "Built-in Device Compliance Policy", which is reflected in device monitoring.

Mark devices with no compliance policy assigned as

Compliant

Compliance status validity period (days)

30

Home > Devices

Devices | Compliance

Search

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Scripts and remediations

Group Policy analytics

eSIM cellular profiles (preview)

Policy sets

Device categories

Partner portals

Manage Windows 365 Cloud PCs

Cloud PC Overview

Compliance

Add or remove favorites by pressing Ctrl+Shift+F

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

+ Add

Refresh

Export

Columns

0 items

Search

Script name

Operating sy...

Script type

Last modified

No compliance scripts found

Devices | Compliance



Search

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Scripts and remediations

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

+ Add

Refresh

Export

Columns

0 items

Linux

macOS

Windows 10 and later



Operating sy...

Script type

Last modified

Create custom script



1 Basics

2 Settings

3 Review + create

Create a new custom script package from detection and remediation scripts that you've written.

Name *

Description

Publisher

Version

Previous

Next

Create custom script ...

✓ Basics 2 Settings 3 Review + create

Detection script *

1	
---	--

Run this script using the logged on credentials

Yes No

Enforce script signature check

Yes No

Run script in 64 bit PowerShell Host

Yes No

Previous

Next

Devices | Compliance ...



Search

Linux

Device onboarding

Enrollment

Manage devices

Configuration

Compliance

Conditional access

Scripts and remediations

Group Policy analytics

eSIM cellular profiles (preview)

Policy sets

Device categories

Partner portals

Manage Windows 365 Cloud PCs

Policies

Notifications

Retire noncompliant devices

Compliance settings

Scripts

Monitor

Refresh

Device compliance status

Noncompliant devices 8 Devices not evaluated 0

Additional monitoring reports

Noncompliant devices

Identify noncompliant devices and investigate their compliance details

Policies with noncompliant and error devices

View policies with one or more noncompliant devices or devices with errors.

Noncompliant devices

Identify noncompliant devices and investigate their compliance details.

This report may be delayed in showing the most recent information.

Refresh Export Columns

8 items

Search



Add filters

Device name	Primary UPN	Compliance status	Platform	OS version	Organization	Last check-in
APP8GB-4BV3KQNR		Not compliant	Windows	10.0.26200.8246	Company	05/01/2026, 03:37 P
APP8GB-4JFNRFCG		Not compliant	Windows	10.0.26200.8246	Company	05/01/2026, 04:38 P
IN-5CD52933XG	suraj.surendranair@kforce.co.in	Not compliant	Windows	10.0.26200.8655	Company	08/20/2026, 09:18 A
IN-5CD5390TFM	38c2ff50e14546eab3b7413b729	Not compliant	Windows	10.0.26200.9106	Company	09/10/2026, 05:31 A
IN-5CD539GGL6	mary.babsi@kforce.co.in	Not compliant	Windows	10.0.26200.8893	Company	08/18/2026, 06:55 A
IN-5CG44513CC	vinit.shah@kforce.co.in	Not compliant	Windows	10.0.26100.8875	Company	07/30/2026, 07:56 A
IN-5CG5242YGT		Not compliant	Windows	10.0.26100.8893	Company	08/07/2026, 11:41 P
IN-5CG5253PQ6	srinivas.guttikonda@kforce.co.ir	Not compliant	Windows	10.0.26100.3194	Company	05/21/2026, 11:38 A



Noncompliant devices

Identify noncompliant devices and investigate their compliance details.

Refresh Export Columns

8 items

Search



Add filters

Device name	Primary UPN	Compliance status	Platform	OS version	Organization	Last check-in	Management a...
APP8GB-4BV3KQNR		Not compliant	Windows	10.0.26200.8246	Company	05/01/2026, 03:37 PM	MDM
APP8GB-4JFNRFCG		Not compliant	Windows	10.0.26200.8246	Company	05/01/2026, 04:38 PM	Not Available
IN-5CD52933XG	suraj.surendranair@kforce.co.in	Not compliant	Windows	10.0.26200.8655	Company	08/20/2026, 09:18 AM	Not Available
IN-5CD5390TFM	38c2ff50e14546eab3b7413b729	Not compliant	Windows	10.0.26200.9106	Company	09/10/2026, 05:31 AM	Not Available
IN-5CD539GGL6	mary.babsi@kforce.co.in	Not compliant	Windows	10.0.26200.8893	Company	08/18/2026, 06:55 AM	Not Available
IN-5CG44513CC	vinit.shah@kforce.co.in	Not compliant	Windows	10.0.26100.8875	Company	07/30/2026, 07:56 AM	Not Available
IN-5CG5242YGT		Not compliant	Windows	10.0.26100.8893	Company	08/07/2026, 11:41 PM	Not Available
IN-5CG5253PQ6	srinivas.guttikonda@kforce.co.ir	Not compliant	Windows	10.0.26100.3194	Company	05/21/2026, 11:38 AM	Not Available

Policy noncompliance ...



Refresh Export Columns ▾

3 items

Add filters

Policy name	Platform	Noncompliant devices	Error devices
Default Device Compliance Policy	All	7	5
Windows Compliance	Windows10	0	2
macOS Default Compliance Policy	MacOS	0	0

Policy noncompliance - Default Device Compliance Policy ...



Refresh Export Columns ▾

25 items

Add filters

Device name	User principal name	Compliance status	Last status update
APP-7TSNSN4ZAA4		Error	09/13/2026, 10:18 PM
APP-B2AD02V45LQ		Error	09/21/2026, 06:53 AM
APP8GB-4BV3KQNR		Not compliant	09/24/2026, 06:37 AM
APP8GB-4JFNRFCG		Not compliant	09/13/2026, 10:17 PM
APP8GB-APF5C69V		Error	09/23/2026, 08:57 AM
APP8GB-NN1AT8NS		Error	09/22/2026, 12:15 AM
IN-5CD524987L		Error	09/07/2026, 03:25 PM
IN-5CD52933XG	suraj.surendranair@kforce.co.in	Not compliant	09/20/2026, 01:30 PM
IN-5CD5390T6B		Error	09/07/2026, 01:06 PM
IN-5CD5390TFM	38c2ff50e14546eab3b7413b72911	Not compliant	09/10/2026, 10:54 PM
IN-5CD539CZX5		Error	09/24/2026, 04:00 PM

Policy noncompliance - Windows Compliance



Refresh Export Columns

2 items

Add filters

Device name	User principal name	Compliance status	Last status update
IN-5CD524987L	sakshi.sharma@kforce.co.in	Error	09/23/2026, 10:06 PM
IN-5CG54912TV	rajeev.shrivastava@kforce.co.in	Error	09/18/2026, 10:42 AM

Windows Compliance



Refresh Export Columns

51 items

OS: WindowsHolographic, Windows, Windows10x , +1 Add filters



Device name	Logged in user	Policy compliance status	Device Id	OS	Last contacted
IN-5CD5390VVX	divyani.parche@kforce.co.in	Compliant	359dd83e-2878-4	Windows	09/24/2026, 10:04 AM
IN-5CD5390VX4	suvarandeep.gaikwad@kforce.co.	Compliant	10adaee9-f1d0-4	Windows	09/24/2026, 09:55 AM
IN-5CD5390VX9	dnyaneshwar.karande@kforce.co.	Compliant	10b82192-0bf7-4	Windows	09/24/2026, 01:01 AM
IN-5CD5390VZJ	shubhangi.wable@kforce.co.in	Compliant	b42c3ac8-2b1d-4	Windows	09/22/2026, 04:29 PM
IN-5CD5391HNB	ganesh.patil@kforce.co.in	Compliant	c76f03af-c7a2-48	Windows	09/22/2026, 09:38 AM
IN-5CD5391HQ8	shivani.pawar@kforce.co.in	Compliant	9373510d-acd9-4	Windows	09/23/2026, 03:15 PM
IN-5CD539CZX5	raghvi.pathak@kforce.co.in	Compliant	99d6d468-6cee-4	Windows	09/24/2026, 05:08 PM

Windows Compliance



Refresh Export Columns

101 items

Search



OS: WindowsHolographic, Windows, Windows10x, +1



Add filters



Device name	Logged in user	Policy compliance status	Device Id	OS	Last contacted
IN-5CD5249872	manish.hiwase@kforce.co.in	Compliant	cd244613-b0c9-4	Windows	09/23/2026, 10:16 AM
IN-5CD524987D	sonika.katariya@kforce.co.in	Compliant	6be95489-af0d-4	Windows	09/24/2026, 09:53 AM
IN-5CD524987L	sakshi.sharma@kforce.co.in	Error	eaf51cfb-8bde-4	Windows	09/23/2026, 10:06 PM
IN-5CD52498H5	procheta.ganguly@kforce.co.in	Compliant	d446b8d1-7688-	Windows	09/24/2026, 01:06 PM
IN-5CD52489V4	shaurya.deshmukh@kforce.co.in	Compliant	769a61f2-416a-4	Windows	09/21/2026, 10:44 PM
IN-5CD52933X7	harsh.master@kforce.co.in	Compliant	b04ce342-f4f4-4	Windows	09/23/2026, 11:34 PM
IN-5CD52933X8	balram.bhattacharya@kforce.co.ir	Compliant	1785c379-c2f4-4	Windows	09/20/2026, 01:41 AM
IN-5CD52933X9	tushar.warale@kforce.co.in	Compliant	04ef4b96-747e-4	Windows	09/23/2026, 07:53 PM

IN-5CD5390VX9
HP ProBook 4 G1iR 14 inch Notebook PC

Search



Sync



Summarize



Run remediation



Collect diagnostics



Overview

Tools

- Device diagnostics
- Device inventory
- Device query
- BitLocker recovery keys
- Local admin password
- Remediations

Reports

- All apps
- App configuration
- Discovered apps
- Device compliance
- Device configuration
- Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

Essentials



IN-5CD5390VX9

Compliant Corporate Intune
Last check-in 09/24/2026, 06:04 PM

Model

HP ProBook 4 G1iR 14 inch Notebook PC

Management name

dnyane
shwar.k
arande_
Windo
ws_4/2
7/2026_
8:53
AM

Manufacturer

HP

OS

Windows

Primary user

DK Dnyaneshwar Karande
dnyaneshwar.karande@kforce.co.in

Serial number

5CD5390VX
9

Remote assistance

Remote Help

IN-5CD5390VX9 ...
HP ProBook 4 G11R 14 inch Notebook PC

Overview

Tools

- Device diagnostics
- Device inventory
- Device query
- BitLocker recovery keys
- Local admin password
- Remediations

Reports

- All apps
- App configuration
- Discovered apps
- Device compliance
- Device configuration
- Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

Device configuration policies status

Total: 44



Succeeded: 44

Device compliance status

Total: 2



Compliant: 2

Managed apps

Total: 41



Installed: 14 Available: 21 Not Installed: 6

IN-5CD539GGL6 ...
HP 250R 15.6 inch G10 Notebook PC

Overview

Tools

- Device diagnostics
- Device inventory
- Device query
- BitLocker recovery keys
- Local admin password
- Remediations

Reports

- All apps
- App configuration
- Discovered apps
- Device compliance
- Device configuration
- Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

Sync Summarize Run remediation Collect diagnostics Secure Locate device

Essentials

**IN-5CD539GGL6**

Not compliant Corporate Intune
Last check-in 08/18/2026, 12:25 PM

Model
HP 250R 15.6 inch G10
Notebook PC

Management name ⓘ
mary.babsi_Windows_8/10/2026_9:26 AM

Manufacturer
Hewlett-Packard

OS
Windows

Primary user
MB Mary Babsi
mary.babsi@kforce.co.in

Serial number
5CD539GGL6

Remote assistance
Remote Help

Monitor Properties Device details Device action status

Home > Devices | Compliance > Noncompliant devices

IN-5CD539GGL6 ...
HP 250R 15.6 inch G10 Notebook PC

Search

Overview

- Tools
 - Device diagnostics
 - Device inventory
 - Device query
 - BitLocker recovery keys
 - Local admin password
 - Remediations
- Reports
 - All apps
 - App configuration
 - Discovered apps
 - Device compliance
 - Device configuration
 - Enrollment profiles

Add or remove favorites by pressing Ctrl+Shift+F

Device configuration policies status

Total: 25

Succeeded: 25

Device compliance status

Total: 2

Compliant: 1 Not Compliant: 1

Managed apps

Total: 19

Installed: 12 Available: 1 Not Installed: 6

Microsoft Entra admin center

Search resources, services, and docs (G+/I)

Home > Raghu Pathak > Conditional Access

Conditional Access | Policies ...

Microsoft Entra ID

Overview

Policies

Deleted Policies

Phased rollout

Insights and reporting

Diagnose and solve problems

Manage

- Named locations
- Custom controls (Preview)
- Terms of use
- VPN connectivity
- Authentication contexts
- Authentication strengths
- Classic policies

Monitoring

You don't have access

Copy the error details and send them to your administrator(s) to get access to this page.

[Copy error details](#)

Error details

Session ID	Resource group name
2a254ba8b9e24de4a98bb8be7045eb7f	Resource ID
Subscription ID	Details
Error code	Insufficient privileges to complete the operation.
401	
Resource name	

Help improve this page

[Give feedback](#)

Microsoft Entra admin center

Search resources, services, and docs (G+/)

Home

Devices | Overview

Kforce Intl. - Microsoft Entra ID

List users who signed in on non-compliant devices in the last 24 hours. +2

Got feedback?

Overview Monitoring Tutorials

Search by name, device ID, or object ID

Alerts

Stale devices
24
Devices stale for 6+ months.
[See all stale devices](#)

Noncompliant devices
12
This number may not reflect all recent changes.
[See all noncompliant devices](#)

Navigation menu:

- Home
- Security Copilot agents
- Security Copilot chat
- Favorites
 - Privileged Identity Management
- Entra ID
 - Overview
 - Users
 - Groups
 - Devices
 - Agents
 - Enterprise apps
 - App registrations
 - Roles & admins

Left sidebar menu:

- Overview
- All devices
- Deleted devices (Preview)
- Manage
 - Device settings
 - Enterprise State Roaming
 - BitLocker keys
 - Local administrator password recovery
 - Remote connection configuration
- Activity
 - Audit logs
 - Bulk operation results (Preview)
- Troubleshooting + Support

Microsoft Entra admin center

Search resources, services, and docs (G+/)

Home

Devices | Overview

Kforce Intl. - Microsoft Entra ID

List users who signed in on non-compliant devices in the last 24 hours. +2

Got feedback?

Overview Monitoring Tutorials

Search by name, device ID, or object ID

Alerts

Stale devices
24
Devices stale for 6+ months.
[See all stale devices](#)

Noncompliant devices
12
This number may not reflect all recent changes.
[See all noncompliant devices](#)

Unmanaged devices
235
This number may not reflect all recent changes.
[See all unmanaged devices](#)

Navigation menu:

- Home
- Security Copilot agents
- Security Copilot chat
- Favorites
 - Privileged Identity Management
- Entra ID
 - Overview
 - Users
 - Groups
 - Devices
 - Agents
 - Enterprise apps
 - App registrations
 - Roles & admins

Home

Devices | Overview

Kforce Intl. - Microsoft Entra ID

»

Got feedback?

Total number of devices

349

This number may not reflect all recent changes.

See all devices

Preview Features

2 total

See all preview features

List users who signed in on non-compliant devices in the last 24 hours.

+2

×

Feature Highlights

Intune

Use Intune to manage devices and protect your organization with device policies.

Microsoft Entra Conditional Access

Use Conditional Access Policies to apply access controls to devices.

Windows 10+ Troubleshooter

Use the Windows 10+ troubleshooter to identify steps you can take to remediate the device issue.

Home > Devices

Devices | BitLocker keys

Kforce Intl. - Microsoft Entra ID

»

Refresh

Got feedback?

Search by complete BitLocker key ID

A BitLocker key ID is a 32-digit key ID, e.g. XXXXXXXX-XXXX-XXXX-XXXXXXXXXXXX

Device name	Key ID	BitLocker recovery key	Drive type	Backed up
Use the search box above to find a BitLocker key.				

Microsoft Intune admin center

Home

Dashboard

All services

Explorer

Devices

Apps

Endpoint security

Agents

Reports

Users

Groups

Tenant administration

Troubleshooting + support

Home > Endpoint security

Endpoint security | Security baselines

Search

Overview

Overview

All devices

Security baselines

Security tasks

Manage

Antivirus

Disk encryption

Firewall

Endpoint Privilege Management

Endpoint detection and response

App Control for Business

Attack surface reduction

Use security baselines to apply Microsoft-recommended security configuration settings to your enrolled devices. [Learn more](#)

Security baselines ↑	Version	Publisher
Advanced Security Baseline for HoloLens 2	Version 1	
Local AI Agent Baseline - OpenClaw	Version 1	
Microsoft 365 Apps for Enterprise Security Baseline	Version 2512	
Microsoft Defender for Endpoint Security Baseline	Version 24H1	
Security Baseline for Microsoft Edge	Version 139	
Security Baseline for Windows 10 and later	Version 25H2	
Standard Security Baseline for HoloLens 2	Version 1	
Windows 365 for Agents Security Baseline	Version 24H1	
Windows 365 Security Baseline	Version 24H1	

Add or remove favorites by pressing Ctrl+L+Shift+F

min center

Home > Endpoint security | Security baselines

Microsoft 365 Apps for Enterprise Security baseline

Search

Manage

Profiles

Create and manage policies

Create policy

Refresh

Search

Policy name ↑

Create a profile

Platform

Windows

Profile

Microsoft 365 Apps for Enterprise Security Baseline

Microsoft 365 Apps for Enterprise Security Baseline

The Microsoft 365 Apps for enterprise security baseline provides a starting point for IT admins to evaluate and balance the security benefits with productivity needs of their users. This baseline aligns with the security recommendations for Microsoft 365 Apps for enterprise group policy security baseline. Use this baseline to configure and customize Microsoft-recommended policy settings.

Create

Home > Endpoint security | Security baselines

Security baseline for Microsoft Edge

Security baseline

Search

×

«

Manage

Profiles

Create and manage policies

+ Create policy

↻ Refr

Search

Policy name ↑

Create a profile

×

Platform

Windows

▼

Profile

Security Baseline for Microsoft Edge

▼

Security Baseline for Microsoft Edge

The Security Baseline for Microsoft Edge represents the recommendations for configuring Microsoft Edge for security conscious customers using the Microsoft full security stack. This baseline aligns with the security recommendations for Edge security baseline for group policy. Use this baseline to configure and customize Microsoft-recommended policy settings.

Create