Презентация по лабораторной работе №6

Работа с командной строкой

Добрынин Никита Артёмович

2026.03.20

Содержание I

1. Цели и задачи работы
2. Процесс выполнения лабораторной работы
3. Выводы по проделанной работе

Раздел 1

Цели и задачи работы

Цель лабораторной работы

Целью данной лабораторной работы является освоение командной строки Unix

Раздел 2

Процесс выполнения лабораторной работы

Домашний каталог

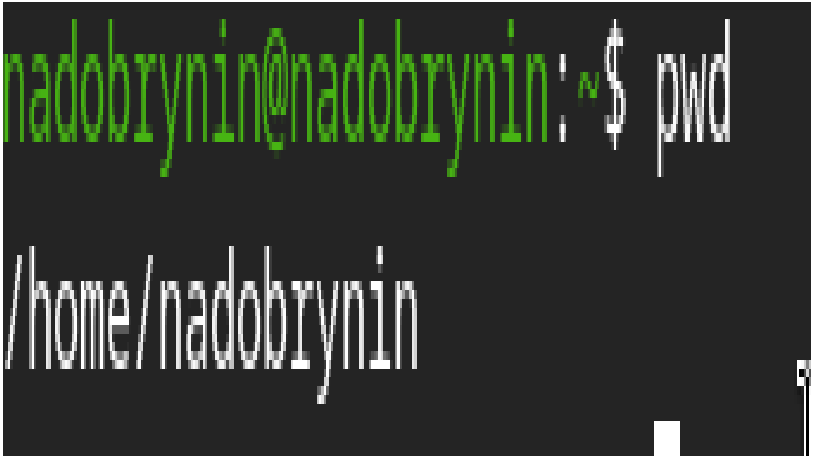

Рисунок 1: Командой pwd проверил путь к домашнему каталогу

Вывод информации ls -alF

```
nadobrynin@nadobrynin:/tmp$ ls -alF
итого 4
drwxrwxrwt. 18 root       root       420 мар 19 18:47 ./
dr-xr-xr-x.  1 root       root       158 окт 23 06:58 ../
drwxrwxrwt.  2 root       root        40 мар 19 18:42 .font-unix/
drwxrwxrwt.  2 root       root        40 мар 19 18:42 .ICE-unix/
drwx------.  2 nadobrynin nadobrynin  80 мар 19 18:42 org.chromium.Chromium.JOsIM4/
srwxr-xr-x.  1 root       root         0 мар 19 18:42 sddm-auth-e016d0e0-b124-4342-aae1-bfbb39ae99aa=
srwx------.  1 sddm       sddm         0 мар 19 18:42 sddm--Orstup=
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-abrt
d.service-eJMSJW/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-chro
nyd.service-S4Gg1y/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-dbus
-broker.service-t2nZaX/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-irqb
alance.service-YMBkmn/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-Mode
mManager.service-G7YMPi/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-pcsc
d.service-N13K96/
drwx------.  3 root       root        60 мар 19 18:42 systemd-private-4df9a2421c9c497087dbb0a519d26c56-polk
it.service-aqajPC/
```

Рисунок 2: Вывел весь список файлов каталога /tmp командой ls -alF

Папка cron

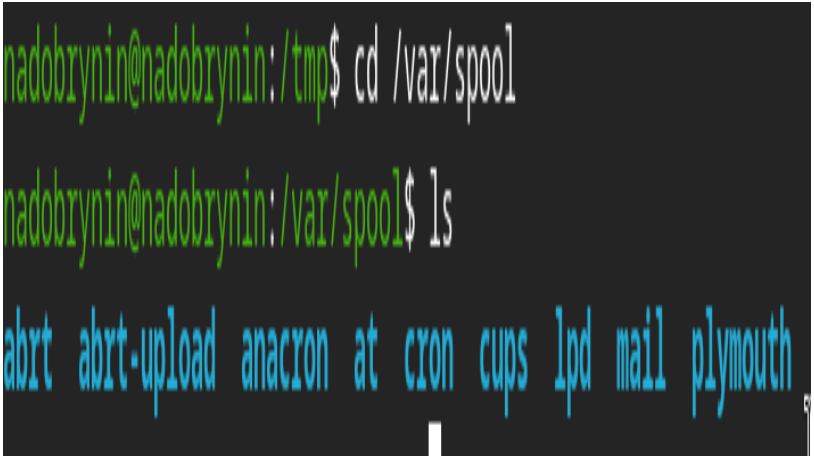

Рисунок 3: Вывел каталоги каталога spool

Папка newdir

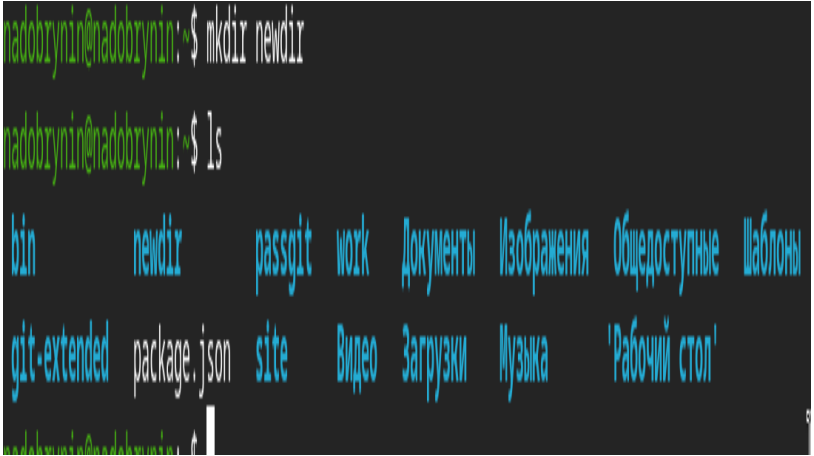

Рисунок 4: Создал каталог mkdir newdir

Создание файла morefun

```
nadobrynin@nadobrynin:~$ cd ~/newdir
nadobrynin@nadobrynin:~/newdir$ touch morefun.txt
nadobrynin@nadobrynin:~/newdir$ ls
morefun.txt
```

Рисунок 5: В новом каталоге создал ыайл morefun.txt

Создание папок

```
nadobrynin@nadobrynin:~$ mkdir letters memos misk
nadobrynin@nadobrynin:~$ ls
 bin            memos    package.json   work
 git-extended   misk     passgit        Видео
 letters        newdir   site           Документы
nadobrynin@nadobrynin:~$
```

Рисунок 6: Создал три новых папки одной командой

Удаление папки

```
nadobrynin@nadobrynin:~$ rm -r ~/newdir
nadobrynin@nadobrynin:~$ ls
bin          memos        passgit  Видео      Изображения  'Рабочий стол'
git-extended misk         site     Документы  Музыка       Шаблоны
letters      package.json work     Загрузки   Общедоступные
```

Рисунок 7: Удалил каталог newdir с файлом morefun

Команда man

```
nadobrynin@nadobrynin:~$ man cd
nadobrynin@nadobrynin:~$ man pwd
nadobrynin@nadobrynin:~$ man mkdir
nadobrynin@nadobrynin:~$ man rmdir
nadobrynin@nadobrynin:~$ man rm
```

Рисунок 8: Команда man с разными командами

Команда man cd

```
cd [-L] [-@] [dir]
cd -P [-e] [-@] [dir]
       Change the current directory to dir.  if dir is not supplied, the value of  the  HOME  shell
       variable  is  used  as dir.  The variable CDPATH exists, and dir does not begin with a slash
       (/), cd uses it as a search path: the shell searches each directory name in CDPATH for  dir.
       Alternative  directory  names in CDPATH are separated by a colon (:).  A null directory name
       in CDPATH is the same as the current directory, i.e.,

       The -P option causes cd to use the physical directory structure by resolving symbolic  links
       while traversing dir and before processing instances of ..  in dir (see also the -P option to
       the set builtin command).

       The  -L option forces cd to follow symbolic links by resolving the link after processing in-
       stances of ..  in dir.  If ..  appears in dir, cd processes it  by  removing  the  immediately
       previous pathname component from dir, back to a slash or the beginning of dir, and verifying
       that the portion of dir it has processed to that point is still a valid directory name after
       removing the pathname component.  If it is not a valid directory name, cd returns a non-zero
       status.  If neither -L nor -P is supplied, cd behaves as if -L had been supplied.

       If the -e option is supplied with -P, and cd cannot successfully determine the current work-
       ing directory after a successful directory change, it returns a non-zero status.

       On systems that support it, the -@ option presents the extended attributes associated with a
       file as a directory.

       An argument of - is converted to $OLDPWD before attempting the directory change.
```

Рисунок 9: man cd

Команда man pwd

```
NAME
       pwd - print name of current/working directory

SYNOPSIS
       pwd [OPTION]...

DESCRIPTION
       Print the full filename of the current working directory.

       -L, --logical
              use PWD from environment, even if it contains symlinks

       -P, --physical
              resolve all symlinks

       --help display this help and exit

       --version
              output version information and exit

       If no option is specified, -P is assumed.

       Your  shell  may  have its own version of pwd, which usually supersedes the version described here.
       Please refer to your shell's documentation for details about the options it supports.
```

Рисунок 10: man pwd

Команда man mkdir

```
NAME
       mkdir - make directories

SYNOPSIS
       mkdir [OPTION]... DIRECTORY...

DESCRIPTION
       Create the DIRECTORY(ies), if they do not already exist.

       Mandatory arguments to long options are mandatory for short options too.

       -m, --mode=MODE
              set file mode (as in chmod), not a=rwx - umask

       -p, --parents
              no error if existing, make parent directories as needed, with their file modes unaffected
              any -m option

       -v, --verbose
              print a message for each created directory

       -Z     set SELinux security context of each created directory to the default type

       --context[=CTX]
              like -Z, or if CTX is specified then set the SELinux or SMACK security context to CTX

       --help display this help and exit
```

Рисунок 11: man mkdir

Команда man rmdir

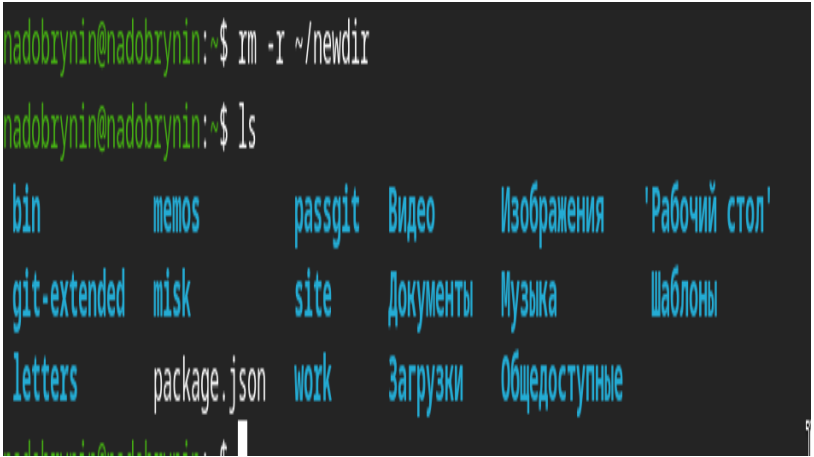

Рисунок 12: man rmdir

Команда man rm

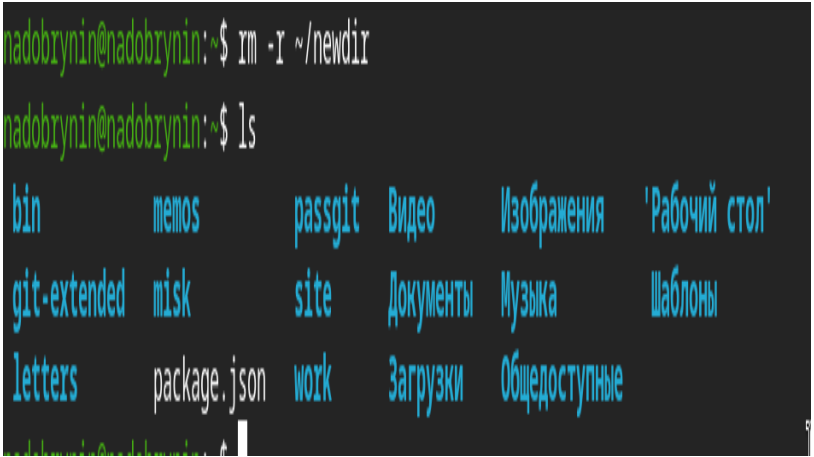

Рисунок 13: man rm

Модификация команды

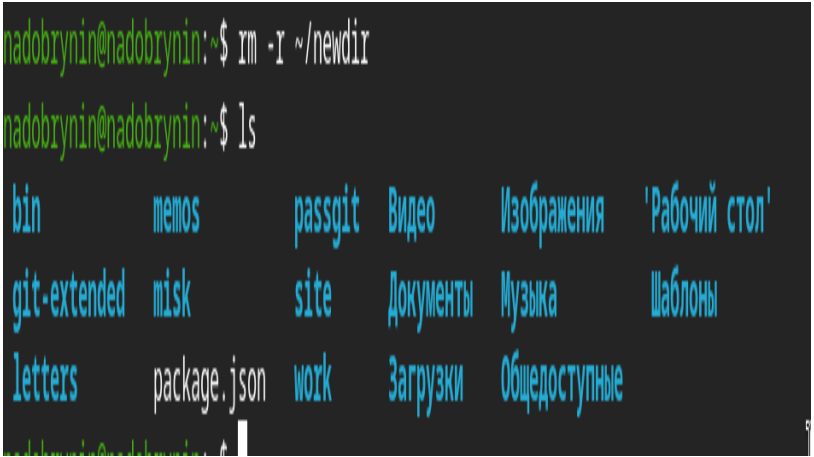

Рисунок 14: Изменил ранее примененную команду

Раздел 3

Выводы по проделанной работе

Вывод

Освоил работу с командной строкой.