

UNINFORMED SEARCH STRATEGIES

Nguyễn Ngọc Thảo – Nguyễn Hải Minh
{nnthao, nhminh}@fit.hcmus.edu.vn

Outline

- Uninformed search strategies
- Breadth-first search
- Uniform-cost search
- Depth-first search
- Depth-limit search
- Iterative deepening search
- Bidirectional search

2


Uninformed search strategies

- No additional information about states beyond that provided in the problem definition
 - All they can do is to generate successors and distinguish a goal state from a non-goal state.
- Also called **Blind Search**



3


Uninformed search strategies

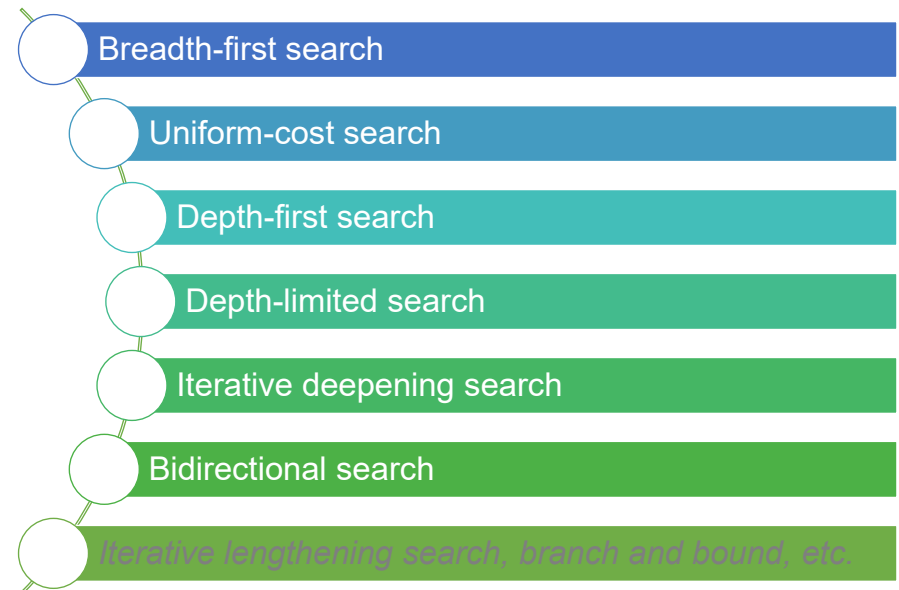

4

Review: Tree search vs. Graph search

- Tree search can end up repeatedly visiting the same nodes.
 - E.g., Arad-Sibiu-Arad-Sibiu-Arad-...
- *A good search algorithm avoids such paths.*
- *Graph search: frontier, explored set, etc.*

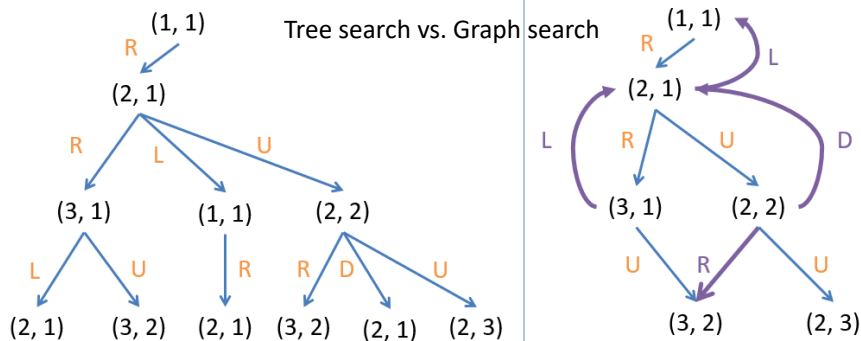


5

Review: Search strategies

- **Search strategies** are distinguished by the order in which nodes are expanded
 - How to evaluate a search strategy?
 - Completeness
 - Time complexity
 - Space complexity
 - Optimality
- Measured by factors *b*, *d*, and *m*
- *b*: maximum branching factor of the search tree
 - *d*: depth of the least-cost solution
 - *m*: maximum depth of the state space (may be ∞)

6


Breadth-first search

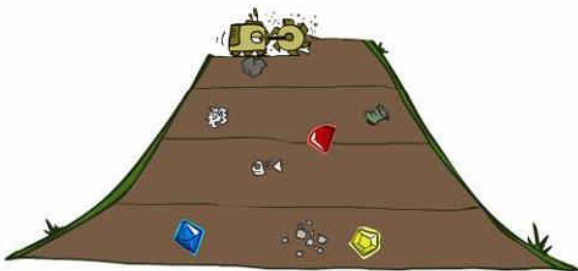

7

Breadth-first search (BFS)


Example state space graph for a tiny search problem

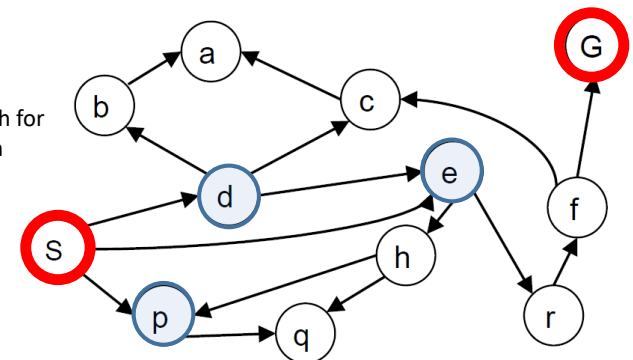

- The **root node** is expanded first, then all the successors of the root, then their successors, and so on.
- In general, all the nodes are expanded at a given depth in the search tree before any nodes at the next level are expanded.

8

Breadth-first search (BFS)

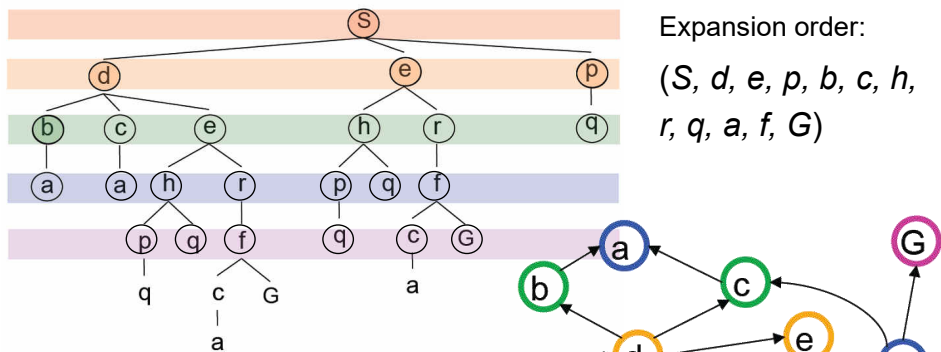

- Expand shallowest unexpanded node
- Implementation: **frontier** is a FIFO queue

9

Breadth-first search on a graph

```

function BREADTH-FIRST-SEARCH(problem) returns a solution, or failure
    node ← a node with STATE = problem.INITIAL-STATE, PATH-COST = 0
    if problem.GOAL-TEST(node.STATE) then return SOLUTION(node)
    frontier ← a FIFO queue with node as the only element
    explored ← an empty set
    loop do
        if EMPTY?(frontier) then return failure
        node ← POP(frontier) /* chooses the shallowest node in frontier */
        add node.STATE to explored
        for each action in problem.ACTIONS(node.STATE) do
            child ← CHILD-NODE(problem, node, action)
            if child.STATE is not in explored and not in frontier then
                if problem.GOAL-TEST(child.STATE) then return SOLUTION(child)
                frontier ← INSERT(child, frontier)
    
```


10

Breadth-first search (BFS)

- An instance of the general graph search algorithm
- The **shallowest unexpanded node** is chosen for expansion
- The **goal test** is applied to each node when it is **generated** rather than when it is selected for expansion
- **Discard** any new path to a state already in the **frontier** or in the **explored set**

11


Breadth-first search on a graph

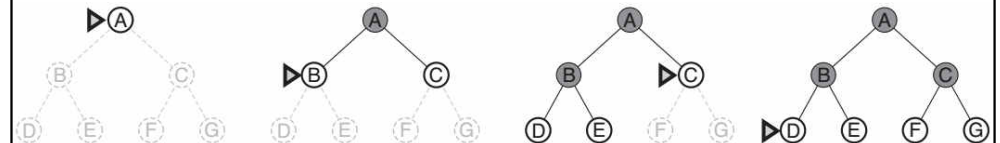

Breadth-first search on a simple binary tree.
At each stage, the node to be expanded next is indicated by a marker

12


Breadth-first search: An example

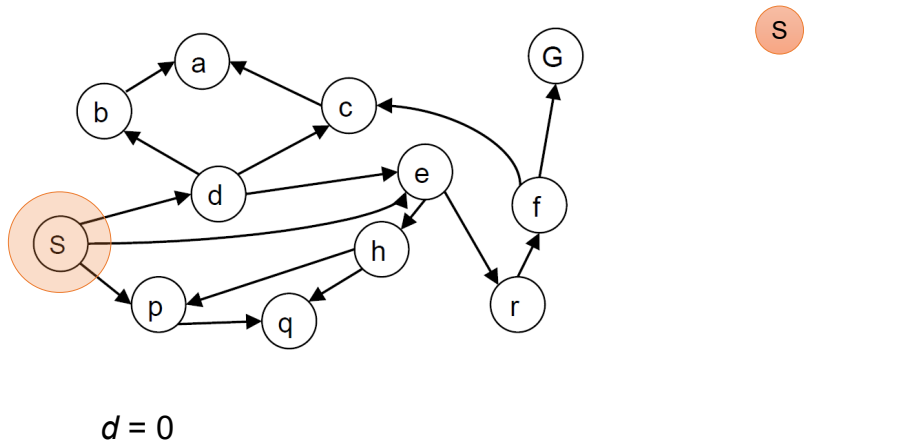

Search Tree

13


Breadth-first search: An example

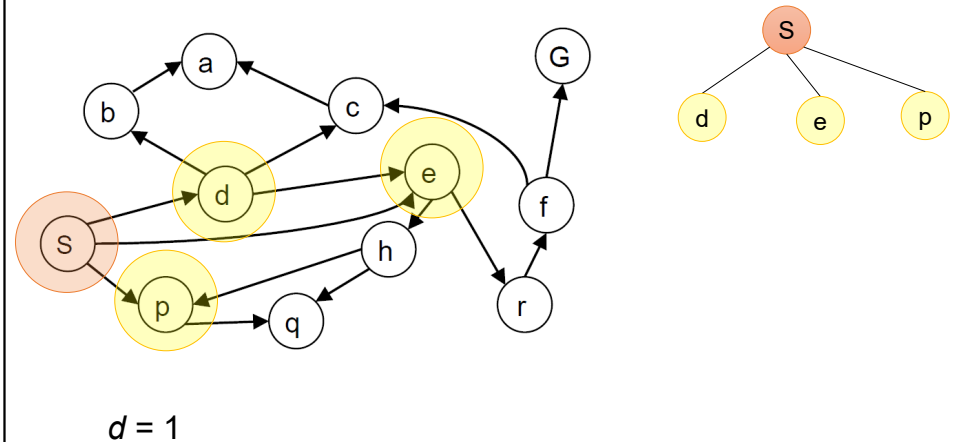

Search Tree

14


Breadth-first search: An example

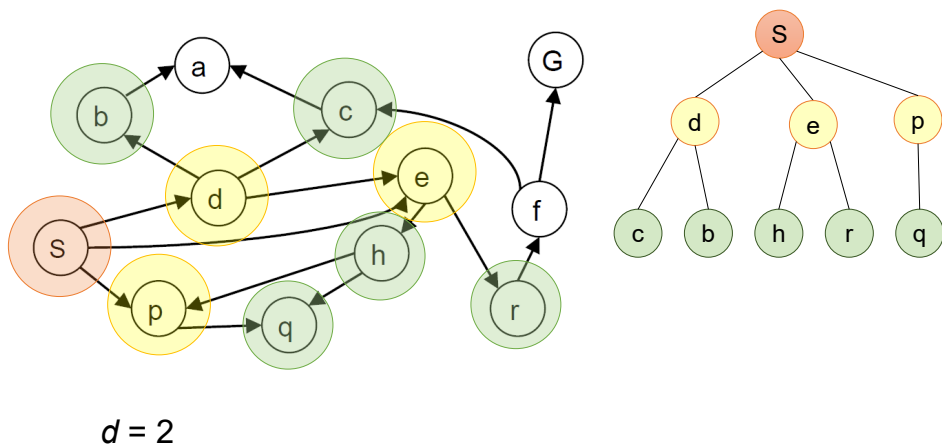

Search Tree

15


Breadth-first search: An example

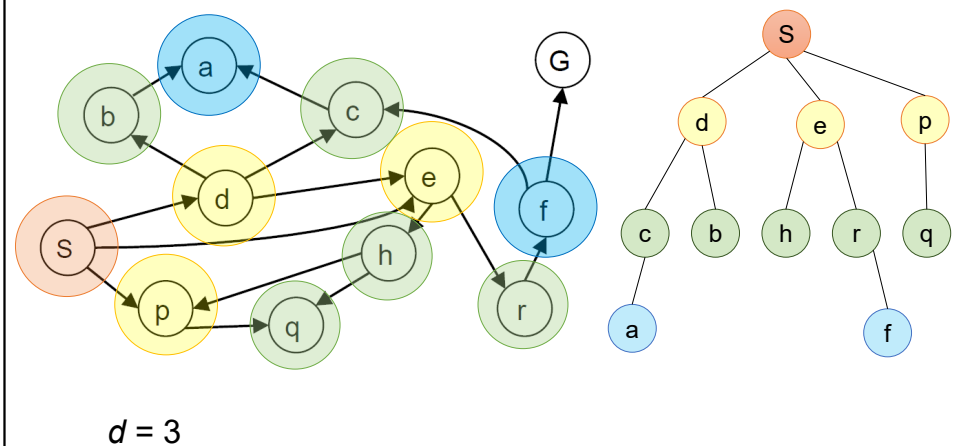

Search Tree


16

Breadth-first search: An example

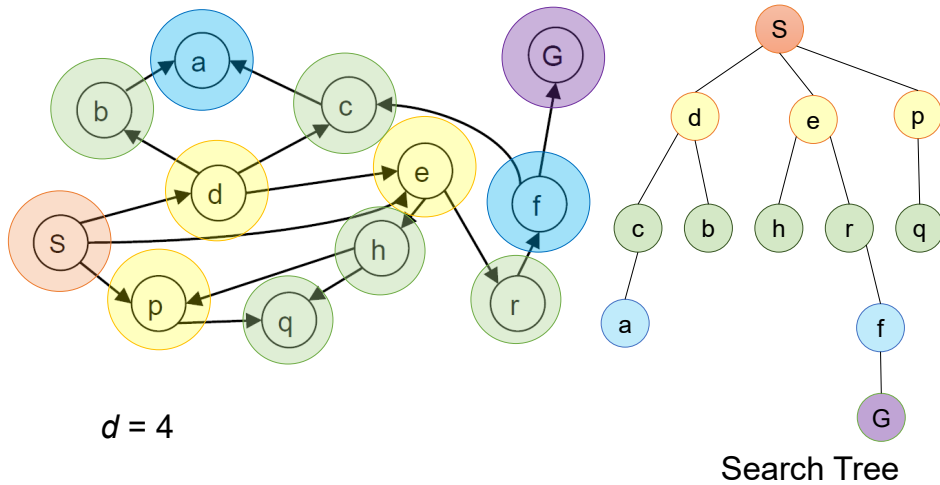

17


Breadth-first search: An example

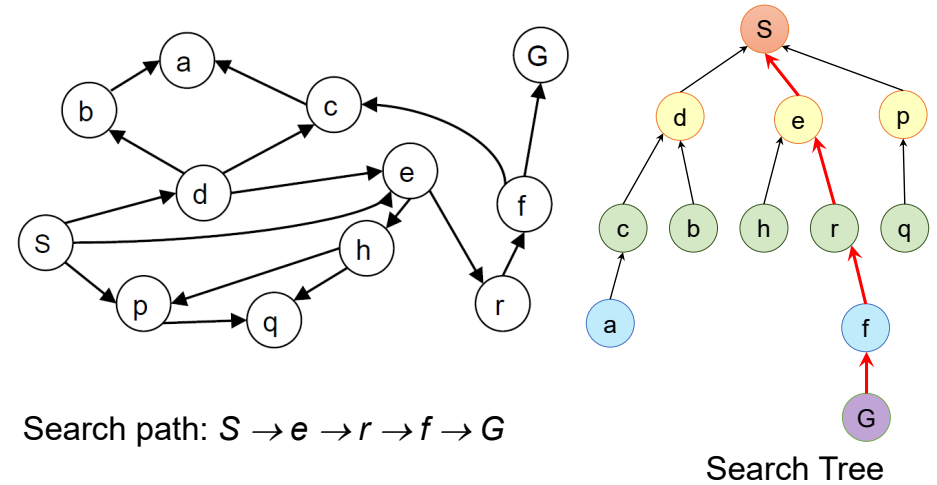

18

An evaluation of BFS

- What nodes does BFS expand?
 - Process all nodes above the shallowest solution
 - Let the shallowest solution's depth be d . Search takes time $O(b^d)$.
- How much space does the frontier take?
 - Roughly the last tier, so $O(b^d)$.
- Is it complete?
 - YES
- Is it optimal?
 - Only if costs are all uniform

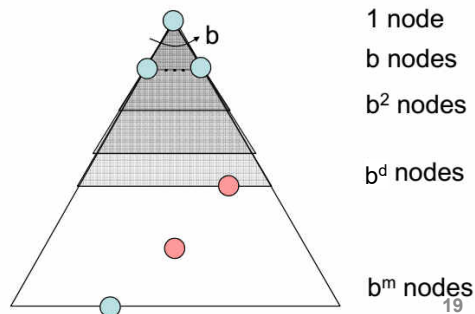

19

The complexity of BFS

Depth	Nodes	Time	Memory
2	110	.11 milliseconds	107 kilobytes
4	11,110	11 milliseconds	10.6 megabytes
6	10^6	1.1 seconds	1 gigabyte
8	10^8	2 minutes	103 gigabytes
10	10^{10}	3 hours	10 terabytes
12	10^{12}	13 days	1 petabyte
14	10^{14}	3.5 years	99 petabytes
16	10^{16}	350 years	10 exabytes

Time and memory requirements for BFS. The numbers shown assume branching factor $b = 10$; 1 million nodes/second; 1000 bytes/node.




The memory requirements are a bigger problem for BFS than the execution time.

In general, exponential-complexity search problems cannot be solved by uninformed methods for any but the smallest instance

20


Quiz 01: Breadth-first search

- Work out the order in which states are expanded, as well as the path returned by graph search. Assume ties resolve in such a way that states with earlier alphabetical order are expanded first.

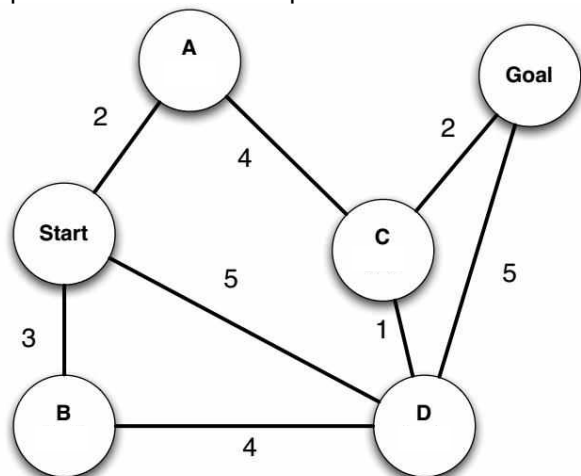


21

Uniform-cost search

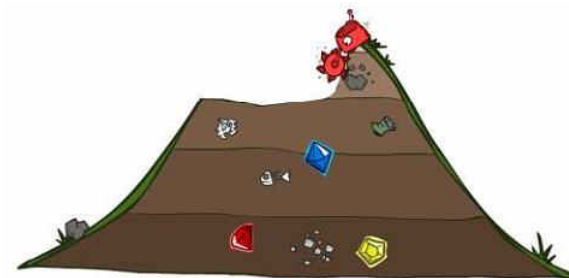

22

Search with varying step costs

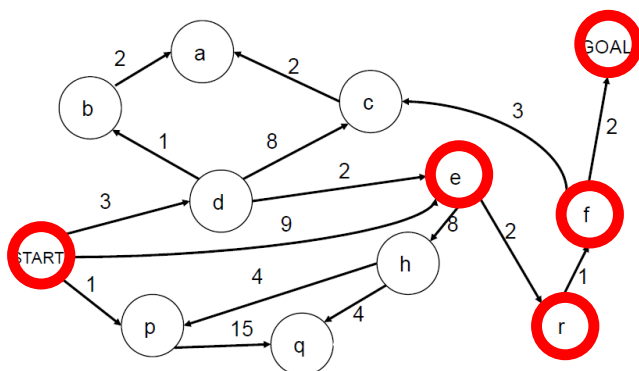

- BFS finds the path with the fewest steps but does not always find the cheapest path.
- An algorithm that is optimal with any step-cost function?*

23

Uniform-cost search (UCS)

- UCS expands the node n with the **lowest path cost** $g(n)$
- Implementation: frontier is a **priority queue** ordered by g
 - Equivalent to breadth-first search if step costs all equal
 - Equivalent to Dijkstra's algorithm in general
- The **goal test** is applied to a node when it is **selected for expansion**
- A test is added in case a **better path** is found to a **node currently on the frontier**.

24


Uniform-cost search (UCS)

```


function UNIFORM-COST-SEARCH(problem) returns a solution, or failure
  node  $\leftarrow$  a node with STATE = problem.INITIAL-STATE, PATH-COST = 0
  frontier  $\leftarrow$  a priority queue ordered by PATH-COST with node as the element
  explored  $\leftarrow$  an empty set
  loop do
    if EMPTY?(frontier) then return failure
    node  $\leftarrow$  POP(frontier) /* chooses the lowest-cost node in frontier */
    if problem.GOAL-TEST(node.STATE) then return SOLUTION(node)
    add node.STATE to explored
    for each action in problem.ACTIONS(node.STATE) do
      child  $\leftarrow$  CHILD-NODE(problem, node, action)
      if child.STATE is not in explored and not in frontier then
        frontier  $\leftarrow$  INSERT(child, frontier)
      else if child.STATE is in frontier with higher PATH-COST then
        replace that frontier node with child
  
```

25

Uniform-cost search

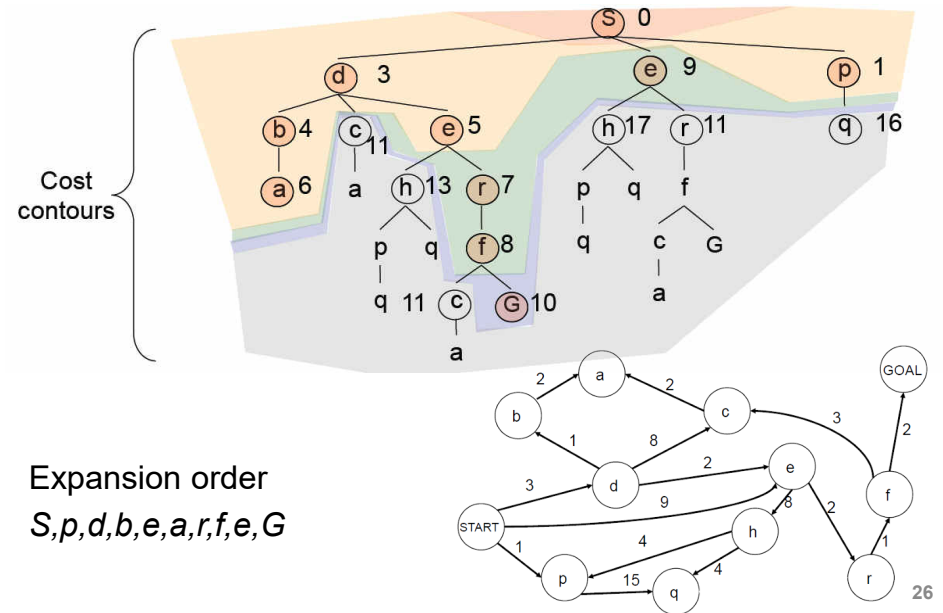


Uniform-cost search: An example

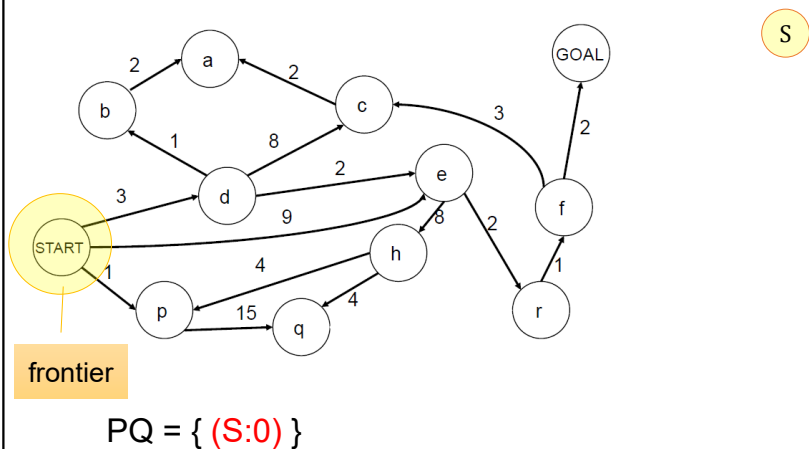

Search Tree


27

Uniform-cost search: An example

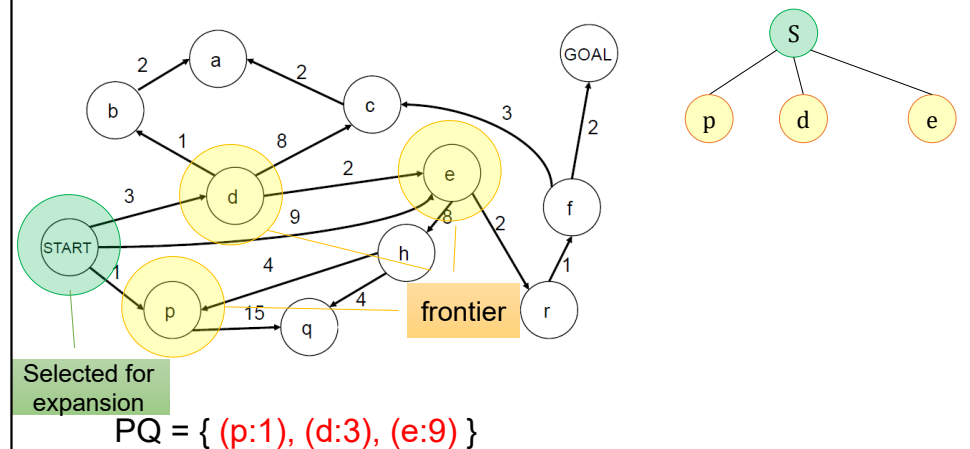

28

Uniform-cost search: An example

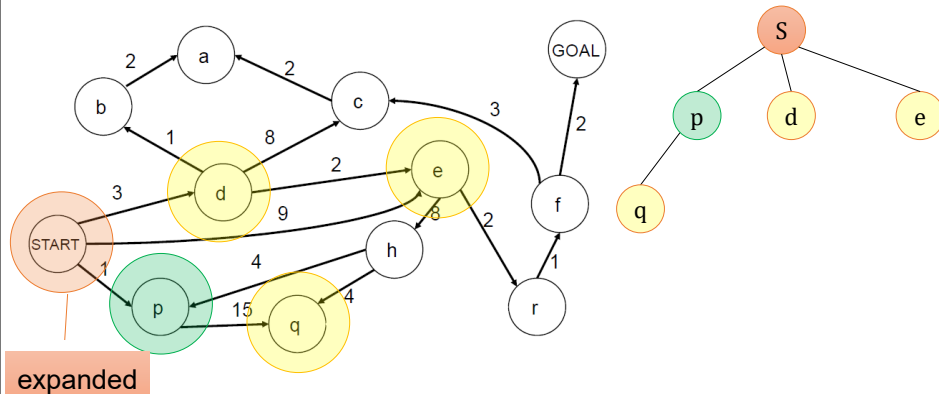


PQ = { (d:3), (e:9), (q:16) }

Search Tree

29

Uniform-cost search: An example

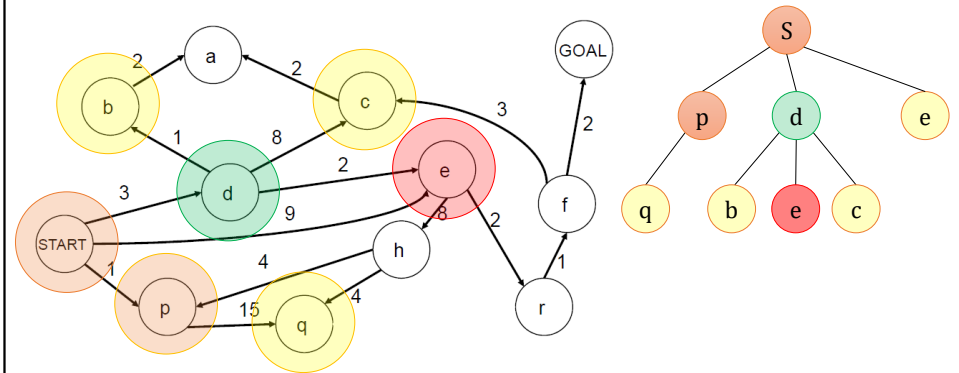


PQ = { (b:4), (e:5), (c:11), (q:16) }

Update path cost of e

Search Tree

30

Uniform-cost search: An example

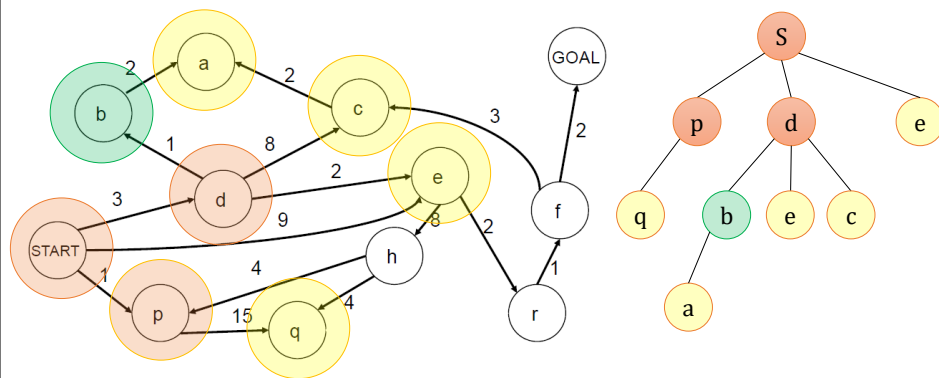


PQ = { (e:5), (a:6), (c:11), (q:16) }

Search Tree

31

Uniform-cost search: An example

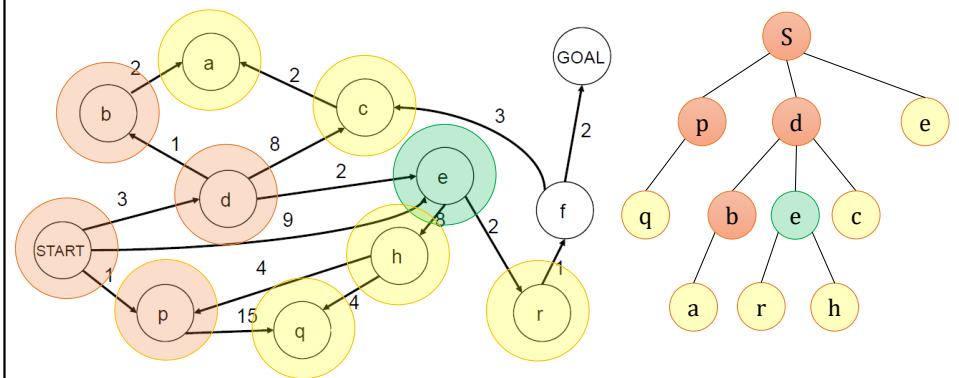


PQ = { (a:6), (r:7), (c:11), (h:13), (q:16) }

Search Tree

32

Uniform-cost search: An example

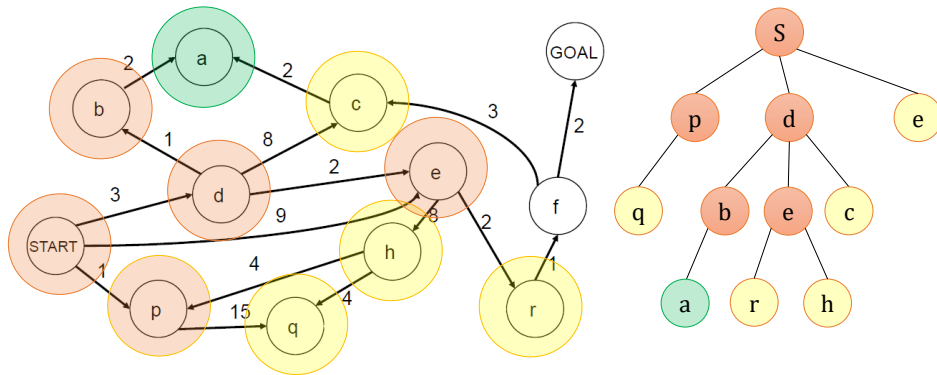


PQ = { (r:7), (c:11), (h:13), (q:16) }

Search Tree

33

Uniform-cost search: An example

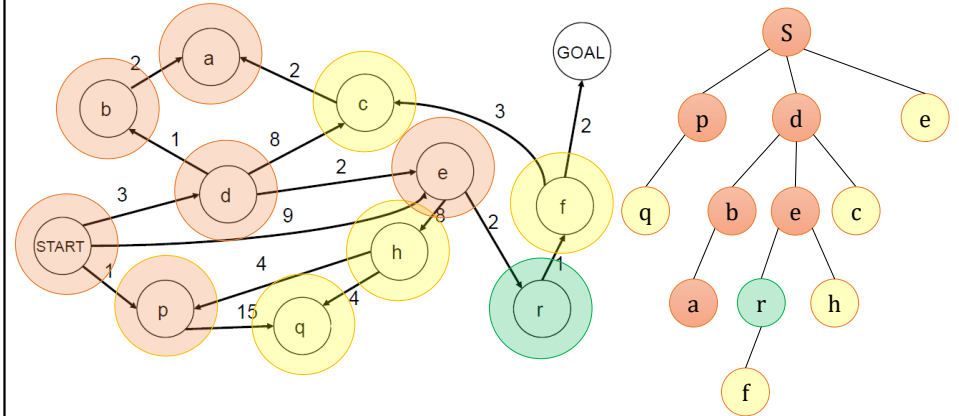


PQ = { (**f:8**), (c:11), (h:13), (q:16) }

Search Tree

34

Uniform-cost search: An example

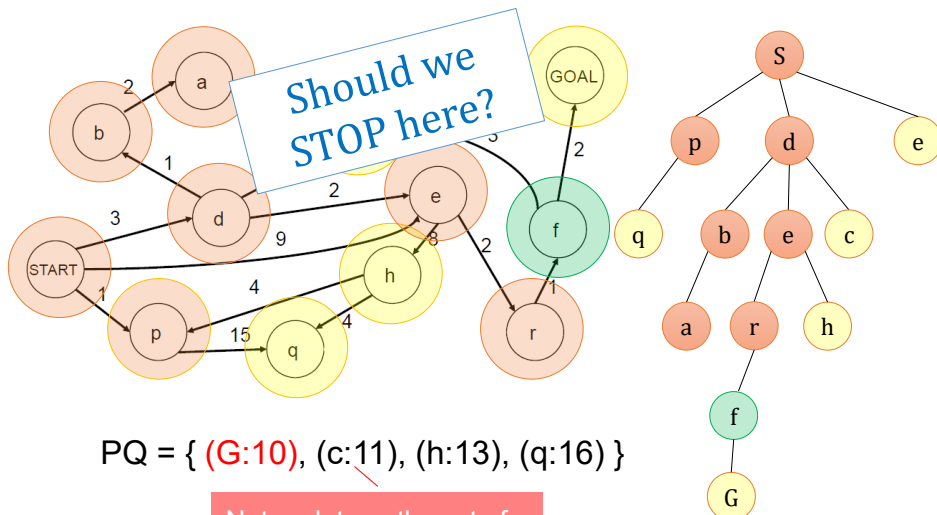


PQ = { (**G:10**), (c:11), (h:13), (q:16) }

Not update path cost of c

Search Tree

35

Uniform-cost search: An example

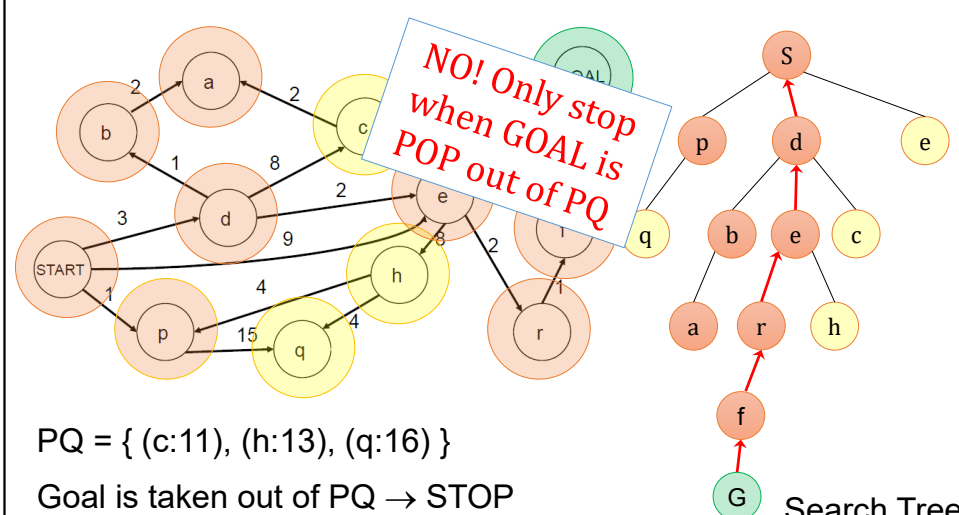

PQ = { (c:11), (h:13), (q:16) }


Goal is taken out of PQ → STOP

Search path: S → d → e → r → f → G, cost = 10

Search Tree


36

Uniform-cost search: An example

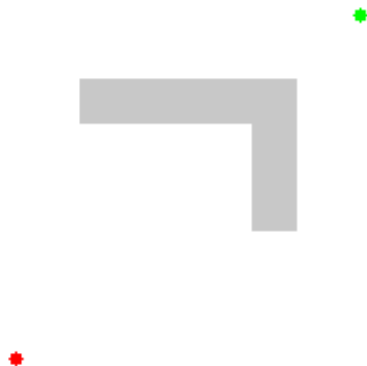

37


Uniform-cost search: Suboptimal path

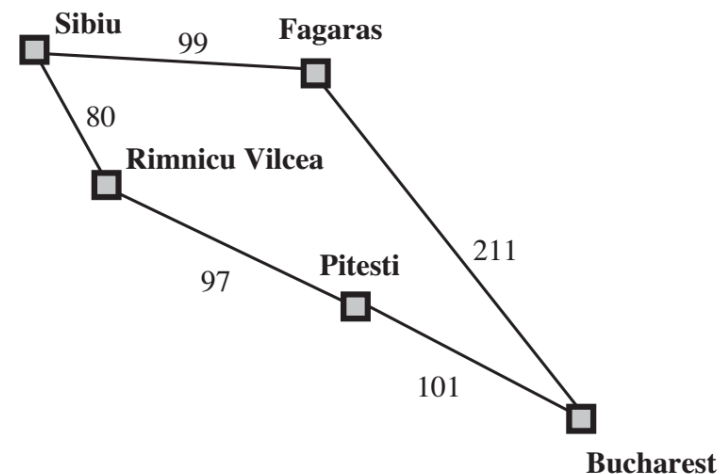

38

An evaluation of UCS

- What nodes does UCS expand?
 - Process all nodes with cost less than cheapest solution!
 - Let C^* be the cost of the optimal solution and assume that every action costs at least ϵ .
 - Take time $O(b^{1+\lceil C^*/\epsilon \rceil})$ (exponential in effective depth)
- How much space does the frontier take?
 - Roughly the last tier, so $O(b^{1+\lceil C^*/\epsilon \rceil})$
- Is it complete?
 - Assume that the best solution has a finite cost and minimum arc cost is positive, YES
- Is it optimal?
 - YES

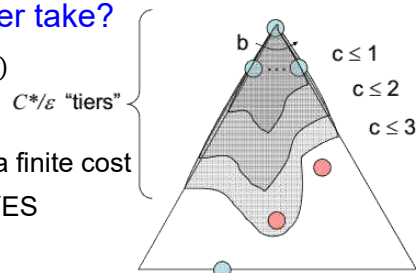

39

An evaluation of UCS

- Graph separation property: every path from the initial state to an unexplored state must pass through a state on the frontier.
 - Proved inductively
- Optimality of UCS: proof by contradiction
 - Suppose UCS terminates at goal state n with path cost $g(n) = C$ but there exists another goal state n' with $g(n') < C$
 - There must exist a node n'' on the frontier that is on the optimal path to n' .
 - Since $g(n'') < g(n') < g(n)$, n'' should have been expanded first!
- UCS expands nodes in order of their optimal path cost.

40


An evaluation of UCS

- The complexity of $O(b^{1+\lceil C^*/\epsilon \rceil})$ can be greater than $O(b^d)$.
 - UCS can explore large trees of small steps before exploring paths involving large and perhaps useful steps.
- When all step costs are equal, $O(b^{1+\lceil C^*/\epsilon \rceil})$ is just $O(b^{d+1})$.
 - UCS does strictly more work by unnecessarily expanding nodes at depth d , while BFS stops as soon as it generates a goal.

41

Quiz 02: Uniform-cost search

- Work out the order in which states are expanded, as well as the path returned by graph search. Assume ties resolve in such a way that states with earlier alphabetical order are expanded first.

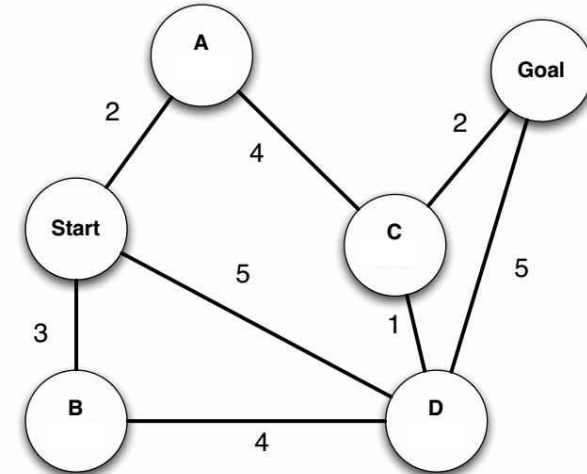

42


Depth-first search



43

Depth-first search (DFS)


- Expand deepest unexpanded node
- Implementation: *frontier* is a **LIFO Stack**

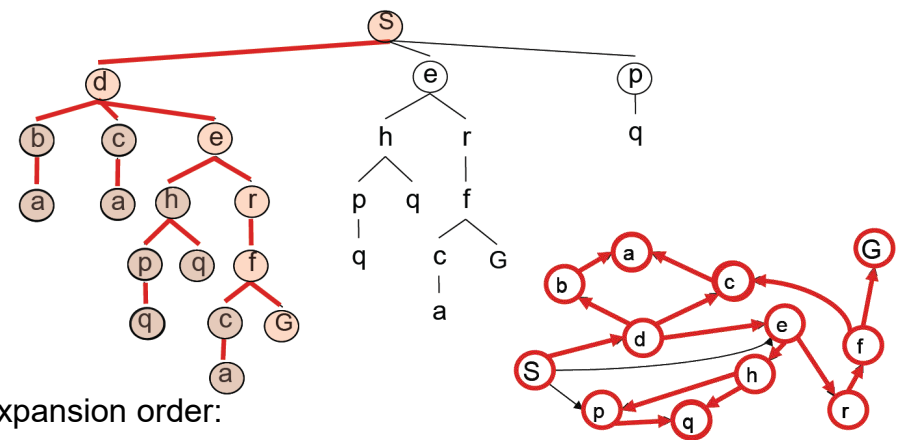

Expansion order:
S, d, b, a, c, a, e, h, p, q, q, r, f, c, a, G

44


Depth-first search: An example

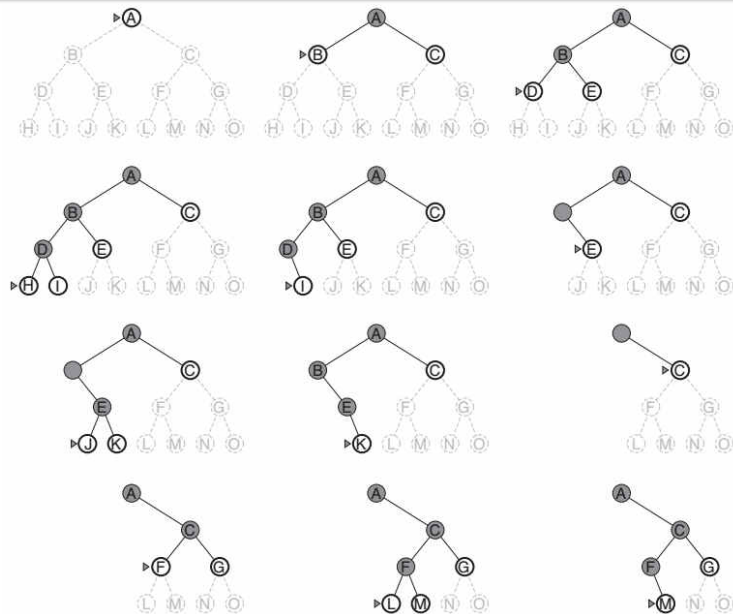

45

An evaluation of DFS

- What nodes DFS expand?
 - Some left prefix of the tree, and it could process the whole tree!
 - If the maximum depth m is finite, it takes time $O(b^m)$
- How much space does the frontier take?
 - Only has siblings on path to root, so $O(bm) \rightarrow$ linear space
- Is it complete?
 - m could be infinite
 - YES if loops prevented
- Is it optimal?
 - NO, the “leftmost” solution, regardless of depth or cost

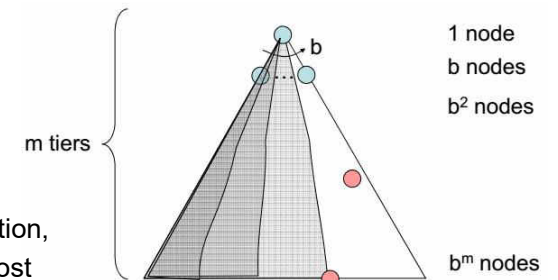

46

Completeness of DFS

- **Graph-search: complete**, while **tree-search: not complete**
- **Avoid repeated states** by checking new states against those on the path from the root to the current node.
 - Infinite loops in finite state spaces are avoided, but the proliferation of redundant paths remains.
- Infinite state spaces: both versions fail if an infinite non-goal path is encountered.
 - E.g., the Knuth's 4 problem \rightarrow keep applying the factorial operator

47

Comparison of BFS and DFS

	DFS	BFS
Space complexity	Linear space	Maybe the whole search space
Time complexity	Same, better on the average (many goals, no loops, and no infinite paths)	Same, better in worst-cases
In general	better if many goals, not many loops, and much better in terms of memory.	better if goal is not deep, infinite paths, many loops, or small search space


DFS in use

- The **goal test** is applied to each node when it is **generated** rather than when it is selected for expansion.
- **Avoid repeated states** by checking new states against those on the path from the root to the current node.

48

Quiz 03: Depth-first search

- Work out the order in which states are expanded, as well as the path returned by the algorithm. Assume ties resolve in such a way that states with earlier alphabetical order are expanded first.

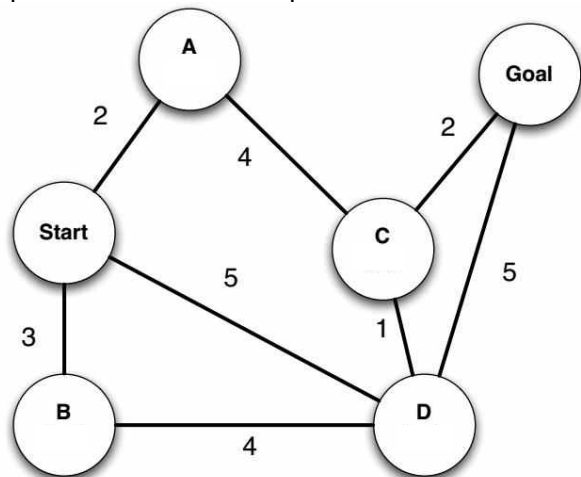

49

Depth-limited search




50

Depth-limited search (DLS)

- Standard DFS with a **predetermined depth limit l**
 - Nodes at depth l are treated as if they have no successors \rightarrow infinite problems solved.
- Depth limits can be based on knowledge of the problem.
 - Diameter of state-space, typically unknown ahead of time in practice

E.g., 20 cities in the Romania map
 $\rightarrow l = 19$

but any city is reached from any other city in at most 9 steps
 $\rightarrow l = 9$ is better

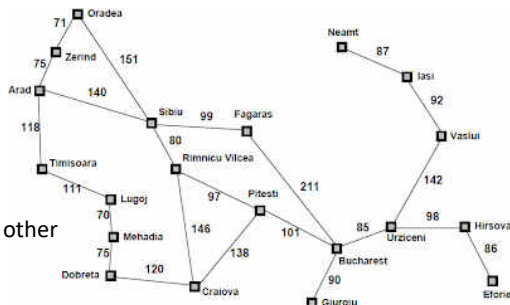

51

Depth-limited search (DLS)

```

function DEPTH-LIMITED-SEARCH(problem, limit) returns a solution, or
                                                    failure/cutoff
return RECURSIVE-DLS(MAKE-NODE(problem.INITIAL-STATE),
                        problem, limit)
  
```

```

function RECURSIVE-DLS(node, problem, limit) returns a solution, or
                                                    failure/cutoff
  
```

```

if problem.GOAL-TEST(node.STATE) then return SOLUTION(node)
  
```

```

else if limit = 0 then return cutoff
  
```

```

else cutoff_occurred?  $\leftarrow$  false
  
```

```

for each action in problem.ACTIONS(node.STATE) do
  
```

```

    child  $\leftarrow$  CHILD-NODE(problem, node, action)
  
```

```

    result  $\leftarrow$  RECURSIVE-DLS(child, problem, limit - 1)
  
```

```

    if result = cutoff then cutoff_occurred?  $\leftarrow$  true
  
```

```

    else if result  $\neq$  failure then return result
  
```

```

if cutoff_occurred? then return cutoff else return failure
  
```

- Failure: no solution
- Cutoff: no solution within the depth limit

52

An evaluation of DLS

- **Completeness**
 - Maybe NO if $l < d$
- **Optimality**
 - NO if $l > d$
- **Time complexity**
 - $O(b^l)$
- **Space complexity**
 - $O(bl)$

DFS is a special case of DLS
when $l = \infty$

53

Iterative deepening search



54

Iterative deepening search (IDS)


- General strategy, often used in combination with **depth-first tree search** to find the best depth limit

function ITERATIVE-DEEPENING-SEARCH(*problem*) **returns** a solution, or failure
for *depth* = 0 **to** ∞ **do**
 result \leftarrow DEPTH-LIMITED-SEARCH(*problem*, *depth*)
 if *result* \neq cutoff **then return** *result*

- Gradually increase the limit until a goal is found.
 - The depth limit reaches the depth d of the **shallowest goal node**.


55

Iterative deepening search (IDS)

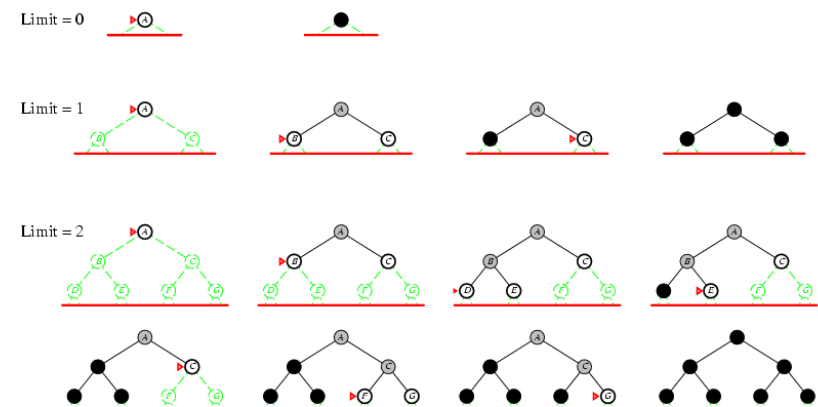

56

Iterative deepening search (IDS)

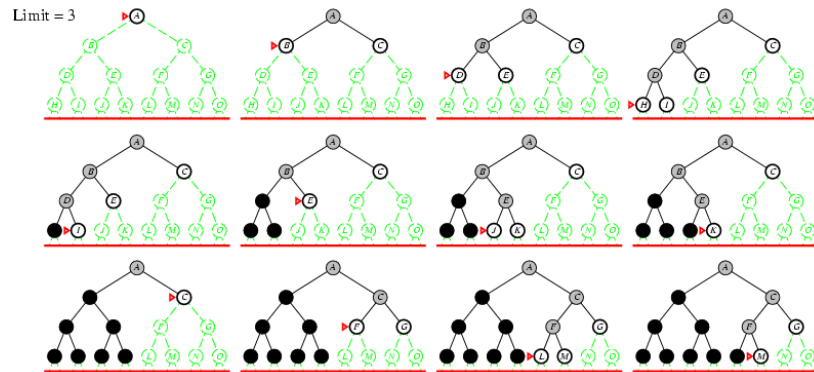

57

An evaluation of IDS

- **Completeness**
 - YES when the branching factor is finite
 - **Optimality**
 - YES if step cost = 1
 - **Time complexity**
 - $(d + 1)b^0 + db^1 + (d - 1)b^d = O(b^d)$
 - **Space complexity**
 - $O(bd)$, similar to DFS
 - Preferred when the search space is large and the depth of the solution is not known
- Similar to BFS


58

Quiz 04: Iterative deepening search

- IDS seem to be wasteful because states are generated multiple times. However, it turns out to be not too costly, compared to BFS.
- Why?

59


Bidirectional search

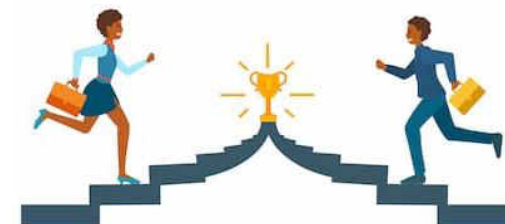

60

Bidirectional search

- Two simultaneous searches: one from the **initial state towards**, and the other from the **goal state backwards**
- Hoping that two searches **meet** in the middle

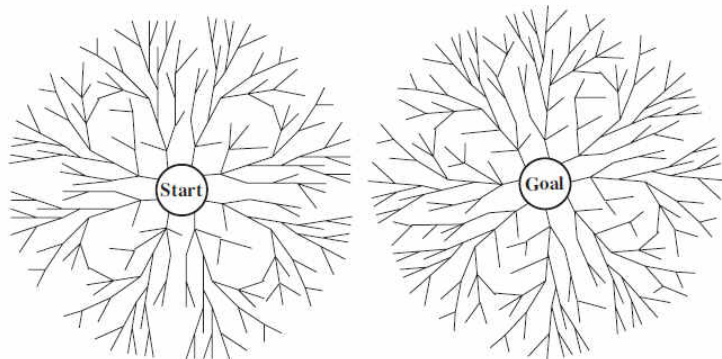

61

Bidirectional search

- **Goal test**: whether the frontiers of two searches intersect
- **Optimality**: maybe NO
- **Time and Space complexity**: $O(b^{d/2})$
- It sounds attractive, but what is the **tradeoff**?
- Space requirement for the frontiers of at least one search
- Not easy to search backwards (predecessors required)
 - In case there are more than 1 goals
 - Especially if the goal is an abstract description (no queen attacks another queen)

62

A summary of uninformed search

- Comparison of uninformed algorithms (tree-search versions)

Criterion	Breadth-First	Uniform-Cost	Depth-First	Depth-Limited	Iterative Deepening	Bidirectional (if applicable)
Complete?	Yes ^a	Yes ^{a,b}	No	No	Yes ^a	Yes ^{a,d}
Time	$O(b^d)$	$O(b^{1+\lceil C^*/\epsilon \rceil})$	$O(b^m)$	$O(b^l)$	$O(b^d)$	$O(b^{d/2})$
Space	$O(b^d)$	$O(b^{1+\lceil C^*/\epsilon \rceil})$	$O(bm)$	$O(bl)$	$O(bd)$	$O(b^{d/2})$
Optimal?	Yes ^c	Yes	No	No	Yes ^c	Yes ^{c,d}

Figure 3.21 Evaluation of tree-search strategies. b is the branching factor; d is the depth of the shallowest solution; m is the maximum depth of the search tree; l is the depth limit. Superscript caveats are as follows: ^a complete if b is finite; ^b complete if step costs $\geq \epsilon$ for positive ϵ ; ^c optimal if step costs are all identical; ^d if both directions use breadth-first search.

63



THE END

64