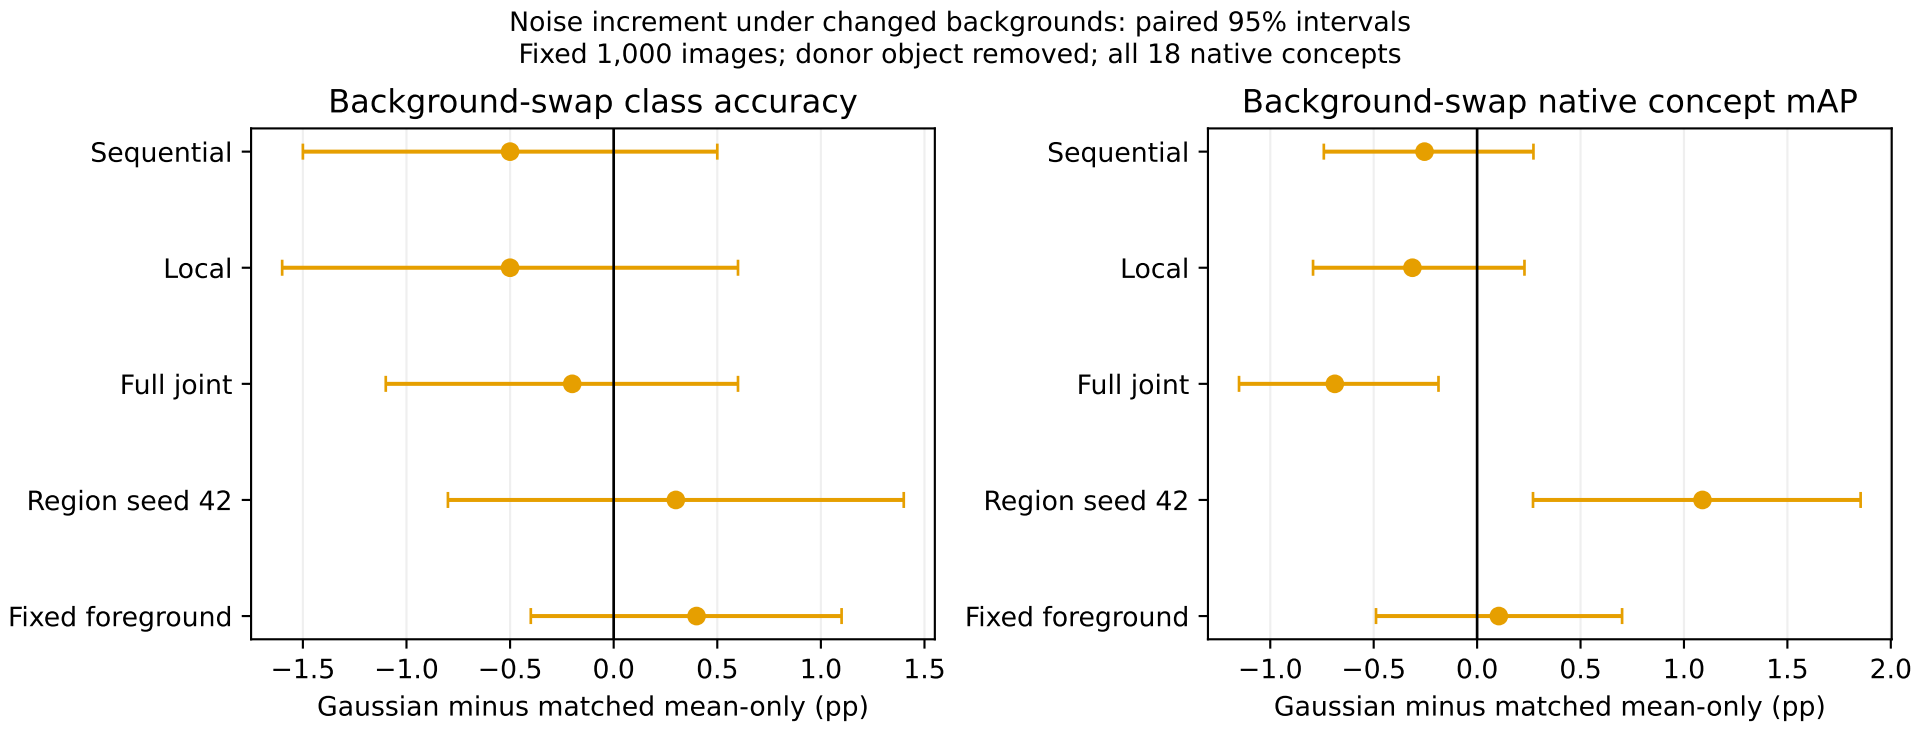
Noise increment under changed backgrounds: paired 95% intervals
Fixed 1,000 images; donor object removed; all 18 native concepts
Background-swap class accuracy
Sequential
Local
Full joint
Region seed 42
Fixed foreground
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
Gaussian minus matched mean-only (pp)
Background-swap native concept mAP
Sequential
Local
Full joint
Region seed 42
Fixed foreground
−1.0
−0.5
0.0
0.5
1.0
1.5
2.0
Gaussian minus matched mean-only (pp)