# Spatial Noise CBM: Detailed Training and Mean Inference

## (1) Concept / region pretraining: 18,987 images, 40 epochs

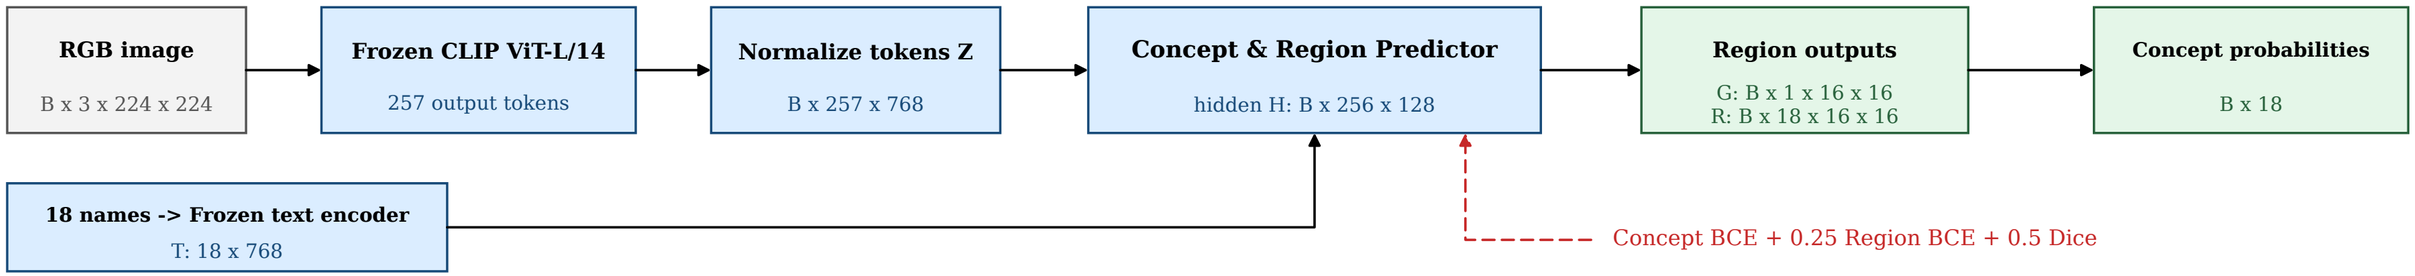


## (2) Noise adaptation: 6,003 images, 6 epochs; one random concept k per image

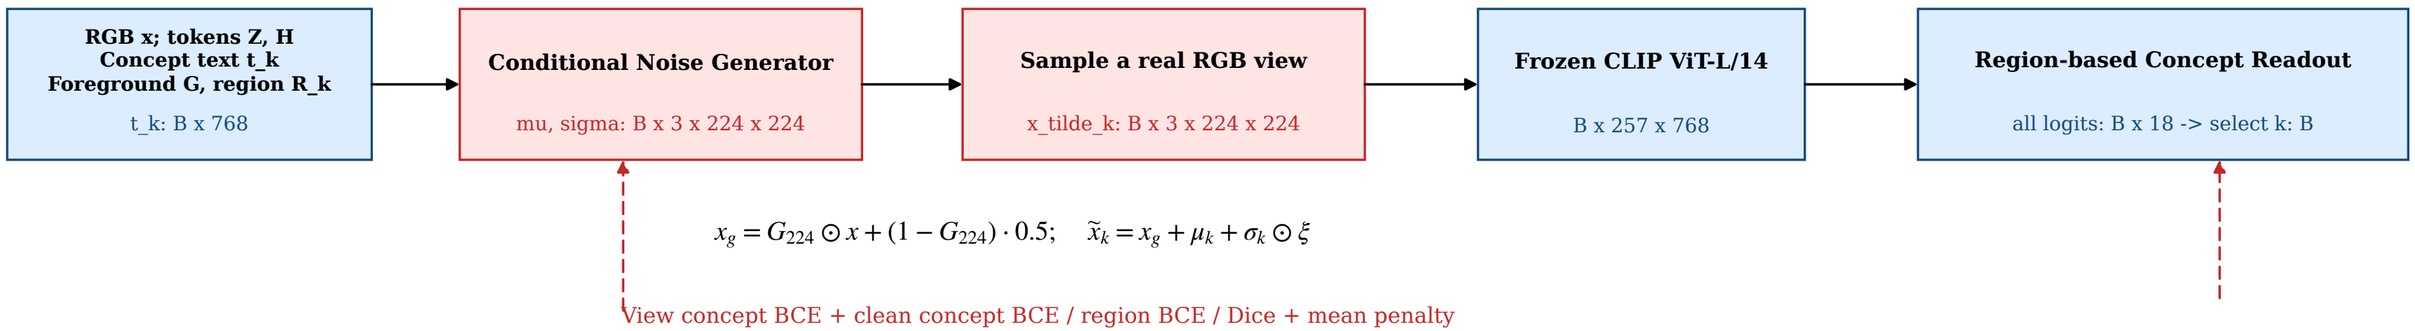


## (3) Sparse head fitting, then mean inference: all 18 concepts are evaluated

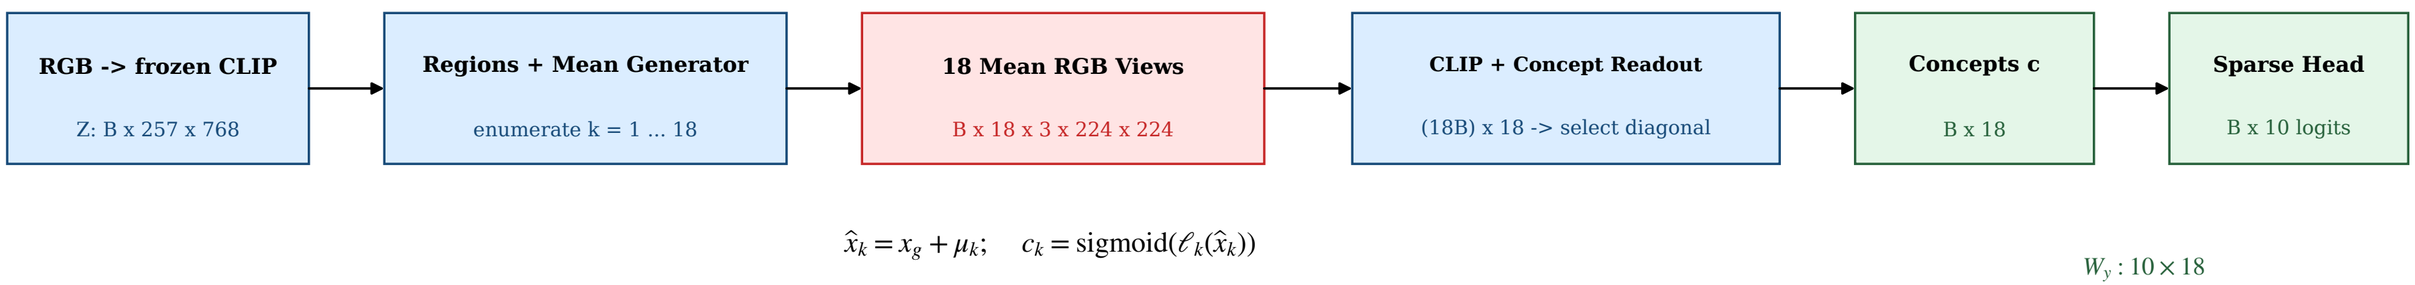


Head fitting uses sampled training concepts; inference reuses the fitted head with mean-view concepts.