



<https://cdimage.debian.org/cdimage/daily-builds/daily/arch-latest/amd64/iso-cd/>

<https://cdimage.debian.org/cdimage/daily-builds/daily/arch-latest/amd64/iso-cd/debian-testing-amd64-netinst.iso>

Préparation du BIOS

- Accès au BIOS F12
- Activer "Advanced setup"
- Allez dans l'onglet passwords -> entrer le mdp dans Admin Password que vous retrouver ici [Coffres | Vaultwarden Web](#) -> Apply changes




Exemple de mot de passe administrateur Latitude 5340


- Allez dans storage -> remplacer RAIDon par AHCI -> confirmer -> puis exit
- Branchez la clé linux -> F12 -> rentrer le mdp -> elle apparait à gauche -> Booter dessus -> suivre l'installation linux ci dessous

Installation Linux


- Advanced options

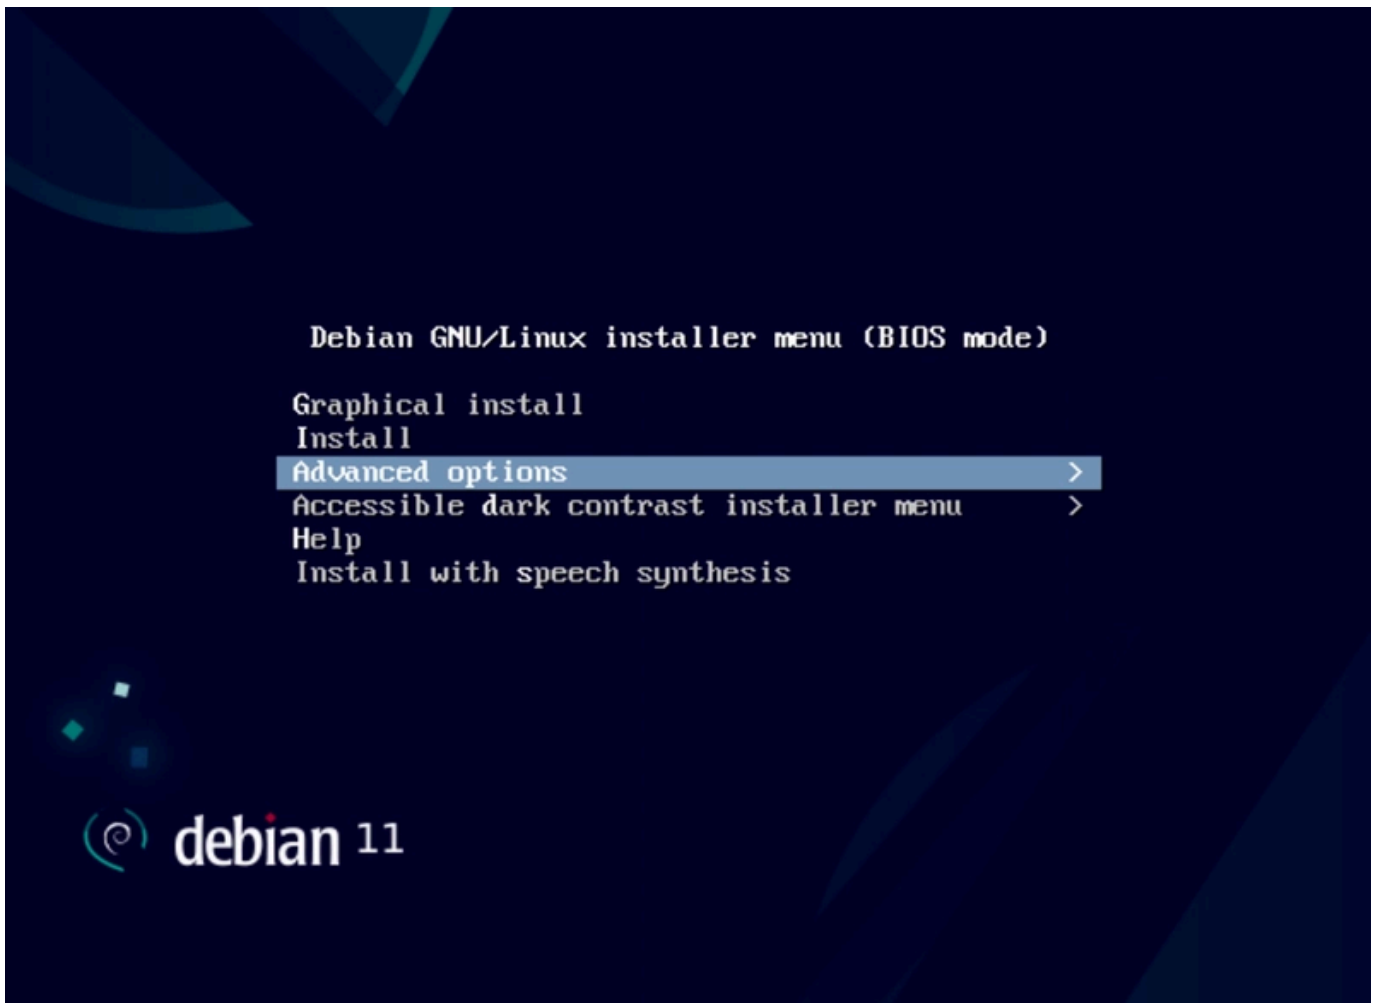

- Graphical expert install (**attention sur la photo c'est en expert install**)

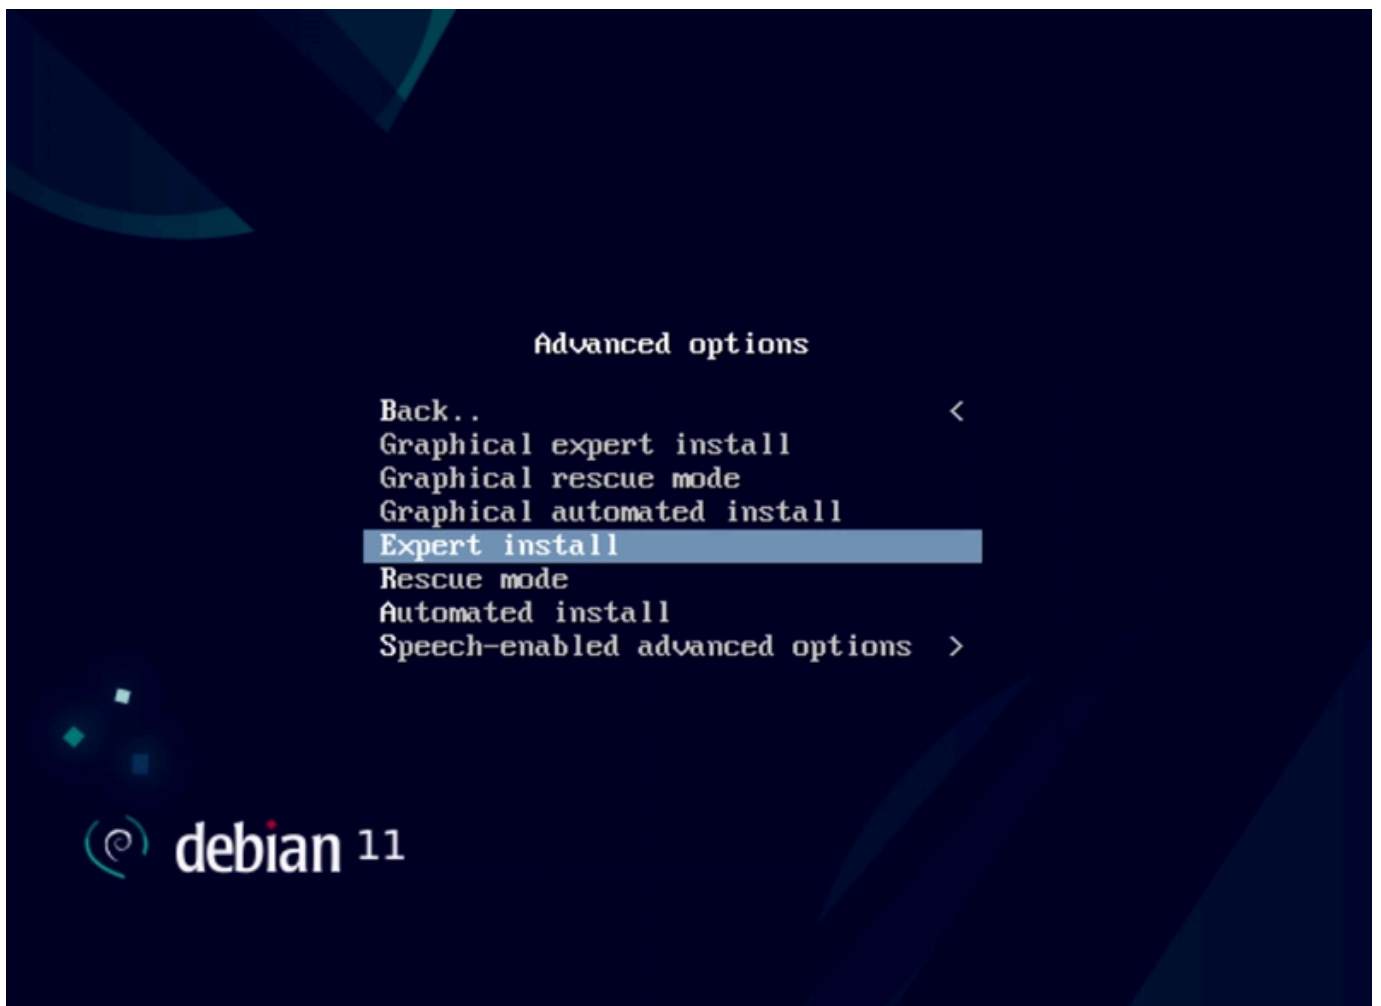

- Language : **English**

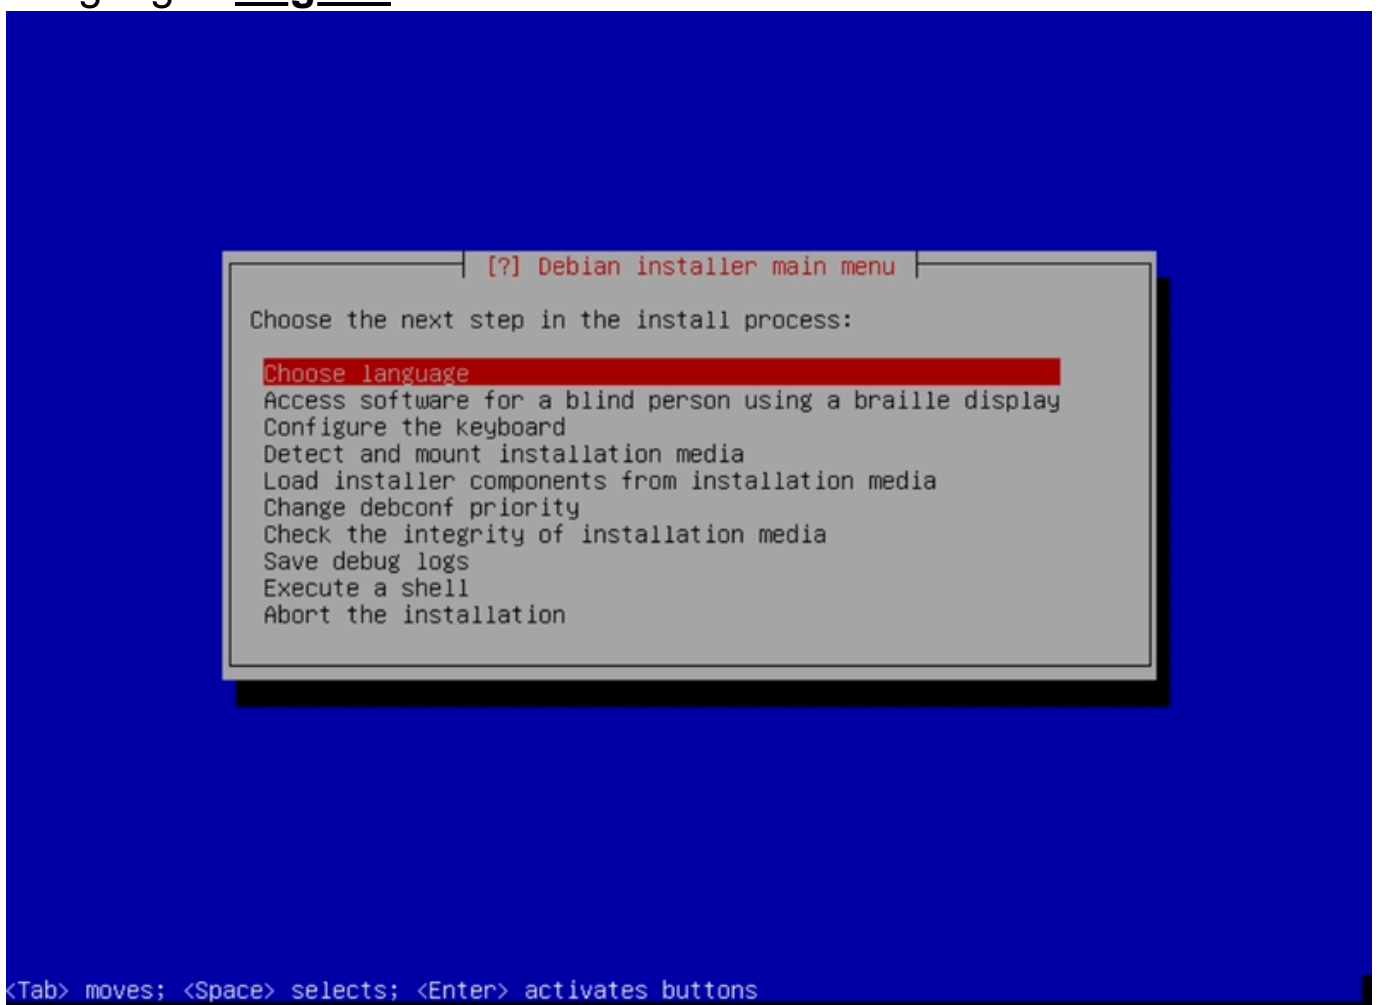

[!!] Select a language

Choose the language to be used for the installation process. The selected language will also be the default language for the installed system.

Language:


C	- No localization	↑
Albanian	- Shqip	
Arabic	- عربي	
Asturian	- Asturianu	
Basque	- Euskara	
Belarusian	- Беларуская	
Bosnian	- Bosanski	
Bulgarian	- Български	
Catalan	- Català	
Chinese (Simplified)	- 中文(简体)	
Chinese (Traditional)	- 中文(繁體)	
Croatian	- Hrvatski	
Czech	- Čeština	
Danish	- Dansk	
Dutch	- Nederlands	
English	- English	
Esperanto	- Esperanto	
Estonian	- Eesti	
Finnish	- Suomi	
French	- Français	
Galician	- Galego	
Georgian	- ქართული	
German	- Deutsch	↓

<Go Back>


<Tab> moves; <Space> selects; <Enter> activates buttons

- Location : Other→ Europe --> France


(attention sur la photo c'est au US)

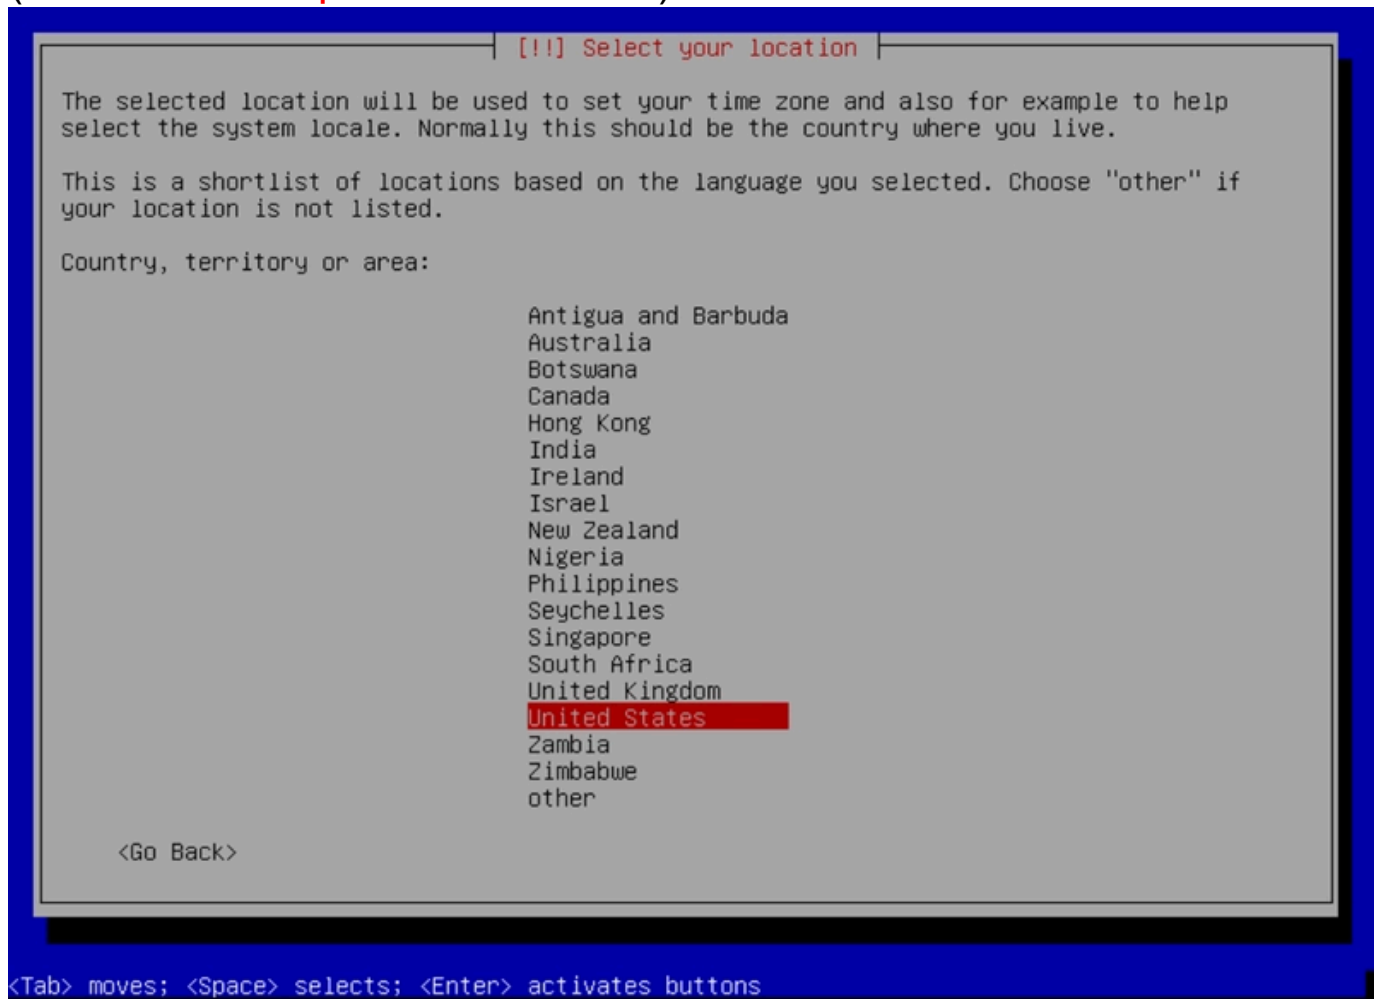


• Configure Locales : en_US.UTF-8

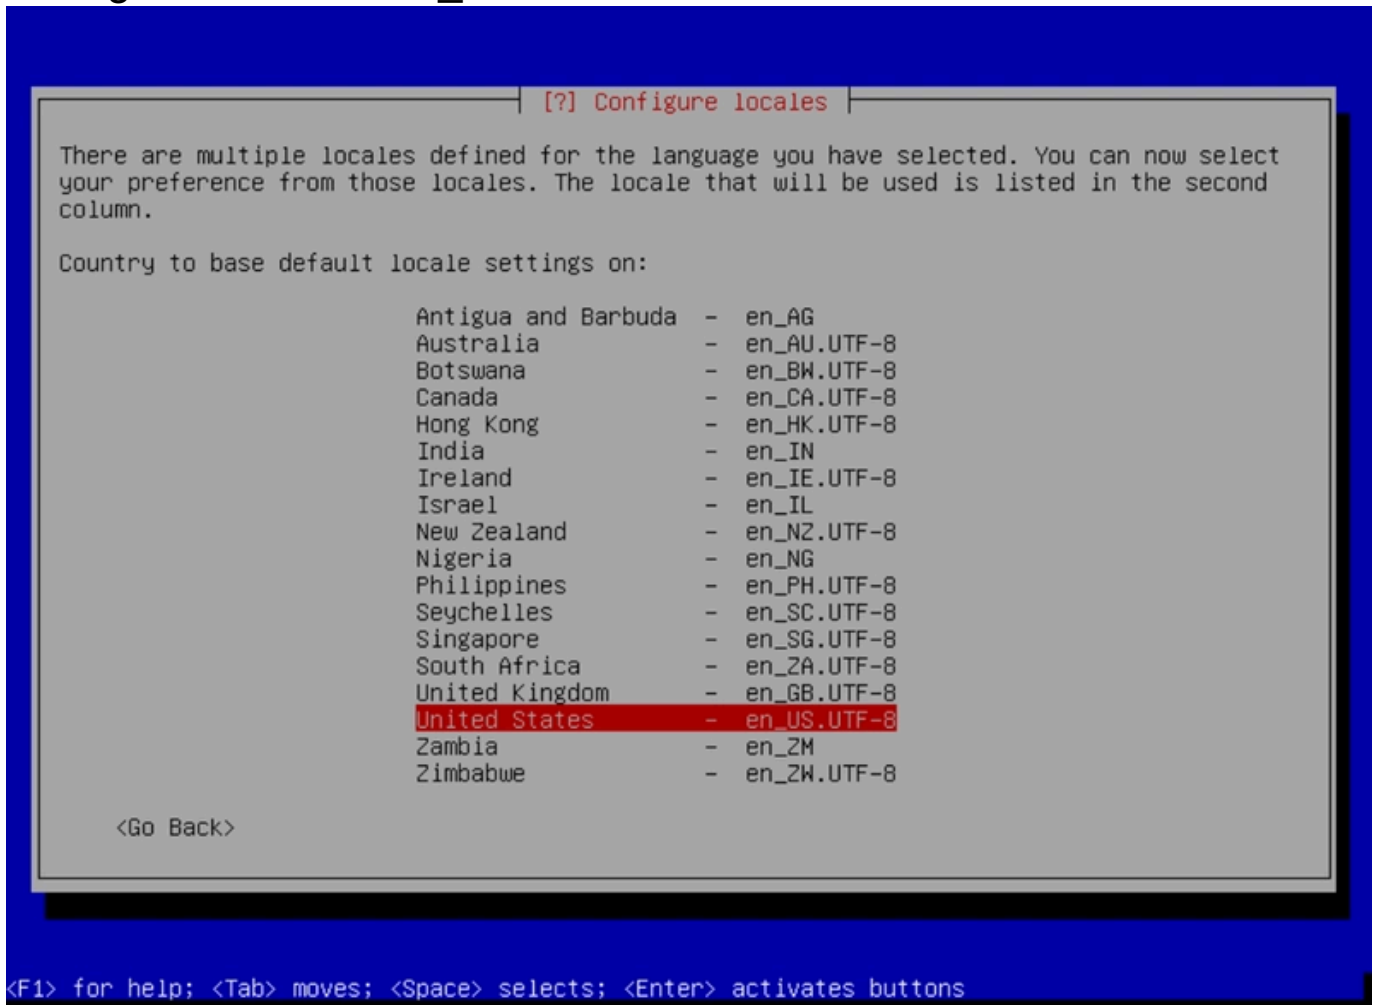

- Pas d'additional locales --> continue

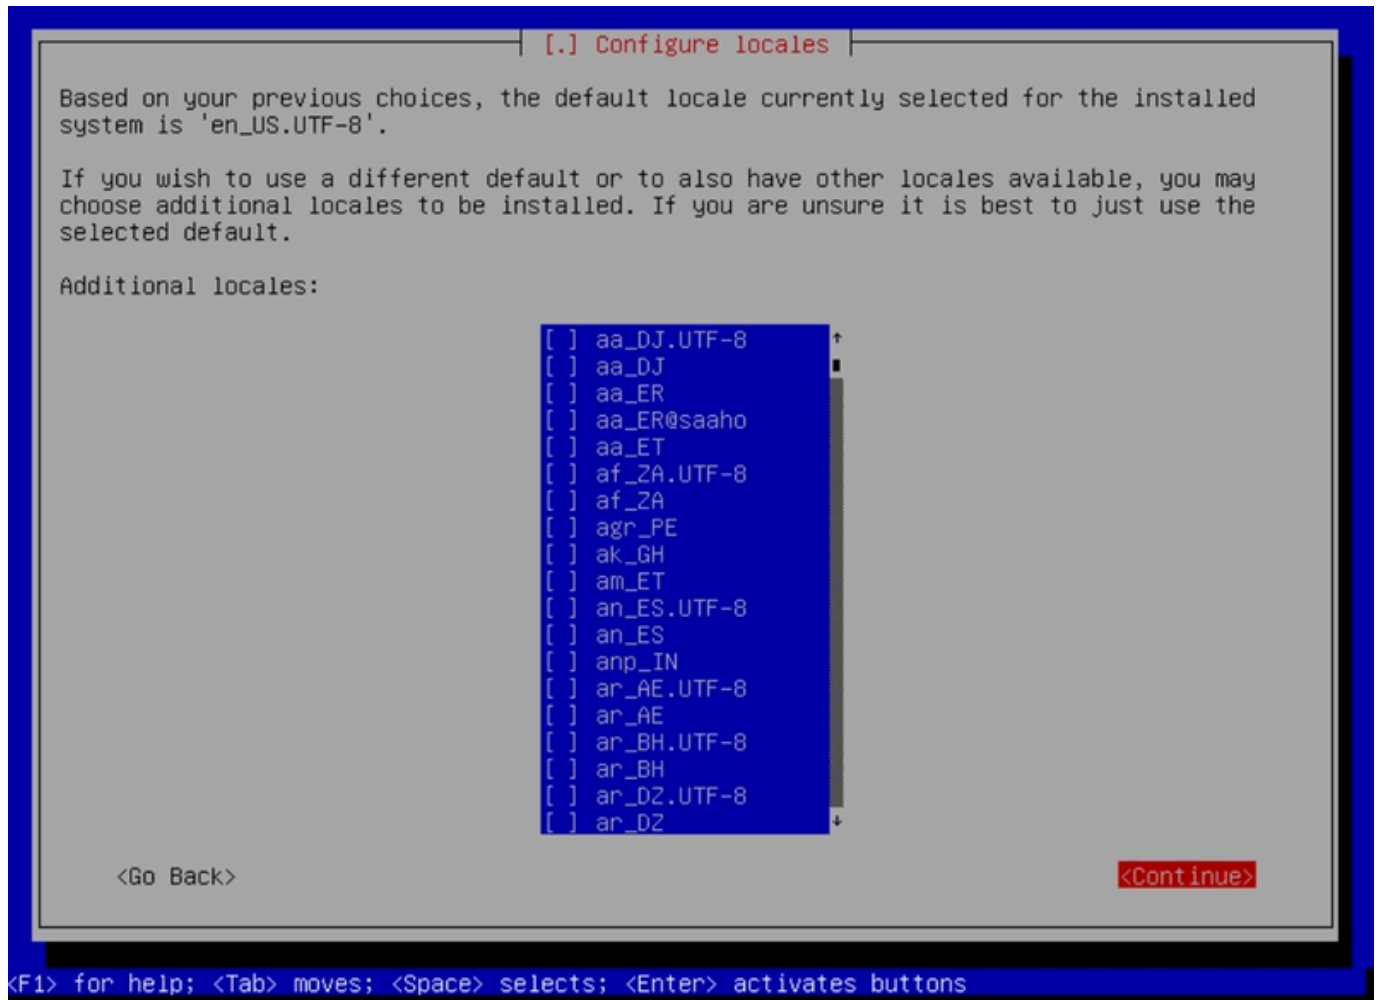


- Configuration du clavier (Keyboard) : French

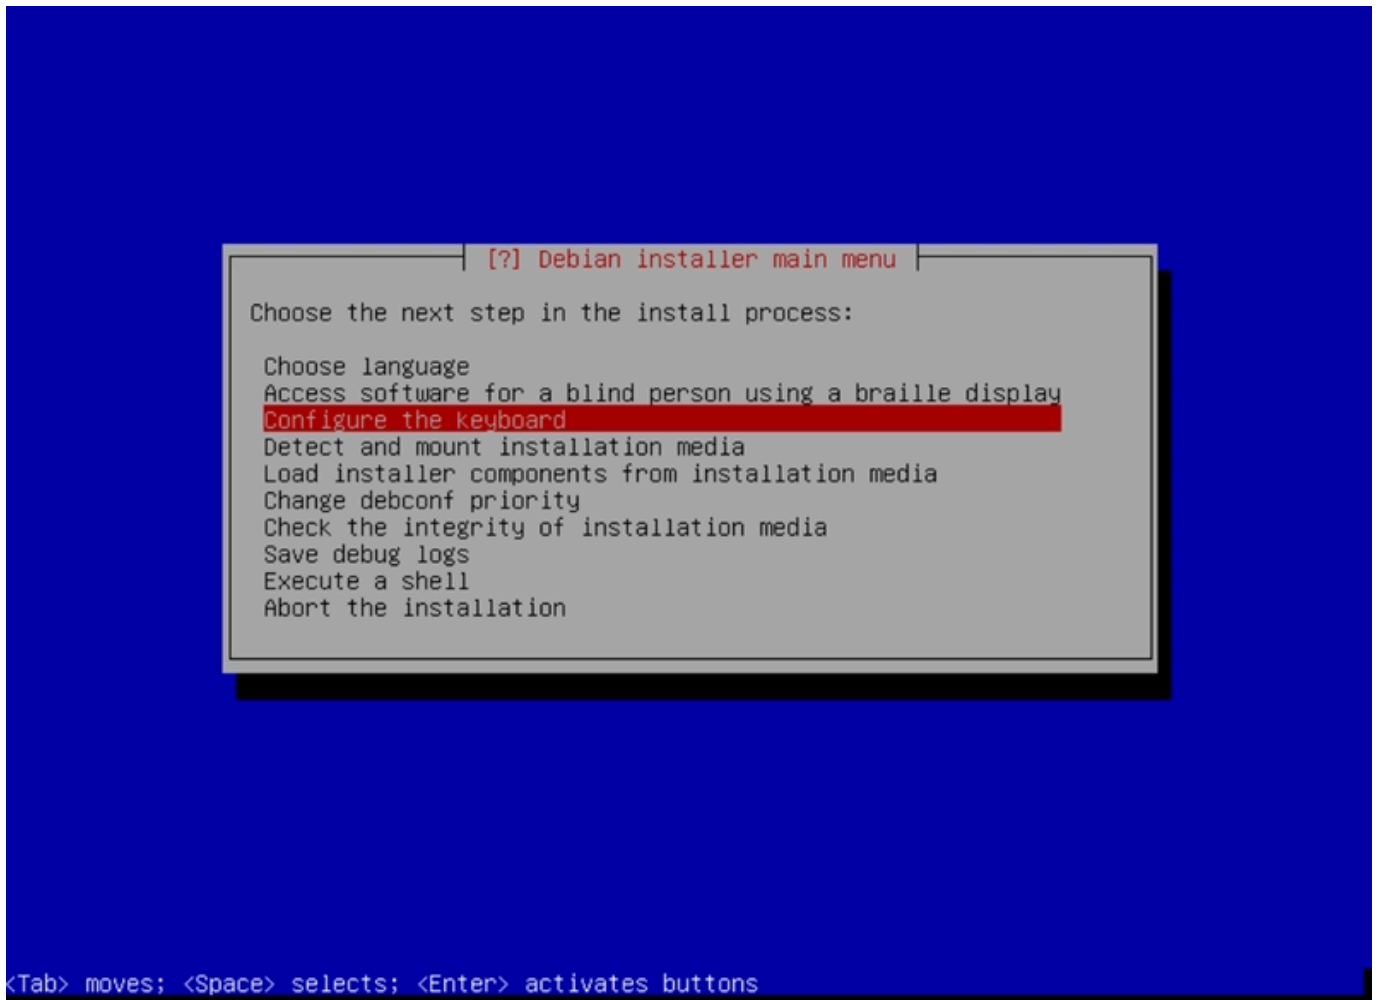

Keymap : French

(attention sur la photo c'est au US)

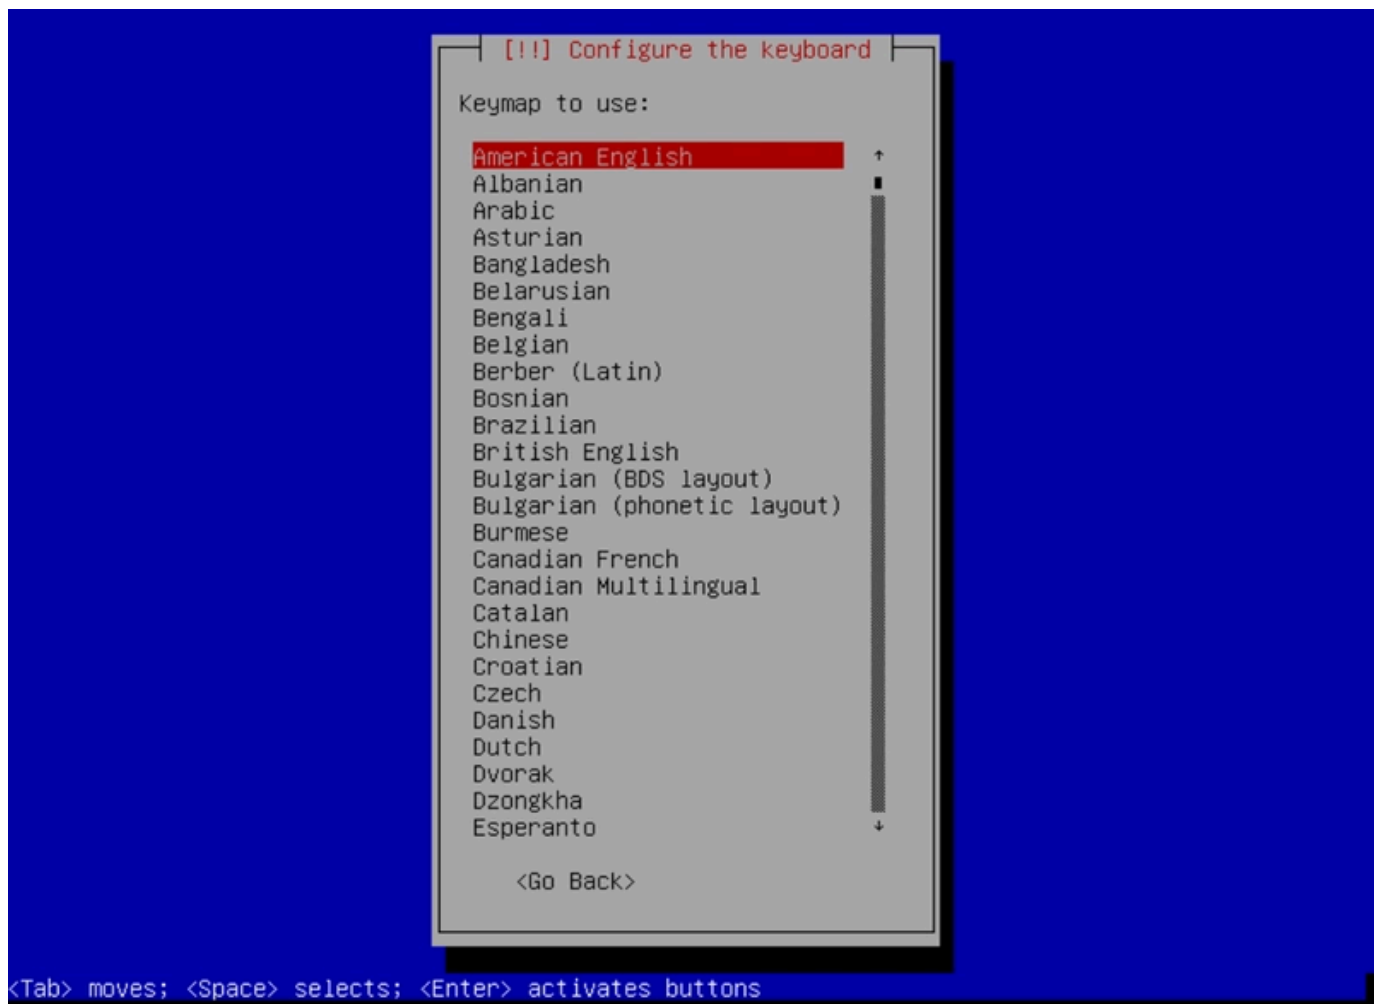

Detect/load : --> Continue (ne rien sélectionner)

[?] Debian installer main menu

Choose the next step in the install process:

- Choose language
- Access software for a blind person using a braille display
- Configure the keyboard
- Detect and mount installation media**
- Load installer components from installation media
- Change debconf priority
- Check the integrity of installation media
- Save debug logs
- Execute a shell
- Abort the installation

<Tab> moves; <Space> selects; <Enter> activates buttons

[?] Detect and mount installation media

The following Linux kernel modules were detected as matching your hardware. If you know some are unnecessary, or cause problems, you can choose not to load them. If you're unsure, you should leave them all selected.

Modules to load:

[*] usb-storage (USB storage)

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

[.] Detect and mount installation media

Installation media detected

Autodetection of the installation media was successful. A drive has been found that contains 'Debian GNU/Linux 11.0.0 "Bullseye" - Official amd64 NETINST 20210814-10:07'. The installation will now continue.

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

Attention ne rien sélectionner (cliquer sur continue)

[?] Load installer components from installation media

All components of the installer needed to complete the install will be loaded automatically and are not listed here. Some other (optional) installer components are shown below. They are probably not necessary, but may be interesting to some users.

Note that if you select a component that requires others, those components will also be loaded.

Installer components to load:


```
[ ] choose-mirror: Choose mirror to install from (menu item)
[ ] crc-modules-5.10.0-8-amd64-di: CRC modules
[ ] crypto-dm-modules-5.10.0-8-amd64-di: devicemapper crypto module
[ ] driver-injection-disk-detect: Detect OEM driver injection disks
[ ] espeakup-udeb: Configure the speech synthesizer voice
[ ] event-modules-5.10.0-8-amd64-di: Event support
[ ] f2fs-modules-5.10.0-8-amd64-di: f2fs filesystem support
[ ] fdisk-udeb: Manually partition a hard drive (fdisk)
[ ] fuse-modules-5.10.0-8-amd64-di: FUSE modules
[ ] i2c-modules-5.10.0-8-amd64-di: i2c support modules
[ ] load-media: Load installer components from removable media
[ ] lowmem: free memory for lowmem install
[ ] mbr-udeb: Master Boot Record for IBM-PC compatible computers
[ ] mmc-core-modules-5.10.0-8-amd64-di: MMC/SD/SDIO core modules
[ ] multipath-modules-5.10.0-8-amd64-di: Multipath support
[ ] nbd-modules-5.10.0-8-amd64-di: Network Block Device modules
[ ] network-console: Continue installation remotely using SSH
[ ] openssh-client-udeb: secure shell client for the Debian installer
[ ] parted-udeb: Manually partition a hard drive (parted)
```

<Go Back>

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

Configurer le Network :

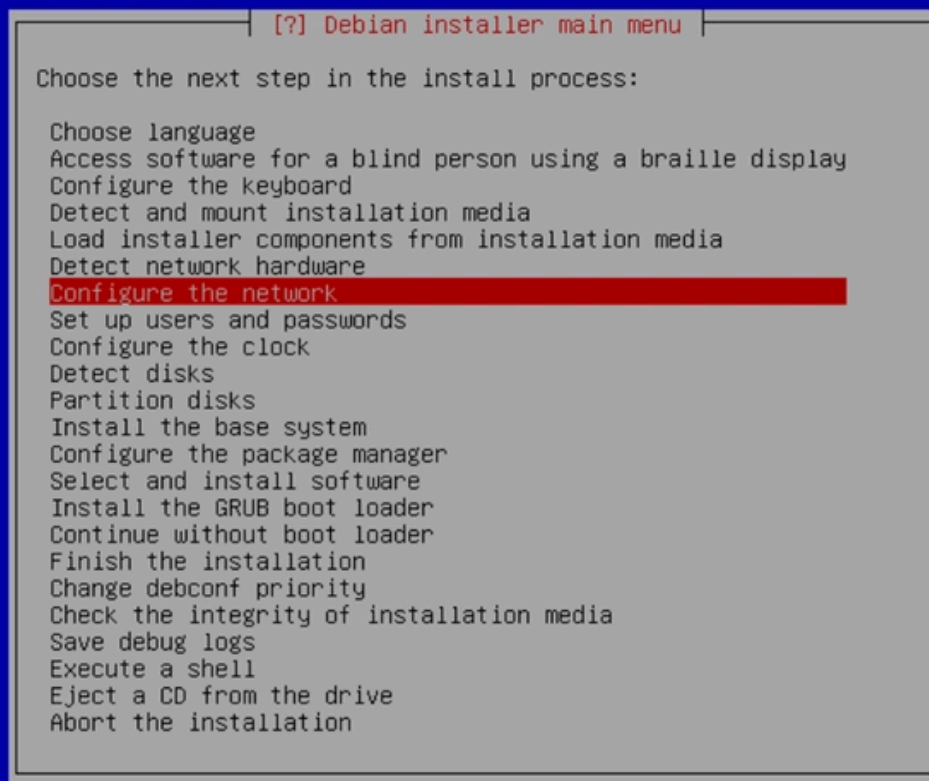


<Tab> moves; <Space> selects; <Enter> activates buttons

Sélectionner Ethernet -> continue




Hostname : FRXXXXXX

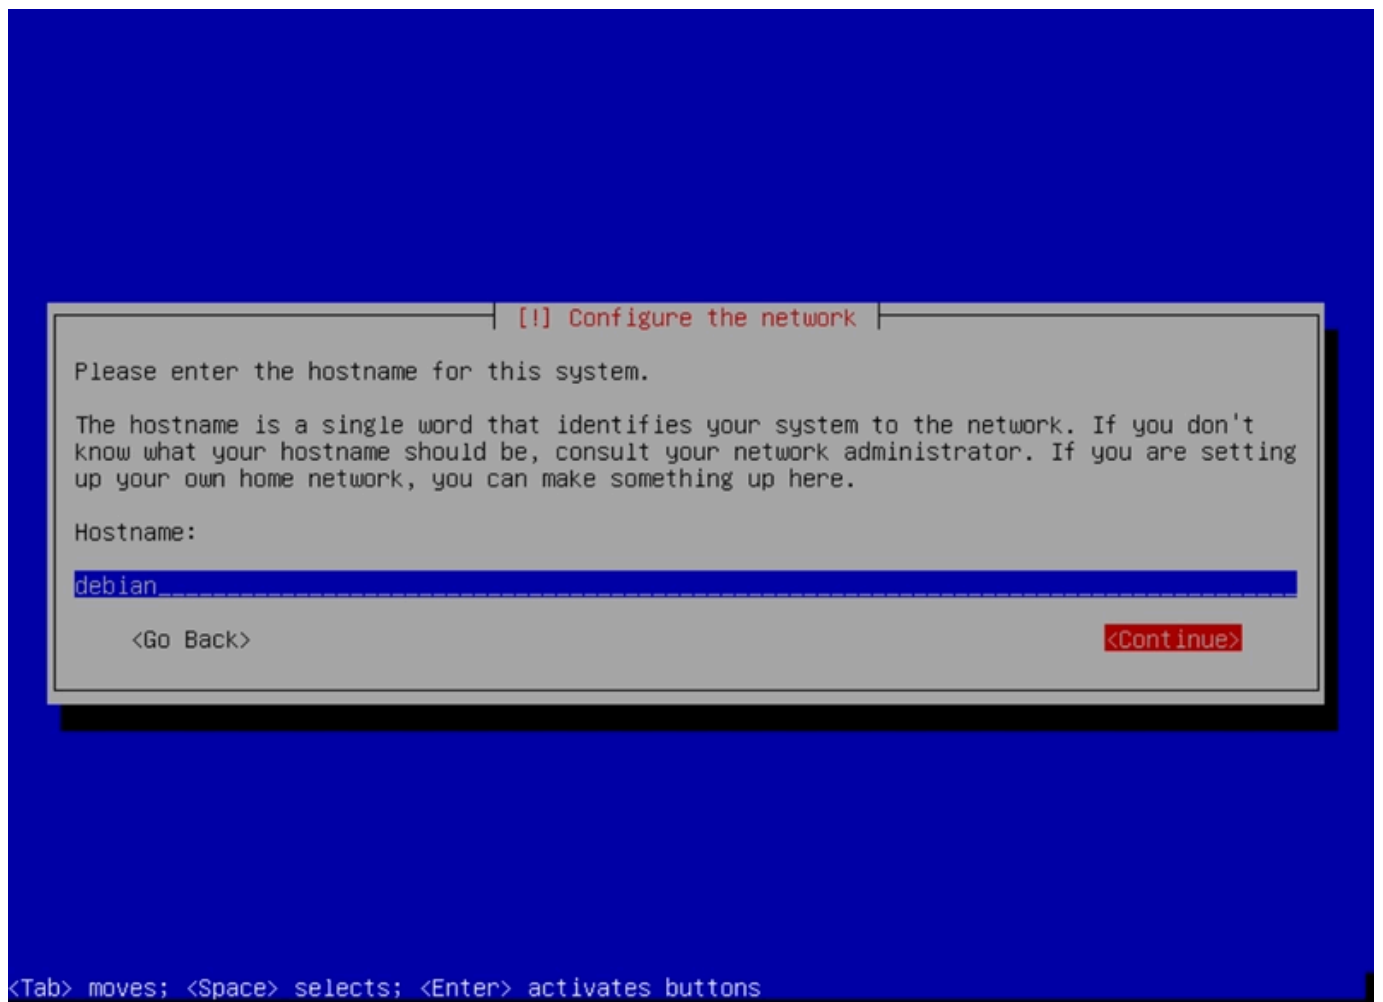

Domain name : ne rien mettre (attention dans la photo ci dessous ce


n'est pas bon)

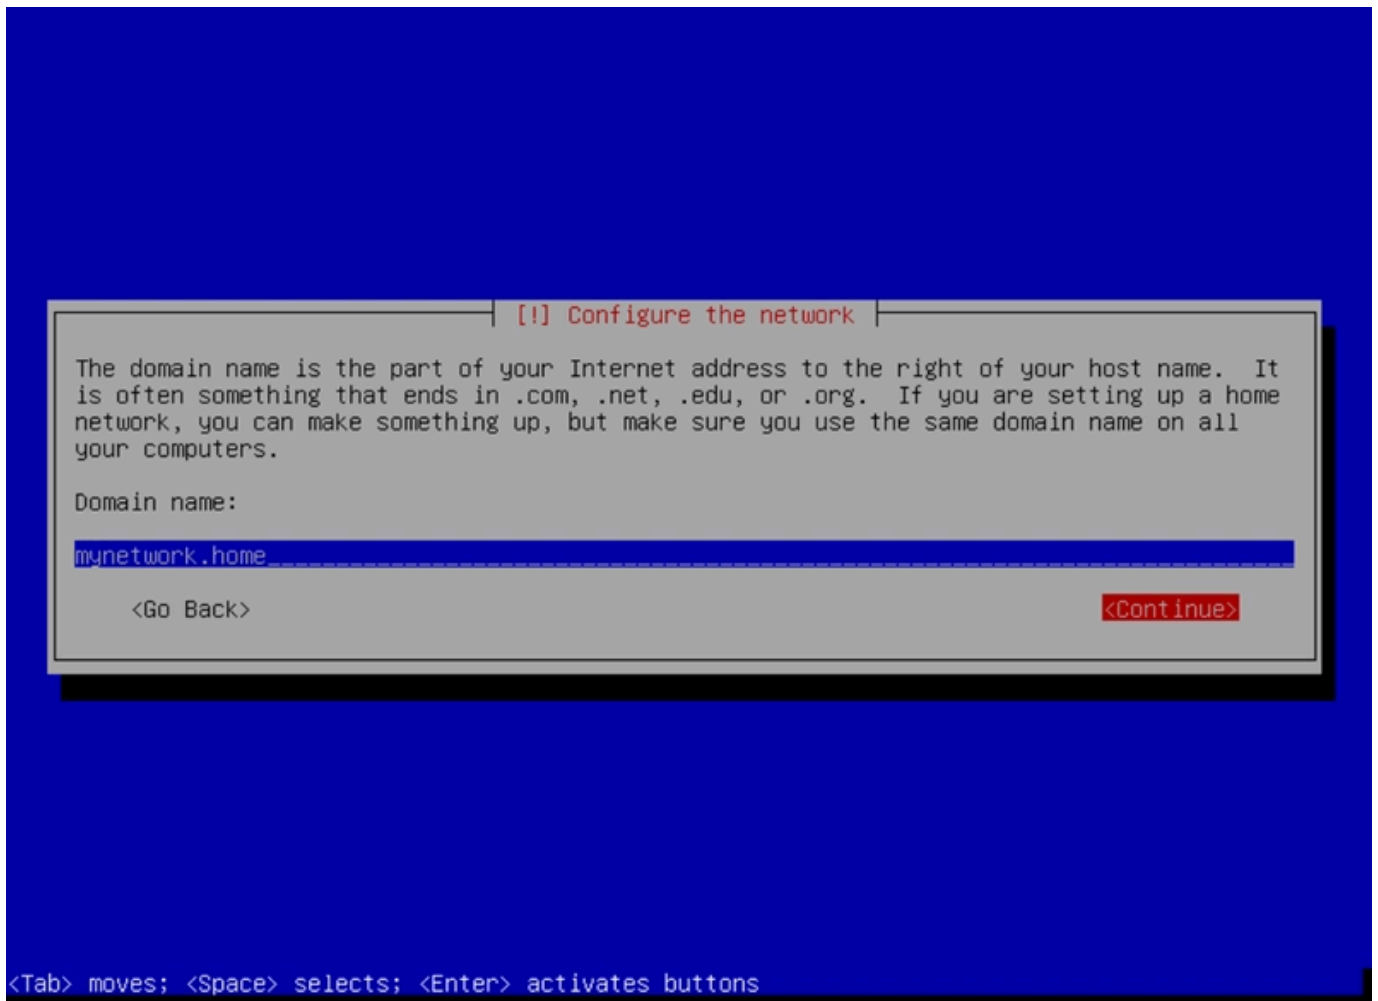


User et passwords : déterminer à l'avance à qui va être remis le PC

pour compléter cette étape.

Yes

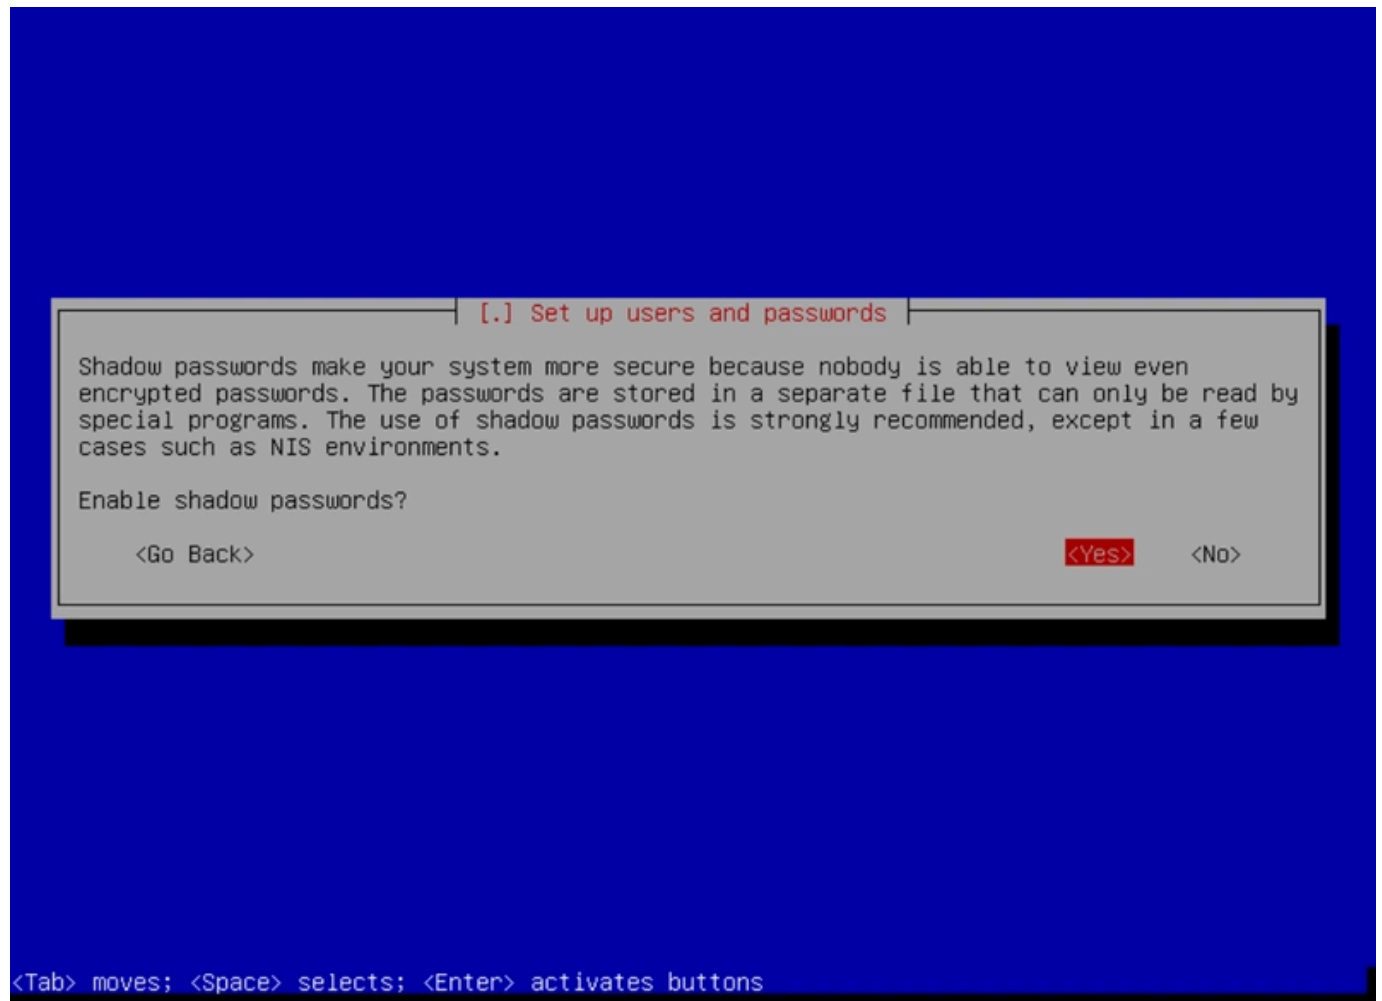


Root sélectionner Yes (attention sur la photo ci-dessous c'est no)

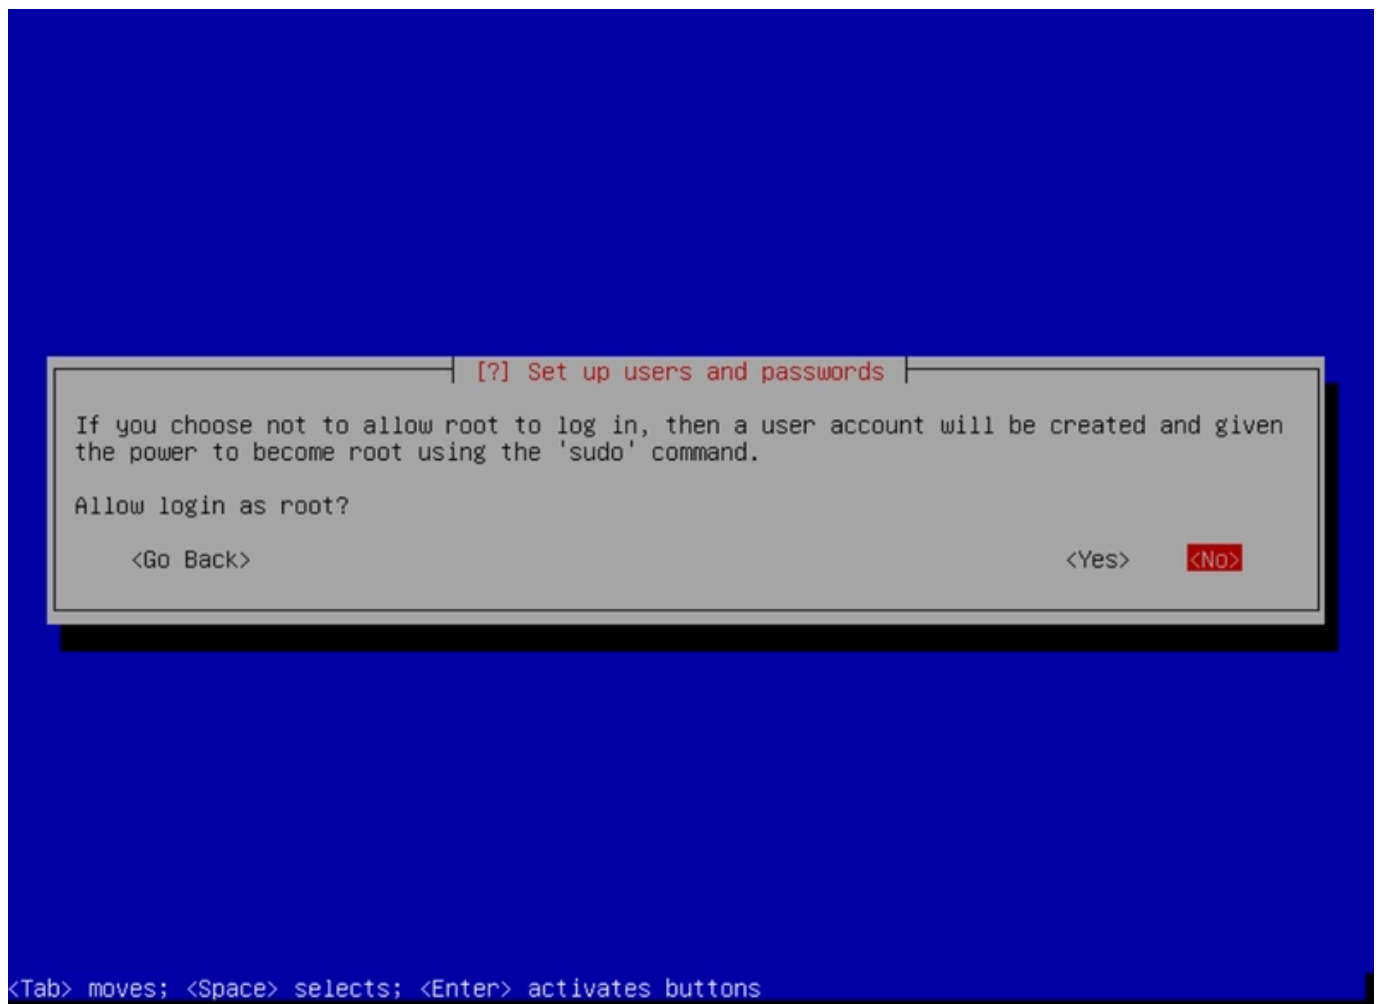

Par la suite entrer le mdp root qui se trouve ici [Coffres | Vaultwarden](#)


Web (Root linux)

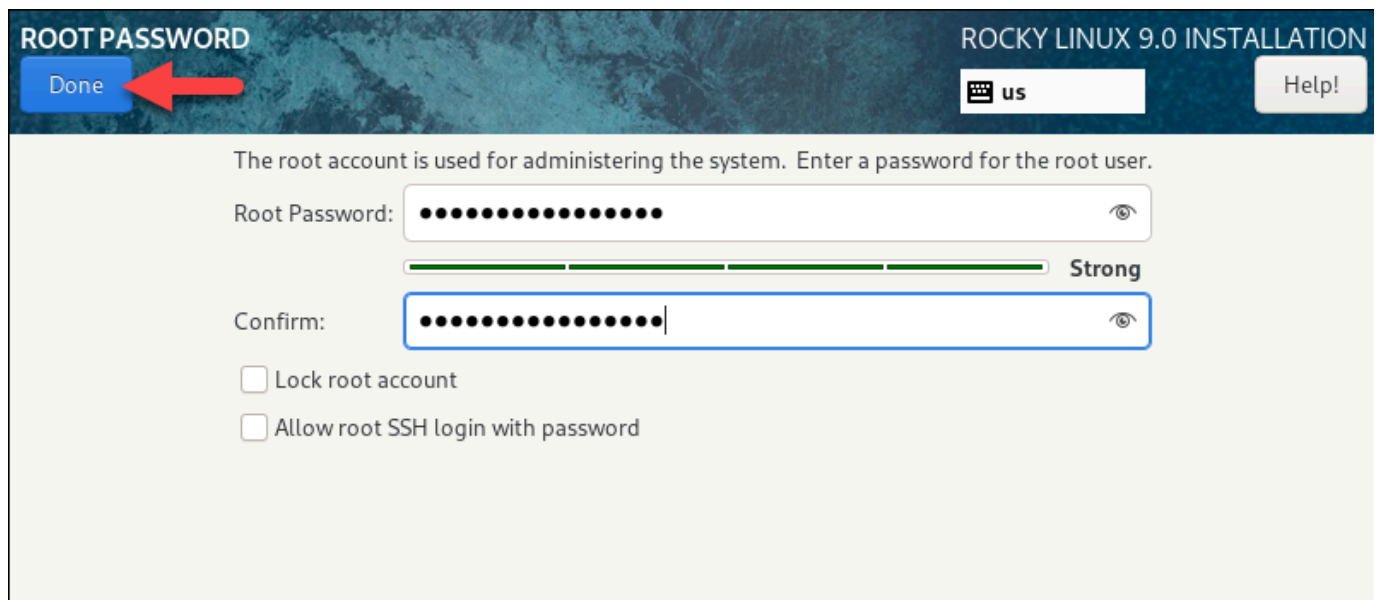

The screenshot shows the 'ROOT PASSWORD' screen in the Rocky Linux 9.0 installation. At the top left is a 'Done' button with a red arrow pointing to it. At the top right is the text 'ROCKY LINUX 9.0 INSTALLATION' and a 'Help!' button. Below the title bar, a message states: 'The root account is used for administering the system. Enter a password for the root user.' There are two password input fields: 'Root Password:' and 'Confirm:'. The 'Root Password' field has a strength indicator below it showing four green bars and the word 'Strong'. Below the input fields are two checkboxes: 'Lock root account' and 'Allow root SSH login with password', both of which are currently unchecked.

Account -> YES


Set USER : Full name

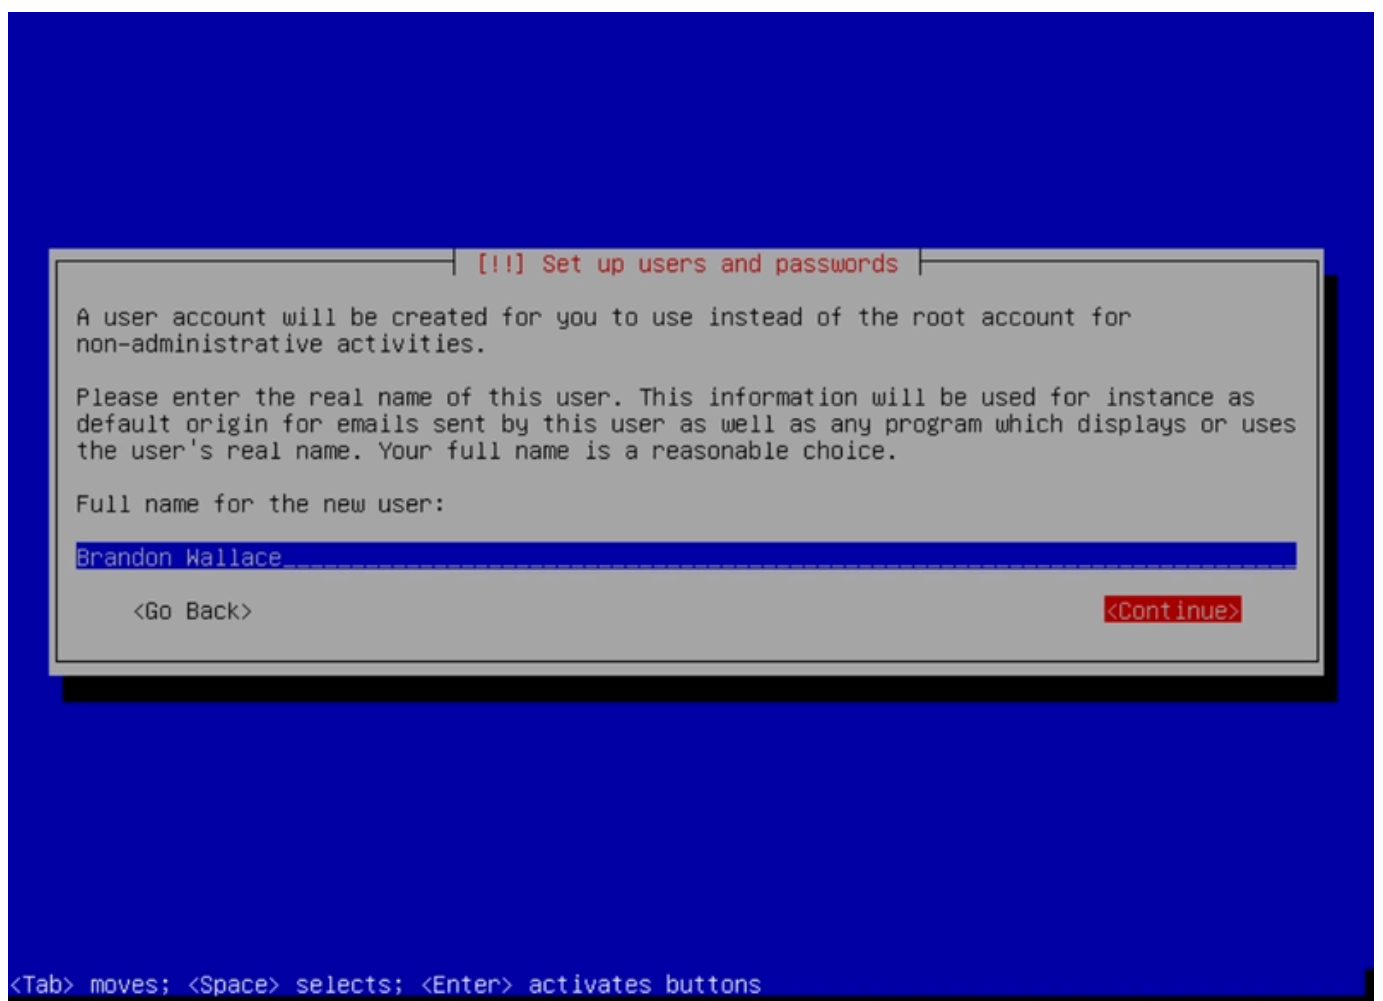

The screenshot shows the 'Set up users and passwords' screen in the Rocky Linux 9.0 installation. The title bar at the top of the window says 'Set up users and passwords'. The main text reads: 'A user account will be created for you to use instead of the root account for non-administrative activities. Please enter the real name of this user. This information will be used for instance as default origin for emails sent by this user as well as any program which displays or uses the user's real name. Your full name is a reasonable choice.' Below this, it asks 'Full name for the new user:' and shows a text input field with 'Brandon Wallace' entered. At the bottom of the window, there are two buttons: '<Go Back>' and '<Continue>'. At the very bottom of the screen, a footer line reads: '<Tab> moves; <Space> selects; <Enter> activates buttons'.

User AD (attention il n'est pas possible de mettre de point, le nom sera

temporaire, dans la suite de la procédure on changera le user)

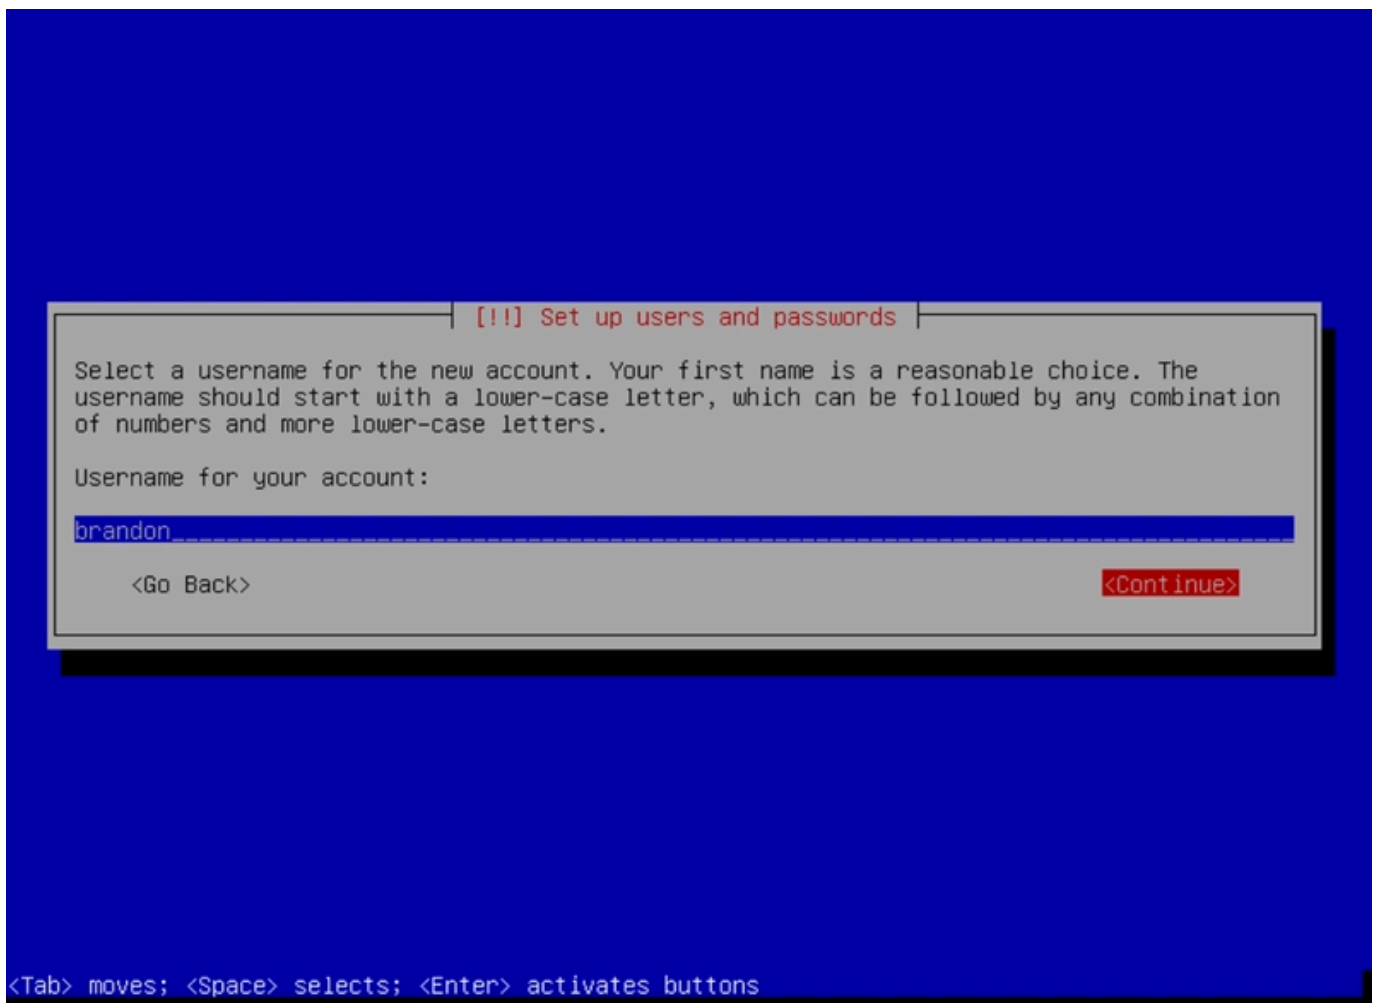

Mettre un mdp temporaire (bien le retenir)


[!!] Set up users and passwords	
A good password will contain a mixture of letters, numbers and punctuation and should be changed at regular intervals.	
Choose a password for the new user:	
☐ Show Password in Clear	
Go Back	Continue

<Tab> moves; <Space> selects; <Enter> activates buttons


[!!] Set up users and passwords	
Please enter the same user password again to verify you have typed it correctly.	
Re-enter password to verify:	
☐ Show Password in Clear	
Go Back	Continue

<Tab> moves; <Space> selects; <Enter> activates buttons


Configure clock

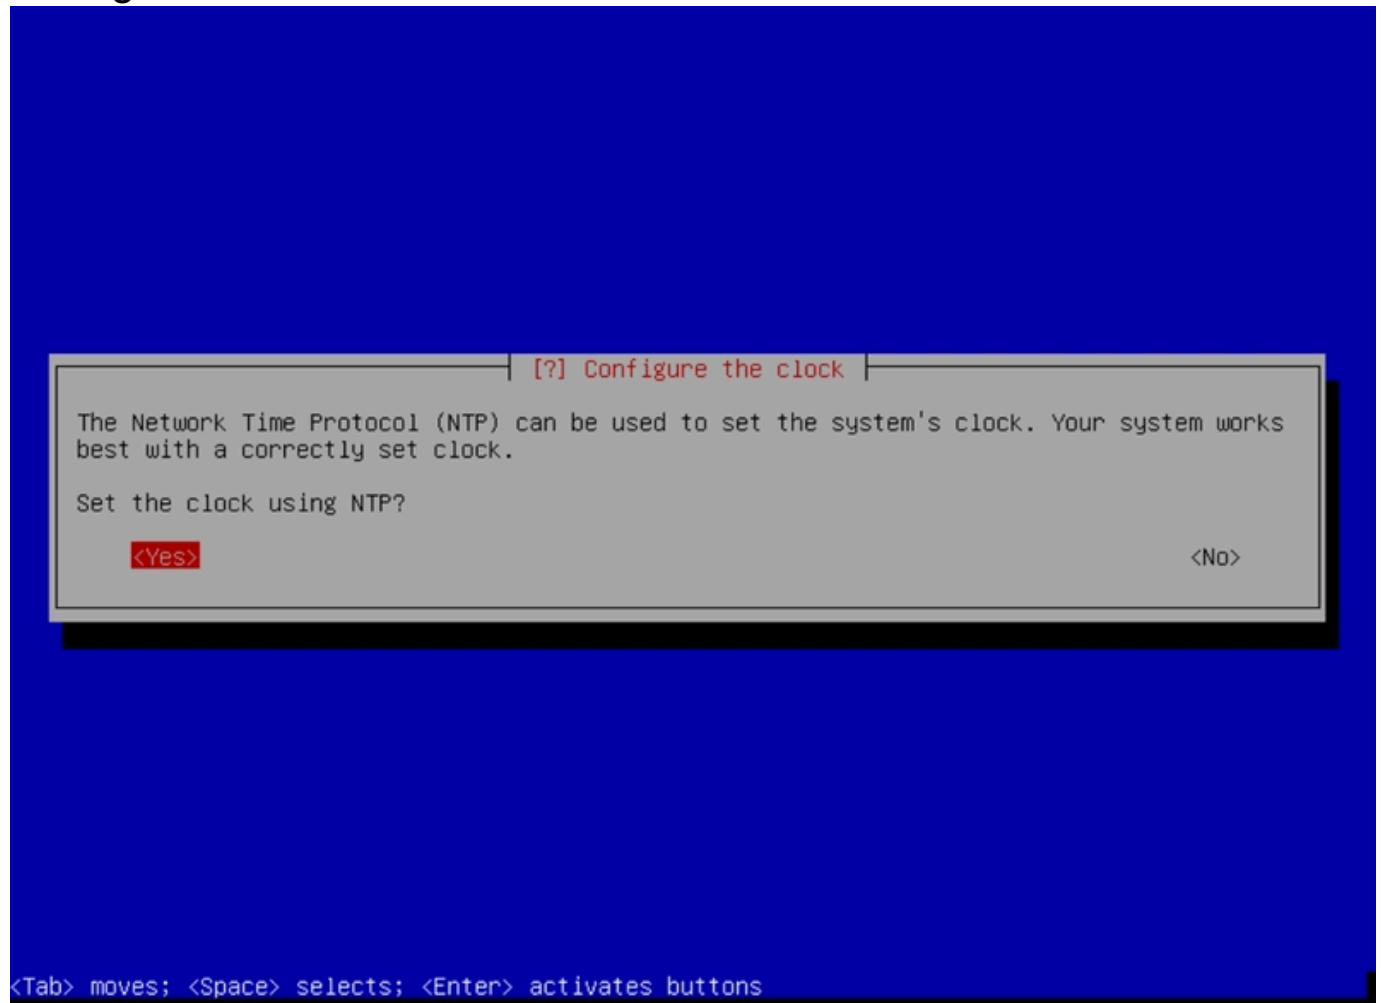


Ne rien remplir juste cliquer sur continue

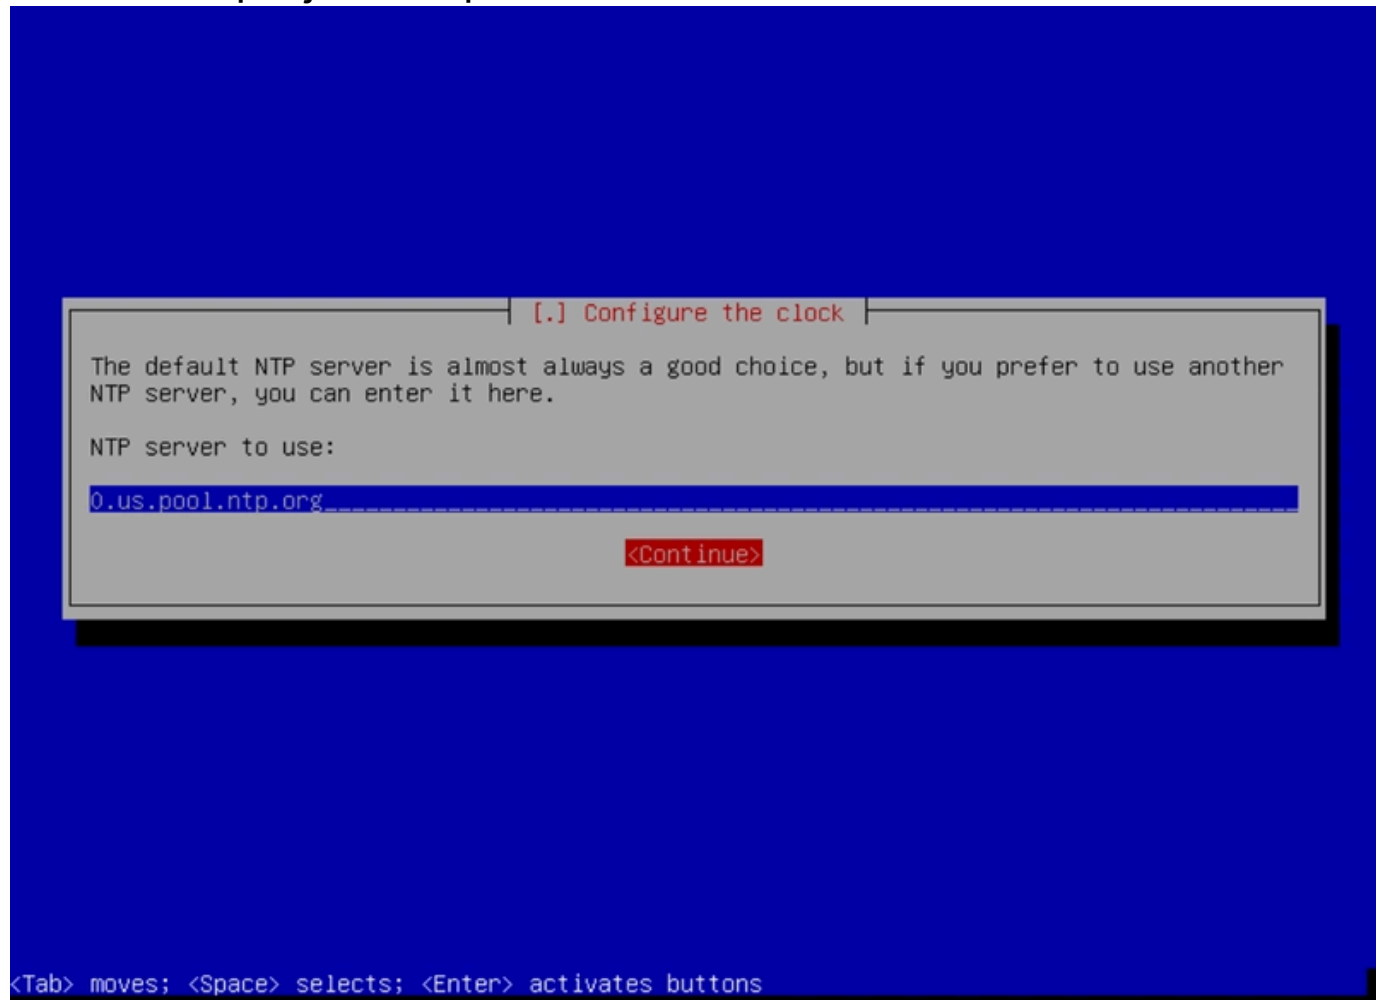

Choisir UTC

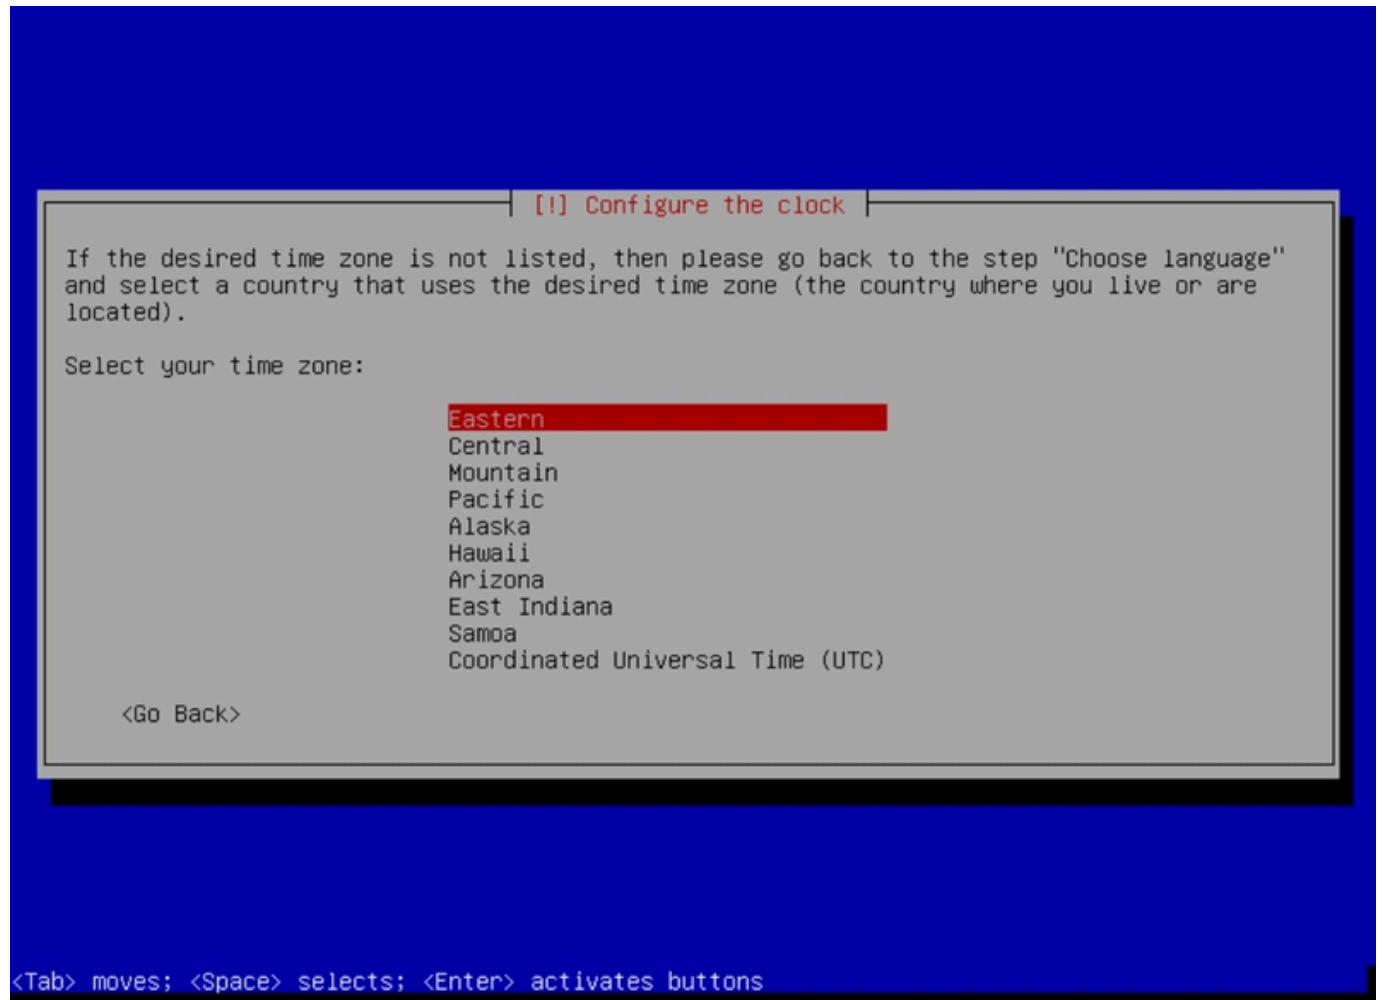


Detect disk

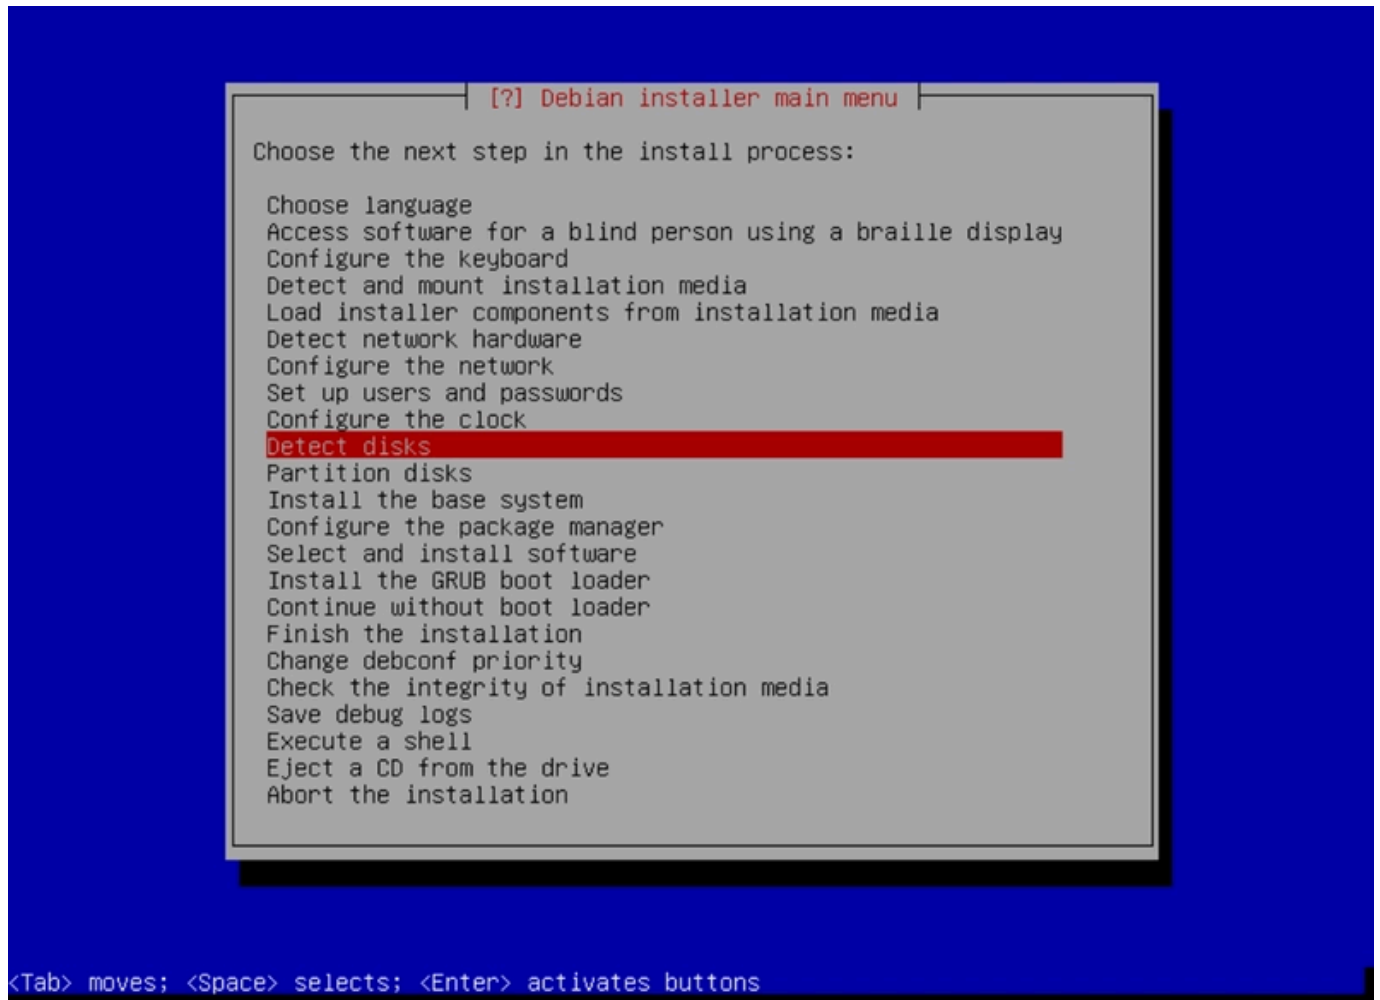


Partition disk : Guided - use entire disk and set up encrypted LVM




choose NVMe (cette étape prend du temps)

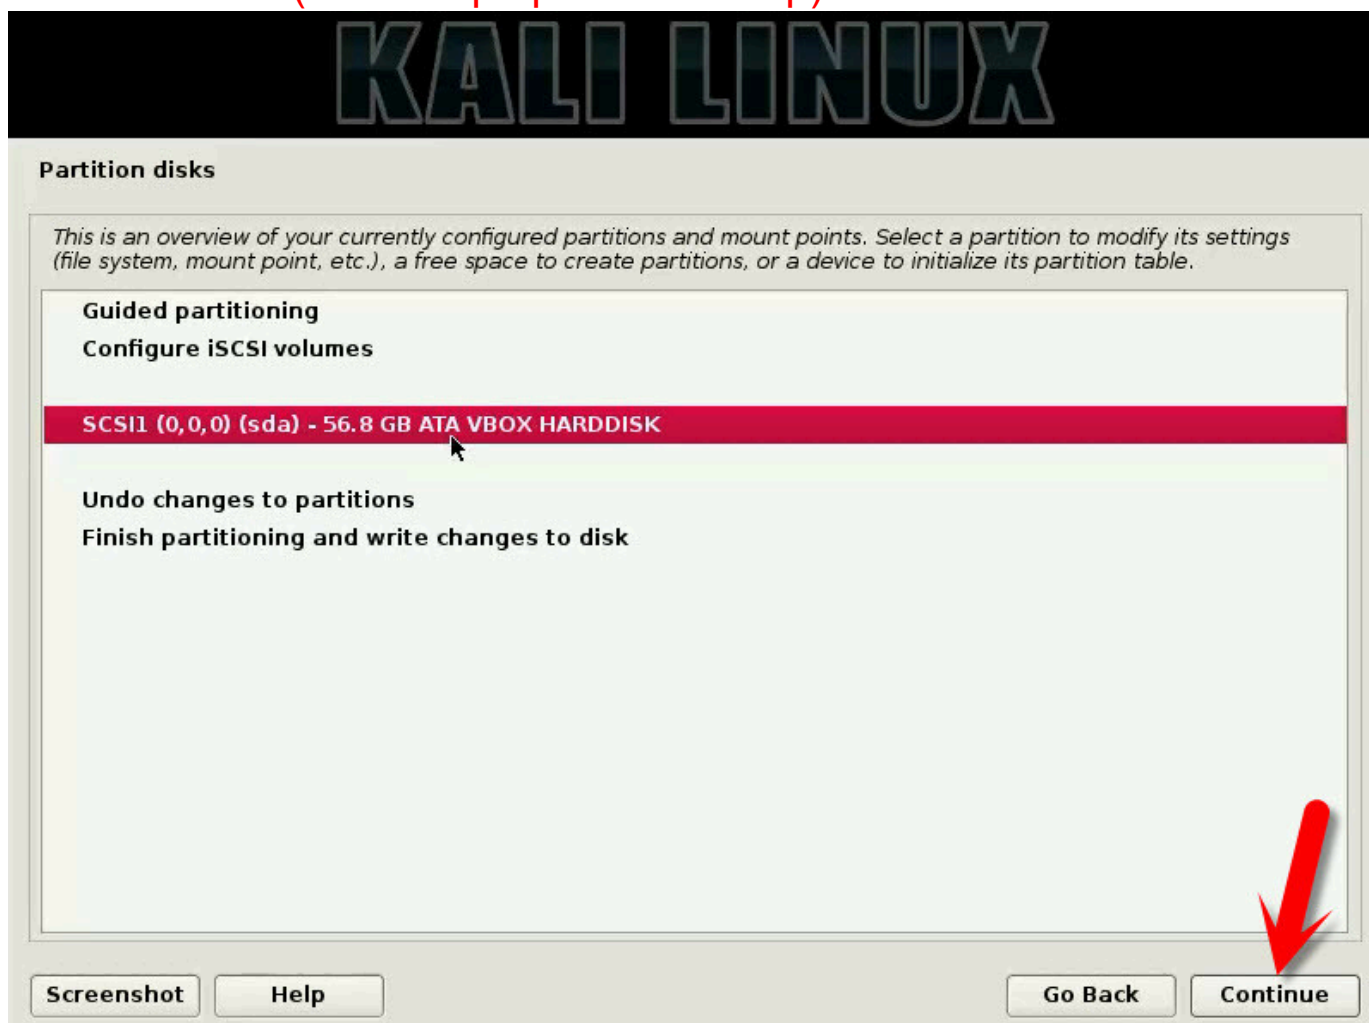


Choose : separate /home ; /var and /tmp partitions

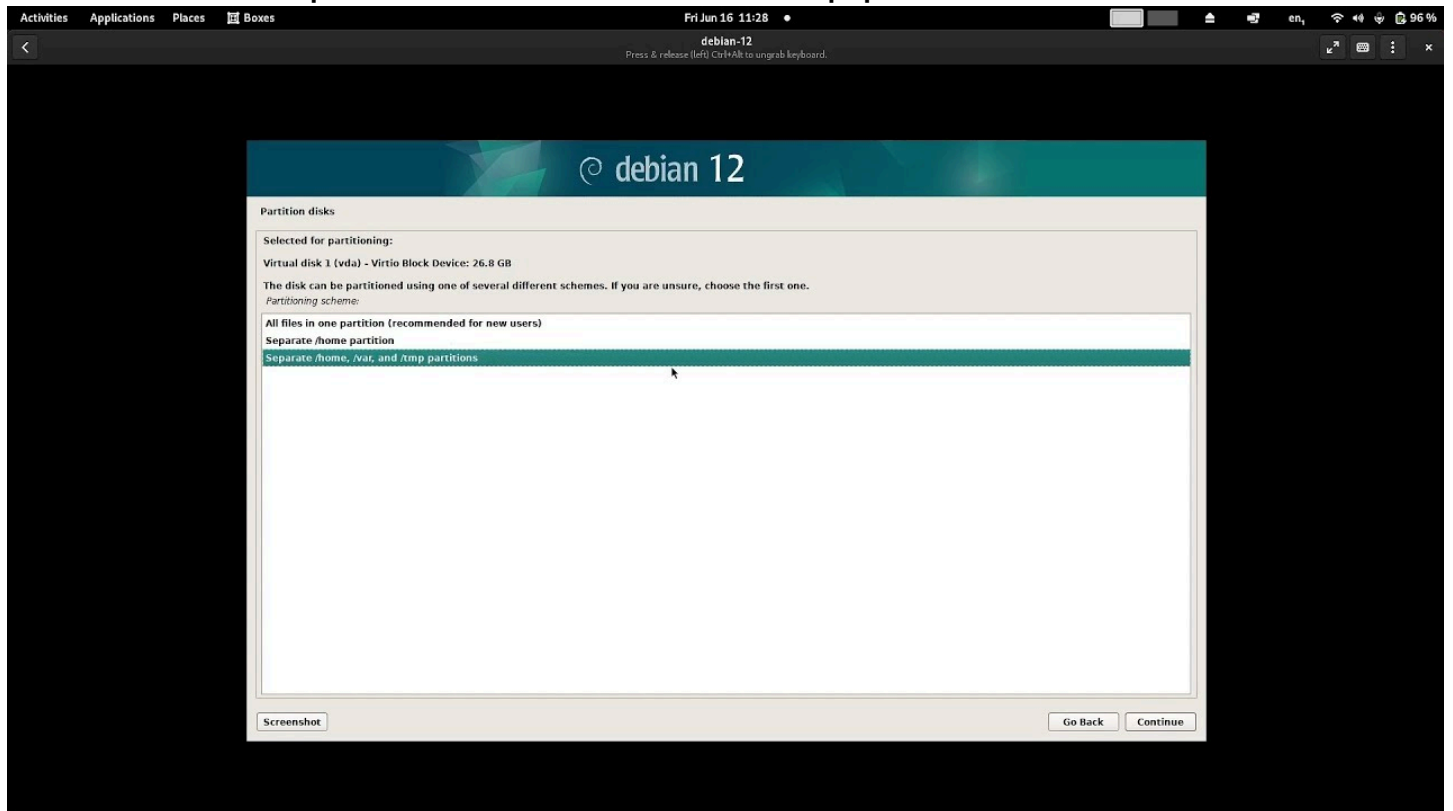

Select Finish Vérifié que le boot fait au minima 1gb and select YES

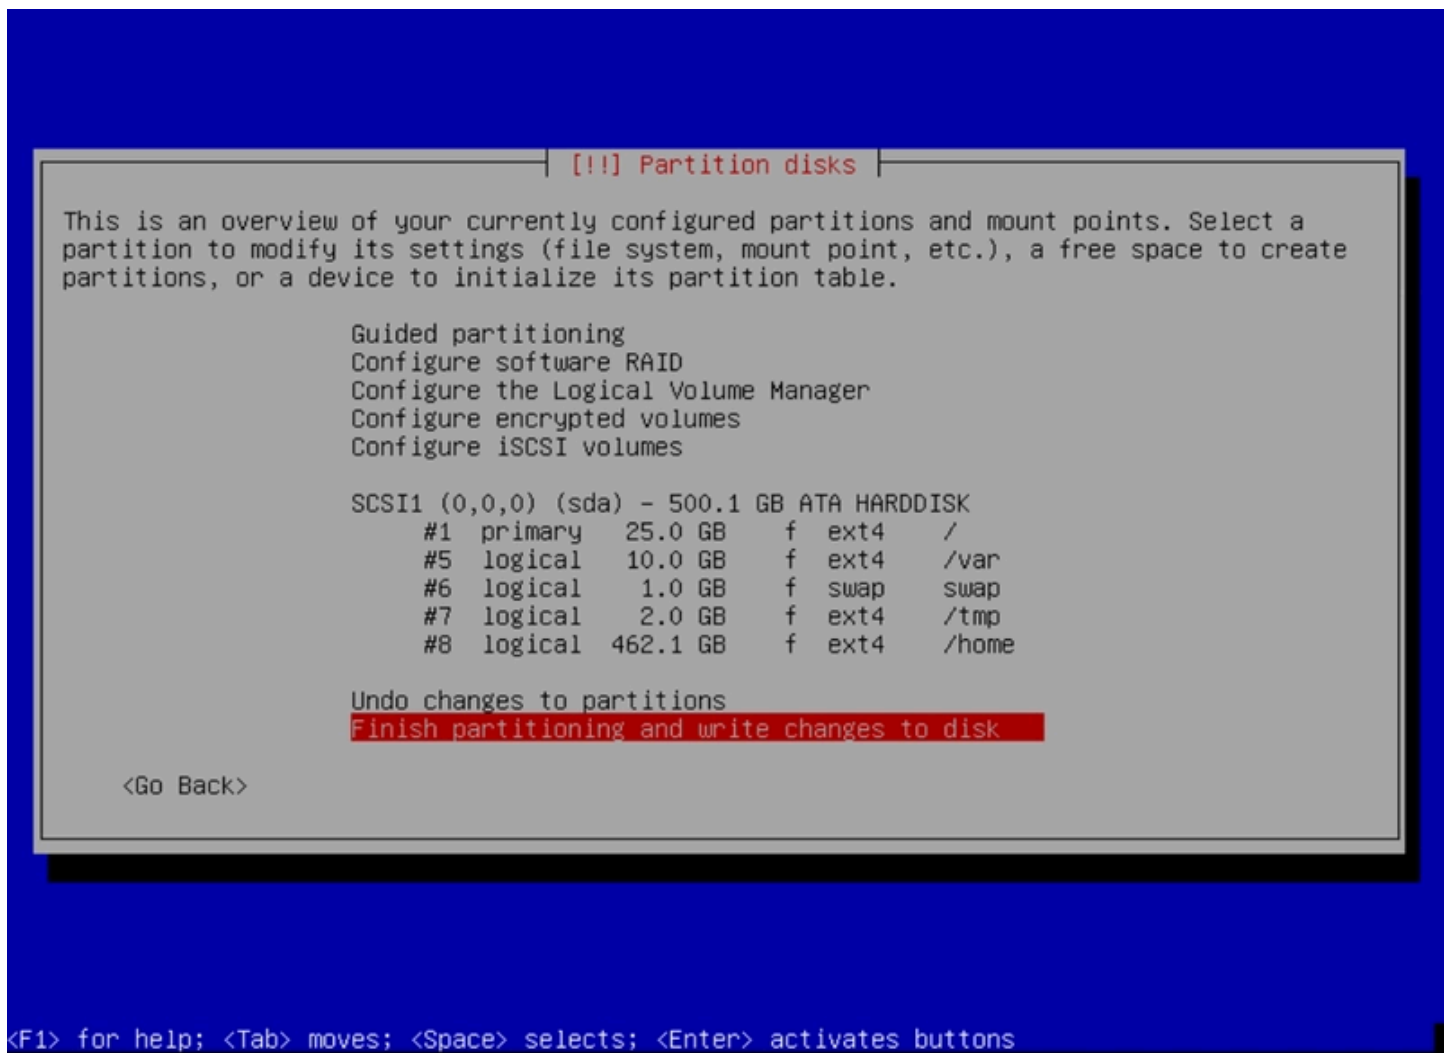

The base system

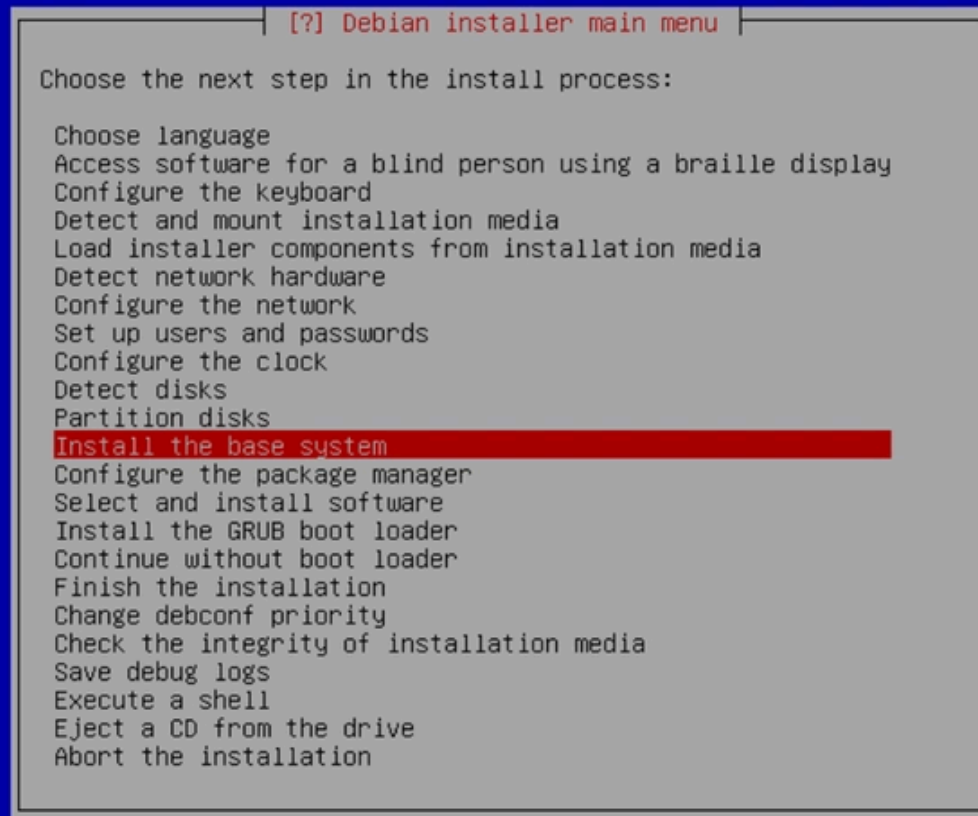

<Tab> moves; <Space> selects; <Enter> activates buttons

Sélectionner : generic: include all available drivers

[?] Install the base system

The primary function of an initrd is to allow the kernel to mount the root file system. It therefore needs to contain all drivers and supporting programs required to do that.

A generic initrd is much larger than a targeted one and may even be so large that some boot loaders are unable to load it but has the advantage that it can be used to boot the target system on almost any hardware. With the smaller targeted initrd there is a very small chance that not all needed drivers are included.

Drivers to include in the initrd:


generic: include all available drivers

targeted: only include drivers needed for this system


<Go Back>

<Tab> moves; <Space> selects; <Enter> activates buttons


The package manager : NO

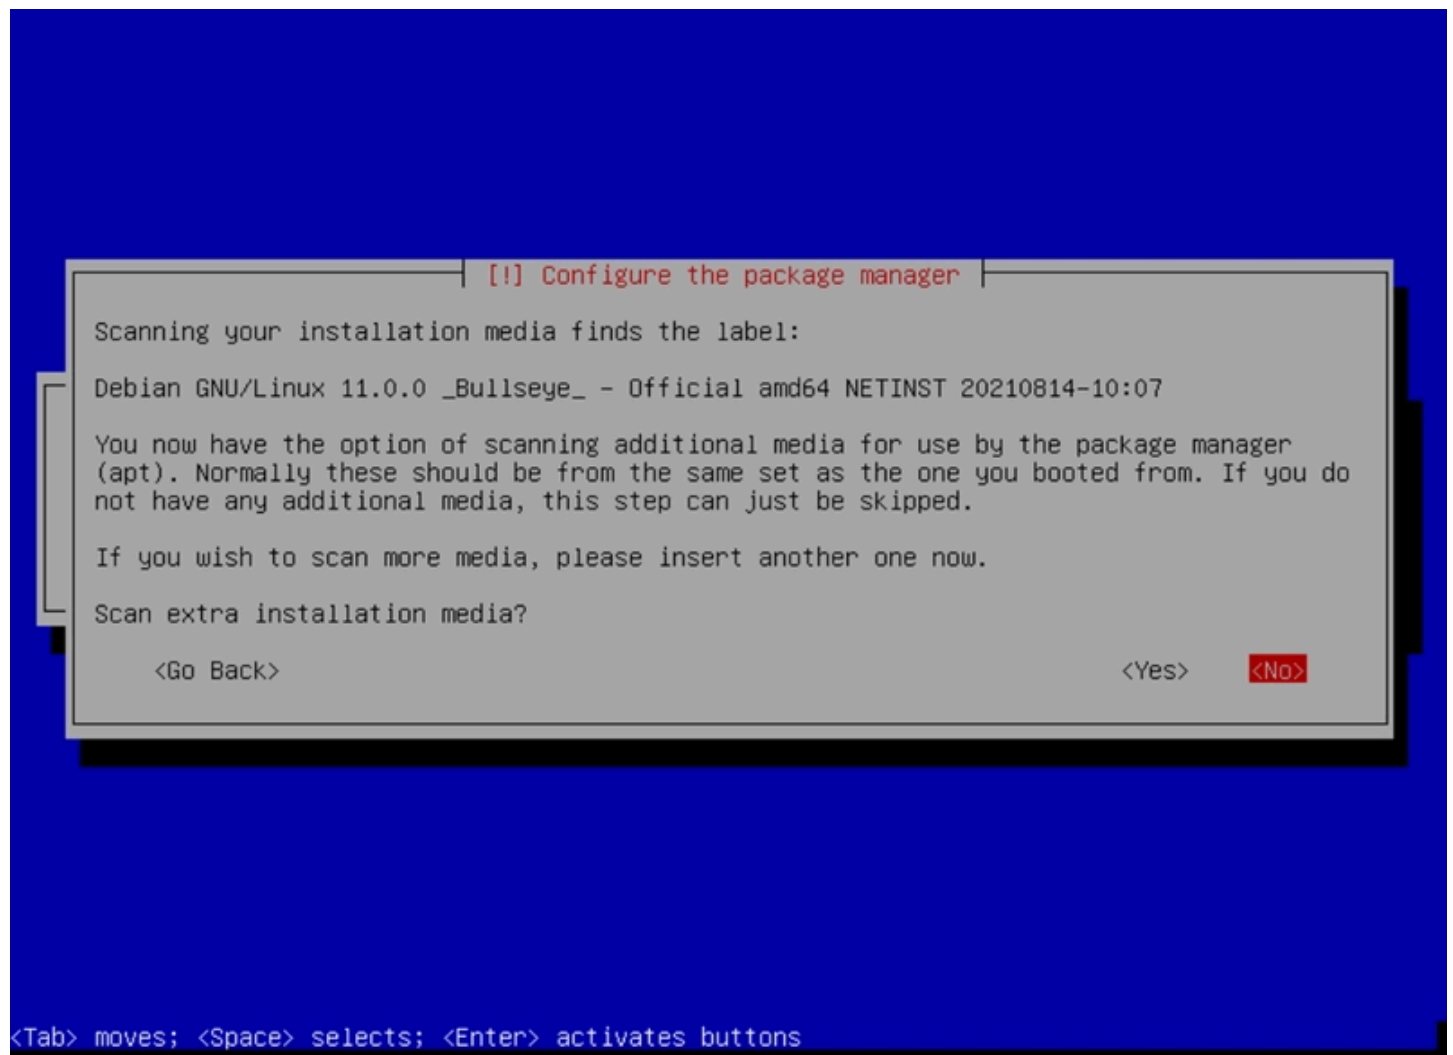


Network mirror : YES and select http

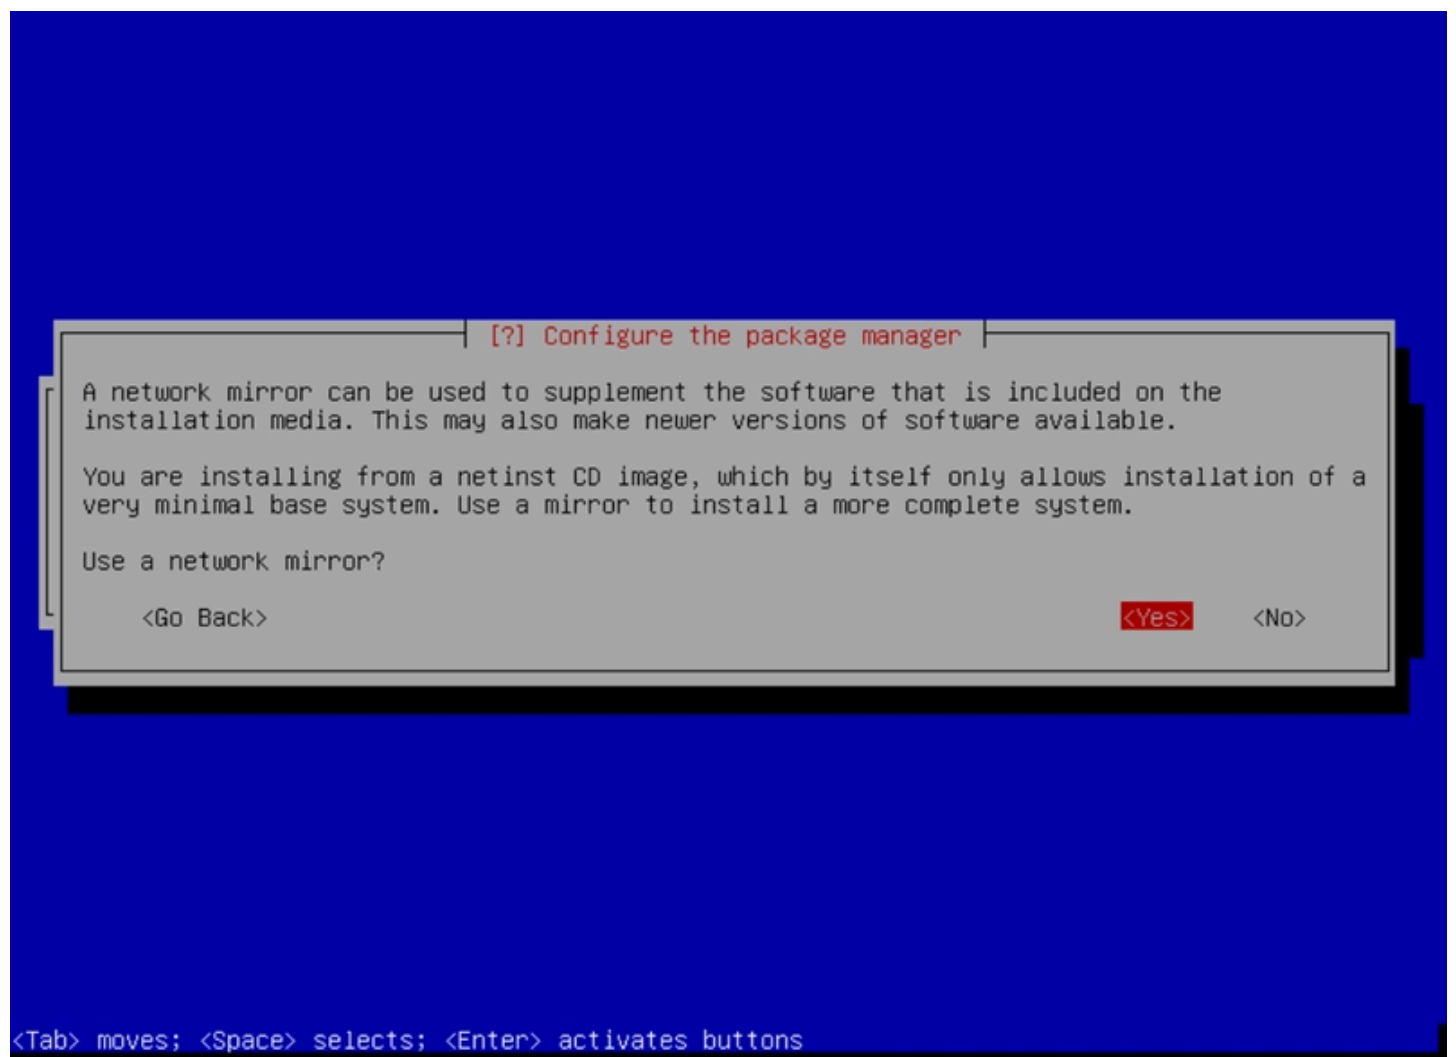


Mirror country : France

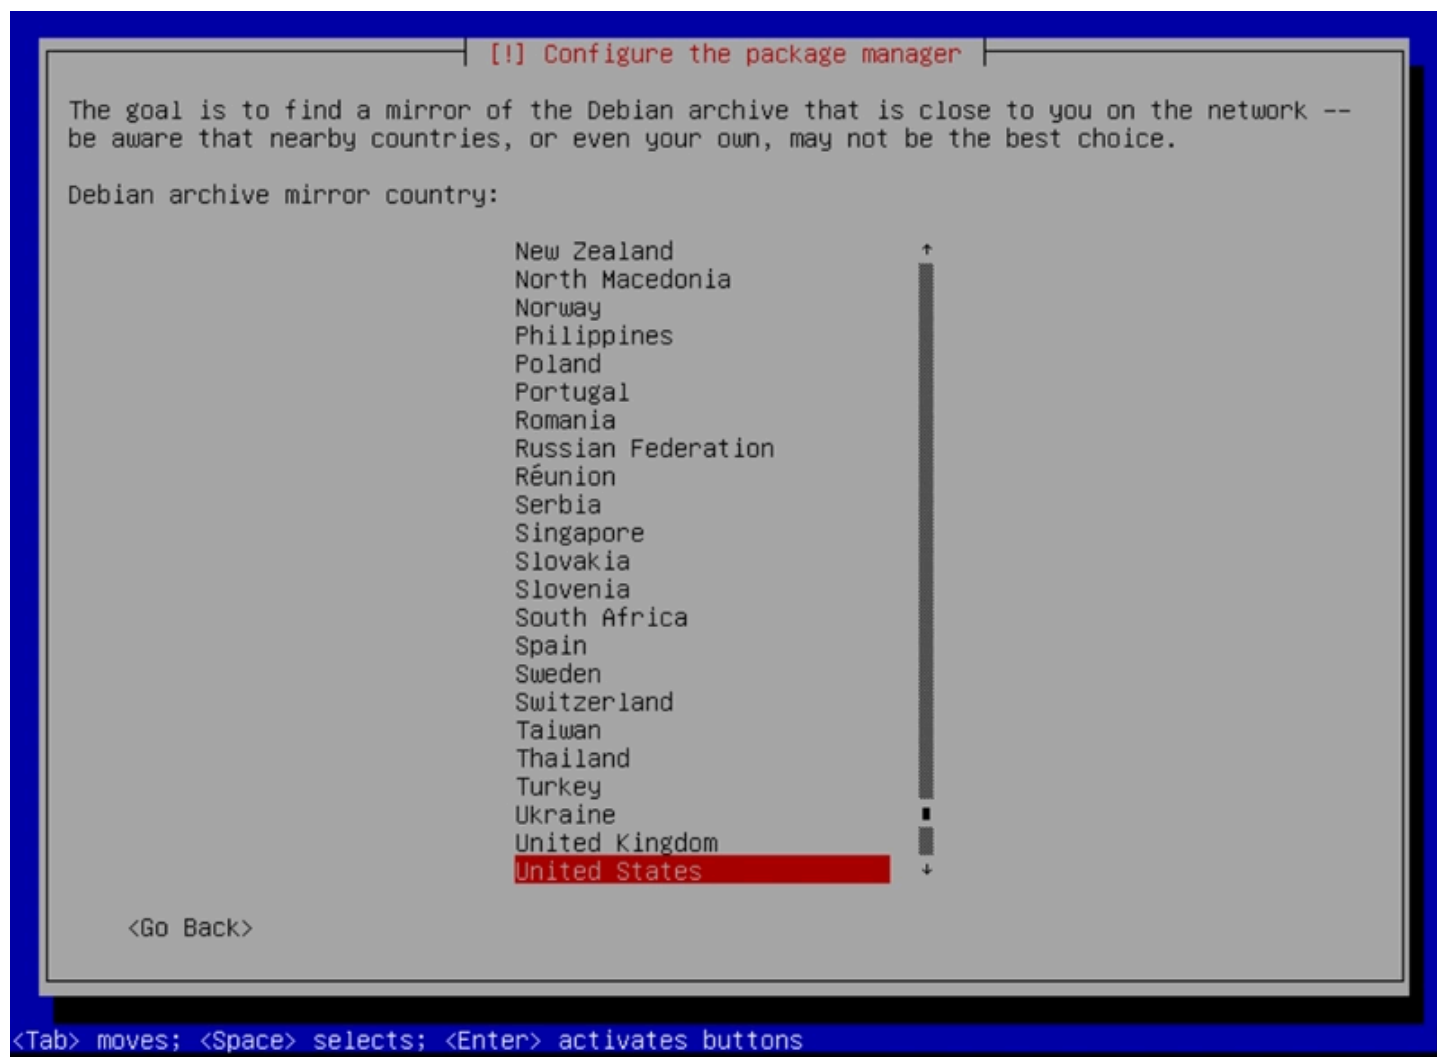


Choisir Debian fr.org

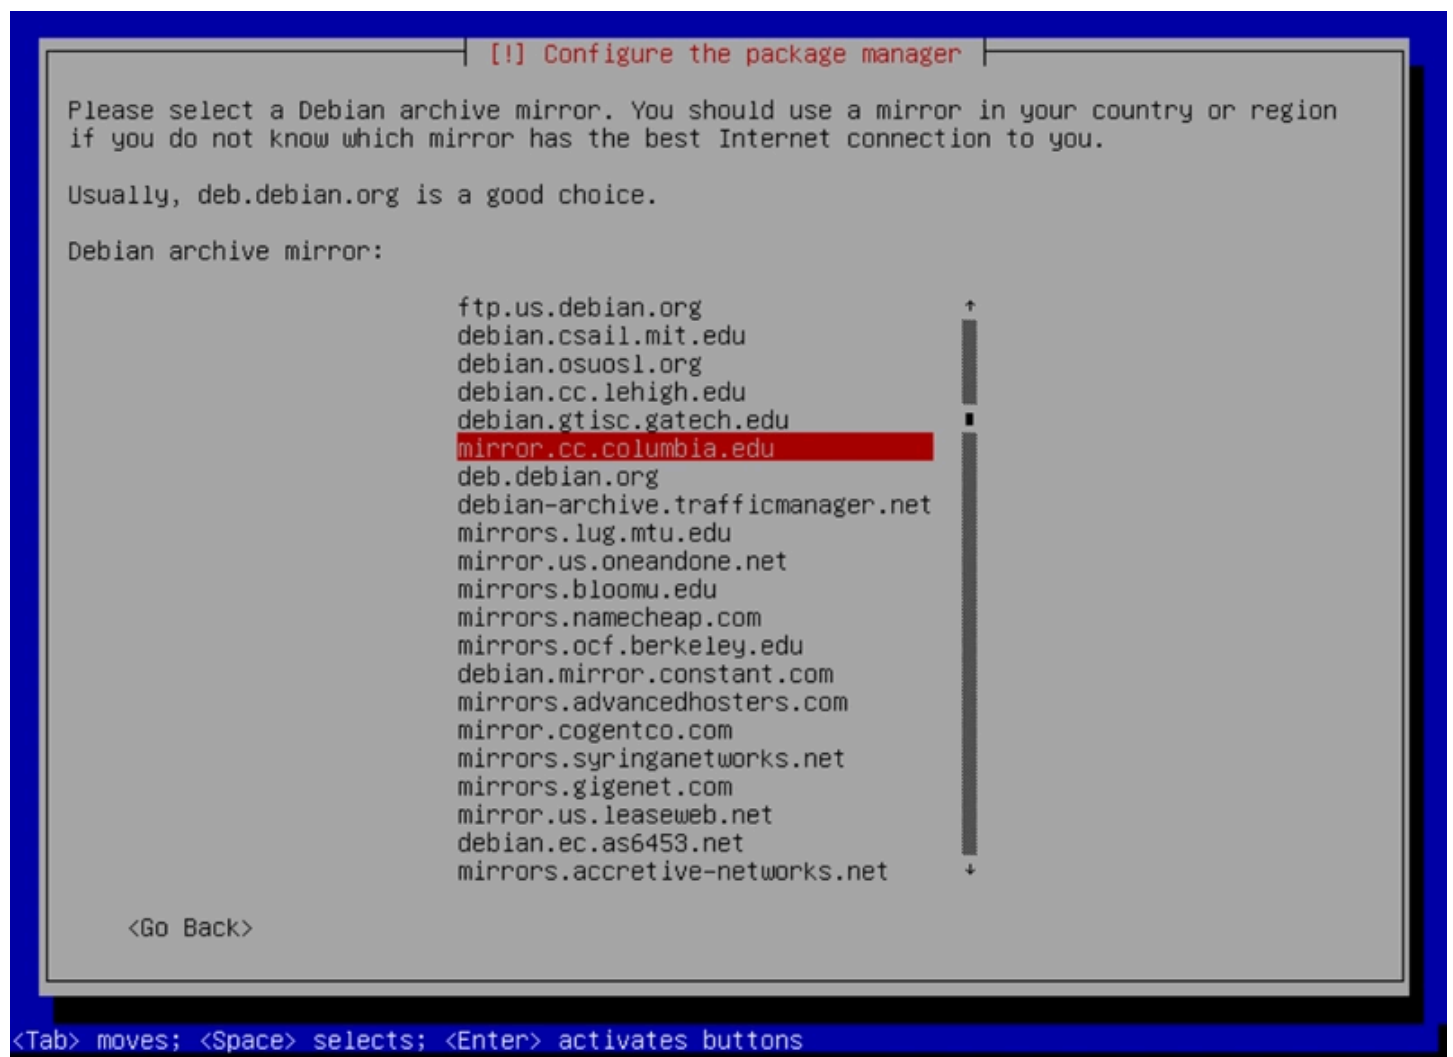

Ne rien sélectionner juste continue

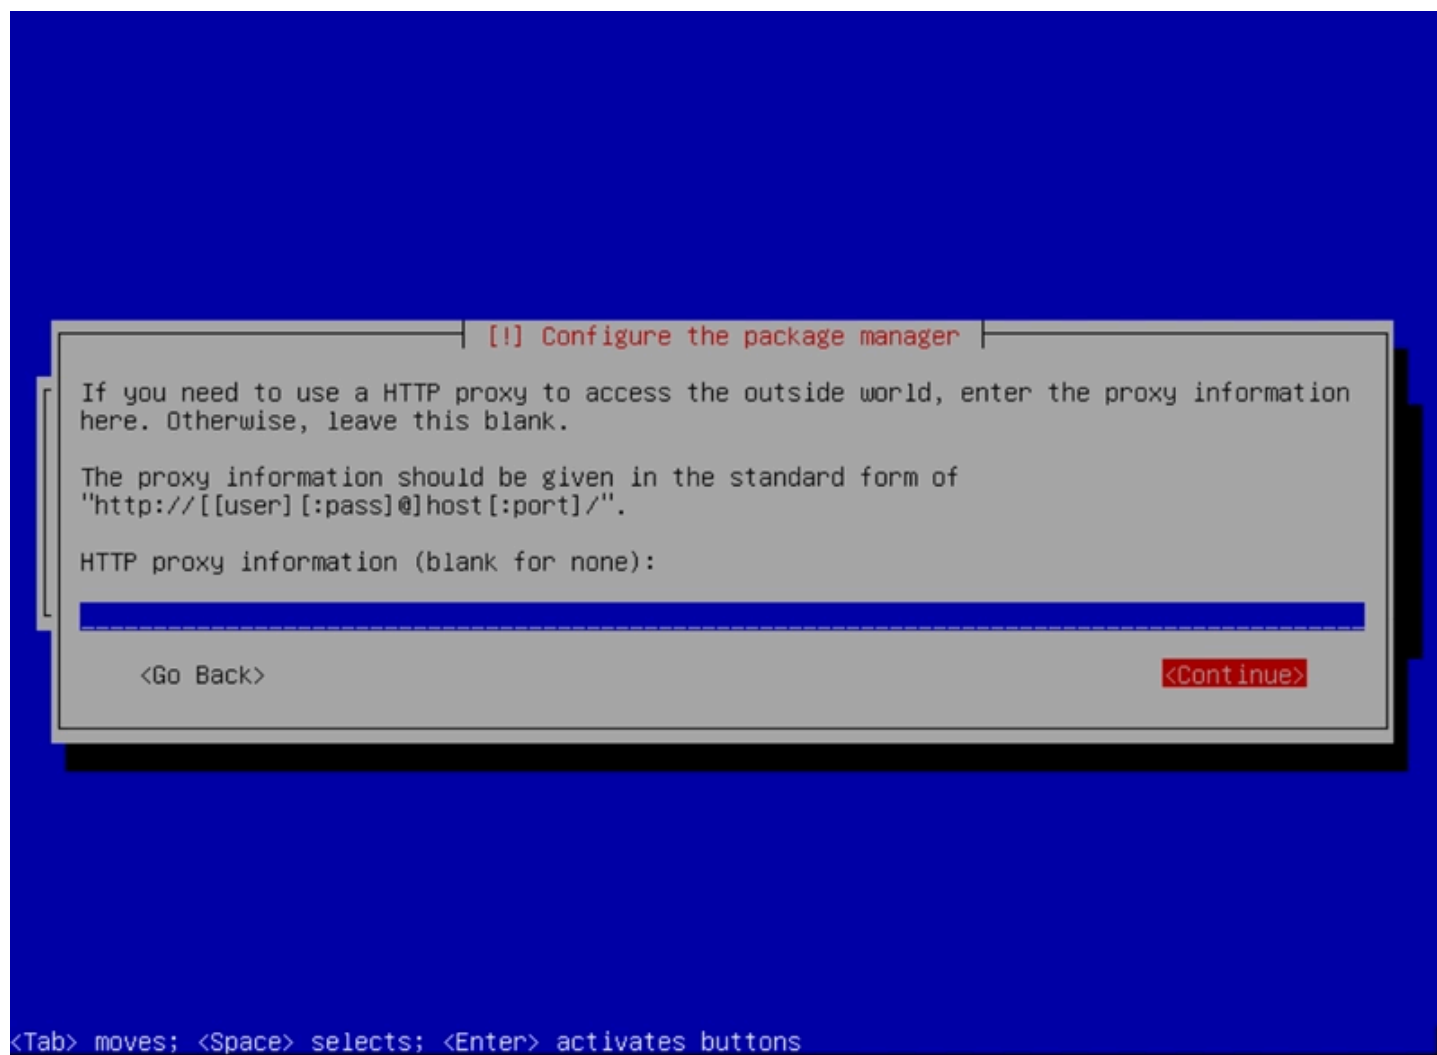

Use non-free software select : YES

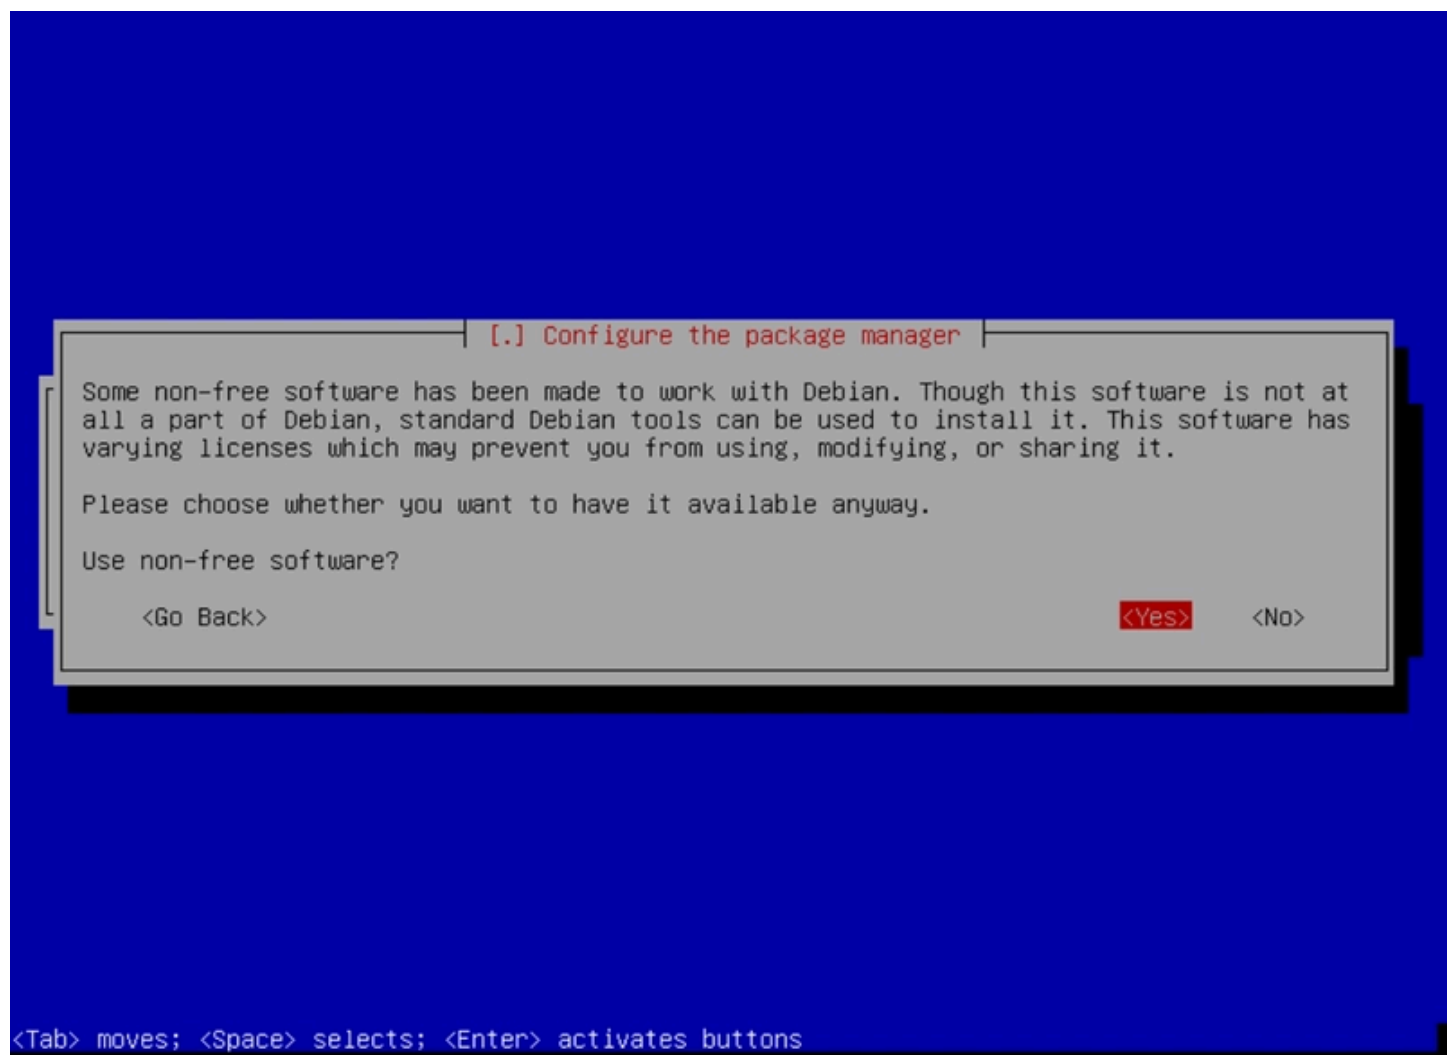

APT select : NO

[.] Configure the package manager

By default source repositories are listed in /etc/apt/sources.list (with appropriate "deb-src" lines) so that "apt-get source" works. However, if you don't need this feature, you can disable those entries and save some bandwidth during "apt-get update" operations.

Enable source repositories in APT?

<Go Back>

<Yes>

<No>

<Tab> moves; <Space> selects; <Enter> activates buttons

Sélectionner juste : security update -> continue

[?] Configure the package manager

Debian has two services that provide updates to releases: security and release updates.

Security updates help to keep your system secured against attacks. Enabling this service is strongly recommended.

Release updates provide more current versions for software that changes relatively frequently and where not having the latest version could reduce the usability of the software. It also provides regression fixes. This service is only available for stable and oldstable releases.

Backported software are adapted from the development version to work with this release. Although this software has not gone through such complete testing as that contained in the release, it includes newer versions of some applications which may provide useful features. Enabling backports here does not cause any of them to be installed by default; it only allows you to manually select backports to use.

Services to use:


```
[*] security updates (from security.debian.org)
[ ] release updates
[ ] backported software
```

<Go Back>

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

Select and install software

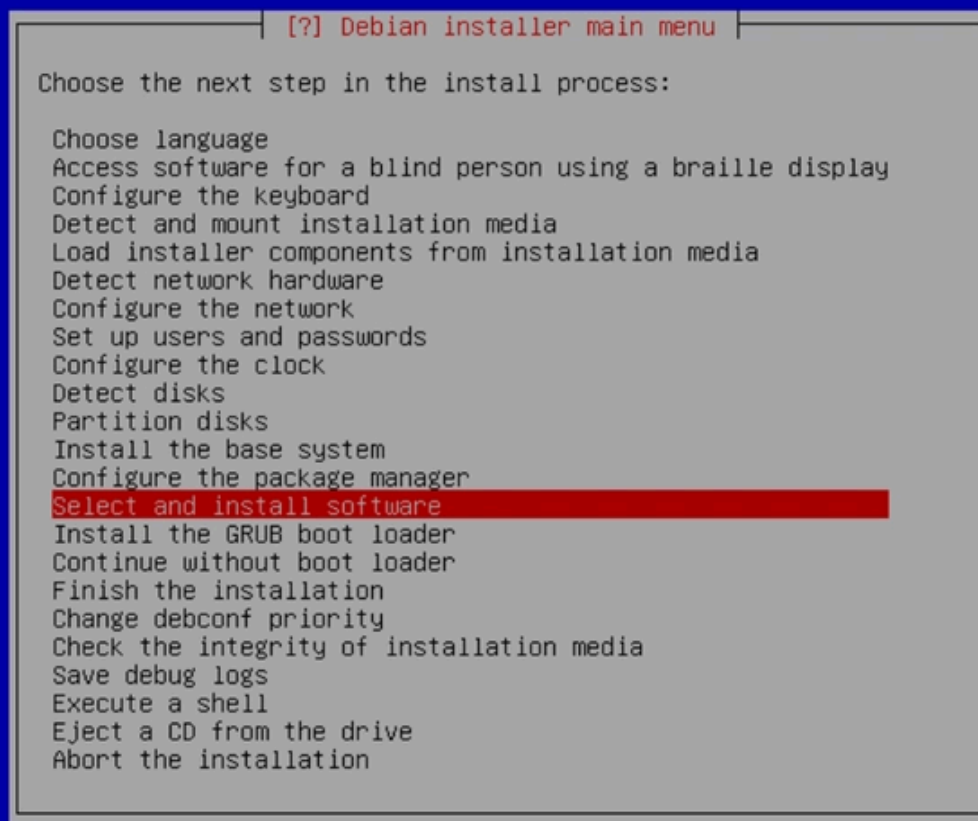

<Tab> moves; <Space> selects; <Enter> activates buttons

Configuring discover : install security updates automatically

[?] Configuring discover

Applying updates on a frequent basis is an important part of keeping the system secure.

By default, security updates are not automatically installed, as security advisories should be reviewed before manual installation of the updates using standard package management tools.

Alternatively the unattended-upgrades package can be installed, which will install security updates automatically. Note however that automatic installation of updates may occasionally cause unexpected downtime of services provided by this machine in the rare cases where the update is not fully backward-compatible, or where the security advisory requires the administrator to perform some other manual operation.

Updates management on this system:

No automatic updates
Install security updates automatically

<Tab> moves; <Space> selects; <Enter> activates buttons

Package survey : **NO**

[!] Configuring popularity-contest

The system may anonymously supply the distribution developers with statistics about the most used packages on this system. This information influences decisions such as which packages should go on the first distribution CD.

If you choose to participate, the automatic submission script will run once every week, sending statistics to the distribution developers. The collected statistics can be viewed on <https://popcon.debian.org/>.

This choice can be later modified by running "dpkg-reconfigure popularity-contest".


Participate in the package usage survey?

<Yes>


<No>

<Tab> moves; <Space> selects; <Enter> activates buttons

Software selection : Debian desktop environment / GNOME / standard system utilities

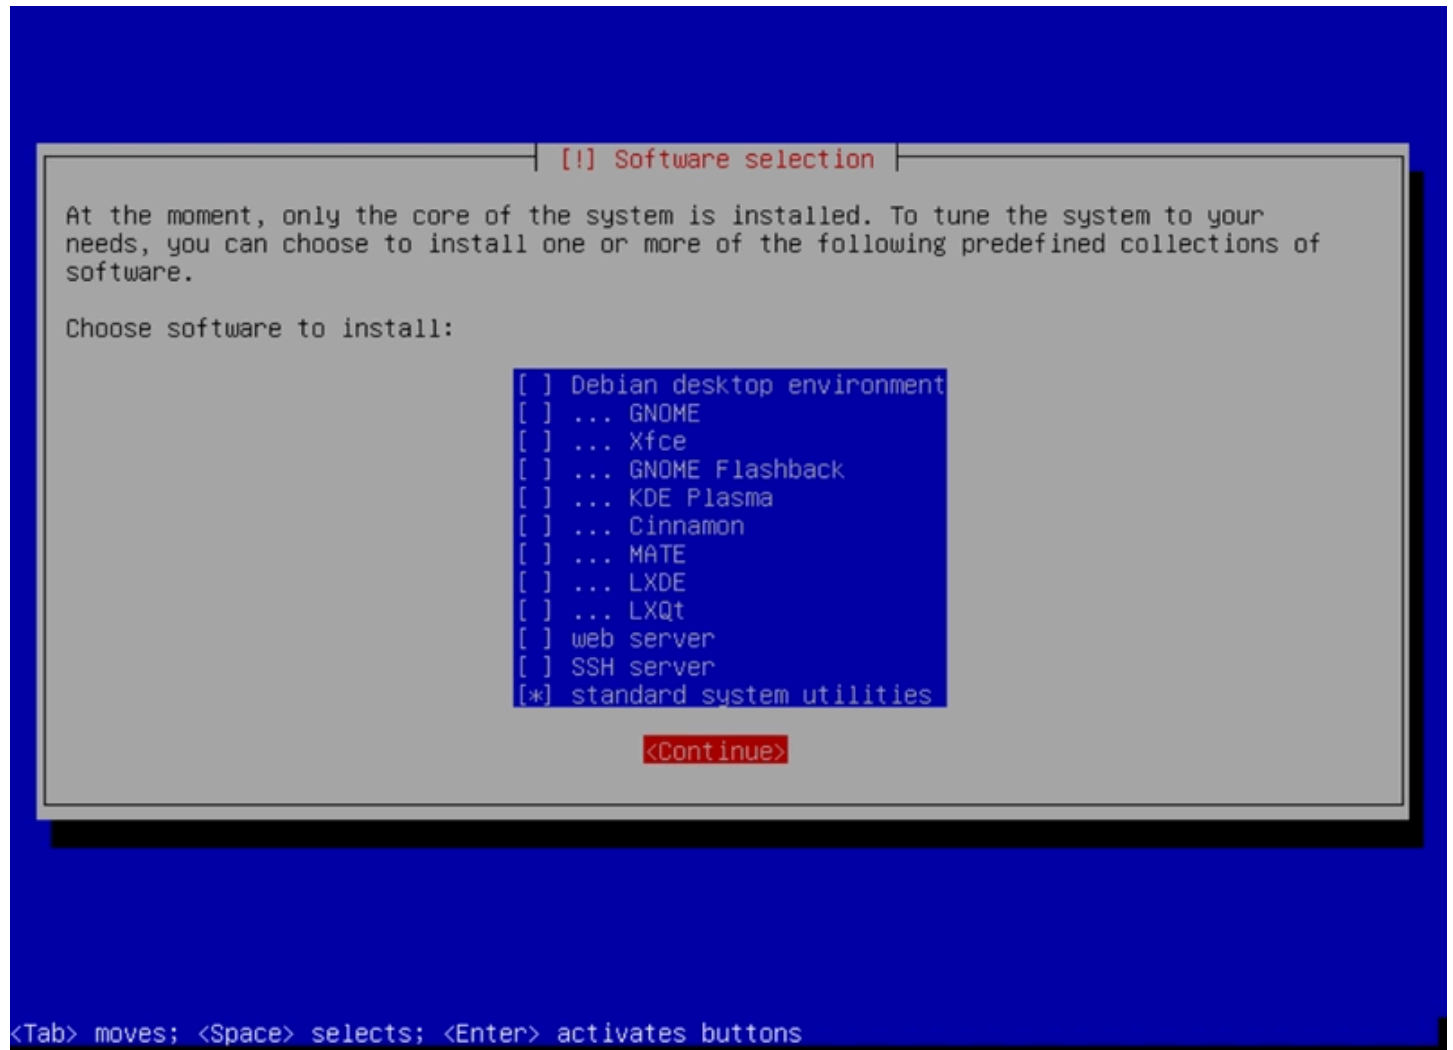


Installation de GRUB

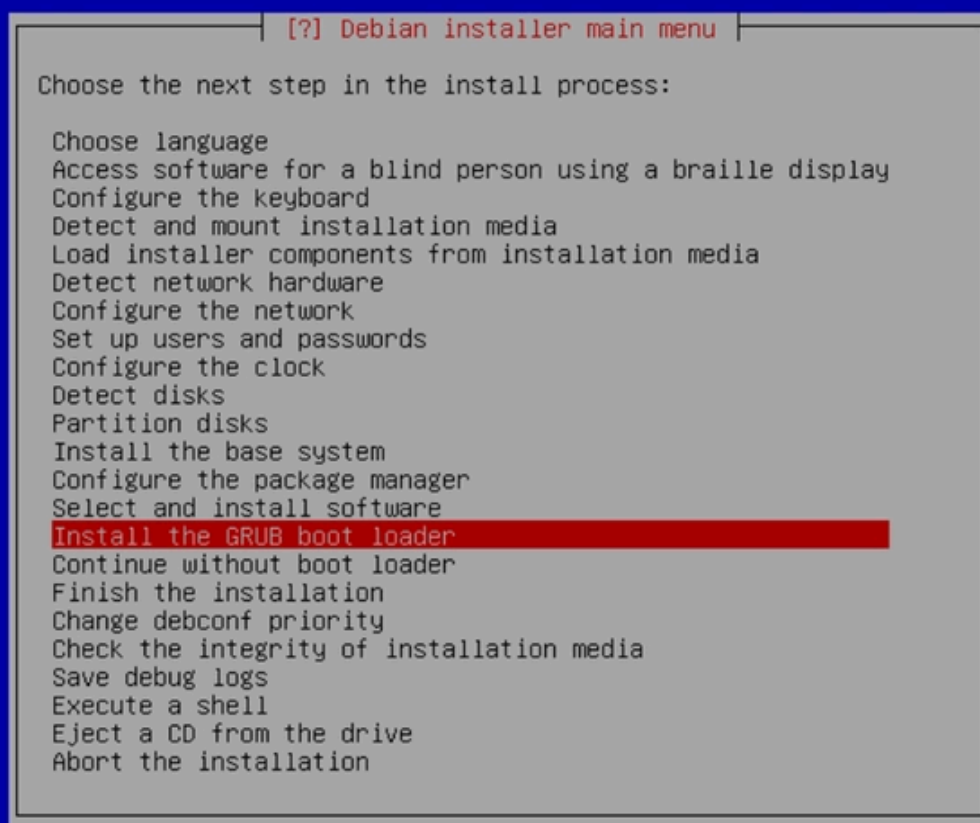


<Tab> moves; <Space> selects; <Enter> activates buttons

Select : NO

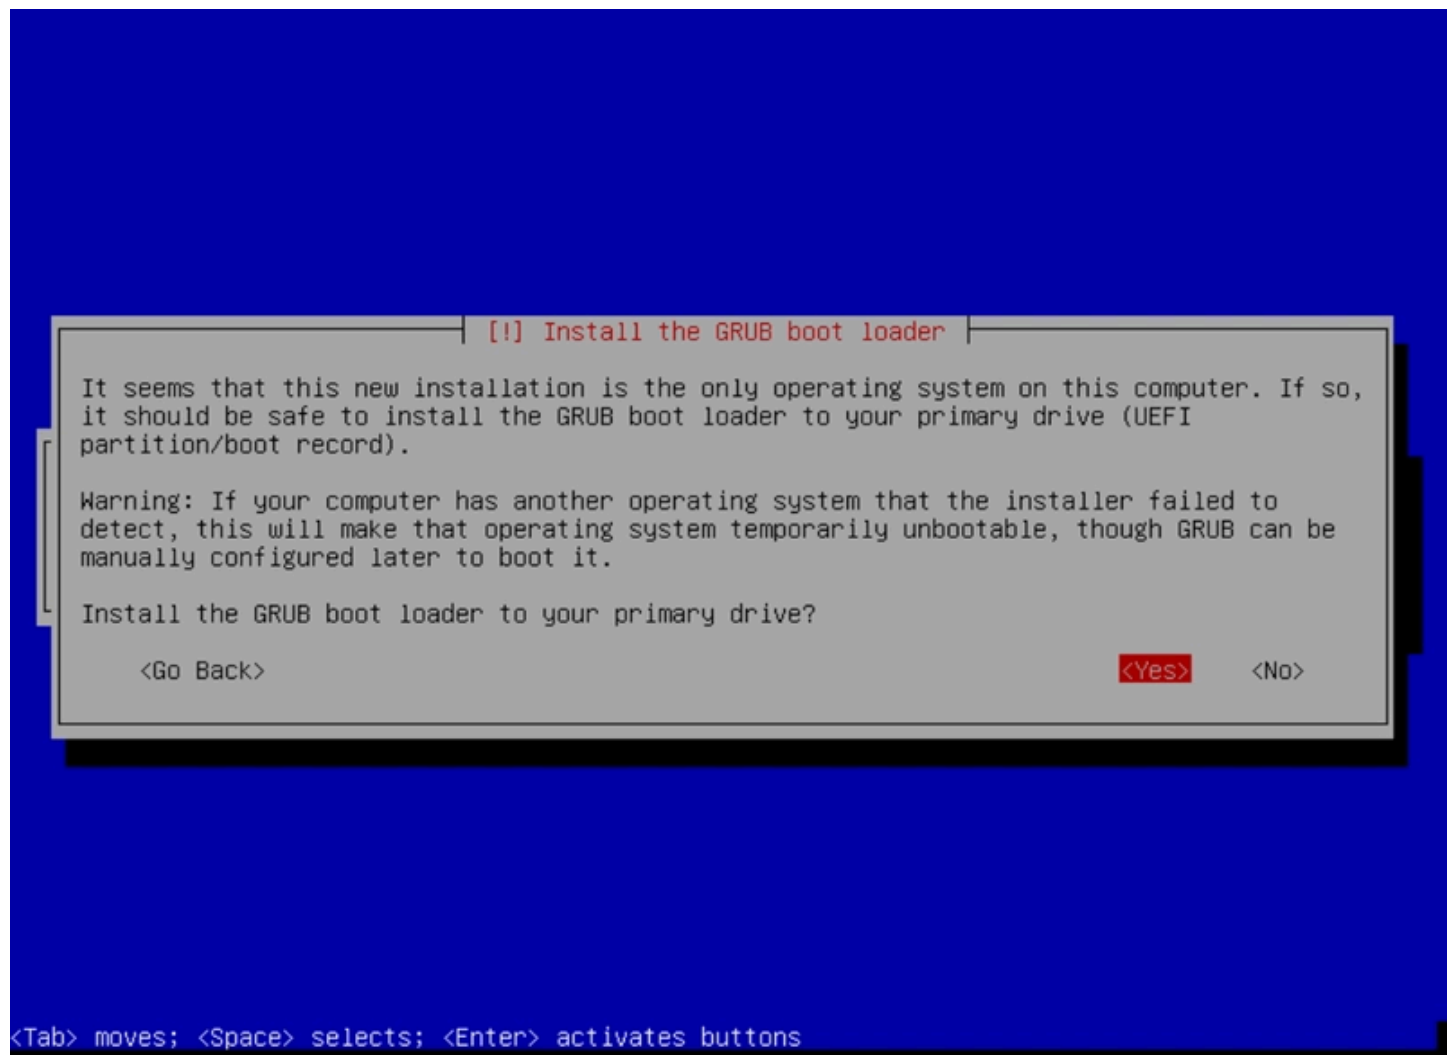


Select YES and OS select : NO

Finish installation

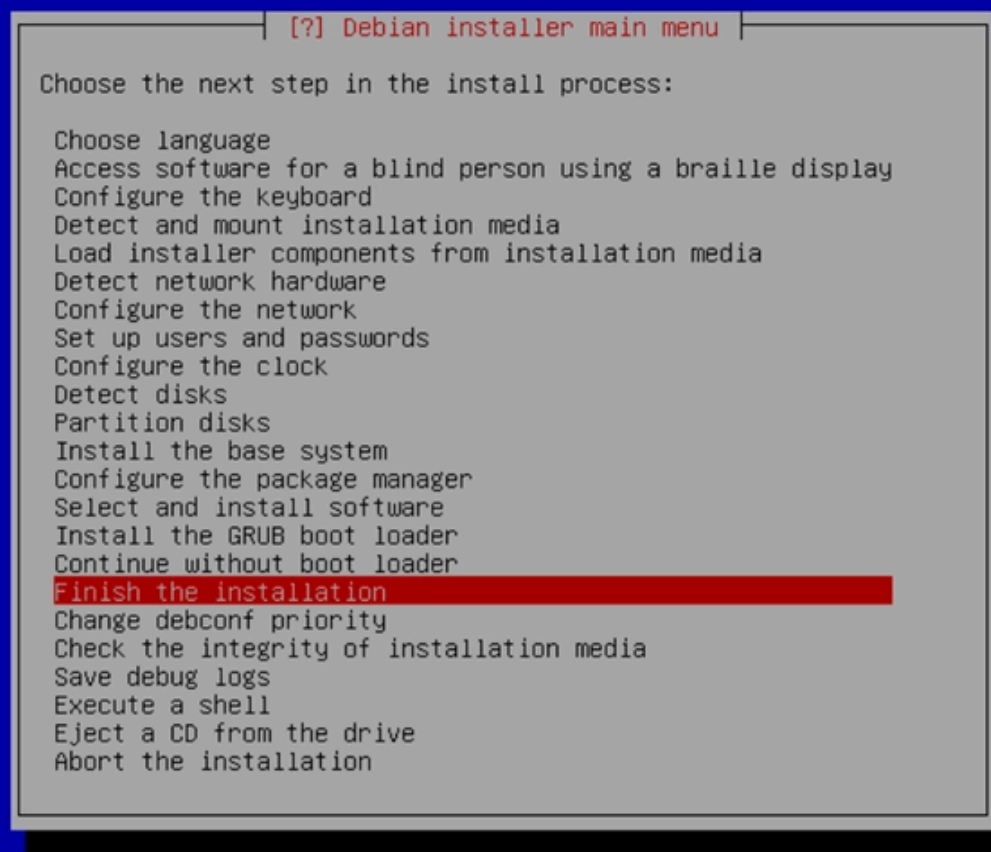


<Tab> moves; <Space> selects; <Enter> activates buttons

Click YES for set to UTC

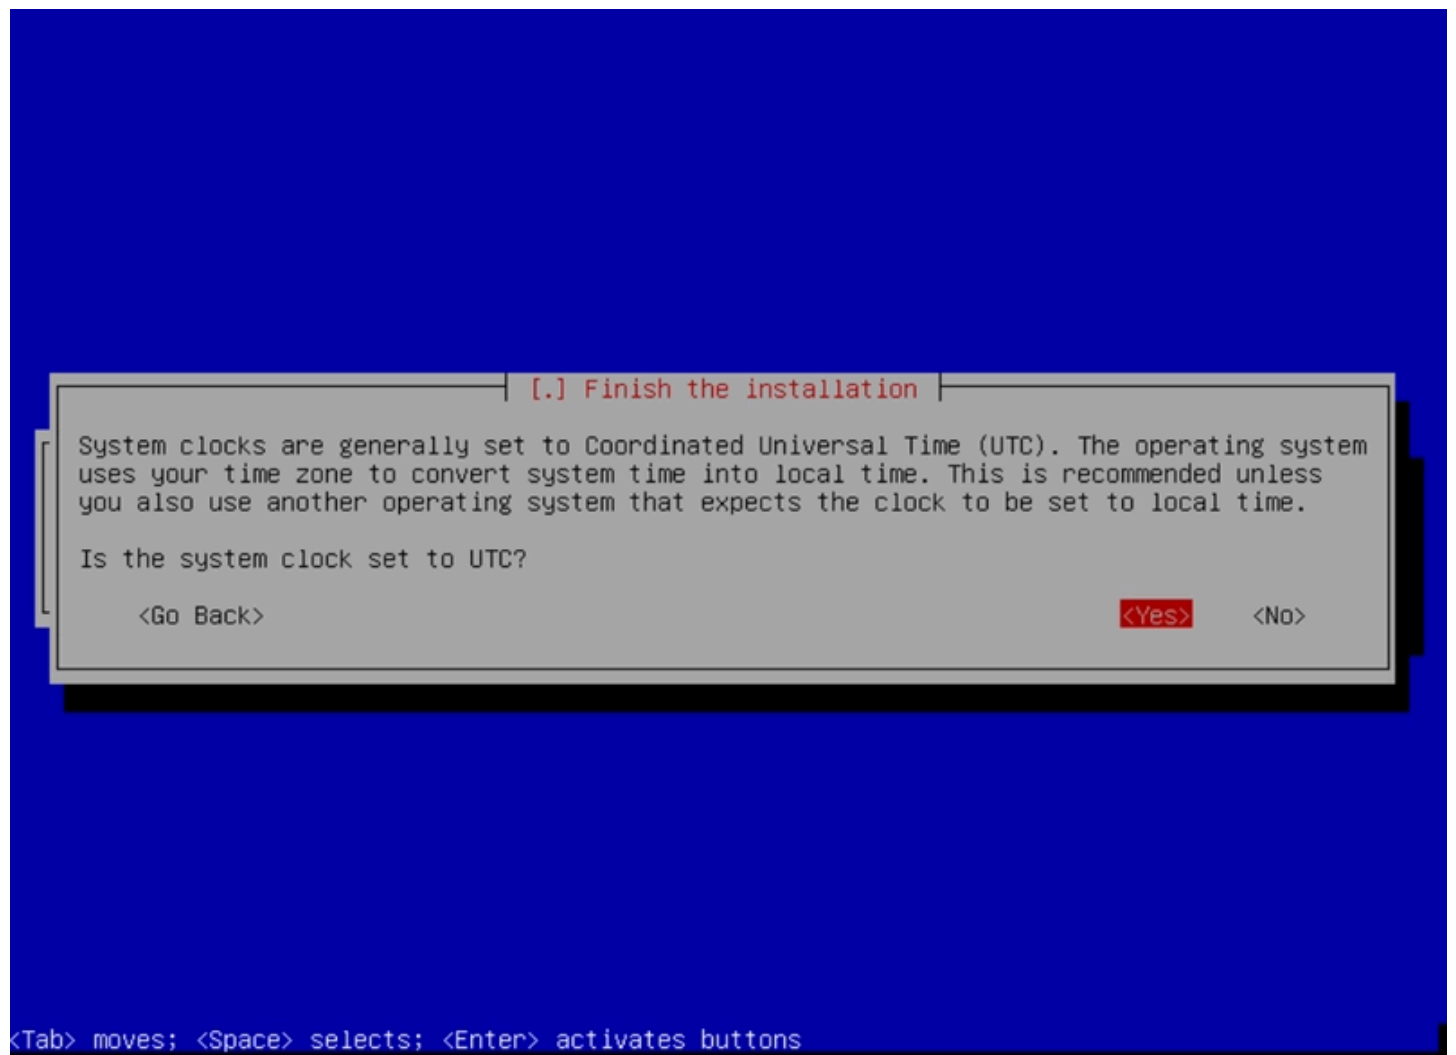


Suite de la procédure Linux

- Entrer le mdp provisoire

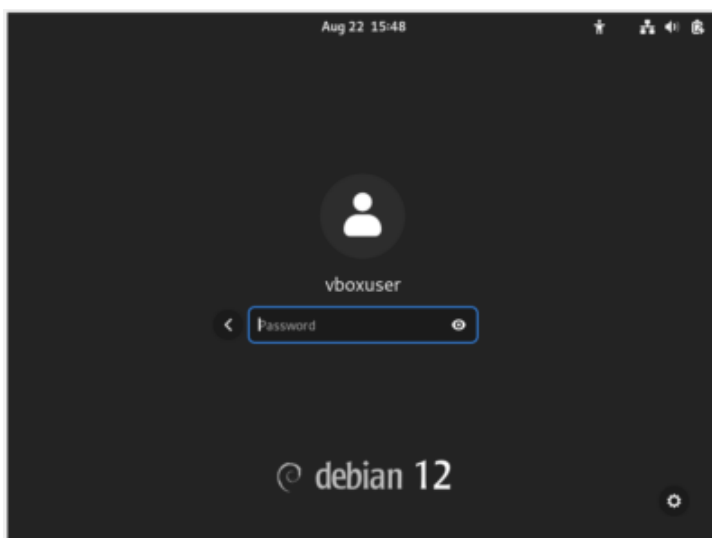

Accédez au terminal

Best Linux Terminal

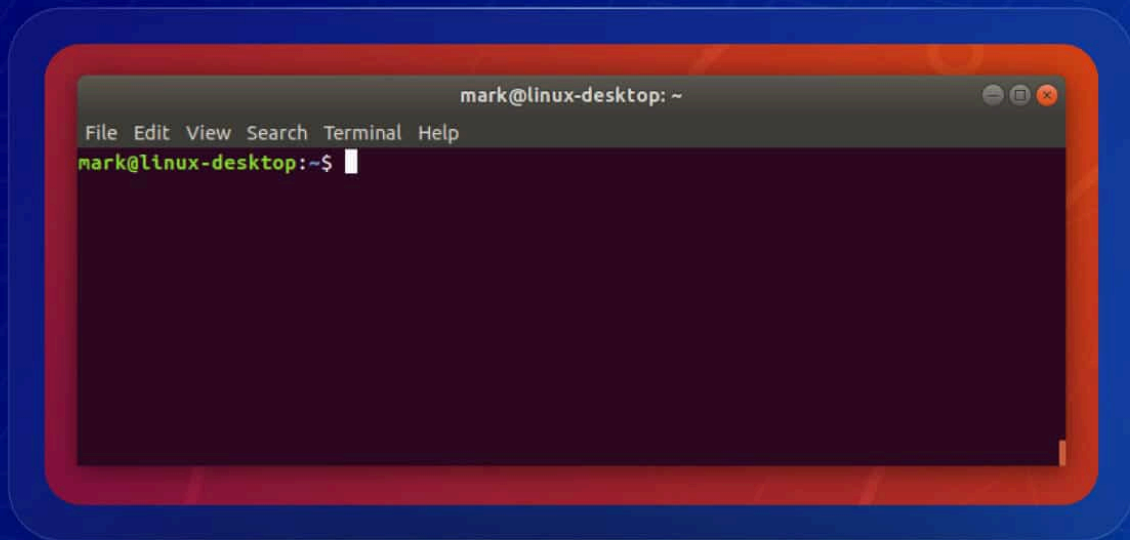

RedSwitches

Changement du nom de USER et de groupe

sudo su - ; mdp root bitwarden communiquer plutôt

mv /home/user /home/user.ad

ls -l /home/

usermod -l user.ad -d /home/user.ad user

ls -l /home/

usermod -a -G sudo user.ad

su -l user.ad

Installation Puppet

```
# sudo su -
```

```
# apt update && upgrade -y
```

```
# fwupdmgr update -> Yes -> No
```

```
# apt install puppet
```

Pour le reste suivre la procédure de Michel via teams (puppet.conf 03/01)

Installation Openvpn

```
# apt install openvpn -y
```

```
# apt install network-manager-open-vpngnome
```

- Sur le bureau Linux allez dans network -> Openvpn -> import (importer le fichier de conf) -> Dans les paramètres activer "Ask for password everytime"