A Relatively Small Turing Machine Whose Behavior Is Independent of Set Theory

Adam Yedidia
MIT
adamy@mit.edu

Scott Aaronson MIT

aaronson@csail.mit.edu

April 1, 2016

Abstract

Since the definition of the Busy Beaver function by Radó in 1962, an interesting open question has been what the smallest value of n for which BB(n) is independent of ZFC set theory. Is this n approximately 10, or closer to 1,000,000, or is it even larger? In this paper, we show that it is at most 8,013 by presenting an explicit description of a 8,013-state Turing machine Z with 1 tape and a 2-symbol alphabet that cannot be proved to run forever in ZFC (even though it presumably does), assuming ZFC is consistent. The machine is based on work of Harvey Friedman on independent statements involving order-invariant graphs. In doing so, we give the first known upper bound on the highest provable Busy Beaver number in ZFC. We also present a 4,888-state Turing machine G that halts if and only if there is a counterexample to Goldbach's conjecture, and a 5,372-state Turing machine G that halts if and only if the Riemann hypothesis is false. To create G, G, and G, we develop and use a higher-level language, Laconic, which is much more convenient than direct state manipulation.

1 Introduction

1.1 Background and Motivation

Zermelo-Fraenkel set theory with the axiom of choice, more commonly known as ZFC, is an axiomatic system invented in the twentieth which has since been used as the foundation of most of modern mathematics. It encodes arithmetic by describing natural numbers as increasing sets of sets.

Like any axiomatic system capable of encoding arithmetic, ZFC is constrained by Gödel's two incompleteness theorems. The first incompleteness theorem states that if ZFC is consistent (it never proves both a statement and its opposite), then ZFC cannot also be complete (able to prove every true statement). The second incompleteness theorem states that if ZFC is consistent, then ZFC cannot prove its own consistency. Because we have built modern mathematics on top of ZFC, we can reasonably be said to have assumed ZFC's consistency. This means that we must also believe that ZFC cannot prove its own consistency. This fact carries with it certain surprising conclusions

In particular, consider a Turing machine Z that enumerates, one after the other, each of the provable statements in ZFC. To describe how such a machine might be constructed, Z could iterate over the axioms and inference rules of ZFC, applying each in every possible way to each conclusion

or pair of conclusions that had been reached so far. We might ask Z to halt if it ever reaches a contradiction; in other words, Z will halt if and only if it finds a proof of 0 = 1. Because this machine will enumerate *every* provable statement in ZFC, it will run forever if and only if ZFC is consistent.

It follows that Z is a Turing machine for which the question of its behavior (whether or not it halts when run indefinitely) is equivalent to the consistency of ZFC.¹ Therefore, just as ZFC cannot prove its own consistency (assuming ZFC is consistent), ZFC also cannot prove that Z will run forever.

This is interesting because, while the undecidability of the halting problem tells us that there cannot exist an algorithmic method for determining whether an arbitrary Turing machine loops or halts, Z is an example of a specific Turing machine whose behavior cannot be proven one way or the other using the foundation of modern mathematics. Mathematicians and computer scientists think of themselves as being able to determine how a given algorithm will behave if given enough time to stare at it; despite this intuition, Z is a machine whose behavior we can never prove without assuming axioms more powerful than those generally assumed in modern mathematics.

1.2 Turing Machines

There are many slightly-different definitions of Turing machines. For example, some definitions allow the machine to have multiple tapes; others only allow it to have one; some allow an arbitrarily large alphabet, while others allow only two symbols, and so on. In most research regarding Turing machines, mathematicians don't concern themselves with which of these models to use, because any one can simulate the others. However, because this work is concerned with upper-bounding the exact number of states required to perform certain tasks, it's important to define the model precisely.

Formally, a k-state Turing machine is a 7-tuple $M = (Q, \Gamma, b, \Sigma, \delta, q_0, F)$, where:

```
\begin{array}{l} Q \text{ is the set of } k \text{ } states \ \{q_0,q_1,\ldots,q_{k-2},q_{k-1}\} \\ \Gamma = \{a,b\} \text{ is the set of } tape \text{ } alphabet \text{ } symbols \\ \text{a is the } blank \text{ } symbol \\ \Sigma = \text{ is the set of } input \text{ } symbols \\ \delta = Q \times \Gamma \to (Q \cup F) \times \Gamma \times \{L,R\} \text{ is the } transition \text{ } function \\ q_0 \text{ is the } start \text{ } state \\ F = \{\text{ACCEPT}, \text{REJECT}, \text{ERROR}\} \text{ is the set of } halting \text{ } transitions. \end{array}
```

A Turing machine's states make up the Turing machine's easily-accessible, finite memory. The Turing machine's state is initialized to q_0 .

The *tape alphabet symbols* correspond to the symbols that can be written on the Turing machine's infinite tape.

In this work, all Turing machines are run on the all-a input.

The transition function encodes the Turing machine's behavior. It takes two inputs: the current state of the Turing machine (an element of Q) and the symbol read off the tape (an element of Γ).

¹While we will talk about ZFC throughout this paper, rather than simple ZF set theory, this is simply a convention. For our purposes, the Axiom of Choice is irrelevant: the consistency of ZFC is equivalent to the consistency of simple ZF set theory, [8] and ZFC and ZF prove exactly the same arithmetical statements (which include, among other things, statements about whether Turing machines halt). [17]

It outputs three instructions: what state to enter (an element of Q), what symbol to write onto the tape (an element of Γ) and what direction to move the head in (an element of $\{L, R\}$). A transition function specifies the entire behavior of the Turing machine in all cases.

The *start state* is the state that the Turing machine is in at initialization.

A halting transition is a transition that causes the Turing machine to halt. While having three possible halting transitions is not necessary for our purposes, being able to differentiate between three different types of halting (ACCEPT, REJECT, and ERROR) is useful for testing.

1.3 The Busy Beaver Function

Consider the set of all Turing machines with k states, for some positive integer k. We call a Turing machine B a k-state $Busy\ Beaver$ if when run on the empty tape as input, B halts, and also runs for at least as many steps before halting as all other halting k-state Turing machines. [16]

In other words, a Busy Beaver is a Turing machine that runs for at least as long as all other halting Turing machines with the same number of states. Another common definition for a Busy Beaver is a Turing machine that writes as many 1's on the tape as possible; because the number of 1's written is a somewhat arbitrary measure, it is not used in this work.

The Busy Beaver function, written BB(k), equals the number of steps it takes for a k-state Busy Beaver to halt. The Busy Beaver function has many striking properties. To begin with, it is not computable; in other words, there does not exist an algorithm that takes k as input and returns BB(k), for arbitrary values of k. This follows directly from the undecidability of the halting problem. Suppose an algorithm existed to compute the Busy Beaver function; then given a k-state Turing machine M as input, we could compute BB(k) and run M for BB(k) steps. If, after BB(k) steps, M had not yet halted, we could safely conclude that M would never halt. Thus, we could solve the halting problem, which we know is impossible.

By the same argument, BB(k) must grow faster than any computable function. (To check this, assume that some computable function f(k) grows faster than BB(k), and substitute f(k) for BB(k) in the rest of the proof.) In particular, the Busy Beaver grows even faster than (for instance) the Ackermann function, a well-known fast-growing function.

Because finding the value of BB(k) for a given k requires so much work (one must fully explore the behavior of all k-state Turing machines), few explicit values of the Busy Beaver function are known. The known values are [10] [3]:

$$BB(1) = 1$$

$$BB(2) = 6$$

$$BB(3) = 21$$

$$BB(4) = 107$$

For BB(5) and BB(6), only lower bounds are known: $BB(5) \ge 47,176,870$, and $BB(6) \ge 7.4 \times 10^{36,534}$. Researchers have worked on pinning down the value of BB(5) exactly, and some consider it to be possibly within reach. A summary of the current state of human knowledge about Busy Beaver values can be found at [13].

Another way to discuss the Busy Beaver sequence is to say that modern mathematics has established a *lower bound* of 4 on the highest provable Busy Beaver value. In this paper, we prove

the first known *upper bound* on the highest provable Busy Beaver value in ZFC; that is, we give a value of k, namely 8,013, such that the value of BB(k) cannot be proven in ZFC.

Intuitively, one might expect that while no algorithm may exist to compute BB(k) for all values of k, we could find the value of BB(k) for any specific k using a procedure similar to the one we used to find the value of BB(k) for $k \leq 4$. The reason this is not so is closely tied to the existence of a machine like the Gödelian machine Z, as described in Section 1.1. Suppose that Z has k states. Because Z's behavior (whether it halts or loops) cannot be proven in ZFC, it follows that the value of BB(k) also can't be proven in ZFC; if it could, then a proof would exist of Z's behavior in ZFC. Such a proof would consist of a computation history for Z, which is an explicit step-by-step description of Z's behavior for a certain number of steps. If Z halts, then a computation history leading up to Z's halting would be the entire proof; if Z loops, then a computation history that takes BB(k) steps, combined with a proof of the value of BB(k), would constitute a proof that Z will run forever.

In this paper we construct a machine like Z, for which a proof that Z runs forever would imply that ZFC was consistent. In doing so, we give an explicit upper bound on the highest Busy Beaver value provable in ZFC assuming the consistency of a slightly stronger set theory. Our machine, which we shall refer to as Z hereafter, contains 8,013 states. Therefore, we will never be able to prove the value of BB(8,013) without assuming more powerful axioms than those of ZFC. This upper bound is presumably very far from tight, but it is a first step.

Even to achieve a state count of 8,013, we will need three nontrivial ideas: Harvey Friedman's order-theoretic statements, on-tape processing, and introspective encoding. Without all three ideas, we found that the state count would be in the tens of thousands, hundreds of thousands, or even millions. We briefly introduce these ideas in the following subsection, and explore them in much greater detail in Section 8. The implementation of these ideas constitutes this paper's main technical contribution.

1.4 Parsimony

In most algorithmic study, efficiency is the primary concern. In designing Z, however, parsimony is the only thing that matters. One historical analogue is the practice of "code-golfing": a recreational pursuit adopted by some programmers in which the goal is to produce a piece of code in a given programming language, using as few characters as possible. Many examples of code-golfing can be found at [19]. The goal of designing a Turing machine with as few states as possible to accomplish a certain task, without concern for the machine's efficiency or space usage, can be thought of as code-golfing with a particularly low-level programming language.

Part of the charm of Turing machines is that they give us a "standard reference point" for measuring complexity, unencumbered by the details of more sophisticated programming languages. Also, with Turing machines, there can be no suspicion that we engineered a programming formalism just for the purpose of code-golfing, or for making the concepts we want artificially simple to describe. This is why we prefer Turing machines as a tool for measuring complexity; not because they are particularly special, but simply because they are so primitive that their specifics will interfere minimally with what we mean by an algorithm being "complicated."

In this paper, we use three ideas for generating parsimonious Turing machines: Harvey Friedman's mathematical statements, *on-tape processing*, and *introspective* Turing machines. The last of these ideas was proposed, under a different name and with some variations, by Ben-Amram and Petersen in 2002. [2] These three ideas are explained in more detail in Subsections 3.1, 8.1, and 8.3,

respectively, but we summarize them very briefly here.

The first idea is simply to use the research done by Friedman into finding simple-to-express statements that are equivalent to the consistency of various axiomatic systems. In particular, we use a statement discovered by Friedman to be equivalent to the consistency of a set theory known to be stronger than ZFC (and whose consistency, therefore, would imply the consistency of ZFC). [6]

The second idea, on-tape processing, is a way to encode high-level commands into a Turing machine parsimoniously. Instead of converting commands to groups of states directly, which incurs a multiplicative overhead based on how large these groups need to be, on-tape processing begins by writing the commands onto the tape, using as efficient an encoding as possible. Then, once the commands are on the tape, the commands are processed by a single group of states that understands how to interpret them.

The third idea, introspective Turing machines, is a way to write long strings onto the tape using as few states as possible. The idea is to encode information one of each state's transitions, instead of encoding information in each state's write field. This is advantageous because there are many choices for which state to point a transition to, but only two choices for what bit to write. Therefore, more information can be encoded in each state using this method.

1.5 Implementation Overview

To generate descriptions of Turing machines with nice mathematical properties entirely by hand is a daunting task. Rather than approach the problem directly, we created tools for generating parsimonious Turing machines while presenting an interface that is comfortably familiar to most programmers (and to us!).

We created two tools. At the top level is the Laconic programming language, whose syntax and capabilities are similar to those of most programming languages, such as Java or Python. Beneath it we created a lower-level language called Turing Machine Descriptor (TMD). TMD is quite unlike most programming languages, and is better thought of as a convenient way to describe a multitape, 3-symbol Turing machine plus a function stack. The style of multi-tape Turing machine used in TMD is the commonly used "one-tape-at-a-time" abstraction: only one tape at a time can be interacted with, for reading, writing, and moving the head. Laconic compiles down to a TMD program, and TMD compiles down to a description of a single-tape, 2-symbol Turing machine. This process is illustrated in Figure 1.

We recommend that programmers hoping to use our tools to generate their own encodings of mathematical statements or algorithms as Turing machines use Laconic. Laconic's interface is perfect for somebody hoping to write in a "traditional" language. On the other hand, if the programmer wishes to improve upon Laconic's compilation process, writing code directly in TMD is likely to be the better option.

2 Related Work

This paper is not the first to attempt to quantify the complexity of arithmetical statements. Calude and Calude [5] define a register machine of their own design, and provide quantifications of the complexity of Legendre's conjecture, Fermat's last theorem, Goldbach's conjecture, Dyson's conjecture,

TMD Laconic /* set up [x_1 U \dots U x_i] */ while (h1) { WHILE_TEST_3: function BUILTIN_assign !0 h1 [!0] E (WHILE_STATE_3_FALSE); 1 () function index freeSet c1 h1 !0 !1 !2 index(freeSet, c1, h1); function incr c1 !0 !1 !2 function BUILTIN_assign !0 h1 incr(c1); function BUILTIN_assign !0 nI [!0] E (IF_STATE_3_FALSE); 1 () function incr oneCounter !0 !1 !2 function index2 graph c1 hl1 !0 !1 !2 function vertexUnion union hl1 h1 h2 h3 h4 hl2 !0 !1 !2 function BUILTIN_assign !0 hl2 function BUILTIN_assign union !0 IF_STATE_3_FALSE: function BUILTIN_assign !0 oneCounter function BUILTIN assign !1 i if (h1) { incr(oneCounter); index2(graph, c1, hl1);> vertexUnion(union, hl1, h1, h2, h3, h4, hl2); union = hl2; function BUILTIN_assign !1 i function BUILTIN_greaterThan !2 !1 !0 function BUILTIN_assign h1 !2 h1 = (oneCounter < i);</pre> [!0] E (WHILE_TEST_3); 1 (WHILE_TEST_3) } Interpretation Setup states + Data states states

Figure 1: A visual overview of the compilation process.

the Riemann hypothesis, and the four color theorem.² In addition, Koza [9] and Pargellis [15] each invent instruction sets that are particularly well-suited to representing self-reproducing programs simply, and show that starting from a "primordial soup" of such instructions distributed about a large memory, along with an increasing number of program threads, a rich ecosystem of increasingly efficient self-reproducing programs start to dominate the "landscape."

This paper differs from the previous work in two ways: firstly, it is the first to give explicit, relatively small machines whose behavior is provably independent of the standard axioms of modern mathematics. Secondly, to our knowledge, this paper is the first concrete study of parsimony to use Turing machines as the model of computation—rather than (for example) a new programming language proposed by the authors! We consider it important to use the weakest and most common model of computation for complexity comparisons across different mathematical statements. This is because the more powerful and complex the model of computation used, the more of the complexity of the algorithm can be "shunted" onto the model of computation, and the greater the potential distortion created by the choice of model. As a reductio ad absurdum, we could imagine a programming language that included "test the Riemann hypothesis" and "test the consistency of ZFC" as primitive operations. By using the "weakest" model of computation that is commonly known, and one which is generally accepted as the mathematical basis of algorithms, we hope to avoid this pitfall and make it easier to interpret our results in a model-independent way.

3 A Turing Machine that Cannot Be Shown to Run Forever Using ZFC

We present a 8,013-state Turing machine whose behavior is *independent of ZFC*; it is not possible to prove that this machine halts or doesn't halt using the axioms of ZFC, assuming that a slightly stronger set theory is consistent. It's therefore impossible to prove the value of BB(8,013) to be any given value without assuming axioms more powerful than ZFC, assuming that ZFC is consistent.

For an explicit listing of this machine, see Appendix C.

We call this machine Z. One way to build this machine would be to start with the axioms of ZFC and apply the inference rules of first-order logic repeatedly in each possible way so as to enumerate every statement ZFC could prove, and to halt if ever a contradiction was found. While this method is conceptually simple, to actually construct such a machine would lead to a huge number of states, because it would require writing a program to manipulate the axioms of ZFC and the inference rules of first-order logic, and then compiling that program all the way down to Turing machine states.

3.1 Friedman's Mathematical Statement

Thankfully, a simpler method exists for creating Z. Friedman [6] was able to derive a graph-theoretic statement whose truth implies the consistency of ZFC, and which will be false if ZFC is inconsistent.³ Here is Friedman's statement (the notation will be explained in the rest of this section):

 $^{^{2}}$ Because Fermat's last theorem and the four color theorem have been proved, their "complexity" is now known to be 1—the minimum number of states in a Turing machine that runs forever.

³In fact, Friedman's statement is equivalent to the consistency of SRP ("stationary Ramsey property"), which is a system of axioms more powerful than ZFC. Because SRP is strictly more powerful than ZFC (it in fact consists of ZFC plus some additional axioms), the consistency of SRP implies the consistency of ZFC, and the inconsistency of

Statement 1. For all k, n, r > 0, every order invariant graph on $[\mathbb{Q}]^{\leq k}$ has a free $\{x_1, \ldots, x_r, ush(x_1), \ldots, ush(x_r)\}$ of complexity $\leq (8knr)!$, each $\{x_1, \ldots, x_{(8kni)!}\}$ reducing $[x_1 \cup \cdots \cup x_i \cup \{0, \ldots, n\}]^{\leq k}$.

A number of *complexity* at most c refers to a number that can be written as a fraction a/b, where a and b are both integers less than or equal to c. A set has complexity at most c if all the numbers it contains have complexity at most c.

An order invariant graph is a graph containing a countably infinite number of nodes. In particular, it has one node for each finite set of rational numbers. The only numbers relevant to the statement are numbers of complexity (8knr)! or smaller. In every description of nodes that follows, the term *node* refers both to the object in the order invariant graph and to the set of numbers that it represents.

In an order invariant graph, two nodes (a,b) have an edge between them if and only if each other pair of nodes (c,d) that is order equivalent with (a,b) has an edge between them. Two pairs of nodes (a,b) and (c,d) are order equivalent if a and c are the same size and b and d are the same size and if for all $1 \le i \le |a|$ and $1 \le j \le |b|$, the i-th element of a is less than the j-th element of b if and only if the i-th element of c is less than the j-th element of d.

To give some trivial examples of order invariant graphs: the graph with no edges is order invariant, as is the complete graph. A less trivial example is a graph on $[\mathbb{Q}]^2$, in which each node corresponds to a set of two rational numbers of a given complexity, and there is an edge between two nodes if and only if their corresponding sets a and b satisfy $a_1 < b_1 < a_2 < b_2$. (Because edges are undirected in order invariant graphs, such an edge will exist if *either* assignment of the vertices to a and b satisfies the inequality above.)

The ush() function takes as input a set and returns a copy of that set with all non-negative numbers in that set incremented by 1.

For vertices x and y, $x \leq_{rlex} y$ if and only if x = y or $x_i < y_i$ where i is least such that $x_i \neq y_i$. Finally, a set of vertices X reduces a set of vertices Y if and only if for all $y \in Y$, there exists $x \in X$ such that $x \leq_{rlex} y$ and an edge exists between x and y.

3.2 Implementation Methods

To create Z, we needed to design a Turing machine that halts if Statement 1 is false, and loops if Statement 1 is true. Such a Turing Machine's behavior is necessarily independent of ZFC, because the truth or falsehood of Statement 1 is independent of ZFC, assuming the consistency of SRP, a slightly more powerful set theory. [6]

To design such a Turing machine, we wrote a Laconic program which encodes Friedman's statement, then compiled the program down to a description of a single-tape, 2-symbol Turing machine. What follows is an extremely brief description of the design of the Laconic program; for the documented Laconic code itself, along with a detailed explanation of the full compilation process, see [18].

Our Laconic program begins by looping over all non-negative values for k, n, and r. For each trio (k, n, r), our program generates a list N of all numbers of complexity at most (8knr)!. These numbers represent the vertices in our putative order invariant graph. Because Laconic does not support floating-point numbers, the list is entirely composed of integers; it is a list of all numbers that can be written in the form (((8knr)!)!)((8kni)!)/((8knj)!), where i and j are integers satisfying

ZFC implies the inconsistency of SRP.

 $-(8knr)! \le i \le (8knr)!$ and $1 \le j \le (8knr)!$. (Note that any number that can be expressed in this form is necessarily an integer, because of the large scaling factor in front.)

After we generate N, we generate the nodes in a potential order invariant graph by adding to N all possible lists of k or fewer numbers from N. We call this list of lists V.

We iterate over all binary lists of length $|V|^2$. Any such list E represents a possible set of edges in the graph. To be more precise, we say that an edge exists between node i and node j (represented by V_i and V_j respectively) if and only if $E_{i|V|+j}$ is 1.

For any graph (V, E), we say that it is "valid" if the following three conditions hold:

- 1. No node has an edge to itself.
- 2. If an edge exists between node i and node j, an edge also exists between node j and node i.
- 3. The graph has a free $\{x_1, ..., x_r, \text{ush}(x_1), ..., \text{ush}(x_r)\}$, each $\{x_1, ..., x_{(8kni)!}\}$ reducing $[x_1 \cup ... \cup x_i \cup \{0, ..., n\}]^{\leq k}$.

For each list of nodes V, we loop over every possible binary list E, and if no pair (V, E) yields a valid graph, we halt.

When verifying the validity of a graph, checking the first two conditions is trivial, but the third merits further explanation. In order to verify that a given graph (V, E) has a free $\{x_1, \ldots, x_r, ush(x_1), \ldots, ush(x_r)\}$, each $\{x_1, \ldots, x_{(8kni)!}\}$ reducing $[x_1 \cup \cdots \cup x_i \cup \{0, \ldots, n\}]^{\leq k}$, we look at every possible subset of the nodes in V. For each subset, we verify that it has length r, that $ush(x_1), \ldots, ush(x_r)$ all exist in V, and for each i such that $(8kni)! \leq r$, that $\{x_1, \ldots, x_{(8kni)!}\}$ reduces $[x_1 \cup \cdots \cup x_i \cup \{0, \ldots, n\}]^{\leq k}$. Once we have found such a subset, we know that the third condition is satisfied.

4 A Turing Machine that Encodes Goldbach's Conjecture

We present a 4,888-state Turing machine that encodes Goldbach's conjecture; in other words, to know whether this machine halts is to know whether Goldbach's conjecture is true. It is therefore impossible to prove the value of BB(4,888) without simultaneously proving or disproving Goldbach's conjecture.

Recall that Goldbach's conjecture is as follows:

Statement 2. Every even integer greater than 2 can be expressed as the sum of two primes.

Because Goldbach's conjecture is so simple to state, the Laconic program encoding the statement is also quite simple. It can be found in Appendix A. A detailed explanation of the compilation process, documentation for the Laconic language, and an explicit description of this Turing machine are available at [18].

5 A Turing Machine that Encodes Riemann's Hypothesis

We present a 5,372-state Turing machine that *encodes Riemann's hypothesis*; in other words, to know whether this machine halts is to know whether Riemann's hypothesis is true. An explicit description of this machine can be found at [18]

Riemann's hypothesis is traditionally stated as follows:

Statement 3. The Riemann zeta function has its zeros only at the negative even integers and the complex numbers with real part 1/2.

5.1 Equivalent Statement

Instead of encoding the Riemann zeta function into a Laconic program, it is simpler to use the following statement, which was shown by Lagarias [4] to be equivalent to the Riemann hypothesis:

Statement 4. For all integers $n \geq 1$,

$$\left(\left(\sum_{k \le \delta(n)} \frac{1}{k} \right) - \frac{n^2}{2} \right)^2 < 36n^3$$

The function $\delta(n)$ used in Statement 4 is defined as follows:

$$\eta(j)=p$$
 if $j=p^k, p$ is prime, k is a positive integer
$$\eta(j)=1 \text{ otherwise}$$

$$\delta(x)=\prod_{n< x}\prod_{j\leq n}\eta(j)$$

5.2 Implementation Methods

Statement 4 is equivalent to the following statement, which contains only positive integers⁴:

for all positive integers n, where

$$l(n) = a(n)^2 + b(n)^2$$

$$r(n) = 36n^3 (\delta(n)!)^2 + 2a(n)b(n)$$

$$a(n) = \sum_{k \le \delta(n)} \frac{\delta(n)!}{k}$$

$$b(n) = \frac{n^2 \delta(n)!}{2}$$

To check the Riemann hypothesis, our program computes a(n), b(n), l(n), and r(n), in that order, for each possible value of n. If $l(n) \ge r(n)$, our program halts.

⁴Although it is not immediately obvious at first glance, $\frac{\delta(n)!}{k}$ is necessarily an integer for all $k \leq \delta(n)$, and $\frac{\delta(n)!}{2}$ is an integer for all n > 1.

6 Laconic

Laconic is a programming language designed to be both user-friendly and easy to compile down to parsimonious Turing machine descriptions.

Laconic is a strongly-typed language that supports recursive functions. Laconic compiles to an intermediate language called TMD. TMD programs are spread across multiple files and grouped into directories. TMD directories are meant to represent sequences of commands that could be given to a multi-tape, 3-symbol Turing machine, using the Turing machine abstraction that allows the machine to read and write from one head at a time.

For an example of a Laconic program, see Appendix A. For an illustration of the compilation process, see Figure 1.

7 TMD

TMD is a programming language designed to help the user describe the behavior of a multi-tape, 3-symbol Turing machine with a function stack. Each tape is infinite in one direction and supports three symbols: _, 1, and E. The blank symbol is _: that is, _ is the only symbol that can appear on the tape an infinite number of times. The tape must always have the form $_{-}?(1|E)^{+}_{-}^{\infty}$; in other words, each tape must always contain a string of 1's and E's of size at least 1, possibly preceded by a _ symbol, and necessarily followed by an infinite number of copies of the _ symbol.

What is the purpose of having a language like TMD as an intermediary between Laconic and a description of a single-tape machine? The concept of tapes in a multi-tape Turing machine and the concept of variables in standard imperative programming languages map to one another very nicely. The idea of the Laconic-to-TMD compiler is to encode the value of each variable on one tape. Then, each Laconic command that manipulates the value of one or more variables compiles down to a TMD function call that manipulates the tapes that correspond to those variables appropriately.

As an example, consider the following Laconic command:

a=b*c;

This Laconic command assigns the value of a to the value of b*c. It compiles down to the following TMD function call:

function BUILTIN multiply a b c

This function call will result in BUILTIN_multiply being run on the three tapes a, b, and c. This will cause the symbols on tape a to take on a representation of an integer whose value is equal to bc

In turn, the TMD code compiles directly to a string of bits that are written onto the tape at the start of the Turing machine's execution.

A TMD directory consists of three types of files:

1. The functions file. This file contains a list of the names of all the functions used by the TMD program. The top function in the file is pushed onto the stack at initialization. When this top function returns, the Turing machine halts.

- 2. The initvar file. This file contains the non-_ symbols that start in each register at initialization.
- 3. Any files used to describe TMD functions. These files all end in a .tfn extension and only have any relevance to the compiled program if they show up in the functions file.

8 Compilation and Processing

There are two ways to think about the layout of the tape symbols: with a 4-symbol alphabet $(\{a,b\}, blank symbol a)$, and with a 2-symbol alphabet $(\{a,b\}, blank symbol a)$. The 2-symbol alphabet version is the one that's ultimately used for the results in this paper, since we advertised a Turing machine that used only two symbols. However, in nearly all parts of the Turing machine, the 2-symbol version of the machine is a direct translation of the 4-symbol version, according to the following mapping:

- \bullet _ \leftrightarrow aa
- $1 \leftrightarrow ab$
- \bullet H \leftrightarrow ba
- $E \leftrightarrow bb$

The sections that follow sometimes refer to the ERROR state. Transitions to the ERROR state should never be taken under any circumstances, and are useful for debugging purposes.

8.1 Concept

A directory of TMD functions is converted at compilation time to a string of bits to be written onto the tape, along with other states designed to interpret these bits. The resulting Turing machine has three main components, or *submachines*:

- 1. The *initializer* sets up the basic structure of the variable registers and the function stack.
- 2. The *printer* writes down the binary string that corresponds to the compiled TMD code.
- 3. The *processor* interprets the compiled binary, modifying the variable registers and the function stack as necessary.

The Turing machine's control flow proceeds from the initializer to the printer to the interpreter. In other words, initializer states point only to initializer states or to printer states, printer states point only to printer states or to interpreter states, and interpreter states point only to interpreter states or the HALT state.

This division of labor, while seemingly straightforward, actually constitutes an important idea. The problem of the compiler is to convert a higher-level representation—a machine with many tapes, a larger alphabet, and a function stack—to the lower-level representation of a machine with a single tape, a 2-symbol alphabet and no function stack. The immediately obvious solution, and the one taught in every computability theory class as a proof of the equivalence of different kinds of

Turing machines, is to have every "state" in the higher-level machine compile down to many states in the lower-level machine.

While simple, this approach is suboptimal in terms of the number of states. As is nearly always true when designing systems to be parsimonious, the clue that improvement is possible lies in the presence of repetition. Each state transition in the higher-level machine is converted to a group of lower-level states with the same basic structure. Why not instead explain how to perform this conversion exactly once, and then apply the conversion many times?

This idea is at the core of the division of labor described previously. We begin by writing a description of the higher-level machine onto the tape, and then "run" the higher-level machine by reading what is on the tape with a set of states that understands how to interpret the encoded higher-level machine. We refer to this idea as *on-tape processing*.

In this paper, we use TMD as the representation of the higher-level machine.⁵ The printer writes the TMD program onto the tape, and the processor executes it. As a result of using this scheme, we incur a constant *additive* overhead—we have to include the processor in our final Turing machine—but we avoid the constant *multiplicative* overhead required for the naïve scheme.

Is this additive overhead small enough to be worth it? We found that it is. Our implementation of the processor requires 3,860 states. (See Section 8.5 for a detailed breakdown of the state cost by submachine.) In contrast to this additive overhead of 3,860, the naïve approach incurs a large multiplicative overhead that depends in part on how many states must be used to represent each higher-level state transition, and in part on how efficient an encoding scheme can be devised for the on-tape approach. The following table compares the performance of on-tape processing to the performance of an implementation that used the naïve approach. The comparison is shown for three kinds of machines: a machine that halts if and only if Goldbach's conjecture is false, a machine that halts if and only if the Riemann hypothesis is false, and a machine whose behavior is independent of ZFC.

Program	States (Naïve)	States (On-Tape Processing)
Goldbach	7,902	4,888
Riemann	36,146	5,372
ZFC	340,943	8,013

As can be seen from this table, on-tape interpretation results in huge gains, particularly in large and complex programs.

The subsections that follow describe each of the three submachines—the initializer, the printer, and the processor—in greater detail.

8.2 The Initializer

The initializer starts by writing a counter onto the tape which encodes how many registers there will be in the program. Using the value in that counter, it creates each register, with demarcation patterns between registers, and unique identifiers for each register. Each register's value begins

⁵Note that instead of TMD, the on-tape processing scheme could be used for any language, assuming the designer provides both a processor and an encoding for that language. We chose TMD because it made the interpreter easy to write, but other minimalist languages, like Unlambda [11], Brainf*ck [14], or Iota and Jot [1], might be good candidates for parsimonious designs, with the additional advantage of being already known to some programmers! Thanks to Luke Schaeffer for this point.

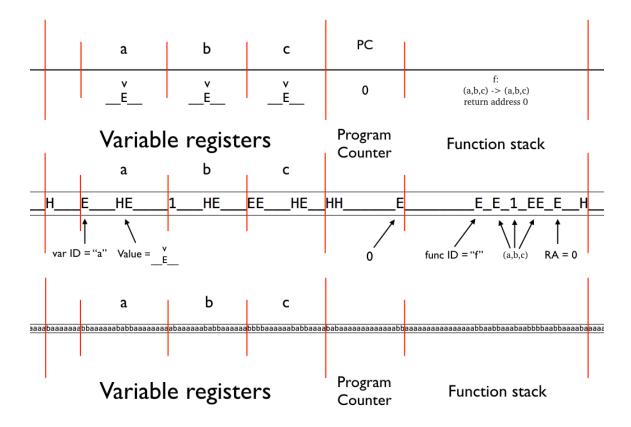


Figure 2: The state of the Turing machine tape after the initializer completes. The TMD program being expressed in Turing machine form is described in full in Appendix B. The top bar is a high-level description of what each part of the Turing machine tape represents. The middle bar is an encoding of the tape in the standard 4-symbol alphabet; the bottom bar is simply the translation of that tape into the 2-symbol alphabet. For a more detailed explanation of how to interpret the tape patterns, see [18].

with the pattern of non-_ symbols laid out in the initvar file. The initializer also creates the program counter, which starts at 0, and the function stack, which starts out with only a single function call to the top function in the functions file.

Figure 2 is a detailed diagram describing the tape's state when the initializer passes control to the printer.

8.3 The Printer

8.3.1 Specification

The printer writes down a long binary string which encodes the entirety of the TMD program onto the tape.

Figure 3 shows the tape's state when the printer passes control to the processor.

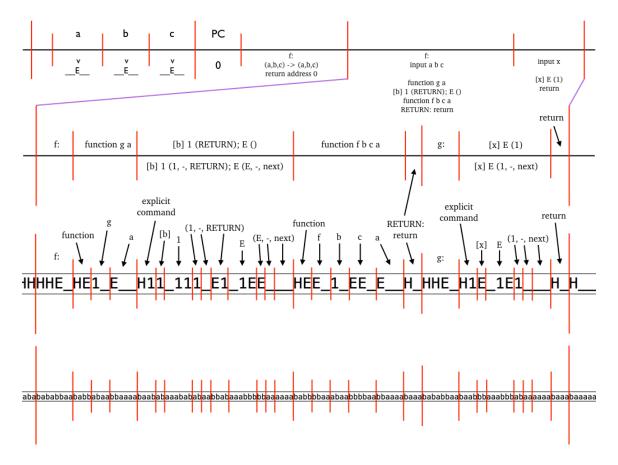


Figure 3: The state of the Turing machine tape after the printer completes. The TMD program being expressed in Turing machine form is described in full in Appendix B. The top bar is a high-level description of the entire tape; unfortunately, at this point there are so many symbols on the tape that it is impossible to see everything at once. For a detailed view of the first two-thirds of the tape (registers, program counter, and stack), see Figure 2. The bottom three bars show a zoomed-in view of the program binary. From the top, the second bar gives a high-level description of what each part of the program binary means; the third bar gives the direct correspondence between 4-symbol alphabet symbols on the tape and their meaning in TMD; the fourth and final bar gives the translation of the third bar into the 2-symbol alphabet. For a more detailed explanation of the encoding of TMD into tape symbols, see [18].

8.3.2 Introspection

Writing down a long binary string onto a Turing machine tape in a parsimonious fashion is not as straightforward as it might initially appear. The first idea that comes to mind is simply to use one state per symbol, with each state pointing to the next, as shown in Figure 4.

On closer examination, however, this approach is quite wasteful for all but the smallest binary files. Every a transition points to the next state in the sequence, and none of the b transitions are used at all! Indeed, the only information-bearing part of the state is the single bit contained in the choice of which symbol to write. But in theory, far more information than that could be encoded in each state. In a machine with n states, each state could contain $2(\log_2(n) + 1)$ bits of information, because each of its two transitions could point to any of the n states, and write either an a or a b onto the tape. Of course, this is only in theory; in practice, to extract the information contained in the Turing machine's states and translate it into bits on the tape is nontrivial.

We will use a scheme originally conceived by Ben-Amram and Petersen [2] and refined further and suggested to us by Luke Schaeffer. It does not achieve the optimal theoretical encoding described above, but is relatively simple to implement and understand, and is within a factor of 2 of optimal for large binary strings. Schaeffer named Turing machines that use this idea introspective.

Introspection works as follows. If the binary string contains k bits, then let w be the word size. w takes the largest value it can such that $w2^w \le k$. We can split the binary string into $n_w = \left\lceil \frac{k}{w} \right\rceil$ words of w bits each (we can pad the last word with copies of the blank symbol). In our scheme, each word in the bit-string is represented by a data state. Each data state points to the state representing the next word in the sequence for its a transition, but which state the b transition points to encodes the next word. Every b transition points to one of the last 2^w data states, thereby encoding w bits of information.

Of course, the encoding is useless until we specify how to extract the encoded bit-string from the data states. The extraction scheme works as follows. To query the i^{th} data state for the bits it encodes, we run the data states on the string $\mathbf{a}^{i-1}\mathbf{b}\mathbf{a}^{\infty}$ (a string of i-1 a's followed by a b in the i^{th} position). After running the data states on that string, what remains on the tape is the string $\mathbf{b}^{i-1}\mathbf{a}\mathbf{b}^r\mathbf{a}^{\infty}$, assuming that the i^{th} data state pointed to the r^{th} -to-last data state. Thus, what we're left with is essentially a unary encoding of the "value" of the word in binary. Thus, the job of the extractor is to set up a binary counter which removes one b at a time and increments the counter appropriately. Then, afterward, the extractor reverts the tape back to the form $\mathbf{a}^i\mathbf{b}\mathbf{a}^{\infty}$, shifts all symbols on the tape over by w bits, and repeats the process. Finally, when the state beyond the last data state sees a b on the tape, we know that the process has completed, and we can pass control to the processor. Figure 5 shows the whole procedure.

How much have we gained by using introspection for encoding the program binary, instead of the naïve approach? It depends on how large the program binary is. Using introspection incurs an $O(\log k)$ additive overhead, because we have to include the extractor in our machine. (Our implementation of the extractor takes 10w + 17 states.) In return, we save a multiplicative factor of w (which scales with $\log k$) on the number of data states needed.

This is plainly not worth it for the 10-bit example binary shown in Figs. 4 and 5. For that binary, we require 69 additional states for the extractor in order to save 5 data states. For real programs, however, it is worth it, as can be seen from the following table.

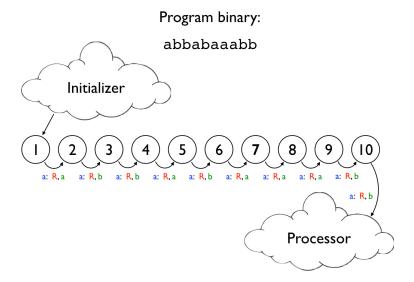


Figure 4: A naïve implementation of the printer. In this example, the hypothetical program is ten bits long, and the printer uses ten states, one for each bit. In the diagram, the blue symbol is the symbol that is read on a transition, the red letter indicates the direction the head moves, and the green symbol indicates the symbol that it written. Note the lack of transitions on reading a b; this is because in this implementation, the printer will only ever read the blank symbol, which is a, since the head is always proceeding to untouched parts of the tape. It therefore makes no difference what behavior the Turing machine adopts upon reading a b in states 1-10 (and therefore b transitions are presumed to lead to the ERROR state)

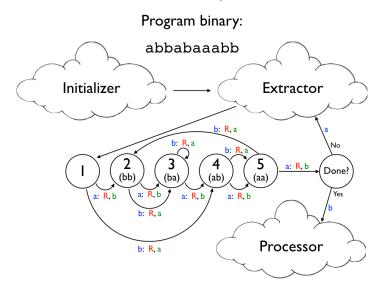


Figure 5: An introspective implementation of the printer. In this example, the hypothetical program is k=10 bits long, and so the word size must be 2 (since w=2 is the largest w such that $w2^w \leq 10$). There are therefore $n_w = \left\lceil \frac{k}{w} \right\rceil = 5$ data states, each encoding two bits. The b transitions carry the information about the encoding; note that each one only points to one of the last four data states. The last four data states have in parentheses what word we mean to encode if we point to them.

Program	Binary Size	w	n_w	Extractor Size	States (Naïve)	States (Introspective)
Example TMD	116	4	29	57	116	86
Goldbach	4,964	9	552	107	4,964	659
Riemann	9,532	10	1,024	117	9,532	1,141
ZFC	35,906	11	3,265	127	35,906	3,392

One minor detail concerns the numbers presented for the Riemann program. Ordinarily, with a binary of size 9,532, we would opt to split the program into 1,060 words of 9 bits each plus a 107-state extractor, since 9 is the greatest w such that $w2^w < 9,532$. But because 9,532 is so close to the "magic number" 10,240, it's actually more parsimonious to pad the program with copies of the blank symbol until it's 10,240 bits long, and split it into 1,024 words of 10 bits each plus a 117-state extractor.

8.4 The Processor

The processor's job is to interpret the code written onto the tape and modify the variable registers and function stack accordingly. The processor does this by the following sequence of steps:

START:

- 1. Find the function call at the top of the stack. Mark the function f in the code whose ID matches that of the top function call.
- 2. Read the current program counter. Mark the line of code l in f whose line number matches the program counter.
- 3. Read l. Depending on what type of command l is, carry out one of the following three lists of tasks.

IF l IS AN EXPLICIT TAPE COMMAND:

- 1. Read the variable name off l. Index the variable name into the list of variables in the top function on the stack. This list of variables corresponds to the mapping between the function's local variables and the register names.
- 2. Match the indexed variable to its corresponding register r. Mark r. Read the symbol s_r to the right of the head marker in that register.
- 3. Travel back to l, remembering the value of s_r using states. Find and mark the reaction x corresponding to the symbol. See what symbol s_w should be written in response to reading s_r .
- 4. Travel back to r, remembering the value of s_w using states. Replace s_r with s_w .
- 5. Travel back to x. See which direction d the head should move in response to reading s_r .
- 6. Travel back to r, remembering the value of d using states. Move the head marker accordingly.
- 7. Travel back to x. See if a jump is specified. If a jump is specified, copy the jump address onto the program counter. Otherwise, increment the program counter by 1.

8. Go back to START.

IF l IS A FUNCTION CALL:

- 1. Write the function's name to the top of the stack.
- 2. For each variable in the function call, index the variable name into the list of variables in the top function on the stack. This list of variables corresponds to the mapping between the function's local variables and the register names. Push the corresponding register names in the order that they correspond to the variables in the function call.
- 3. Copy the current program counter to the return address of the newborn function call at the top of the stack.
- 4. Replace the current program counter with 0 (meaning "read the first line of code").
- 5. Go back to START.

IF l IS A RETURN STATEMENT:

- 1. Replace the current program counter with f's return address.
- 2. Increment the program counter by 1.
- 3. Erase the call to f from the top of the stack.
- 4. Check if the stack is now empty. If so, halt.
- 5. Go back to START.

8.5 Cost Analysis

It's worthwhile to analyze the relative contributions of the initializer, the printer, and the processor to the machine's final state count. The following table lists the number of states in each submachine for each of the four different TMD programs under discussion.

Program	Initializer	Printer	Processor	Total
Example TMD	349	86	3,860	4,295
Goldbach	369	659	3,860	4,888
Riemann	371	1,141	3,860	5,372
ZFC	389	3,392	3,860	8,013

As can be seen from this table, the processor makes the largest contribution to all four programs. Improving the processor, therefore, is probably the best approach for improving upon the bounds we present. Equally clear, however, is that for programs more complicated than the ones presented here, the cost of the printer will grow almost linearly but the cost of the processor will stay the same. The cost of the initializer grows very slightly with the complexity of programs because of the need to initialize additional registers.

Improving the printer, and with it the TMD and Laconic languages, is probably the best approach for reducing state count for very large and complex programs.

9 Future Work

How much further can Z's state count be reduced? Without a significant new insight, further order-of-magnitude reductions seem unlikely via tweaks to our existing system: note that such tweaks would need to reduce the sizes of both the printer and the processor by an order of magnitude. However, improvement is possible by (for example) a redesigned processor, combined with a simpler independent mathematical statement than Friedman's.

Other future work might involve further use of our Laconic language to upper-bound the 'complexities' of mathematical statements and algorithms, in as standardized and model-independent a way as possible. Perhaps Laconic could be used to measure the complexity of other well-known conjectures, or even to compare different algorithms for solving the same problem to each other (e.g., to try to quantify the notion that an insertion sort is simpler than a merge sort)!

10 Acknowledgements

We thank Prof. Harvey Friedman for having done the crucial theoretical work that made this project feasible. Prof. Friedman was endlessly available over email, and provided us with immediate and detailed clarifications when we needed them.

We thank Luke Schaeffer for his early help, as well as his help designing introspective Turing machines.

We thank Alex Arkhipov for introducing us to the term "code golfing."

Supported by an Alan T. Waterman Award from the National Science Foundation, under grant no. 1249349.

References

- [1] Barker, C. "Iota and Jot: the simplest languages?" http://semarch.linguistics.fas.nyu.edu/barker/Iota/ [A website describing the Iota and Jot programming languages]
- [2] Ben-Amram, A., Petersen, H. "Improved Bounds for Functions Related to Busy Beavers" Theory of Computing Systems 35, 1-11 (2002)
- [3] Brady, A.H. "Solution of the Non-computable 'Busy Beaver' game for k=4." Abstracts for: ACM Computer Science Conference (Washington, DC, February 18-20, 1975), p. 27, ACM, 1975.
- [4] Browder, F. "Mathematical Developments Arising from Hilbert Problems." American Mathematical Society. Volume 28, Part 1.
- [5] Calude, C., Calude, E. "Evaluating the Complexity of Mathematical Problems: Part 1," "Evaluating the Complexity of Mathematical Problems: Part 2." Complex Systems 18, pp. 387-401. 2010.
- [6] Friedman, H. "Order Invariant Graphs and Finite Incompleteness." https://u.osu.edu/friedman.8/files/2014/01/FliniteSeqInc062214a-v9w7q4.pdf

- [7] Friedman, H. "Order Theoretic Equations, Maximality, and Incompleteness." June 7, 2014. http://u.osu.edu/friedman.8/foundational-adventures/downloadable-manuscripts #78.
- [8] Gödel, K. "The Consistency of the Axiom of Choice and of the Generalized Continuum-Hypothesis with the Axioms of Set Theory." Published in 1940 by the Princeton University Press. Annals of Mathematics Studies.
- [9] Koza, J. "Spontaneous Emergence of Self-Replicating and Evolutionarily Self-Improving Computer Programs." in Artificial Life III (SFI Studies in the Sciences of Complexity, vol. XVII), C. G. Langton, Ed. Reading, MA: Addison-Wesley. pp. 225-262. 1994.
- [10] Lin, S., Rado, T. "Computer Studies of Turing Machine Problems." Published in Journal of the ACM, Volume 12, Issue 2, April 1965. Pages 196-212.
- [11] Madore, D. "The Unlambda Programming Language." http://www.madore.org/david/programs/unlambda/ [A website describing the Unlambda programming language]
- [12] Marxen, H., Buntrock, J. "Attacking the Busy Beaver 5." Bull EATCS, Vol. 40, pp. 247-251. 1990.
- [13] Marxen, H. http://www.drb.insel.de/~heiner/BB/ [A list of the known busy beaver values]
- [14] Müller, U. "Brainfuck." http://www.muppetlabs.com/ breadbox/bf/ [A website describing the Brainf*ck programming language]
- [15] Pargellis, A. "The Spontaneous Generation of Digital 'Life." Physica D, 91, 86-96. 1996.
- [16] Rado, T. "On Non-Computable Functions." Bell System Technical Journal, 41: 3. May 1962 pp 877-884.
- [17] Schoenfield, J. "The Problem of Predicativity." Essays on the foundations of mathematics, Y. Bar-Hillel et al., eds., pp. 132-142. 1961.
- [18] Yedidia, A. https://github.com/adamyedidia/parsimony A link to a GitHub repository containing all programs, Turing machines related to this paper, along with related documentation.
- [19] http://codegolf.stackexchange.com/ [A place where programmers go for recreational code golfing]

Appendices

A Example Laconic Program: Goldbach's Conjecture

The following is an example Laconic program, which compiles down to the Turing machine G mentioned in Section 4 (which halts if and only Goldbach's Conjecture is false).

```
func zero(x) {
   x = 0;
    return;
func one(x) {
   x = 1;
    return;
func incr(x) {
   x = x + 1;
    return;
/* Computes x modulo y */
func modulus(x, y, out) {
   out = x;
    while (out >= y) {
        out = out - y;
    return;
}
func assignXtoYminusX(x, y) {
   x = y - x;
    return;
}
/* Figures out if x is prime, and puts the output in y */ \,
/* Does not modify x, modifies y */
func isPrime(x, h, y) {
   if (x == 1) {
        zero(y);
        return;
    }
    y = 2;
    while (x > y) {
        modulus(x, y, h);
        if (h == 0) {
            zero(y);
            return;
        }
        incr(y);
    return;
}
int evenNumber;
int primeCounter;
int isThisOnePrime;
int foundSum;
int h;
evenNumber = 2;
one(foundSum);
while (foundSum) {
    zero(foundSum);
```

```
evenNumber = evenNumber + 2;
    one(primeCounter);
    while (primeCounter < evenNumber) {</pre>
        isPrime(primeCounter, h, isThisOnePrime);
        if (isThisOnePrime) {
            assignXtoYminusX(primeCounter, evenNumber);
            isPrime(primeCounter, h, isThisOnePrime);
            assignXtoYminusX(primeCounter, evenNumber);
            if (isThisOnePrime) {
                print evenNumber;
                print primeCounter;
                one(foundSum):
        }
        incr(primeCounter);
    }
}
halt;
```

For detailed documentation of the Laconic programming language, see [18]. To find this file specifically, navigate to parsimony/src/laconic/laconic_files/goldbach.lac at [18].

B Example TMD Program

The following is an example TMD directory, which compiles down to a binary string to be written on a Turing machine tape. It's the example used in illustrations throughout this paper, most notably in the example compilation shown in Figs. 2 and 3. The program calls itself recursively three times until the starting symbol on each tape, E, is replaced with a 1, at which point the program halts.

This TMD directory is called example_tmd_dir, and contains four files: f.tmd, g.tmd, initvar, and functions.

```
f.tmd:
input a b c

// Recursively writes a 1 on every tape.

function g a
[b] 1 (RETURN); E ()
function f b c a
RETURN: return
    g.tmd:
input x

// Writes a 1 on the input tape.

[x] E (1)
return
    functions:
```

```
f
g
initvar:
```

For detailed documentation of the TMD programming language, see [18]. To find this directory specifically, navigate to parsimony/src/tmd/tmd_dirs/example_tmd_dir/ at [18].

C Explicit Listing of Z

A description of a single state in Z

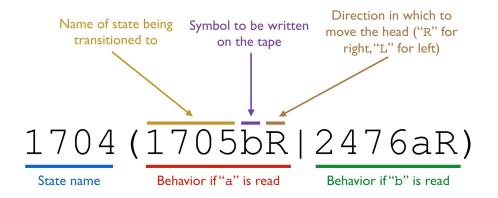


Figure 6: This figure explains how to read a description of a single state. Note that "ERROR-" or "HALT--" denote transitions to the ERROR or HALT states, respectively (no further information is provided because what symbol is written and which direction the head moves are at that point irrelevant).

We present below an explicit listing of Z. For a more easily readable version of Z, complete with descriptive state names, see [18].

We ran this Turing machine for 10,000,000,000,000 steps (more than half a day on our simulators) and within that time it did not halt. We note, however, that Z was designed for parsimony rather than efficiency, and that this "experiment" is of little consequence! We similarly ran a Turing machine designed to test the conjecture that all perfect squares are less than 5, and it ran for 2,895,083,899 steps (a couple hours on our simulator) before it found the counterexample 9 and halted.

Figure 6 explains how to interpret the description shown below. In addition, note the following:

1. The tape has a 2-symbol alphabet, with tape symbols {a,b} and blank symbol a (in other words, a is the only symbol that can appear an infinite times on the tape).

- 2. The start state of Z is 0000.
- 3. Z will never transition to the ERROR state. Any transition to the ERROR state could be replaced by a transition to any other state (including HALT) and the Turing machine's behavior would remain identical.
- 4. Z contains only one transition to the HALT state, out of state 7593.

0020(0021aR ERROR-) 0021(0022aR 0022bR) 0022(002 0030(0031aL 0031bL) 0031(0026aL 0026bL) 0032(003 0040(0049aL 0049bL) 0041(ERROR- 0042bL) 0042(004	23aR ERROR-) 0023(0024aR 0024bR) 0024(0025aR E 33aL 0035bL) 0033(0034aL 0034bL) 0034(0037aL 43aL 0043aL) 0043(0037aL 0037bL) 0044(0045aR 0	ERROR-) 0025(0067aR 0067bR) 0026(0027aR 0032bR) 0 0037bL) 0035(0036aL 0036bL) 0036(0026aL 0026bL) 0048bR) 0045(ERROR- 0046aL) 0046(0047aR 0047aR)	037(0038aR 0041bR) 0038(0044aR 0039bL) 0039(0	0010bR ERROR-) 0020aR 0020bR) 0026aL 0026bL) 0040bR 0040bR) 0050aR 0051bR)
0060(0061aR 0061bR) 0061(0062aR ERROR-) 0062(006 0070(0026aL 0026bL) 0071(0072aR 0075bR) 0072(007) 0080(0081bR 0081bR) 0081(0083aR 0083bR) 0082(007 0090(0091aR 0091bR) 0091(0099aL 0099bL) 0092(009 0100(0101aL 0103bL) 0101(0102aL 0102bL) 0102(009	33aR 00534bR 0053 (0052aR 0052bR) 0054 (0055aL 0053bR) 0053 (0064aR ERROR-) 0064 (0065aR 671aR 0073bL) 0073 (0074aR 0074bR) 0074 (0078aL 671aR 0073bL) 0073 (0074aR 0074bR) 0094 (0083aR 0083 (0084aR 0085bL) 0094 (0083aR 0383bL) 0094 (0083aR 0383bR) 0094 (0095aL 0094bL) 0094 (0	0065BR) 0065(0066aR ERROR-) 0066(0016aR 0016bR) 0 0078bL) 0075(ERROR- 0076bL) 0076(0077aR 0077bR) 0 0083bR) 0085(0086aL 0083bR) 0086(0087aL 0087bL) 0 0097bL) 0095(0096aL 0096bL) 0096(0088aL 0088bL) 0 0110bL) 0105(0106aL 0108bL) 0106(0107aR 0107bR) 0	067(0068bB ERROR-) 0068(0069bB ERROR-) 0069(07/10078aL]0078bD, 0079(079aR]0062bB, 0079(0078aL]0078bD, 0079(079aR]0062bB, 0079(0087(0088aL]0088bL) 0088(0089aR]0094bB, 0089(0088aL]0088bL) 0099(0088aL]0088bL) 0099(0088aL]0098bD, 0099(0088aL]0098bD, 0099(0088aL)0098bD, 0099(0088bD, 0099(0088bD, 0099)(0088bD, 0099)(0098bD, 0099)(0088bD, 0099)(00	0060aR ERROR-) 0070bL ERROR-) 0080aL 0078bR) 0090aL 0092bL) 0100aR 0105bR) 0110aL 0110bL)
0120(0121aL 0123bL) 0121(0122aR 0122bR) 0122(013 0130(0131aR 0136bR) 0131(0132aL 0134bL) 0132(013 0140(0139aR 0141bL) 0141(0142aR 0142bR) 0142(014 0150(0151aL 0146bR) 0151(0152aR 0152aR) 0152(015 0160(0157aL 0157bL) 0161(0162aR 0162bR) 01620(16)	13bL 0113bL) 0113 (0130aL 0130bL) 0114 (0115bL 030aL 0130bL) 0124 (0114bL 0124bL) 0124 (0119aL 0124bL) 0124 (0119aL 0124bL) 0124 (0119aL 0124bL) 0134 (0135aR 0136aL 0130bL) 0134 (0135aR 0136aL 0136bL) 0144 (0145aR 0145aR 0145aL 0145 (0155aR 0156aL 0165 (0155aR 0156aL 0164 (0155aR 0156aL 0166aL	0119bl) 0125(0126al 0128bl) 0126(0127al 0127bl) 0 0135bR) 0135(0088al 0088bl) 0136(ERR0R- 0137bl) 0 0145bR) 0145(0146al 0146bl) 0146(0147aR 0150bR) 0 0155bR) 0155(0156bl ERR0R-) 0156(0157al 0157bl) 0 0165bR) 0165(0166al 0166bl) 0166(0167aR 017bR) 0	127(0119aL 0119bL) 0128(0129aL 0129bL) 0129(137(0119aL 0139bR) 0139(01808aL 0088bL) 0139(01806) 0139(0	0120aR 0125bR) 0119aL 0119bL) 0140aR 0143bR) 0071aL 0071bL) 0160aL 0160bL) 0177aL 0177bL) 0180aL 0180bL)
0180(0177aL 0177bL) 0181(0182aR 0182bR) 0182(018 0190(0191aL 0191bL) 0191(0186aL 0186bL) 0192(018 0200(0201aR 0204bR) 0201(0202aL 0197bR) 0202(020 0210(0219aR 0219bR) 0211(0212bR ERROR-) 0212(021 0220(0221aR 0221bR) 0221(0222aR ERROR-) 0222(022	36aL 0186bL) 0183(ERROR- 0184bL) 0184(0185aR 0	0185bR) 0185(0186aL 0186bL) 0186(0187aR 0192bR) (0186bL) 0195(0196aL 0196bL) 0196(0186aL 0186bL) (0197bR) 0205(0206aR ERROR-) 0206(0207aR 0207bR) (0233bR) 0215(0216bR ERROR-) 0216(0217bR ERROR-) (0225bR) 0225(0226aR ERROR-) 0226(0227aR 0227bR) (187(0188aL 0190bL) 0188(0189aR 0189bR) 0189(1 197(0198aR 0199bR) 0198(0197aR 0197bR) 0199((207(0208aR ERROR-) 0208(0209aR 0209bR) 0209((217(0218bL ERROR-) 0218(0263aL 0263bL) 0219((227(0228aR ERROR-) 0228(0229aR 0229bR) 0229((0157aL 0157bL) 0157aL 0157bL) 0200aR 0197bR) 0210aR ERROR-) 0220aR ERROR-) 0230aR ERROR-) 0240bR ERROR-)
0240 (0241bR ERROR-) 0241 (0242bR ERROR-) 0242 (0242bR CEROR-) 0242 (0242bR CEROR-) 0256 (0255 ital 0251bR) 0251 (0252aR ERROR-) 0256 (02561aR 0261bR) 0261 (0262aR ERROR-) 0262 (0212bR 0274bL 0271bR 0274bL 0274bL 0274bL 0274bL 0274bL 0274bL 0282bR 0285bR 0282bR 0292bR 0293bR	33bR ERROR-) 0243 (0244bR ERROR-) 0244 (0235bR E 33aR 10255bR 0253 (0254aR ERROR-) 0254 (0255aR E 15aR 0215bR 0253 (0264aR 0269bR) 0264 (0265aL E 33aL 0273bL) 0273 (0263aL 0263bL) 0274 (0275aR E 10R- 0283aL) 0283 (0284aR 0284aR) 0294 (0295aL E 11aR 0291bR) 0293 (0294aL 0291bR) 0294 (0295aR E	ERROR-) 0245 (0246aR ERROR-) 0246 (0247aR 0247bR) 0255bR) 0255bR) 0255bR 0255bR 0257bR 0257bR 0257bR 0257bR 0267bL 0265 (0256aL 0266bL 0266 (0263aL 0263bL) 027bR) 027bR) 0275 (0263bL 0276bL) 0276 (0277bR) 0277bR 0277bR 0277bR 0277bR 0277bR 0277bR 0286bL 0285 (0287bL) 0285 (0286aL 0286bR) 0286 (0287aR 0287aR) 0286bR 0295 (0297bR 0287aR) 0286bR 0296 (0297bR 0296bR 0296 0297bR	247 (0248aR ERROR-) 0248 (0249aR 0249bR) 0249 (257 (0258aR ERROR-) 0255 (0259aR 0259bR) 0255 (257 (0258aR 0268bL) 0268 (02563aL 0268bL) 0268 (0263aL 0268bL) 0269 (027 (0268aL 0268bL) 0268 (0263aL 0268bL) 0269 (027 (0288aL 0288bL) 0279 (ERROR-) 0279 bL) 027 (0280 (029bL) 0289 (029bL)	0250aR ERROR-) 0260aR ERROR-) 0270aL 0272bL) 0280aL 0280aL) 0288aR 0288bR) 0263aL 0263bL)
0320(0321aR 0324bR) 0321(0320aR 0322aL) 0322(032 0330(0331bL 0329bR) 0331(0332aR 0332aR) 0332(032 0340(0341bR 0341bR) 0341(0320aR 0320bR) 0342(034	JOBAR 10303-RR 10304-RR 10305-BR 10304 (0398-RR 10315-BR 10314 (0339-RR 10315-BR 103	0327aL) 0325(0326aR 0326aR) 0326(0347aR 0347bR) 0 0335aR) 0335(0347aR 0347bR) 0336(0337aR 0337aR) 0 0338bR) 0345(0346bR 0346bR) 0346(0347aR 0347bR) 0	327(0328aR 0328aR) 0328(0338aR 0338bR) 0329(337(0338aR 0338bR) 0338(0339aR 0344bR) 0339(347(0348bL ERRNR-) 0348(0349aL 0349bL) 0349(0308aR 0308bR 0360aL 0360bL 0330aR 0333bR 0340bL 0342bL 0350aR 0355bR 0349aL 0349bL 0370aL 0370bL
0370 (03860aL) (0360bL) 0371 (0372aR) (0375bR) 0372 (0373 0380 (03814R) ERROR-) 0381 (0382aR) (0382bR) 0382 (038 0390 (0391bL) ERROR-) 0391 (0395aR) ERROR-) 0392 (038 0400 (0401bR) 2166aR) 0401 (0402bR) 13952aR) 0402 (0404 0410 (0411bR) 2123aR) 0411 (0412bR) 13257aR) 0412 (041 0420 (0421bR) 2155aR) 0421 (0422bR) 13037aR) 0412 (041	73aL 0371bB 0373 (0374bR 0374bR 0374(0308aR C) 33aB ERROR - 0383 (0384aR 0384bR 0384bR 03840R 03840R	0308bR) 0375(0376aL 0371bR) 0376(0377aR 0377aR) ERROR-) 0385(0389aR 0389bR) 0386(0387aR 038bR) 05 ERROR-) 0395(0396bR 2662aR) 0396(0397bR 3184aR) 0496 1998aR) 0405(0406bR 3390aR) 0406(0407bR 3194aR) 02767aR] 0415(0416bR 2561aR) 0416(0417bR 3050aR) 3184aR) 0425(0427bR 2643aR) 0416(0417bR 3650aR)	377 (0378aR 0378kR) 0378 (0379bR ERROR-) 0379 (03879bR ERROR-) 0379 (03876) 0306bR 0388 (0306bR 0306bR 0396bR 0395 (0398bR 0395 (0398bR 0397 (0398bR 0397 (0398bR 0398 (0399bR 2960aR) 0399 (047) (0408bR 02337aR) 0408 (0409bR 2173aR) 0499 (0417 (0418bR 3540aR) 0418 (0419bR 2760aR) 0419 (0428bR 0342aR) 0428 (0429bR 0	0380bR ERROR-) 0390aR ERROR-) 0400bR 3105aR) 0410bR 2054aR) 0420bR 3500aR) 0430bR 3521aR)
0440(0441bR 3680aR) 0441(0442bR 3863aR) 0442(04 0450(0451bR 12147aR) 0451(0452bR 2106aR) 0452(045 0460(0461bR 2996aR) 0461(0462bR 1991aR) 0462(046 0470(0471bR 12670aR) 0471(0472bR 3104aR) 0472(047 0480(0481bR 3706aR) 0481(0482bR 3396aR) 0482(048	33BR 2544aR)	3042aR) 0445(0446bR 3937aR) 0446(0447bR 2178aR) (2147aR) 0455(0456bR 2053aR) 0466(0457bR 3372aR) (2027aR) 0465(0466bR 3365aR) 0466(0467bR 3570aR) (2760aR) 0475(0476bR 3397aR) 0476(0477bR 2178aR) (2868aR) 0485(0496bR 1988aR) 0496(0487bR 2796aR) (447(0448bR 2336aR) 0448(0449bR 2685aR) 0449((457(0458bR 3356aR) 0458(0459bR 2216aR) 0459((467(0468bR 2389aR) 0468(0469bR 3531aR) 0469((477(0478bR 3386aR) 0478(0479bR 1992aR) 0479((487(0488bR 2263aR) 0488(0499bR 3272AR) 0489(0440bR 3457aR) 0450bR 2054aR) 0460bR 3125aR) 0470bR 3014aR) 0480bR 2437aR) 0490bR 3537aR) 0500bR 3648aR)
0500 (0501bR) [2542aR] 0501 (0502bR) [3381aR) 0502 (0552bR) 0510 (0511bR) [2795aR] 0511 (0512bR) [3668aR] 0512 (0515bR) (2499bR) 0512 (0522bR) [2001aR) 0522 (0525bR) [2499bR] 0531 (0532bR) [3461aR) 0532 (0552bR) [3461aR] 0532 (0552bR) [3461aR] 0532 (0552bR) [3461aR] 0542 (0542bR) [3572bR] 0541 (0542bR) [3574aR) 0542 (0552bR) [3573aR] 0552 (0	305H 3192aH	2672aR) 0505(0506bR]3096aR) 0506(0507bR]2636aR) 2643aR) 0515(0516bR]2757aR) 0516 (0517bR]2028aR) 0526(0527bR]2540aR) 0526(0527bR]2540aR) 0526(0527bR]2540aR) 0526(0527bR]2540aR) 0526(0527bR]2540aR) 0526(0527bR]2540aR) 0546(0547bR]2544aR) 0546(0547bR)2544aR) 0546(0547bR)254(507 (0509bR) [2327aR] 0508 (0509bR) [3272aR] 0509 (1517 (0518bR) [3792aR) 0518 (0519bR) [223aR) 0519 (0527 (0528bR) [2310aR) 0528 (0529bR) [2155aR] 0529 (0528bR) [2310aR] 0528 (0529bR) [2155aR] 0529 (0528bR) [3352aR) 0538 (0539bR) [2540aR] 0549 (0548bR) [2636aR] 0549 (0548bR) [2636aR] 0549 (0558 (0559bR) [2636aR] 0549 (0558 (05595R) 0559 (05594R) 0558 (0558 (05595R) 0559 (05594R) 0558 (0558 (05595R) 0559 (05594R) 0558	0510bR 3537aR) 0520bR 3936aR) 0530bR 3652aR) 0540bR 2311aR) 0550bR 2327aR) 0560bR 3073aR)
0570 (0571bR 3570aR) 0571 (0572bR 2389aR) 0572 (057 0580 (0581bR 3042aR) 0581 (0582bR 3540aR) 0582 (058 0590 (0591bR 3178aR) 0591 (0592bR 3863aR) 0592 (058 0600 (0601bR 3018aR) 0601 (0602bR 3865aR) 0602 (060 0610 (0611bR 3147aR) 0611 (0612bR 2246aR) 0612 (061	33bR 2156aR) 0563 (0564bR 2012aR) 0564 (0565bR 273bR 3020aR) 0573 (0575bR 2343aR) 0574 (0575bR 2343aR) 0574 (0575bR 2343aR) 0574 (0575bR 2343aR) 0584 (0565bR 33bR 2762aR) 0583 (0584bR 3406aR) 0584 (0565bR 33bR 3842aR) 0593 (0584bR 2310aR) 0594 (0565bR 33bR 3842aR) 0693 (0604bR 3109aR) 0694 (0605bR 31084R) 0614 (0615bR 2365aR) 0614 (0615bR 2365aR) 0614 (0615bR 2365aR)	2890aR) 0575 (0576bR 3841aR) 0576 (0577bR 3040aR) 0 2228aR) 0585 (0586bR 12264aR) 0586 (0587bR 12542aR) 0 1998aR) 0595 (0596bR 12268aR) 0596 (0597bR 12728aR) 0 2755aR) 0605 (0606bR 12073aR) 0606 (0607bR 13744aR) 0 2220aR) 0615 (0616bR 12262aR) 0616 (0617bR 12147aR) 0	577(0578bB 3857aR) 0578(0579bR 3008aR) 0579(587(0588bR 3358aR) 0588(0589bR 3528aR) 0589(597(0598bR 3525aR) 0598(0599bR 3659aR) 0599(607(0608bR 3456aR) 0608(0609bR 2794aR) 0609(617(0618bR 2069aR) 0618(0619bR 3136aR) 0619((0570bR 3365aR) 0580bR 3861aR) 0590bR 3457aR) 0690bR 1989aR) 0610bR 3601aR) 0620bR 3937aR) 0630bR 3863aR)
0640(0641bR 3531aR) 0641(0642bR 2053aR) 0642(064 0650(0651bR 12543aR) 0651(0652bR 2756aR) 0652(065 0660(0661bR 2184aR) 0661(0662bR 3612aR) 0662(066 0670(0671bR 12218aR) 0671(0672bR 3537aR) 0672(067 0680(0681bR 12123aR) 0681(0682bR 2066aR) 0682(066	238h 3304aR) 6232(6624hR 2337aR) 6624(6625hR 23338h 21686aF) 6633(6634hR 2357aR) 6634(6635hR 2358hR 23634) 6634(6635hR 2358hR 2357aR) 6644(6645hR 2358hR 2720aR) 6653(6644hR 35541aR) 6644(6645hR 2358hR 2352aR) 6654(6656hR 23658hR 23654R) 6654(6656hR 23654R) 6654(6656	2960aR) 0645(0646bR 3105aR) 0646(0647bR 2168aR) (2923aR) 0655(0656bR 2049aR) 0656(0657bR 3840aR) (2636aR) 0665(0666bR 2327aR) 0666(0667bR 3272aR) (2034aR) 0675(0676bR 3381aR) 0676(0677bR 2794aR) (2642aR) 0685(0686bR 2080aR) 0686(0687bR 2238aR) (637 (6638bR 2333aR) 6638 (6639bR 2796aR) 6639 (6467 (6648bR 2362aR) 6481 (6449bR 2126aR) 6659 (667 (6658bR 2007aR) 6658 (6659bR 2680aR) 6659 (6667 (6658bR 3557aR) 6668 (6669bR 2880aR) 6659 (667 (6668bR 3557aR) 6668 (6669bR 2880aR) 6676 (677 (6678bR 3936aR) 6678 (6679bR 2156aR) 6679 (68768bR 3521aR) 6678 (6879bR 3840aR) 6869 (6889 3840aR) 6878 (6879bR 3840aR) 6878 (68768bR 3840aR) 6878 (6878bR 3840aR) 6878 (6878bR 3840aR) 6878 (6888BR 3840aR) 6878	0640bR 3121aR) 0650bR 2264aR) 0660bR 3479aR) 0670bR 3937aR) 0680bR 2070aR) 0690bR 2328aR)
0700(0701bR 12914aR) 0701(0702bR 13537aR) 0702(070 0710(0711bR 12764aR) 0711(0712bR 12262aR) 0712(070 0720(0721bR 13764aR) 0721(0722bR 12265aR) 0722(072 0730(0731bR 12670aR) 0731(0732bR 12078aR) 0732(073 0740(0741bR 12323aR) 0741(0742bR 12941aR) 0742(074	33BR 12147aR) 0693 (0694bR 12069aR) 0694 (0695bR 12) 33bR 12762aB) 70703 (0704bR 12373aR) 0704 (0705bR 12) 13bR 12147aR) 0713 (0714bR 12069aR) 0714 (0715bR 12) 13bR 13767aR) 0723 (0724bR 1256bAR) 0724 (0725bR 12) 13bR 1359AB) 379AB 0733 (0734bR 13591aR) 0734 (0735bR 12) 13bR 13541aR) 0743 (0744bR 13125aR) 0744 (0745bR 12) 13bR 13541aR) 0743 (0744bR 12)	2742aR) 0705 (0706bR 2053aR) 0706 (0707bR 3534aR) (3872aR) 0715 (0715bR 3100aR) 0716 (0717bR 2222aR) (2163aR) 0725 (0726bR 3669aR) 0726 (0727bR 3255aR) (2638aR) 0735 (0736bR 2014aR) 0736 (0737bR 3578aR) (2040aR) 0745 (0746bR 2013aR) 0746 (0747bR 3965aR) (2040aR) 0746 (0747bR 3965aR) (2040aR) 0746 (0745bR 2013aR) 0746 (0745bR 20	707(0708bR 2453aR) 0708(0709bR 3581aR) 0709(171(0718bR 3383aR) 0718(0719bR 3476aR) 0719((727(0728bR 2650aR) 0728(0729bR 2547aR) 0729((727(0728bR 3868aR) 0738(0739bR 2927aR) 0739(747(0748bR 3686aR) 0748(0749bR 3148aR) 0749)((0700bR 1989aR) 0710bR 1989aR) 0720bR 3649aR) 0730bR 3719aR) 0740bR 2781aR) 0750bR 3936aR) 0760bR 3120aR)
0760(0761bR 2555aR) 0761(0762bR 3643aR) 0762(0767 0770(07771bR 2722aR) 0771(0772bR 2363aR) 0762(0776 0780(0781bR 2028aR) 0781(0782bR 3936aR) 0782(0787 0790(0791bR 2813aR) 0791(0792bR 3376aR) 0792(078 0800(0801bR 2891aR) 0801(0802bR 3713aR) 0802(080 0810(0811bR 201aR) 0811(0812bR 3941aR) 0812(081	33bH 3341aR) 0763 (0764bR 2073aR) 0764 (0765bR 1; 37bH 2220aB) 0773 (0774bR 12352aR) 0774 (0775bR 1; 33bR 2735aR) 0783 (0784bR 2921aR) 0784 (0785bR 1; 39bH 2218aR) 0793 (0794bR 3607aR) 0794 (0795bR 1; 39bH 2318aR) 0793 (0794bR 3607aR) 0894 (0805bR 1; 31bR 2813aR) 0813 (0814bR 31355aR) 0814 (0815bR 1;	3883aR) 0765(0766bR) 3335aR) 0766(0767bR) 1986aR) 2173aR) 0775(0776bR) 13172rA) 0776 (0777bR) 3764aR) 6 3298aR) 0785(0786bR) 3617aR) 0786(0787bR) 3764aR) 8 438aR) 0795(0797bR) 2795(0796bR) 29997aR) 0796 (0797bR) 2744aR) 6 005(0806bR) 2577aR) 0806(0807bR) 3203aR) 2691aR) 0815(0815bR) 3713aR) 0816 (0817bR) 3532aR) 6 0815CR) 3813AR) 0815(0815bR) 3532aR) 6 0815CR) 3813AR) 0815(0815bR) 3532aR) 6 0815CR) 6 0817bR)	767 (0768bR 3901aR) 0768 (0769bR 1230aR) 0769 (1777 (0778bR 12329aR) 0778 (0779bR 13767aR) 0779 (1779bR 13767aR) 0778 (0779bR 13675aR) 0788 (0789bR 13893aR) 0789 (1797 (0798bR 12491aR) 0798 (0799bR 12404aR) 0799 (0807 (0808bR 13500aR) 0808 (0809bR 12923aR) 0809 (1817 (0818bR 12557aR) 0818 (0819bR 12936aR) 0819 (1817 (0818bR 12557aR) 0818 (0818bR 12936aR) 0819 (1817 (0818bR 12936aR) 0818 (1817 (0818bR 1293	0770bR 2460aR) 0780bR 2650aR) 0790bR 2401aR) 0800bR 2101aR) 0810bR 3100aR) 0820bR 3289aR)
0830 (0831hR) 2996aR) 0831 (0832hR) 3357aR) 0832 (0838 0840 (0841hR) 13160aR) 0841 (0842hR) 3952aR) 0842 (0848 0850 (0851hR) 12690aR) 0851 (0852hR) 12472aR) 0852 (08586 0860 (0851hR) 0343aR) 0861 (0852hR) 13552aR) 0852 (08586 0870 (0871hR) 12127aR) 0871 (0872bR) 13552aR) 0872 (0878678) 0872 (0878678) 0880 (08816R) 38452aR) 0881 (0882bR) 12369aR) 0882 (08886 (0881bR) 13842aR) 0881 (0882bR) 12369aR) 0882 (08886 (0881bR) 13842aR)	23BA 2928aR) 0823 (0824BR 3962AR) 0824 (0825BR 335BR 3476aR) 0833 (0834BR 3719aR) 0834 (0835BR 3476aR) 0834 (0835BR 3476aR) 0844 (0845BR 2635BR 2544BR 0843 (0845BR 2635BR 2544BR 0853 (0854BR 2359aR) 0854 (0855BR 2535BR 0854 (0855BR 2359aR) 0854 (0855BR 2359aR) 0854 (0855BR 2359aR) 0854 (0855BR 235BR 2356BR 0854BR 08	2683aR) 0835 (0836bR) 13033aR) 0836 (0837bR) 2960aR) (2173aR) 0845 (0845bR) 2054aR) 0846 (0847bR) 1214aR) (3296aR) 0855 (0856bR) 12372aR) 0856 (0857bR) 2762aR) 3272aR) 0856 (0867bR) 2357aR) 0856 (0867bR) 3059aR) (3072aR) 0856 (0867bR) 2357aR) 0856 (0867bR) 3059aR) (3076aR) 0875 (0876bR) 2449aR) 0876 (0877bR) 3696aR) (2672aR) 0885 (0885bR) 13104aR) 0886 (0887bR) 12740aR) (3272aR) 0885 (0887bR) 12740aR) (3272aR) 0886 (0887bR) 12740aR) (3272aR) (3272aR) 0886 (0887bR) 12740aR) (3272aR)	837 (0838bB 3422aR) 0838 (0839bR 3984aR) 0839 (6847 (0848bR 3940aR) 0848 (0849bR 2032aR) 0849 (849bR 2032aR) 0849 (857 (0858bR 3525aR) 0858 (0859bR 3842aR) 0859 (867 (0868bR 3242aR) 0859 (0869bR 3051aR) 0869 (877 (0878bR)2369aR) 0878 (0879bR 12760aR) 0879 (679bR 12760aR) 0879 (679	0830bR 2096aR) 0840bR 3422aR) 0850bR 3360aR) 0860bR 2437aR) 0870bR 2006aR) 0880bR 3541aR) 0890bR 3936aR)
0900(0901bR 3019aR) 0901(0902bR 2362aR) 0902(090 0910(0911bR 2032aR) 0911(0912bR 3101aR) 0912(091 0920(0921bR 2045aR) 0921(0922bR 2262aR) 0922(092 0930(0931bR 3019aR) 0931(0932bR 2362aR) 0932(093	33BR 2755aB) 0883 (0884bR 3649aR) 0884 (0885bB 23bR 3669aB 0893 (0894bR 2072aB) 0894 (0895bB 23bR 3669aB 0893 (0894bR 2072aB) 0894 (0895bB 23bR 2124aB) 0993 (0994bR 2264aB) 0994 (0995bB 23bR 2124aB) 0913 (0914bR 2265aB) 0914 (0915bB 32bR 2156aB) 0913 (0914bR 2265aB) 0914 (0915bB 32bR 2156aB) 0923 (0924bR 2269aB) 0924 (0925bB 23bR 2124aB) 0934 (0935bB 23bR 2124aB) 0914 (0935bB 23bR 2124aB) 0914 (0935bB 23bR 2054aB) 0914 (0945bB 23bR 2054aB) 0914 (0955bB 2054bB 2054aB) 0914 (0955bB 2054bB 2054aB) 0914 (0955bB 2054bB 2054bB 2054aB) 0914 (0955bB 2054bB 2054b	2544aR) 0895 (0896bR 3386aR) 0896 (0897bR 2112aR) (2228aR) 0905 (0906bR 3096aR) 0906 (0907bR 12672aR) (3019aR) 0915 (0916bR 3652aR) 0916 (0917bR 12754aR) (2173aR) 0925 (0926bR 3029aR) 0926 (0927bR 3532aR) (2228aR) 0935 (0936bR 3014aR) 0936 (0937bR 12156aR) (887 (1888bR) 3590aR) 0898 (0899bR) 2031aR) 0899 (1907 (1908bR) 3104aR) 0809 (1907 (1908bR) 3104aR) 0908 (0909bR) [2742aR) 099 (1917 (1918bR) 3806aR) 0918 (0919bR) 3043aR) 0919 (1927 (1928bR) 2071aR) 0928 (0929bR) (2887aR) 0929 (1935 (1938bR) 2072aR) 0938 (0939bR) 2587aR) 0939 (1938bR) 2072aR) 0938 (0939bR) 2587aR) 0939 (1937 (1938bR) 3361aR) 0938 (0939bR) 2228bR) 0939 (1938 (1938bR) 2228bR) 0939 (1938 (19	0900bR 2513aR) 0910bR 2071aR) 0920bR 2054aR) 0930bR 2513aR) 0940bR 2054aR) 0950bR 2261aR) 0960bR 3496aR)
0960(096thR 2027aR) 0961(0962bR 2336aR) 0962(0969 0970(0971bR 2674aR) 0971(0972bR 2393aR) 0972(097 0990(099thR 2685aR) 0991(0972bR 2054aR) 0982(098 0990(0991bR 2973aR) 0991(0992bR 2605aR) 0992(098 1000(1001bR 2818aR) 1001(1002bR 2087aR) 1002(100 1010(101bR 2813aR) 1011(1012bR 239aR) 1012(101	33BR 2690aR 0963 (0964bR 2373aR) 0964 (0965bR 2373aR) 0730R 2770aR 0973 (0974bR 3864aR) 0974 (0975bR 238bR 2028aR) 0983 (0984bR 2014aR) 0984 (0995bR 238bR 2124aR) 0993 (0994bR 3941aR) 0994 (0995bR 238bR 3307aR) 1003 (1004bR 2478aR) 1004 (1005bR 238bR 3893R 1013 (1014bR 2401aR) 1014 (1015bR 238bR 3893R 1013 (1014bR 2401aR) 1014 (1015bR 238bR 3893R 1013 (1014bR 2401aR) 1014 (1015bR 238bR 3893R 238bR 3893R 3013 (1014bR 2401aR) 1014 (1015bR 2401aR) 1	2968aR) 0965(0966bR]2076aR) 0966(0967bR]2178aR) 2178aR) 075(0976bR]3862aR) 0976(0977bR]2723aR) (3008aR) 0995(0996bR]3862aR) 0976(0977bR]2176aR) 2813aR) 0995(0996bR]3866aR) 0996 (0997bR]3018aR) (3316aR) (3016aR)	967 (0968bR) (2453aR) 0968 (0969bR) (3043aR) 0969 (977 (0978bR) (1990aR) 0978 (0979bR) (2028aR) 0978 (979bR) (2028aR) 0978 (979bR) (2058bR) 0988 (0989bR) (2554aR) 0988 (9998 (999bR) (2675bR) 0999 (997 (0998bR) 3642aR) 0998 (0999bR) (2675bR) 0999 (097 (1008bR) 3422aR) 1008 (1009bR) 3859aR) 1009 (107 (1018bR) 2656baR) 1018 (1019bR) (2035bR) 1019 (107 (1018bR) 2656baR) 1018 (1019bR) (2035bR) 1019 (1017 (1018bR) 2656baR) 1018 (1018bR) (2035bR) 1019 (1018bR) (2035bR) 1019 (1018bR) (2035bR) 1019 (1018bR) (2035bR) (203	0970bR 3653aR) 0980bR 2264aR) 0990bR 3396aR) 1000bR 3754aR) 1010bR 2516aR) 1020bR 3669aR)
1040(1041bR 2208aR) 1041(1042bR 2453aR) 1042(104 1050(1051bR 2923aR) 1051(1052bR 3962aR) 1052(105 1060(1061bR 2552aR) 1061(1062bR 2375aR) 1062(106 1070(1071bR 3578aR) 1071(1072bR 3357aR) 1072(107	238h 2163aR) 1023 (1024hR) 3664aR) 1024 (1025hB) 238hR 3535aR) 1033 (1034hR) 3668aR) 1034 (1035hR) 2438hR 3668aR) 1034 (1035hR) 2438hR 3668aR) 1044 (1045hR) 2438hR 3668aR) 1044 (1045hR) 253hR 3218aR) 1053 (1054hR) 2398aR) 1054 (1055hR) 253hR 3406aR) 1063 (1064hR) 2263aR) 1064 (1055hR) 273hR 3832aR) 1073 (1074hR) 21074 R) 1074 (1075hR) 273hR 3832aR) 1073 (1074hR) 2107AR) 1074 (1075hR) 21074 R) 1074 (1075hR) 21074 R) 21074 R	3754aR) 1045(1046bR 4013aR) 1046(1047bR 2880aR) 1 3146aR) 1055(1056bR 3639aR) 1056(1057bR 3304aR) 1 2803aR) 1065(1066bR 3668aR) 1066(1067bR 2223aR) 1 3341aR) 1075(1076bR 2070aR) 1076(1077bR 2941aR) 1	037(1038bR 3638aR) 1038(1039bR 2231aR) 1039(047(1048bR 3863aR) 1048(1049bR 2230aR) 1049(057(1058bR 2398aR) 1058(1059bR 3859aR) 1059(067(1068bR 2921aR) 1068(1069bR 3406aR) 1069(077(1078bR 2006aR) 1078(1079bR 2231aR) 1079(1030bR 2375aR) 1040bR 2651aR) 1050bR 3487aR) 1060bR 2845aR) 1070bR 2078aR) 1080bR 2651aR)
1100(1101bR 2507aR) 1101(1102bR 3127aR) 1102(110 1110(1111bR 2740aR) 1111(1112bR 2265aR) 1112(111 1120(1121bR 2923aR) 1121(1122bR 3936aR) 1122(112	338h 2237aR) 1083 (1084hR 2325aR) 1084 (1085kR 1338hR 2210aR) 1093 (1094hR 3354aR) 1094 (1095kR 1398hR 2210aR) 1093 (1094hR 3354aR) 1094 (1095kR 139kR 2991aR) 1103 (1104kR 12781aR) 1104 (1105kR 138kR 2941aR) 1113 (1114bR 12055aR) 1114 (1115bR 1280R 1215aR) 1124 (1125bR 13104 1215kR 13104 1125kR 13104 13104 1135kR 13104 13104 1135kR 13104 13	3254ah 1095 (1096bR 1201aR) 1096 (1097bR 12994aR) 13576ah 1095 (1096bR 3100aR) 1096 (1097bR 12954aR) 13576ah 1095 (1096bR 3100aR) 1096 (1097bR 1257saR) 12237aR) 1105 (1106bR 12056aR) 1106 (1107bR 12973aR) 12191aH 1115 (1116bR 1256aR) 1116 (1117bR 13704aR) 12997aR) 1125 (1127bR 1251aR) 1126 (1127bR 13144aR) 12927aR) 1135 (1136bR 12775aR) 1136 (1137bR 1274aR) 3341aR) 1145 (1147bR 13742aR) 136 (1137bR 1372bR) 2147aR) 1154 (1157bR 1372bR) 3147aR) 1154 (1157bR 1372bR)	087(1088bR 12110ab) 1088(1089bR 3179ab) 1089(097(1098bR 3125ab) 1088(1099bR 3977ab) 1099(107(1190bR 3125ab) 1088(1099bR 3977ab) 1099(107(1108bR 364ab) 1108(1109bR 1995aR) 1109(117(1118bR 3614ab) 1118(1119bh 3684aR) 1119(117(1112bB 3937ab) 1128(1129bR 1221aab) 129(137(1138bB 3357ab) 1138(1139bh 3893ab) 1139(147(1145bB 12397ab) 1148(1149bh 3893ab) 1139(1110bR 3398aR) 1120bR 2097aR) 1130bR 3497aR)
1150(1161bH 12220aB, 1151(1152bH 3950aB) 1152(116 1160(1161bH 2815aB, 1151(1162bH 3851aB, 1162(116 1170(1171bH 2860aB, 1171(1172bH 3952aB, 1172(117 1180(1181bH 3554aB, 1161(1182bH 3858aB, 1182(116 1190(1191bH 2156aB, 1191(1192bH 3859aB, 1182(116 1200(1201bH 3692aB, 120(1202bH 2996aB, 1202(122 1210(1211bH 372aB, 1211(1212bH 3785aB, 1212(121 1220(1221bH 372aB, 1211(1212bH 3785aB, 1212(121 1220(1221bH 372aB, 1211(1212bH 3777aB, 1222(122)	S3bR 2754aR) 1163(1164bR 3777aR) 1164(1165bR 373bR 2942aR) 1173(1174bR 3783aR) 1174(1175bR 335kR 2024aR) 1183(1184bR 3873aR) 1184(1185bR 3873aR)	3883aR) 1165(1166bR 3511aR) 1166(1167bR 2046aR) 1 3695aR) 1175(1177bR 3649aR) 1176(1177bR 2163aR) 1 3883aR) 1185(1186bR 3359aR) 1186(1187bR 2042aR) 1	167(1168bR 3390aR) 1168(1169bR 3534aR) 1169(1777(1178bR 3665aR) 1178(1179bR 2702aR) 1179(1877(1188bR 3496aR) 1188(1189bR 2123aR) 1189(1170bR 3364aR) 1180bR 3953aR) 1190bR 2473aR) 1200bR 3713aR)
1230(1231bR) 3555aR) 1231(1232bR) 3719aR) 1232(123 1240(1241bR) 3040aR) 1241(1242bR) 3486aR) 1242(124 1250(1251bR) 2928aR) 1251(1252bR) 3952aR) 1252(125 1260(1261bR) 3875aR) 1261(1262bR) 3077aR) 1262(126 1270(1271bR) 2818aR) 1271(1277bR) 3033aR) 1272(127	73bR 3723aR) 1273(1274bR 3125aR) 1274(1275bR 3	3744aB 1205 (1206BB 3989aB) 1206 (1207BB 15964aB) 33875aB 1215 (1215BB 3073AB) 1216 (1217BB 1764AB) 34875aB 1216 (1215BB 3073AB) 1216 (1217BB 1764AB) 1226 (1227BB 2638AB) 13485aB 1226 (1227BB 2638AB) 13485aB 1226 (1227BB 2638AB) 1245 (1247BB 12638AB) 1246 (1247BB 12673AB) 1247BB 12673AB 1245 (1247BB 12673AB) 1247BB 12673AB 1245 (1247BB 12673AB) 1267BB 1267BB 1267BB 1267BB 1267BB 1267BB 1267BB 1267BB 12	207(1200bk 3209ak) 1200(1209bk 3715ak) 1209(1 277(1278bk 2455ak) 1278(1279bk 3476ak) 1279(1	1240bR 3686aR) 1250bR 2561aR) 1260bR 2081aR) 1270bR 3754aR) 1280bR 3652aR)
1290(1291bR 3272aR) 1291(1292bR 3639aR) 1292(129 1300(1301bR 2672aR) 1301(1302bR 2432aR) 1302(130	33bR 3274aR) 1293(1294bR 3110aR) 1294(1295bR 2 33bR 2970aR) 1303(1304bR 3901aR) 1304(1305bR 3	2031aR) 1250(1296bR)3105aR) 1296(1297bR)3197aR) 1 2231aR) 1295(1296bR)2650aR) 1296(1297bR)257aR) 1 3695aR) 1305(1306bR)3039aR) 1306(1307bR)3266aR) 1	297(1298bR 3649aR) 1298(1299bR 2163aR) 1299(307(1308bR 2343aR) 1308(1309bR 3406aR) 1309(1300bR 3735aR) 1310bR 2081aR)

1313 (1314bR | 3421aR) 1323 (1324bR | 3616aR) 1323 (1324bR | 4008aR) 1333 (1334bR | 4008aR) 1343 (1344bR | 1300aR) 1355 (1354bR | 2433aR) 1363 (1364bR | 2457aR) 1373 (1374bR | 3496aR) 1383 (1364bR | 2496aR) 1383 (1394bR | 2496aR) 1393 (1394bR | 3293aR) 1403 (1404bR | 2078aR) 1413 (1414bR | 2073aR) 1423 (1424bR | 3777aR) 1315 (1316bR | 3421aR) 1325 (1326bR | 2356aR) 1325 (1336bR | 2012aR) 1345 (1346bR | 3052aR) 1345 (1346bR | 3352aR) 1355 (1356bR | 3572aR) 1356 (1366bR | 3572aR) 1356 (1366bR | 3572aR) 1356 (1366bR | 3799aR) 1385 (1366bR | 2752aR) 1405 (1406bR | 2512aR) 1415 (1416bR | 2255aR) 1425 (1426bR | 2166aR) 1425 (1426bR | 2166aR) 1316 (1317bR | 3893aR) 1326 (1327bR | 2923aR) 1336 (1337bR | 2740aR) 1346 (1347bR | 2960aR) 1356 (1357bR | 3304aR) 1366 (1367bR | 2170aR) 1366 (1377bR | 2126aR) 1386 (1387bR | 3264aR) 1317(1318bR | 2404aR) 1327(1328bR | 3652aR) 1337(1338bR | 3053aR) 1347(1348bR | 3121aR) 1357(1358bR | 3110aR) 1367(1358bR | 3453aR) 1377(1378bR | 3390aR) 1387(1388bR | 2072aR) 1397(1398bR | 3652aR) 1311(1312bR|2087aR) 1321(1322bR|3664aR) 1331(1332bR|3032aR) 1318 (1319 kH 1998 ak)
1328 (1329 kH 298 tak)
1328 (1329 kH 298 tak)
1328 (1339 kH 298 tak)
1328 (1339 kH 2054 ak)
1328 (139 kH 2054 ak)
1328 (1439 kH 2054 ak)
1328 (1331 (1332bR| 1341 (1342bR| 1351 (1352bR| 1361 (1362bR| 1371 (1372bR| 1381 (1382bR| 1391 (1392bR| 1381 (138258) (138758) (23978) (13978) (13928) 1393(14) 13938(12) 139418(14) 139418(14) 1492(14) 139418(13) 13418(14) 1492(14) 14938(14) 139418(14) 1492(14) 14938(14) 139418(14) 1492(14) 14938(1400(1401bR|2542aR) 1410(1411bR|2547aR) 1420(1421bR|2163aR) 1419 (1420bil 3649aB) 3645aB) 365aB) 1420 (1421bR) 21538R 1 1430 (1431bR) 85328R 1 1440 (1441bR) 85328R 1 1440 (1441bR) 22114R 1 1450 (1451bR) 21248R 1 1460 (1451bR) 21248R 1 1490 (1451bR) 21348R 1 1490 (1451bR) 23798R 1 1590 (1551bR) 33068R 1 1510 (1511bR) 33068R 1 1510 (1511bR) 21738R 1 1530 (1551bR) 21738R 1 1530 (1551bR) 21738R 1 1530 (1551bR) 21738R 1 1550 (1551bR) 21258R 1 1580 (1581bR) 2237aR) 1590 (1591bR) 2962aR) 1590 (1591bR) 2962aR) 1600 (1601bR) 2691aR) 1610 (1611bR) 2670aR) 1620 (1621bR) 2973aR) 1630 (1631bR) 3059aR) 1640 (1641bR) 2687aR) 1650 (1651bR) 2174aR) 1660 (1661bR) 2787aR) 1670 (1671bR) 2787aR) 1680 (1681bR) 2787aR) 1680(1681bR|2030aR) 1690(1691bR|2032aR) 1700(1701bR|2188aR) 1710(1711bR|3770aR) 1720(1721bR|3058aR) 1730(1731bR|2891aR) 1740(1741bR|2179aR) 1741 (1742bH 3398aH)
1751 (1752bH 2457aH)
1751 (1752bH 2457aH)
1761 (1752bH 3941aH)
1761 (1752bH 3941aH)
1761 (1752bH 3852bH)
1761 (1752bH 3852bH)
1801 (1802bH 3896aH)
1801 (1802bH 3896aH) 1749 (1750bR 2650aR)
1759 (1760bR 2432aR)
1769 (1770bR 3104aR)
1779 (1780bR 2329aR)
1789 (1800bR 2054aR)
1789 (1800bR 2054aR)
1809 (1810bR 3671aR)
1819 (1820bR 3381aR)
1829 (1830bR 3496aR)
1839 (1840bR 3463aR)
1849 (1850bR 3350aR) 1740 (1741bk | 21794k) 1750 (1751bk | 1994ak) 1760 (1761bk | 2923ak) 1770 (1771bk | 2763ak) 1780 (1781bR|3064aR) 1790 (1791bR|3148aR) 1800 (1801bR|2168aR) 1800(1801bR|2168aR) 1810(1811bR|2688aR) 1820(1821bR|2927aR) 1820(1821bR|2927aR) 1830(1831bR|2019aR) 1840(1841bR|2743aR) 1850(1851bR|2763aR) 1850(1851bR|283aR) 1870(1871bR|2892aR) 1880(1881bR|2766aR) 1880 (1891bit 2776ah)
1890 (1891bit 2776ah)
1890 (1891bit 2775ah)
1890 (1891bit 1896ah)
1890 (1891bit 1896ah) 1881 (1882bR 1852bR 3652bR)
1891 (1892bR 3652bR)
1991 (1992bR 3652bR)
1991 (1992bR 38552bR)
1991 (1992bR 38552bR)
1991 (1992bR 38552bR)
1993 (1992bR 38552bR)
1993 (1992bR 3751bR)
1995 (1992bR 3751bR)
1995 (1992bR 3751bR)
1995 (1992bR 3850bR)
1996 (1992bR 3850bR)
1997 (1907bR)
1997 1890 (1890 km) 2294 km) 1890 (1890 km) 2294 km) 1890 (1890 km) 2294 km) 1895 (1890 km) 2394 (1890 km) 2395 (189 22b2 (2283b), 2928b), 2927b), 2022 (2283b), 2813b), 282 (2283b), 2813b), 282 (2283b), 283 b), 2269 (2270bR | 3359aR) 2279 (2280bR | 2500aR) 2289 (2290bR | 3009aR) 2299 (2300bR | 2369aR) 2309 (2310bR | 3392aR) 2319 (2320bR | 2008aR) 2331 (23408h) (2348h) (2358h) 2761 (2762bR 2437aR) 2771 (2772bR 3360aR) 2781 (2782bR 3936aR) 2791 (2792bR 3376aR) 2801 (2802bR 3463aR) 2811 (2812bR 2565aR) 2821 (2822bR 3653aR) 2831 (2832bR 3037aR)

2841 (2842bR | 3462aR) 2851 (2852bR | 2328aR) 2861 (2862bR | 3782aR) 2871 (2872bR | 2369aR) 2881 (2882bR | 2362aR) 2891 (2892bR | 3293aR) 2901 (2902bR | 3652aR) 2911 (2912bR | 3477aR) 2921 (2922bR | 3937aR) 2843 (2844bR | 2389aR) 2853 (2854bR | 2332aR) 2863 (2864bR | 3550aR) 2873 (2874bR | 2839aR) 2883 (2884bR | 3399aR) 2893 (2894bR | 2055aR) 2903 (2904bR | 2362aR) 2913 (2914bR | 2650aR) 2923 (2924bR | 2375aR) 2845 (2846bR | 2581aR) 2855 (2856bR | 2308aR) 2865 (2866bR | 2561aR) 2875 (2876bR | 2016aR) 2875 (2876bR | 2014aR) 2895 (2896bR | 3652aR) 2905 (2906bR | 3801aR) 2915 (2916bR | 2373aR) 2925 (2926bR | 3735aR) 2846 (2847bR | 2178aR) 2856 (2857bR | 2764aR) 2866 (2867bR | 2699aR) 2876 (2877bR | 2996aR) 2886 (2887bR | 3139aR) 2996 (2897bR | 2755aR) 2996 (2907bR | 2800aR) 2916 (2917bR | 3069aR) 2926 (2927bR | 2638aR) 2847 (2848bR | 3526aR) 2857 (2858bR | 3609aR) 2867 (2858bR | 2375aR) 2877 (2878bR | 3285aR) 2877 (2878bR | 3285aR) 2897 (2898bR | 3496aR) 2907 (2908bR | 3864aR) 2917 (2918bR | 3686aR) 2927 (2928bR | 1985aR) 2842 (2843bR | 2034aR) 2852 (2853bR | 2787aR) 2862 (2853bR | 2787aR) 2872 (2863bR | 216aR) 2872 (2873bR | 2167aR) 2882 (2883bR | 2126aR) 2892 (2893bR | 2746aR) 2902 (2903bR | 2764aR) 2912 (2913bR | 3767aR) 2922 (2923bR | 2667aR) 2844 (2845bR | 3535aR) 2854 (2855bR | 2228aR) 2864 (2865bR | 3859aR) 2874 (2875bR | 2032aR) 2894 (2895bR | 3275aR) 2894 (2895bR | 2691aR) 2904 (2905bR | 2538aR) 2914 (2915bR | 2154aR) 2924 (2925bR | 3476aR) 2848 (2849bR | 2546aR) 2858 (2859bR | 2196aR) 2868 (2869bR | 2219aR) 2878 (2879bR | 3211aR) 2888 (2899bR | 2115aR) 2998 (2999bR | 2175aR) 2908 (2909bR | 2178aR) 2918 (2919bR | 3043aR) 2928 (2929bR | 3768aR) 2840 (2841bR|2732aR) 2850 (2851bR|3840aR) 2860 (2861bR|3400aR) 2870 (2871bR|2740aR) 2880 (2881bR|3020aR) 2890 (2891bR|2883aR) 2930 (2931bR| 2920aR) 2940 (2941bR| 2991aR) 2950 (2951bR| 3272aR) 2931 (2932bR|39374R) 2931 (2932bR|2436aR) 2941 (2942bR|3496aR) 2951 (2952bR|2096aR) 5940 (541181 296181 59748) 5941 (592581 296948) 5942 (294381 29748) 5942 (295881 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 29748) 5950 (295181 295181 2950 (295181 295181 295181 2950 (295181 295181 295181 295181 2950 (295181 295281 295281 295181 295181 295181 295181 295181 295181 295181 295181 295181 295181 295181 29 2201 (2321bit | 2598ah | 3521 (232bit | 2305bit | 2305bi 3289 (3290bR | 3314aR) 3289 (3290bR | 2433aR) 3299 (3300bR | 2096aR) 3309 (3310bR | 3936aR) 3339 (3340bR 12352aR) 3349 (3350bR 1078aR) 3359 (3350bR 1201aR) 3369 (3370bR 2513aR) 3369 (3370bR 3031aR) 3389 (3390bR 3033aR) 3400bR 3037aR) 3419 (3410bR 3781aR) 3429 (3430bR 12084aR) 3429 (3430bR 12084aR) 3439 (3440bR 3601aR) 1429 (34,50)kl 2094kl 304 (34,50)kl 301 (34,50)kl 3120kl 3120kl 3140kl 4450kl 3120kl 3 3799 (3800bR | 2006aR) 3809 (3810bR | 3360aR) 3819 (3820bR | 3105aR) 3829 (3830bR|3012aR) 3839 (3840bR|2332aR) 3849 (3850bR|3525aR) 3969(3970bil 3465aR)
3979(3980bil 3398aR)
3989(3890bil 3398aR)
3989(3890bil 32012aR)
3989(3890bil 2012aR)
4009(4010bil 2012aR)
4009(4010bil 2012aR)
4009(4010bil 2013aR)
4009(4010bil 2013aR)
4009(4010bil 2013aR)
4009(4010bil 2013aR)
4009(4010bil 2013aR)
4009(4010bil 2013aR)
4009(4070bil 14009bil 2013aR)
4009(4070bil 14009bil 14109bil 1 4290(4291aL | 4291bL) 4300(4314aR | 4314bR) 4310(4314aL | 4314bL) 4320(4321aR | 4324bR) 4330(4331aL | 4333bL) 4340(4341aR | 4344bR) 4291 (4329a1, 4329b1, 4292 (4293aR 4294bR)
4301 (4302a1 4303bR) 4302 (4327aR 4304bR)
4311 (ERROR- 4312b1, 4312 (4313aR 4313bR)
4321 (4301aR 4322b1, 4322 (4323aR 4323bR)
4331 (4332a1, 4332b1, 4332 (4329a1, 4329b1)
4341 (4374aR 4342b1, 4342 (4343b1, 4343b1)
4351 (4352a1, 4354a1), 4352 (4353aR 4353aR)
4361 (4362a1, 4354a1), 4352 (4353aR 4355aR)
4361 (4362a1, 4352aR)

7480 (743841 741911) 783 (742841 741911) 783 (742841 744911) 743 (