


Chapter 7: Deadlocks



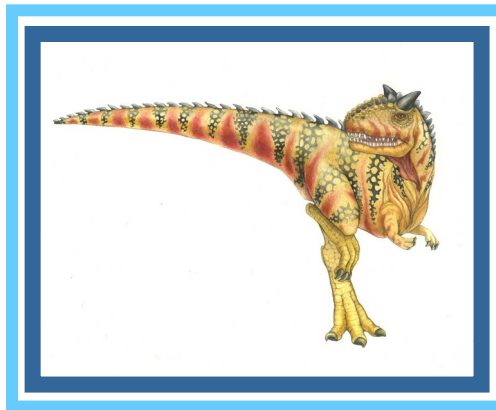

Outline

- System Model
- Deadlock Characterization
- Methods for Handling Deadlocks
- Deadlock Prevention
- Deadlock Avoidance
- Deadlock Detection
- Recovery from Deadlock





Chapter Objectives

- Illustrate how deadlock can occur when mutex locks are used
- Define the four necessary conditions that characterize deadlock
- Identify a deadlock situation in a resource allocation graph
- Evaluate the four different approaches for preventing deadlocks
- Apply the banker's algorithm for deadlock avoidance
- Apply the deadlock detection algorithm
- Evaluate approaches for recovering from deadlock






The Deadlock Problem


- A set of blocked processes each holding a resource and waiting to acquire a resource held by another process in the set.
- Example
 - System has 2 tape drives.
 - P_1 and P_2 each hold one tape drive and each needs another one.
- Example
 - semaphores A and B , initialized to 1

P_0	P_1
<i>wait</i> (A);	<i>wait</i> (B)
<i>wait</i> (B);	<i>wait</i> (A)

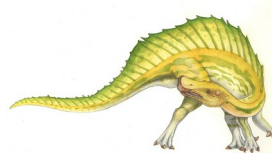



Bridge Crossing Example

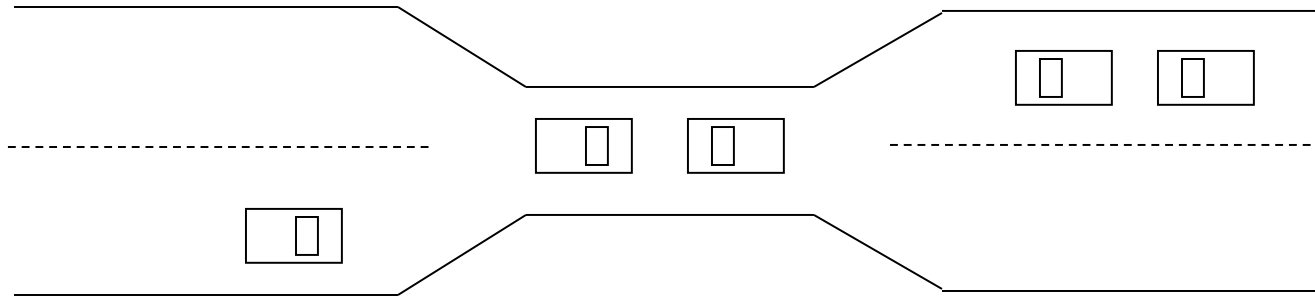

- Traffic only in one direction.
- Each section of a bridge can be viewed as a resource.
- If a deadlock occurs, it can be resolved if one car backs up (preempt resources and rollback).
- Several cars may have to be backed up if a deadlock occurs.
- Starvation is possible.





System Model

- System consists of resources
- Resource types R_1, R_2, \dots, R_m
 - *CPU cycles, memory space, I/O devices*
- Each resource type R_i has W_i instances.
- Each process utilizes a resource as follows:
 - **request**
 - **use**
 - **release**






Deadlock Characterization

Deadlock can arise if four conditions hold simultaneously.

- **Mutual exclusion:** only one thread at a time can use a resource
- **Hold and wait:** a thread holding at least one resource is waiting to acquire additional resources held by other threads
- **No preemption:** a resource can be released only voluntarily by the thread holding it, after that thread has completed its task
- **Circular wait:** there exists a set $\{T_0, T_1, \dots, T_n\}$ of waiting threads such that T_0 is waiting for a resource that is held by T_1 , T_1 is waiting for a resource that is held by T_2 , ..., T_{n-1} is waiting for a resource that is held by T_n , and T_n is waiting for a resource that is held by T_0 .






Resource-Allocation Graph

A set of vertices V and a set of edges E .


- V is partitioned into two types:
 - $T = \{T_1, T_2, \dots, T_n\}$, the set consisting of all the threads in the system.
 - $R = \{R_1, R_2, \dots, R_m\}$, the set consisting of all resource types in the system
- **request edge** – directed edge $T_i \rightarrow R_j$
- **assignment edge** – directed edge $R_j \rightarrow T_i$

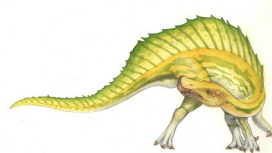




Resource Allocation Graph Example

- One instance of R_1
- Two instances of R_2
- One instance of R_3
- Three instance of R_4
- T_1 holds one instance of R_2 and is waiting for an instance of R_1
- T_2 holds one instance of R_1 , one instance of R_2 , and is waiting for an instance of R_3
- T_3 is holds one instance of R_3

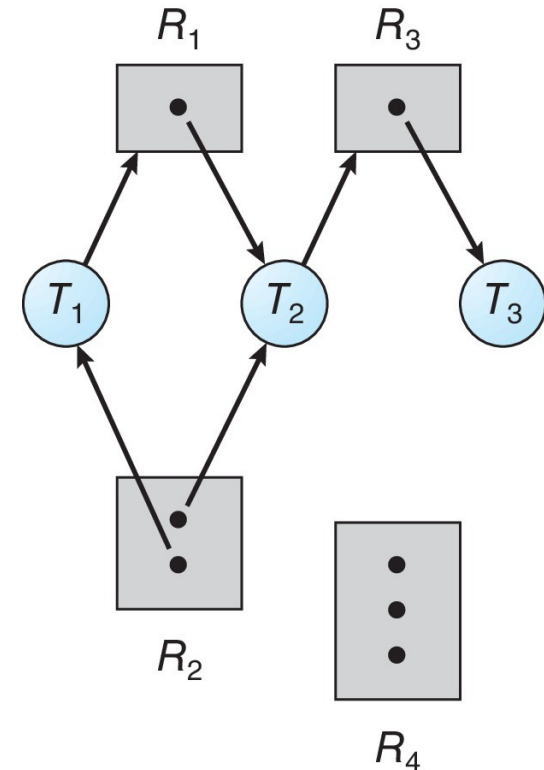




Resource Allocation Graph with a Deadlock

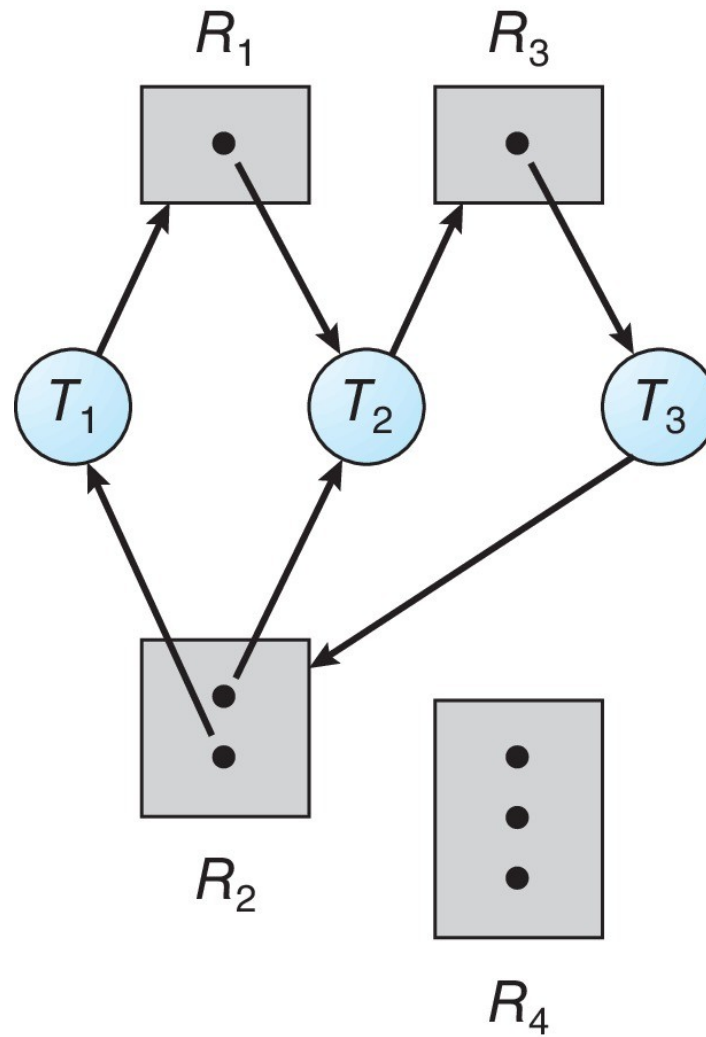



Graph with a Cycle But no Deadlock

- If graph contains no cycles \Rightarrow no deadlock
- If graph contains a cycle \Rightarrow
 - if only one instance per resource type, then deadlock
 - if several instances per resource type, possibility of deadlock

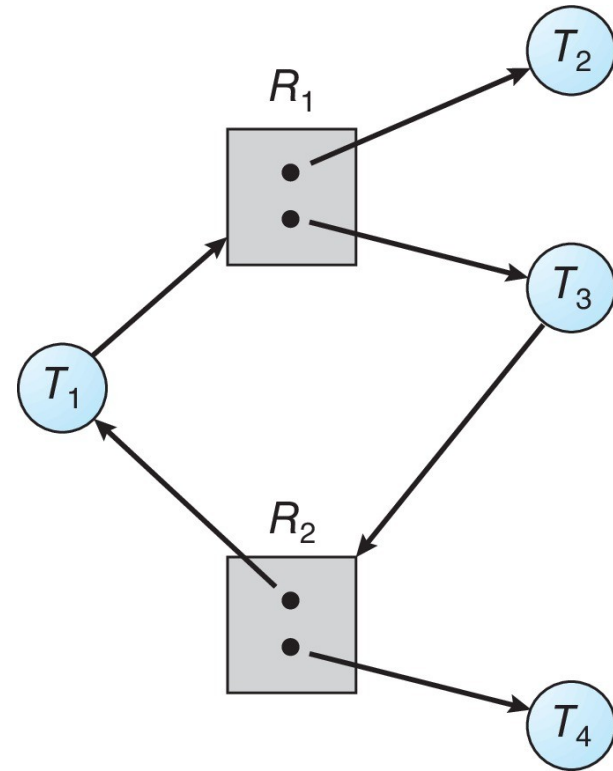



Methods for Handling Deadlocks

- Ensure that the system will **never** enter a deadlock state:
 - Deadlock prevention
 - Deadlock avoidance
- Allow the system to enter a deadlock state and then recover
- Ignore the problem and pretend that deadlocks never occur in the system.





Deadlock Prevention

Invalidate one of the four necessary conditions for deadlock:

- **Mutual Exclusion** – not required for sharable resources (e.g., read-only files); must hold for non-sharable resources
- **Hold and Wait** – must guarantee that whenever a thread requests a resource, it does not hold any other resources
 - Require threads to request and be allocated all its resources before it begins execution or allow thread to request resources only when the thread has none allocated to it.
 - Low resource utilization; starvation possible





Deadlock Prevention (Cont.)

■ No Preemption:

- If a process that is holding some resources requests another resource that cannot be immediately allocated to it, then all resources currently being held are released
- Preempted resources are added to the list of resources for which the thread is waiting
- Thread will be restarted only when it can regain its old resources, as well as the new ones that it is requesting

■ Circular Wait:

- Impose a total ordering of all resource types, and require that each thread requests resources in an increasing order of enumeration






Circular Wait

- Invalidating the circular wait condition is most common.
- Simply assign each resource (i.e., mutex locks) a unique number.
- Resources must be acquired in order.
- If:

```
first_mutex = 1  
second_mutex = 5
```

code for `thread_two` could not be written as follows:



```
/* thread_one runs in this function */  
void *do_work_one(void *param)  
{  
    pthread_mutex_lock(&first_mutex);  
    pthread_mutex_lock(&second_mutex);  
    /**  
     * Do some work  
     */  
    pthread_mutex_unlock(&second_mutex);  
    pthread_mutex_unlock(&first_mutex);  
  
    pthread_exit(0);  
}  
  
/* thread_two runs in this function */  
void *do_work_two(void *param)  
{  
    pthread_mutex_lock(&second_mutex);  
    pthread_mutex_lock(&first_mutex);  
    /**  
     * Do some work  
     */  
    pthread_mutex_unlock(&first_mutex);  
    pthread_mutex_unlock(&second_mutex);  
  
    pthread_exit(0);  
}
```





Deadlock Avoidance

Requires that the system has some additional *a priori* information available

- Simplest and most useful model requires that each thread declare the ***maximum number*** of resources of each type that it may need
- The deadlock-avoidance algorithm dynamically examines the resource-allocation state to ensure that there can never be a circular-wait condition
- Resource-allocation *state* is defined by the number of available and allocated resources, and the maximum demands of the processes





Safe State

- When a thread requests an available resource, system must decide if immediate allocation leaves the system in a safe state
- System is in **safe state** if there exists a sequence $\langle T_1, T_2, \dots, T_n \rangle$ of ALL the threads in the systems such that for each T_i , the resources that T_i can still request can be satisfied by currently available resources + resources held by all the T_j , with $j < i$
- That is:
 - If T_i resource needs are not immediately available, then T_i can wait until all T_j have finished
 - When T_j is finished, T_i can obtain needed resources, execute, return allocated resources, and terminate
 - When T_i terminates, T_{i+1} can obtain its needed resources, and so on






Basic Facts

- If a system is in safe state \Rightarrow no deadlocks
- If a system is in unsafe state \Rightarrow possibility of deadlock
- Avoidance \Rightarrow ensure that a system will never enter an unsafe state.





Safe, Unsafe, Deadlock State

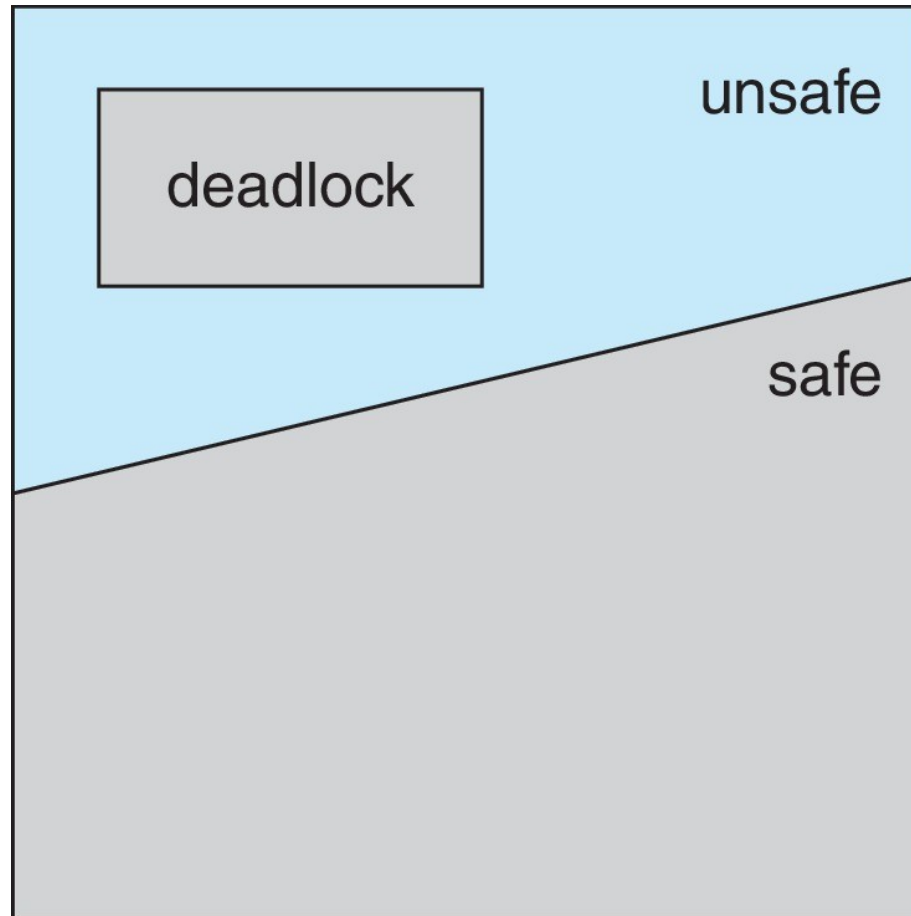



Avoidance Algorithms

- Single instance of a resource type
 - Use a resource-allocation graph
- Multiple instances of a resource type
 - Use the Banker's Algorithm






Resource-Allocation Graph Scheme

- **Claim edge** $T_i \rightarrow R_j$ indicated that process T_j may request resource R_j ; represented by a dashed line
- Claim edge converts to request edge when a thread requests a resource
- Request edge converted to an assignment edge when the resource is allocated to the thread
- When a resource is released by a thread, assignment edge reconverts to a claim edge
- Resources must be claimed *a priori* in the system






Resource-Allocation Graph For Deadlock Avoidance

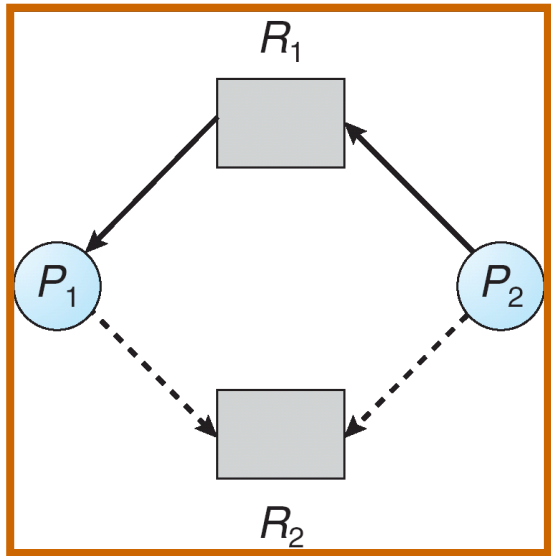

Unsafe State In Resource-Allocation Graph

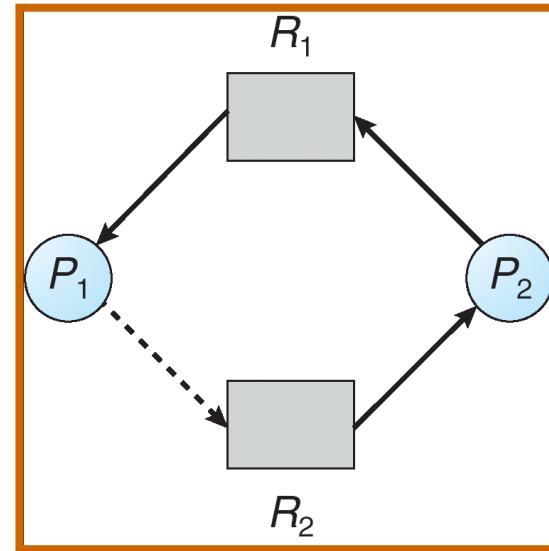

- Suppose that thread T_i requests a resource R_j
- The request can be granted only if converting the request edge to an assignment edge does not result in the formation of a cycle in the resource allocation graph





Banker's Algorithm

- Multiple instances of resources
- Each thread must a priori claim maximum use
- When a thread requests a resource, it may have to wait
- When a thread gets all its resources it must return them in a finite amount of time





Data Structures for the Banker's Algorithm

Let n = number of processes, and m = number of resources types.

- **Available:** Vector of length m . If $available[j] = k$, there are k instances of resource type R_j available
- **Max:** $n \times m$ matrix. If $Max[i,j] = k$, then process T_i may request at most k instances of resource type R_j
- **Allocation:** $n \times m$ matrix. If $Allocation[i,j] = k$ then T_i is currently allocated k instances of R_j
- **Need:** $n \times m$ matrix. If $Need[i,j] = k$, then T_i may need k more instances of R_j to complete its task

$$Need[i,j] = Max[i,j] - Allocation[i,j]$$





Safety Algorithm

1. Let **Work** and **Finish** be vectors of length m and n , respectively.
Initialize:

Work = Available

Finish [i] = false for $i = 0, 1, \dots, n-1$

2. Find an i such that both:

(a) **Finish [i] = false**

(b) **Need_i ≤ Work**

If no such i exists, go to step 4

3. **Work = Work + Allocation_i**

Finish[i] = true

go to step 2

4. If **Finish [i] == true** for all i , then the system is in a safe state





Resource-Request Algorithm for Process P_i

$Request_i$ = request vector for process T_i . If **$Request_i[j] = k$** then process T_i wants k instances of resource type R_j

1. If **$Request_i \leq Need_i$** , go to step 2. Otherwise, raise error condition, since process has exceeded its maximum claim
2. If **$Request_i \leq Available$** , go to step 3. Otherwise T_i must wait, since resources are not available
3. Pretend to allocate requested resources to T_i by modifying the state as follows:

$$Available = Available - Request_i;$$

$$Allocation_i = Allocation_i + Request_i;$$

$$Need_i = Need_i - Request_i;$$

- If safe \Rightarrow the resources are allocated to T_i
- If unsafe $\Rightarrow T_i$ must wait, and the old resource-allocation state is restored





Example of Banker's Algorithm

■ 5 threads T_0 through T_4 ;

3 resource types:

A (10 instances), B (5 instances), and C (7 instances)

■ Snapshot at time T_0 :

	<u>Allocation</u>	<u>Max</u>	<u>Available</u>
	$A \ B \ C$	$A \ B \ C$	$A \ B \ C$
T_0	0 1 0	7 5 3	3 3 2
T_1	2 0 0	3 2 2	
T_2	3 0 2	9 0 2	
T_3	2 1 1	2 2 2	
T_4	0 0 2	4 3 3	





Example (Cont.)

- The content of the matrix **Need** is defined to be **Max – Allocation**

	<u>Need</u>		
	A	B	C
T_0	7	4	3
T_1	1	2	2
T_2	6	0	0
T_3	0	1	1
T_4	4	3	1

- The system is in a safe state since the sequence $\langle T_1, T_3, T_4, T_2, T_0 \rangle$ satisfies safety criteria





Example: P_1 Request (1,0,2)

- Check that Request \leq Available (that is, $(1,0,2) \leq (3,3,2) \Rightarrow$ true

	<u>Allocation</u>			<u>Need</u>			<u>Available</u>		
	A	B	C	A	B	C	A	B	C
T_0	0	1	0	7	4	3	2	3	0
T_1		3	0	2			0	2	0
T_2	3	0	2	6	0	0			
T_3	2	1	1	0	1	1			
T_4	0	0	2	4	3	1			


- Executing safety algorithm shows that sequence $\langle T_1, T_3, T_4, T_0, T_2 \rangle$ satisfies safety requirement
- Can request for (3,3,0) by T_4 be granted?
- Can request for (0,2,0) by T_0 be granted?





Deadlock Detection

- Allow system to enter deadlock state
- Detection algorithm
- Recovery scheme






Single Instance of Each Resource Type

- Maintain **wait-for** graph
 - Nodes are threads
 - $T_i \rightarrow T_j$ if T_i is waiting for T_j
- Periodically invoke an algorithm that searches for a cycle in the graph. If there is a cycle, there exists a deadlock
- An algorithm to detect a cycle in a graph requires an order of n^2 operations, where n is the number of vertices in the graph






Resource-Allocation Graph and Wait-for Graph

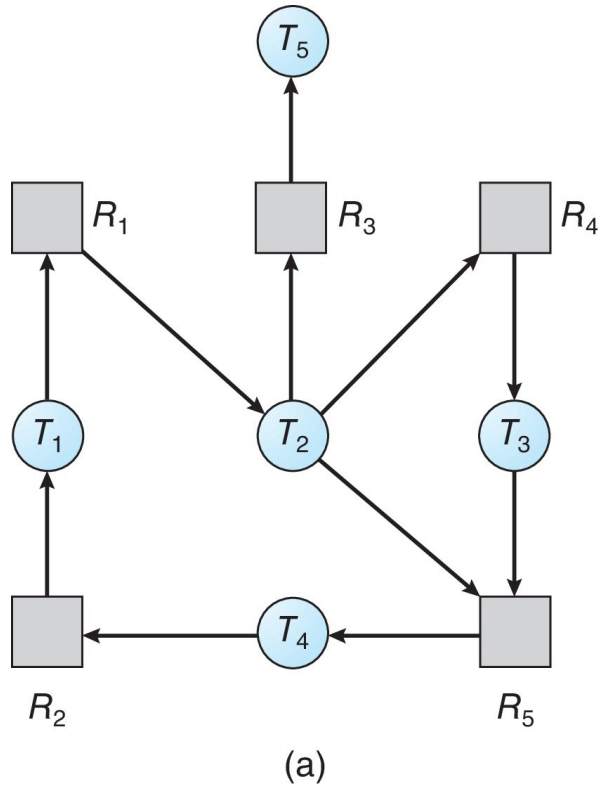

Resource-Allocation Graph

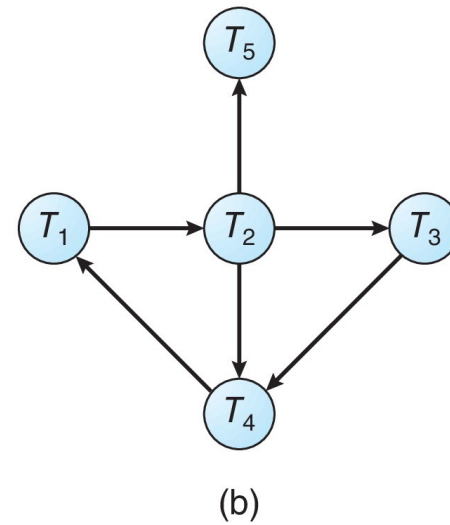

Corresponding wait-for graph





Several Instances of a Resource Type

- **Available:** A vector of length m indicates the number of available resources of each type
- **Allocation:** An $n \times m$ matrix defines the number of resources of each type currently allocated to each thread.
- **Request:** An $n \times m$ matrix indicates the current request of each thread. If $\mathbf{Request}[i][j] = k$, then thread T_i is requesting k more instances of resource type R_j .





Detection Algorithm

1. Let **Work** and **Finish** be vectors of length **m** and **n**, respectively
Initialize:
 - a) **Work = Available**
 - b) For $i = 1, 2, \dots, n$, if **Allocation_i ≠ 0**, then
Finish[i] = false; otherwise, **Finish[i] = true**
2. Find an index **i** such that both:
 - a) **Finish[i] == false**
 - b) **Request_i ≤ Work**

If no such **i** exists, go to step 4





Detection Algorithm (Cont.)

3. **$Work = Work + Allocation_i$**
 $Finish[i] = true$
go to step 2
4. If **$Finish[i] == false$** , for some i , $1 \leq i \leq n$, then the system is in deadlock state. Moreover, if **$Finish[i] == false$** , then T_i is deadlocked

Algorithm requires an order of $O(m \times n^2)$ operations to detect whether the system is in deadlocked state





Example of Detection Algorithm

- Five threads T_0 through T_4 ; three resource types A (7 instances), B (2 instances), and C (6 instances)
- Snapshot at time T_0 :

	<u>Allocation</u>			<u>Request Available</u>					
	A	B	C	A	B	C	A	B	C
T_0		0	1	0			0	0	0
T_1			2	0	0		2	0	2
T_2				3	0	3		0	0
T_3		2	1	1			1	0	0
T_4		0	0	2			0	0	2

- Sequence $\langle T_0, T_2, T_3, T_1, T_4 \rangle$ will result in ***Finish[i] = true*** for all i





Example (Cont.)

- T_2 requests an additional instance of type C

Request

$A \ B \ C$

T_0 0 0 0

T_1 2 0 2

T_2 0 0 1

T_3 1 0 0

T_4 0 0 2

- State of system?
 - Can reclaim resources held by thread T_0 , but insufficient resources to fulfill other processes; requests
 - Deadlock exists, consisting of processes T_1 , T_2 , T_3 , and T_4





Detection-Algorithm Usage

- When, and how often, to invoke depends on:
 - How often a deadlock is likely to occur?
 - How many processes will need to be rolled back?
 - ▶ one for each disjoint cycle
- If detection algorithm is invoked arbitrarily, there may be many cycles in the resource graph and so we would not be able to tell which of the many deadlocked threads “caused” the deadlock.





Recovery from Deadlock: Process Termination

- Abort all deadlocked threads
- Abort one process at a time until the deadlock cycle is eliminated
- In which order should we choose to abort?
 1. Priority of the thread
 2. How long has the thread computed, and how much longer to completion
 3. Resources that the thread has used
 4. Resources that the thread needs to complete
 5. How many threads will need to be terminated
 6. Is the thread interactive or batch?





Recovery from Deadlock: Resource Preemption

- **Selecting a victim** – minimize cost
- **Rollback** – return to some safe state, restart the thread for that state
- **Starvation** – same thread may always be picked as victim, include number of rollback in cost factor



End of Chapter 7

