

Adminisztrációs felület frontend - Osztály szintű dokumentáció

April 30, 2026

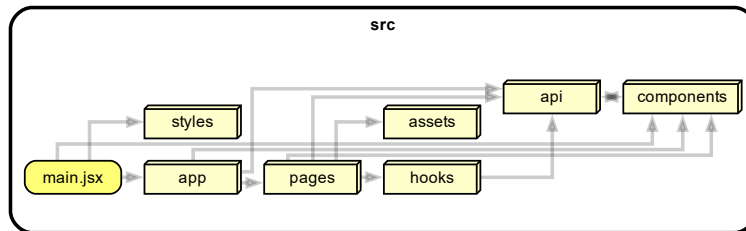


Figure 1: Az adminisztrációs felület frontendjének `dependency-cruiser`-el létrehozott program csomag diagrammja.

llm-api-gateway / api/axios

1 api/axios

1.1 Variables

1.1.1 default

`const default: AxiosInstance`

Defined in: `api/axios.js:10`

llm-api-gateway / api/auth/AuthProvider

2 api/auth/AuthProvider

2.1 Functions

2.1.1 AuthProvider()

`AuthProvider(props): Element`

Defined in: `api/auth/AuthProvider.jsx:16`

Provides authentication state and actions to the component tree.

Parameters

props Component props.
children
ReactNode
Child elements rendered inside the provider.

Returns **Element**
The auth context provider.

2.1.2 `useAuth()`

`useAuth()`: **AuthContextValue**

Defined in: `api/auth/AuthProvider.jsx:160`
Access the current authentication context.

Returns **AuthContextValue**
The auth context value.

llm-api-gateway / `api/auth/Registration`

3 `api/auth/Registration`

3.1 Functions

3.1.1 `registerUser()`

`registerUser(param)`: **Promise<string>**

Defined in: `api/auth/Registration.jsx:14`

Make a registration request to the backend API with the provided user details. If the registration is successful, returns a success message. If there is an error during registration, throws an error with a message from the backend or a generic error message.

Parameters

param The user registration parameters.
email
string
The user's email address.
mandateReset
boolean
Whether to mandate a password reset.

`password`
`string`
The user's password.
`username`
`string`
The user's username.

Returns `Promise<string>`
A promise resolving to the registration message.

llm-api-gateway / api/auth/token

4 api/auth/token

4.1 Functions

4.1.1 getTokenExpiryMs()

`getTokenExpiryMs(token): number | null`

Defined in: `api/auth/token.js:29`
Get the expiration time of a JWT in milliseconds since epoch.

Parameters

`token` `string`
JWT string.

Returns `number | null`
The expiration timestamp in milliseconds, or null if unavailable.

4.1.2 isTokenExpired()

`isTokenExpired(token): boolean`

Defined in: `api/auth/token.js:45`
Check whether a JWT is expired.

Parameters

`token` `string`
JWT string.

Returns `boolean`

True if the token is expired or invalid.

llm-api-gateway / api/management/keys/Create

5 api/management/keys/Create

5.1 Functions

5.1.1 createApiKey()

`createApiKey(params): Promise<any>`

Defined in: api/management/keys/Create.jsx:11

Make a request to create a new API key.

Parameters

params API key creation parameters.

name

string

API key label.

project_id

number

Project identifier.

Returns `Promise<any>`

A promise resolving to the backend response data.

llm-api-gateway / api/management/keys/Delete

6 api/management/keys/Delete

6.1 Functions

6.1.1 deleteApiKey()

`deleteApiKey(keyId): Promise<any>`

Defined in: api/management/keys/Delete.jsx:9

Make a request to delete an API key by id.

Parameters

keyId number
API key identifier.

Returns `Promise<any>`
A promise resolving to the backend response data.

llm-api-gateway / api/management/keys/Info

7 api/management/keys/Info

7.1 Functions

7.1.1 fetchKeyInfos()

fetchKeyInfos(projectId?, userId?): `Promise<any[]>`

Defined in: api/management/keys/Info.jsx:10
Make a request to fetch API keys for a project or a user.

Parameters

projectId? number | null
Project identifier, or null to skip project scope.

userId? number | null
User identifier, or null to skip user scope.

Returns `Promise<any[]>`
A promise resolving to the API key list.

llm-api-gateway / api/management/project/AddUser

8 api/management/project/AddUser

8.1 Functions

8.1.1 addUserToProject()

addUserToProject(params): `Promise<any>`

Defined in: api/management/project/AddUser.jsx:11
Make a request to add a user to a project.

Parameters

params Project membership parameters.
project_id
number
Project identifier.
user_id
number
User identifier.

Returns Promise<any>

A promise resolving to the backend response data.

llm-api-gateway / api/management/project/Create

9 api/management/project/Create

9.1 Functions

9.1.1 createProject()

createProject(params): Promise<any>

Defined in: api/management/project/Create.jsx:11
Make a request to create a new project.

Parameters

params Project creation parameters.
manager_id
number
User id of the project manager.
name
string
Project name.

Returns Promise<any>

A promise resolving to the backend response data.

llm-api-gateway / api/management/project/Delete

10 api/management/project/Delete

10.1 Functions

10.1.1 deleteProject()

deleteProject(projectId): Promise<any>

Defined in: api/management/project/Delete.jsx:9

Make a request to delete a project by id.

Parameters

projectId number
Project identifier.

Returns Promise<any>

A promise resolving to the backend response data.

llm-api-gateway / api/management/project/Info

11 api/management/project/Info

11.1 Functions

11.1.1 fetchProjectInfosForUser()

fetchProjectInfosForUser(): Promise<any[]>

Defined in: api/management/project/Info.jsx:8

Make a request to fetch the project information visible to the current user.

Returns Promise<any[]>

A promise resolving to the project list.

llm-api-gateway / api/management/project/RemoveUser

12 api/management/project/RemoveUser

12.1 Functions

12.1.1 removeUserFromProject()

removeUserFromProject(params): Promise<any>

Defined in: api/management/project/RemoveUser.jsx:11

Make a request to remove a user from a project.

Parameters

params Project membership parameters.
project_id
number
Project identifier.
user_id
number
User identifier.

Returns Promise<any>

A promise resolving to the backend response data.

llm-api-gateway / api/management/quotas/Create

13 api/management/quotas/Create

13.1 Functions

13.1.1 createQuota()

createQuota(params): Promise<any>

Defined in: api/management/quotas/Create.jsx:16
Make a request to create a new quota.

Parameters

params Quota creation parameters.
expires_at
string | null = null
Optional expiration timestamp.
key_id
number | null = null
API key identifier, or null if not targeting a key.
limit_id
number
Limit type identifier.
limit_value
number | null = null
Numeric limit value.
period
string
Quota period value.

`project_id`
`number | null = null`
Project identifier, or null for non-project quotas.
`user_id`
`number | null = null`
User identifier, or null if not targeting a user.

Returns `Promise<any>`

A promise resolving to the backend response data.

llm-api-gateway / api/management/quotas/Delete

14 api/management/quotas/Delete

14.1 Functions

14.1.1 deleteQuota()

`deleteQuota(id): Promise<any>`

Defined in: api/management/quotas/Delete.jsx:9

Make a request to delete a quota by id.

Parameters

`id number`
Quota identifier.

Returns `Promise<any>`

A promise resolving to the backend response data.

llm-api-gateway / api/management/quotas/Info

15 api/management/quotas/Info

15.1 Functions

15.1.1 fetchQuotaInfos()

`fetchQuotaInfos(projectId?, userId?, keyId?, activeOnly?, includeInherited?): Promise<any[]>`

Defined in: api/management/quotas/Info.jsx:43

Make a request to fetch quotas for a project, user, or API key.

Parameters

projectId? number | null
Project identifier.

userId? number | null
User identifier.

keyId? number | null
API key identifier.

activeOnly? boolean = false
Whether to include only active quotas.

includeInherited? boolean = true
Whether to include inherited quotas.

Returns Promise<any[]>
A promise resolving to the quota list.

15.1.1.2 fetchQuotaLimitTypes()

fetchQuotaLimitTypes(): Promise<any[]>

Defined in: api/management/quotas/Info.jsx:8
Make a request to fetch available quota limit types.

Returns Promise<any[]>
A promise resolving to the limit type list.

15.1.1.3 fetchQuotaPeriods()

fetchQuotaPeriods(): Promise<any[]>

Defined in: api/management/quotas/Info.jsx:23
Make a request to fetch available quota periods.

Returns Promise<any[]>
A promise resolving to the period list.

llm-api-gateway / api/management/user/ChangeIdentity

16 api/management/user/ChangeIdentity

16.1 Functions

16.1.1 changeIdentity()

changeIdentity(params): Promise<string>

Defined in: api/management/user/ChangeIdentity.jsx:11

Make a request to change the current user's email and username.

Parameters

params Identity change parameters.

email

string

New email address.

username

string

New username.

Returns Promise<string>

A promise resolving to the success message.

llm-api-gateway / api/management/user/ChangePassword

17 api/management/user/ChangePassword

17.1 Functions

17.1.1 changePassword()

changePassword(params): Promise<string>

Defined in: api/management/user/ChangePassword.jsx:14

Make a request to change a user's password.

Parameters

params Password change parameters.
currentPassword
string | **null** = **null**
Current password when changing your own password.
mandateReset
boolean = **false**
Whether the new password should be marked as expired.
newPassword
string
New password.
newPasswordConfirm
string
Confirmation of the new password.
userId
number | **null** = **null**
Target user identifier for admin changes.

Returns **Promise**<**string**>
A promise resolving to the success message.

llm-api-gateway / api/management/user/Delete

18 api/management/user/Delete

18.1 Functions

18.1.1 deleteUser()

deleteUser(userId): **Promise**<**any**>

Defined in: api/management/user/Delete.jsx:9
Make a request to delete a user by id.

Parameters

userId **number**
User identifier.

Returns **Promise**<**any**>
A promise resolving to the backend response data.

llm-api-gateway / api/management/user/Info

19 api/management/user/Info

19.1 Functions

19.1.1 fetchUserInfos()

fetchUserInfos(projectId?): Promise<any[]>

Defined in: api/management/user/Info.jsx:9

Make a request to fetch user information for a project or for the full user list.

Parameters

projectId? number | null

Project identifier, or null for global user information.

Returns Promise<any[]>

A promise resolving to the user information list.

llm-api-gateway / api/usageLogs/UsageLogs

20 api/usageLogs/UsageLogs

20.1 Functions

20.1.1 fetchUsageLogs()

fetchUsageLogs(projectId, userId, aggregate, limit, offset?): Promise<any[]>

Defined in: api/usageLogs/UsageLogs.jsx:13

Fetch usage logs with optional filtering and aggregation.

Parameters

projectId number | null

Project identifier.

userId number | null

User identifier.

aggregate boolean

Whether to return aggregated rows.

limit `number` | `null`
Maximum number of rows to return.

offset? `number` = 0
Number of rows to skip.

Returns `Promise<any[]>`
A promise resolving to the usage log list.
llm-api-gateway

llm-api-gateway / app/App

21 app/App

21.1 Functions

21.1.1 `default()`

`default()`: `Element`

Defined in: app/App.jsx:19
The main application component that sets up routing and authentication context for the dashboard.

Returns `Element`
The rendered application component.

llm-api-gateway / components/blocks/ApiKeysTable

22 components/blocks/ApiKeysTable

22.1 Functions

22.1.1 `default()`

`default(__namedParameters)`: `Element`

Defined in: components/blocks/ApiKeysTable.jsx:24

Parameters

```

    __namedParameters  actionLabel?
    string = "Delete"
    onAction
    any
    rows?
    never[] = []
    showUser?
    boolean = true
    title?
    string = "API Keys"

```

Returns Element

llm-api-gateway / components/blocks/CreateQuotaForm

23 components/blocks/CreateQuotaForm

23.1 Functions

23.1.1 default()

default(props): Element

Defined in: components/blocks/CreateQuotaForm.jsx:18

Form for creating a new quota with limit type, period, value, and optional targeting.

Parameters

props Component props.

enableKeyTarget

boolean = false

Whether to allow targeting by API key.

isGlobal

boolean = false

Whether the quota is global or project-specific.

onSubmit

Function

Callback fired with form data on submission.

title

string

Form title.

Returns `Element`

The rendered form component.

llm-api-gateway / components/blocks/QuotasTable

24 components/blocks/QuotasTable

24.1 Functions

24.1.1 default()

`default(__namedParameters): Element`

Defined in: components/blocks/QuotasTable.jsx:28

Parameters

```
__namedParameters  actionLabel?  
string = "Delete"  
onAction  
any  
rows?  
never[] = []  
showKey?  
boolean = false  
showUser?  
boolean = false  
title?  
string = "Quotas"
```

Returns `Element`

llm-api-gateway / components/blocks/Sidebar

25 components/blocks/Sidebar

25.1 Functions

25.1.1 default()

`default(props): Element`

Defined in: components/blocks/Sidebar.jsx:17

Main layout sidebar with navigation menu and project selector.

Parameters

props Component props.
children
Element
Page content to render in the main area.

Returns Element

The rendered sidebar layout component.

llm-api-gateway / components/blocks/UsageTable

26 components/blocks/UsageTable

26.1 Functions

26.1.1 default()

default(props): Element

Defined in: components/blocks/UsageTable.jsx:9
Displays a table of usage logs with time, tokens, and price information.

Parameters

props Component props.
rows
any[] = []
Usage log data rows to display.
title
string
Table header title.

Returns Element

The rendered table component.

llm-api-gateway / components/blocks/UsersTable

27 components/blocks/UsersTable

27.1 Functions

27.1.1 default()

default(__namedParameters): Element

Defined in: components/blocks/UsersTable.jsx:22

Parameters

```
__namedParameters  actionLabel?  
string = "Delete"  
onAction  
any  
rows?  
never[] = []  
title?  
string = "Users"
```

Returns Element

llm-api-gateway / components/primitives/AlertBox

28 components/primitives/AlertBox

28.1 Functions

28.1.1 default()

default(props): any

Defined in: components/primitives/AlertBox.jsx:16

Displays a styled alert message with optional variant and dismiss.

Parameters

```
props  Component props.  
className  
string = ''  
Additional CSS classes.  
message  
string  
Alert message text; if falsy, component returns null.
```

`variant`
`string = 'error'`
Alert style variant: 'error', 'success', or 'warning'.

Returns `any`
The rendered alert or null if no message.

llm-api-gateway / components/primitives/Dropdown

29 components/primitives/Dropdown

29.1 Functions

29.1.1 `default()`

`default(props): Element`

Defined in: components/primitives/Dropdown.jsx:19
Searchable dropdown component with optional auto-selection and required validation.

Parameters

props Component props.

`containerClassName`
`string = ""`
CSS classes for the dropdown container.

`initialSelected`
`string = null`
Initially selected item value.

`itemName`
`string`
Singular name for the item type (e.g., "project").

`items`
`string[] = []`
List of selectable items.

`name`
`string`
HTML name attribute for the hidden input.

`onSelect`
Function
Callback fired when an item is selected.

`required`
`boolean = false`

Whether selection is required for form validation.
`selectFirst`
`boolean = false`
Whether to auto-select the first item if none selected.

Returns `Element`

The rendered dropdown component.

llm-api-gateway / components/primitives/InfoBox

30 components/primitives/InfoBox

30.1 Functions

30.1.1 `default()`

`default(props)`: any

Defined in: components/primitives/InfoBox.jsx:14

Displays sensitive information (like API keys) in a warning box with copy capability.

Parameters

props Component props.

`className`

`string = ""`

Additional CSS classes.

`rows`

`number = 2`

Number of textarea rows.

`title`

`string = "Created API Key"`

Box title.

`value`

`string`

The sensitive content to display in the textarea.

`warning`

`string = "Make sure to save this API key now. You won't be able to see it again!"`

Warning message shown above the content.

Returns any

The rendered info box or null if value is falsy.

llm-api-gateway / components/shared/ProjectContext

31 components/shared/ProjectContext

31.1 Interfaces

31.1.1 ProjectContextValue

Defined in: components/shared/ProjectContext.jsx:8

Properties

clearSelectedProject

clearSelectedProject: Function

Defined in: components/shared/ProjectContext.jsx:12

Clear the selected project.

selectedProject

selectedProject: object | null

Defined in: components/shared/ProjectContext.jsx:9

Currently selected project object.

selectedProjectId

selectedProjectId: number | null

Defined in: components/shared/ProjectContext.jsx:10

ID of the selected project.

selectProject

selectProject: Function

Defined in: components/shared/ProjectContext.jsx:11

Set the selected project.

31.2 Functions

31.2.1 ProjectProvider()

ProjectProvider(props): Element

Defined in: components/shared/ProjectContext.jsx:40

Provides project selection context with localStorage persistence.

Parameters

props Component props.

children

Element

Child components.

Returns Element

The rendered provider.

31.2.2 useProject()

useProject(): ProjectContextValue

Defined in: components/shared/ProjectContext.jsx:84

Hook to access the project context.

Returns ProjectContextValue

The project context value with selection methods.

Throws If used outside of ProjectProvider.

llm-api-gateway / components/shared/ProtectedRoute

32 components/shared/ProtectedRoute

32.1 Functions

32.1.1 default()

default(): Element

Defined in: components/shared/ProtectedRoute.jsx:11

Route wrapper that protects routes requiring authentication and checks token validity. Redirects to login if token is expired or missing, and enforces password change if needed.

Returns `Element`

The protected outlet or a redirect.

llm-api-gateway / components/shared/RequirePermissions

33 components/shared/RequirePermissions

33.1 Functions

33.1.1 default()

default(props): `Element`

Defined in: components/shared/RequirePermissions.jsx:13

Route wrapper that enforces permission requirements based on user and project context.

Parameters

props Component props.

`children`

`Element`

Content to render if requirements are met.

`requirements`

`Function`

Function taking (user, selectedProject) and returning boolean.

Returns `Element`

The children if allowed, or a redirect to home.

llm-api-gateway

llm-api-gateway / hooks/useApiKeyCreation

34 hooks/useApiKeyCreation

34.1 Functions

34.1.1 default()

default(params): `object`

Defined in: hooks/useApiKeyCreation.jsx:19

Hook for managing API key creation with validation and error/success states.

Parameters

params Hook parameters.
projectId
number | null = null
Project identifier for key creation.
userId
number | null = null
Current user identifier.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useApiKeyDeletion

35 hooks/useApiKeyDeletion

35.1 Functions

35.1.1 default()

default(params): object

Defined in: hooks/useApiKeyDeletion.jsx:17
Hook for managing API key deletion with error and success states.

Parameters

params Hook parameters.
apiKeys
any[]
Current array of API keys.
setApiKeys
Function
State setter for the API keys array.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useProfileIdentityUpdate

36 hooks/useProfileIdentityUpdate

36.1 Functions

36.1.1 default()

default(params): object

Defined in: hooks/useProfileIdentityUpdate.jsx:16

Hook for managing profile identity updates with validation and error/success states.

Parameters

params Hook parameters.

sessionExpired

boolean

Whether the current auth session is expired.

Returns object

Hook return value.

llm-api-gateway

llm-api-gateway / hooks/useProfilePasswordUpdate

37 hooks/useProfilePasswordUpdate

37.1 Functions

37.1.1 default()

default(params): object

Defined in: hooks/useProfilePasswordUpdate.jsx:16

Hook for managing profile password updates with validation and error/success states.

Parameters

params Hook parameters.

sessionExpired

boolean

Whether the current auth session is expired.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useProjectCreation

38 hooks/useProjectCreation

38.1 Functions

38.1.1 default()

default(): object

Defined in: hooks/useProjectCreation.jsx:14
Hook for managing project creation with validation and loading state.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useProjectDeletion

39 hooks/useProjectDeletion

39.1 Functions

39.1.1 default()

default(): object

Defined in: hooks/useProjectDeletion.jsx:14
Hook for managing project deletion with error and success states.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useProjectUserAddition

40 hooks/useProjectUserAddition

40.1 Functions

40.1.1 default()

default(params): object

Defined in: hooks/useProjectUserAddition.jsx:16

Hook for managing addition of users to a project with error and success states.

Parameters

params Hook parameters.

projectId

number

Project identifier.

Returns object

Hook return value.

llm-api-gateway

llm-api-gateway / hooks/useProjectUserRemoval

41 hooks/useProjectUserRemoval

41.1 Functions

41.1.1 default()

default(params): object

Defined in: hooks/useProjectUserRemoval.jsx:18

Hook for managing removal of users from a project with error and success states.

Parameters

params Hook parameters.
projectId
number
Project identifier.
projectUsers
any[]
Current array of project users.
setProjectUsers
Function
State setter for the project users array.

Returns **object**
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useQuotaCreation

42 hooks/useQuotaCreation

42.1 Functions

42.1.1 default()

default(params): object

Defined in: hooks/useQuotaCreation.jsx:16
Hook for managing quota creation with validation and error/success states.

Parameters

params Hook parameters.
projectId
number | null = null
Project identifier, or null for global quotas.

Returns **object**
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useQuotaDeletion

43 hooks/useQuotaDeletion

43.1 Functions

43.1.1 default()

default(params): object

Defined in: hooks/useQuotaDeletion.jsx:17

Hook for managing quota deletion with error and success states.

Parameters

params Hook parameters.

quotas

any[]

Current array of quotas.

setQuotas

Function

State setter for the quotas array.

Returns object

Hook return value.

llm-api-gateway

llm-api-gateway / hooks/useUserCreation

44 hooks/useUserCreation

44.1 Functions

44.1.1 default()

default(params): object

Defined in: hooks/useUserCreation.jsx:17

Hook for managing user creation with validation and error/success states.

Parameters

params Hook parameters.

sessionExpired

boolean

Whether the current auth session is expired.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useUserDeletion

45 hooks/useUserDeletion

45.1 Functions

45.1.1 default()

default(params): object

Defined in: hooks/useUserDeletion.jsx:17

Hook for managing user deletion with error and success states.

Parameters

params Hook parameters.
setUsers
Function
State setter for the users array.
users
any[]
Current array of users.

Returns object
Hook return value.
llm-api-gateway

llm-api-gateway / hooks/useUserPasswordUpdate

46 hooks/useUserPasswordUpdate

46.1 Functions

46.1.1 default()

default(params): object

Defined in: hooks/useUserPasswordUpdate.jsx:16

Hook for managing admin-driven user password updates with validation and error/success states.

Parameters

params Hook parameters.
sessionExpired
boolean
Whether the current auth session is expired.

Returns object
Hook return value.

llm-api-gateway / pages/Global/GlobalSettings

47 pages/Global/GlobalSettings

47.1 Functions

47.1.1 default()

default(): Element

Defined in: pages/Global/GlobalSettings.jsx:33

Returns Element

llm-api-gateway / pages/Global/components/CreateProjectForm

48 pages/Global/components/CreateProjectForm

48.1 Functions

48.1.1 default()

default(props): Element

Defined in: pages/Global/components/CreateProjectForm.jsx:16
Form for creating a new project with name and manager selection.

Parameters

props Component props.
error
string = ""
Error message to display.
loading
boolean = false
Whether the form is in a loading state.
onSubmit
Function
Callback fired with project data on successful submission.
success
string = ""
Success message to display.

Returns **Element**
The rendered form.

llm-api-gateway / pages/Global/components/CreateUserForm

49 pages/Global/components/CreateUserForm

49.1 Functions

49.1.1 default()

default(props): Element

Defined in: pages/Global/components/CreateUserForm.jsx:15
Form for admin users to create new dashboard user accounts.

Parameters

props Component props.
onCreated
Function
Callback fired when a user is successfully created.

Returns **Element**
The rendered form.

llm-api-gateway / pages/Global/components/SetUserPasswordForm

50 pages/Global/components/SetUserPasswordForm

50.1 Functions

50.1.1 default()

default(): Element

Defined in: pages/Global/components/SetUserPasswordForm.jsx:15

Form for admin users to set another user's password and optionally mark it as expired.

Returns Element

The rendered form.

llm-api-gateway / pages/Home/Home

51 pages/Home/Home

51.1 Functions

51.1.1 default()

default(): Element

Defined in: pages/Home/Home.jsx:14

Dashboard home page showing selected project overview with active quotas and usage logs.

Returns Element

The rendered home page.

llm-api-gateway / pages/Home/components/ActiveQuotaCard

52 pages/Home/components/ActiveQuotaCard

52.1 Functions

52.1.1 default()

default(props): Element

Defined in: pages/Home/components/ActiveQuotaCard.jsx:12

Card displaying a single active quota with usage progress bar and reset date.

Parameters

props Component props.
limit
number
Maximum limit value.
name
string
Quota name.
resetDate
string
Date/time when the quota resets.
type
string
Quota type (e.g., 'Request Limit', 'Token Limit').
used
number
Current usage amount.

Returns Element

The rendered quota card.

llm-api-gateway / pages/Keys/ApiKeys

53 pages/Keys/ApiKeys

53.1 Functions

53.1.1 default()

default(): Element

Defined in: pages/Keys/ApiKeys.jsx:15

API keys management page for creating and managing user API keys.

Returns Element

The rendered API keys page.

llm-api-gateway / pages/Keys/components/CreateKeyForm

54 pages/Keys/components/CreateKeyForm

54.1 Functions

54.1.1 default()

default(props): Element

Defined in: pages/Keys/components/CreateKeyForm.jsx:16
Form for creating a new API key for the selected project.

Parameters

props Component props.
onCreated
Function
Callback fired when an API key is successfully created.

Returns Element

The rendered form.

llm-api-gateway / pages/Login/Login

55 pages/Login/Login

55.1 Functions

55.1.1 default()

default(): Element

Defined in: pages/Login/Login.jsx:8
Login page for unauthenticated users to sign in.

Returns Element

The rendered login page.

llm-api-gateway / pages/Login/components/LoginForm

56 pages/Login/components/LoginForm

56.1 Functions

56.1.1 default()

default(): Element

Defined in: pages/Login/components/LoginForm.jsx:11
Login form for user authentication.

Returns Element

The rendered login form.

llm-api-gateway / pages/Profile/Profile

57 pages/Profile/Profile

57.1 Functions

57.1.1 default()

default(): Element

Defined in: pages/Profile/Profile.jsx:11
User profile page for managing account identity, password, and settings.

Returns Element

The rendered profile page.

llm-api-gateway / pages/Profile/components/ProfileIdentityForm

58 pages/Profile/components/ProfileIdentityForm

58.1 Functions

58.1.1 default()

default(): Element

Defined in: pages/Profile/components/ProfileIdentityForm.jsx:13
Form for updating user profile identity (username and email).

Returns `Element`
The rendered form.

llm-api-gateway / pages/Profile/components/ProfilePasswordForm

59 pages/Profile/components/ProfilePasswordForm

59.1 Functions

59.1.1 default()

default(): `Element`

Defined in: pages/Profile/components/ProfilePasswordForm.jsx:13
Form for updating user password with validation and expiry checks.

Returns `Element`
The rendered form.

llm-api-gateway / pages/Project/ProjectSettings

60 pages/Project/ProjectSettings

60.1 Functions

60.1.1 default()

default(): `Element`

Defined in: pages/Project/ProjectSettings.jsx:36

Returns `Element`

llm-api-gateway / pages/Project/components/AddUserForm

61 pages/Project/components/AddUserForm

61.1 Functions

61.1.1 default()

default(props): `Element`

Defined in: pages/Project/components/AddUserForm.jsx:12
Form for adding a user to the current project.

Parameters

props Component props.
onSubmit
Function
Callback fired with `user_id` when form is submitted.

Returns **Element**
The rendered form.

llm-api-gateway / pages/Project/components/DeleteProjectForm

62 pages/Project/components/DeleteProjectForm

62.1 Functions

62.1.1 default()

default(): Element

Defined in: `pages/Project/components/DeleteProjectForm.jsx:12`
Form for deleting the currently selected project with confirmation.

Returns **Element**
The rendered form.

llm-api-gateway / pages/Usage/Usage

63 pages/Usage/Usage

63.1 Functions

63.1.1 default()

default(): Element

Defined in: `pages/Usage/Usage.jsx:13`
Usage page for viewing active quotas and usage records across different scopes.

Returns `Element`

The rendered usage page.

llm-api-gateway / pages/Usage/components/ActiveQuotasTable

64 pages/Usage/components/ActiveQuotasTable

64.1 Functions

64.1.1 default()

`default(__namedParameters): Element`

Defined in: pages/Usage/components/ActiveQuotasTable.jsx:22

Parameters

```
__namedParameters rows?  
never[] = []  
title?  
string = "Active Quotas"
```

Returns `Element`

llm-api-gateway / pages/Usage/components/UsageRecordsTable

65 pages/Usage/components/UsageRecordsTable

65.1 Functions

65.1.1 default()

`default(__namedParameters): Element`

Defined in: pages/Usage/components/UsageRecordsTable.jsx:31

Parameters


```
__namedParameters  aggregate?  
boolean = true  
enabled?  
boolean = true  
pageSize?  
number = 50  
projectId?  
null = null  
showProject?  
boolean = false  
showUser?  
boolean = false  
title?  
string = "Usage Records"  
userId?  
null = null
```

Returns Element