

Results for: <https://mws-restaurant-1519596698262.firebaseio.com/restaurant.html?id=1>
Jul 14, 2018, 11:01 AM GMT+2 • ▶ Runtime settings



Performance



Progressive Web App



Accessibility



Best Practices



SEO


Performance



These encapsulate your web app's current performance and opportunities to improve it.

Metrics

These metrics encapsulate your web app's performance across a number of dimensions.

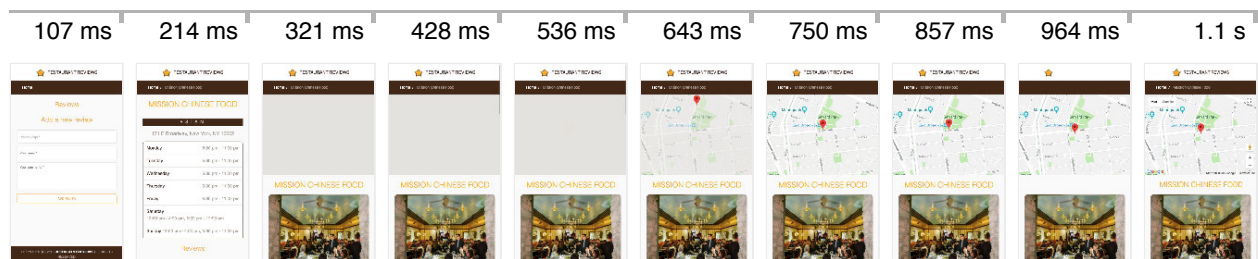

- ▼ First meaningful paint 90 ms
First meaningful paint measures when the primary content of a page is visible. [Learn more.](#)

- ▼ First Interactive (beta) 300 ms
First Interactive marks the time at which the page is minimally interactive. [Learn more.](#)

- ▼ Consistently Interactive (beta) 300 ms
Consistently Interactive marks the time at which the page is fully interactive. [Learn more.](#)

- ▼ Perceptual Speed Index: 447 100
Speed Index shows how quickly the contents of a page are visibly populated. [Learn more.](#)

- ▼ Estimated Input Latency: 18 ms 100
The score above is an estimate of how long your app takes to respond to user input, in milliseconds. There is a 90% probability that a user encounters this amount of latency, or less. 10% of the time a user can expect additional latency. If your latency is higher than 50 ms, users may perceive your app as laggy. [Learn more.](#)

Opportunities

These are opportunities to speed up your application by optimizing the following resources.

- ▼ Serve images in next-gen formats
Audit error: Invalid network timing information

Diagnostics

More information about the performance of your application.




Critical Request Chains: 2

The Critical Request Chains below show you what resources are issued with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn more](#).
Longest chain: **958.2ms** over **1** requests, totalling **0 KB**

▼ View critical network waterfall:

Initial Navigation

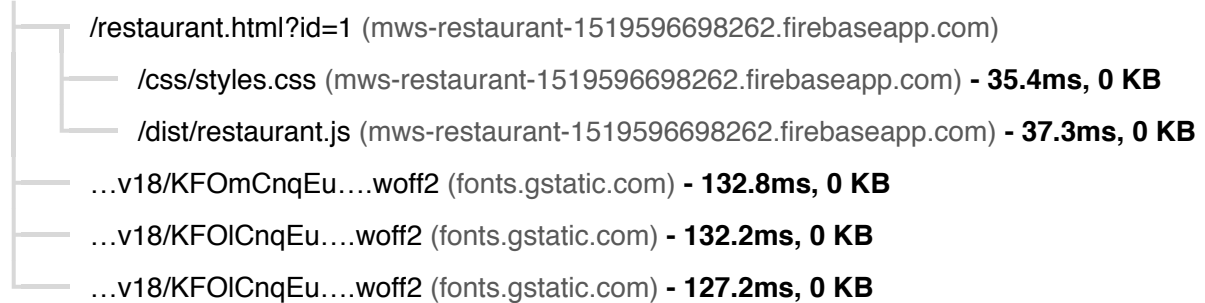

▼ 19 Passed Audits

▼ Reduce render-blocking stylesheets

External stylesheets are blocking the first paint of your page. Consider delivering critical CSS via ``<style>`` tags and deferring non-critical styles. [Learn more](#).

▼ Reduce render-blocking scripts

Script elements are blocking the first paint of your page. Consider inlining critical scripts and deferring non-critical ones. [Learn more](#).

▼ Properly size images

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn more](#).

▼ Offscreen images

Consider lazy-loading offscreen and hidden images to improve page load speed and time to interactive. [Learn more](#).

▼ Minify CSS

Minifying CSS files can reduce network payload sizes. [Learn more](#).

▼ Minify JavaScript

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn more](#).

▼ Unused CSS rules

Remove unused rules from stylesheets to reduce unnecessary bytes consumed by network activity. [Learn more](#)

▼ Optimize images

Optimized images load faster and consume less cellular data. [Learn more](#).

▼ Enable text compression

Text-based responses should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more](#).

▼ Keep server response times low (TTFB): 0 ms

Time To First Byte identifies the time at which your server sends a response. [Learn more](#).

▼ Avoids page redirects: 0 ms

Redirects introduce additional delays before the page can be loaded. [Learn more](#).



- ▼ Preload key requests: 0 ms
Consider using <link rel=preload> to prioritize fetching late-discovered resources sooner [Learn more](#).

100

- ▼ Avoids enormous network payloads: Total size was 0 KB
Large network payloads cost users real money and are highly correlated with long load times. [Learn more](#).

▼ View Details

URL	Total Size	Transfer Time
/maps/vt?pb=... (maps.googleapis.com)	0 KB	0 ms
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
/svg/star.svg (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
/dist/restaurant.js (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
/reviews/?restaurant_id=1 (restaurant-reviews-app-server.herokuapp.com)	0 KB	0 ms
...api/js?key=AlzaSyCJx...&libraries=places&callback=initMap (map...	0 KB	0 ms
/icons/favicon-32x32.png (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
...470/1.webp (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
/icons/favicon-16x16.png (mws-restaurant-1519596698262.firebaseio.com)	0 KB	0 ms
...en_gb/common.js (maps.googleapis.com)	0 KB	0 ms

- ▼ Uses efficient cache policy on static assets: 6 assets found
A long cache lifetime can speed up repeat visits to your page. [Learn more](#).

1

▼ View Details

URL	Cache TTL	Size (KB)
...api/js?key=AlzaSyCJx...&libraries=places&callback=initMap (map...	30 m	0 KB
/css?family=Roboto:300,400,500,700 (fonts.googleapis.com)	1 d	0 KB
/css/styles.css (mws-restaurant-1519596698262.firebaseio.com)	7 d	0 KB
/svg/star.svg (mws-restaurant-1519596698262.firebaseio.com)	7 d	0 KB
/dist/restaurant.js (mws-restaurant-1519596698262.firebaseio.com)	7 d	0 KB
...470/1.webp (mws-restaurant-1519596698262.firebaseio.com)	7 d	0 KB

- ▼ Avoids an excessive DOM size: 270 nodes
Browser engineers recommend pages contain fewer than ~1,500 DOM nodes. The sweet spot is a tree depth < 32 elements and fewer than 60 children/parent element. A large DOM can increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn more](#).

100

▼ View details

Total DOM Nodes	DOM Depth	Maximum Children
270 target: < 1,500 nodes	14 target: < 32	40 target: < 60 nodes

▼ User Timing marks and measures: 0

Consider instrumenting your app with the User Timing API to create custom, real-world measurements of key user experiences. [Learn more](#).

▼ JavaScript boot-up time: 390 ms

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS | with this.

▼ View Details

URL	Script Evaluation	Script Parsi
...en_gb/common.js (maps.googleapis.com)	83 ms	
/js/contentscript.js (cjpaldlnbpafamejdnhcphjbkeiagm)	59 ms	
...api/js?key=AlzaSyCJx...&libraries=places&callback=initMap (map...	37 ms	
...en_gb/controls.js (maps.googleapis.com)	32 ms	
...en_gb/util.js (maps.googleapis.com)	9 ms	
...js/Viewportl....GetViewportInfo?... (maps.googleapis.com)	9 ms	

▼ Main thread work breakdown: 630 ms

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this.

▼ View Details

Category	Work	Time spent
Script Evaluation	Evaluate Script	169 ms
Script Evaluation	Animation Frame Fired	83 ms
Script Evaluation	Run Microtasks	49 ms
Style & Layout	Recalculate Style	107 ms
Style & Layout	Layout	71 ms
Compositing	Update Layer Tree	42 ms
Compositing	Composite Layers	9 ms
Script Parsing & Compile	Compile Script	40 ms
Garbage collection	Minor GC	17 ms
Garbage collection	DOM GC	12 ms

Category	Work	Time spent
Garbage collection	Major GC	5 ms
Paint	Paint	13 ms
Parsing HTML & CSS	Parse HTML	9 ms
Parsing HTML & CSS	Parse Stylesheet	1 ms
Images	Image Decode	0 ms

▼ All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more](#).



Progressive Web App

These checks validate the aspects of a Progressive Web App, as specified by the baseline [PWA Checklist](#).

100

1 Failed Audits

▼ Page load is fast enough on 3G

A fast page load over a 3G network ensures a good mobile user experience. [Learn more](#).



▼ View Details

URL	Latency (ms)
/reviews/?restaurant_id=1 (restaurant-reviews-app-server.herokuapp.com)	0.05
...js/Viewportl....GetViewportInfo?... (maps.googleapis.com)	0.05

First Interactive was found at 300 ms; however, the network request latencies were not sufficiently realistic, so the performance measurements cannot be trusted.

▼ 10 Passed Audits

▼ Registers a service worker

The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. [Learn more](#).



▼ Responds with a 200 when offline

If you're building a Progressive Web App, consider using a service worker so that your app can work offline. [Learn more](#).



▼ Contains some content when JavaScript is not available

Your app should display some content when JavaScript is disabled, even if it's just a warning to the user that JavaScript is required to use the app. [Learn more](#).



▼ Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more](#).



- ▼ Redirects HTTP traffic to HTTPS ✓
If you've already set up HTTPS, make sure that you redirect all HTTP traffic to HTTPS. [Learn more.](#)
 - ▼ User can be prompted to Install the Web App ✓
Browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. [Learn more.](#)
 - ▼ Configured for a custom splash screen ✓
A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. [Learn more.](#)
 - ▼ Address bar matches brand colors ✓
The browser address bar can be themed to match your site. [Learn more.](#)
 - ▼ Has a <meta name="viewport"> tag with width or initial-scale ✓
Add a viewport meta tag to optimize your app for mobile screens. [Learn more.](#)
 - ▼ Content is sized correctly for the viewport ✓
If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. [Learn more.](#)
- ▼ Additional items to manually check
- These checks are required by the baseline [PWA Checklist](#) but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.
- ▼ Site works cross-browser
To reach the most number of users, sites should work across every major browser. [Learn more.](#)
 - ▼ Page transitions don't feel like they block on the network
Transitions should feel snappy as you tap around, even on a slow network, a key to perceived performance. [Learn more.](#)
 - ▼ Each page has a URL
Ensure individual pages are deep linkable via the URLs and that URLs are unique for the purpose of shareability on social media. [Learn more.](#)

Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

85

Elements Describe Contents Well

These are opportunities to make your content easier to understand for a user of assistive technology, like a screen reader.

- ▼ Form elements do not have associated labels ✗
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more.](#)

▼ View failing elements

```
<input id="review-name" class="c-input" type="text" name="name"
placeholder="Your name *" required="" minlength="2">
```


▼ ARIA Attributes Follow Best Practices

These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

- ▼ **[aria-*] attributes match their roles** ✓
Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. [Learn more](#).
- ▼ **[role]s have all required [aria-*] attributes** ✓
Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more](#).
- ▼ **Elements with [role] that require specific children [role]s, are present** ✓
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more](#).
- ▼ **[role]s are contained by their required parent element** ✓
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more](#).
- ▼ **[role] values are valid** ✓
ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more](#).
- ▼ **[aria-*] attributes have valid values** ✓
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more](#).
- ▼ **[aria-*] attributes are valid and not misspelled** ✓
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more](#).

▼ Elements Have Discernible Names

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

- ▼ **Buttons have an accessible name** ✓
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn more](#).
- ▼ **Links have a discernible name** ✓
Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn more](#).

▼ Elements Describe Contents Well

These are opportunities to make your content easier to understand for a user of assistive technology, like a screen reader.

- ▼ **The page contains a heading, skip link, or landmark region** ✓
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more](#).
- ▼ **Document has a <title> element** ✓
Screen reader users use page titles to get an overview of the contents of the page. [Learn more](#).
- ▼ **<frame> or <iframe> elements have a title** ✓

Screen reader users rely on frame titles to describe the contents of frames. [Learn more](#).

▼ Elements Are Well Structured

These are opportunities to make sure your HTML is appropriately structured.

- ▼ `[id]` attributes on the page are unique ✓
The value of an id attribute must be unique to prevent other instances from being overlooked by assistive technologies. [Learn more](#).
- ▼ Lists contain only `` elements and script supporting elements (`<script>` and `<template>`). ✓
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more](#).
- ▼ List items (``) are contained within `` or `` parent elements ✓
Screen readers require list items (``) to be contained within a parent `` or `` to be announced properly. [Learn more](#).

▼ Page Specifies Valid Language

These are opportunities to improve the interpretation of your content by users in different locales.

- ▼ `<html>` element has a `[lang]` attribute ✓
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more](#).
- ▼ `<html>` element has a valid value for its `[lang]` attribute ✓
Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn more](#).

▼ Meta Tags Used Properly

These are opportunities to improve the user experience of your site.

- ▼ `[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5. ✓
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more](#).

▼ 11 Not Applicable Audits

▼ Elements Use Attributes Correctly

These are opportunities to improve the configuration of your HTML elements.

- ▼ `[accesskey]` values are not unique
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more](#).
- ▼ `<audio>` elements are missing a `<track>` element with `[kind="captions"]`.
Captions make audio elements usable for deaf or hearing-impaired users, providing critical information such as who is talking, what they're saying, and other non-speech information. [Learn more](#).
- ▼ `<input type="image">` elements do not have `[alt]` text
When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn more](#).

▼ Elements Describe Contents Well

These are opportunities to make your content easier to understand for a user of assistive technology, like a screen reader.

- ▼ Presentational `<table>` elements do not avoid using `<th>`, `<caption>` or the `[summary]` attribute.

A table being used for layout purposes should not include data elements, such as the `th` or `caption` elements or the `summary` attribute, because this can create a confusing experience for screen reader users. [Learn more](#).

- ▼ `<object>` elements do not have `[alt]` text

Screen readers cannot translate non-text content. Adding alt text to `<object>` elements helps screen readers convey meaning to users. [Learn more](#).

- ▼ `<video>` elements do not contain a `<track>` element with `[kind="captions"]`.

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more](#).

- ▼ `<video>` elements do not contain a `<track>` element with `[kind="description"]`.

Audio descriptions provide relevant information for videos that dialogue cannot, such as facial expressions and scenes. [Learn more](#).

▼ Elements Are Well Structured

These are opportunities to make sure your HTML is appropriately structured.

- ▼ `<dl>`'s do not contain only properly-ordered `<dt>` and `<dd>` groups, `<script>` or `<template>` elements.

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn more](#).

- ▼ Definition list items are not wrapped in `<dl>` elements

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn more](#).

▼ Page Specifies Valid Language

These are opportunities to improve the interpretation of your content by users in different locales.

- ▼ `[lang]` attributes do not have a valid value

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn more](#).

▼ Meta Tags Used Properly

These are opportunities to improve the user experience of your site.

- ▼ The document uses `<meta http-equiv="refresh">`

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more](#).

▼ Additional items to manually check

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

- ▼ The page has a logical tab order

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more.](#)

- ▼ **Interactive controls are keyboard focusable**
Custom interactive controls are keyboard focusable and display a focus indicator. [Learn more.](#)
- ▼ **The user's focus is directed to new content added to the page**
If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn more.](#)
- ▼ **User focus is not accidentally trapped in a region**
A user can tab into and out of any control or region without accidentally trapping their focus. [Learn more.](#)
- ▼ **Custom controls have associated labels**
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more.](#)
- ▼ **Custom controls have ARIA roles**
Custom interactive controls have appropriate ARIA roles. [Learn more.](#)
- ▼ **Visual order on the page follows DOM order**
DOM order matches the visual order, improving navigation for assistive technology. [Learn more.](#)
- ▼ **Offscreen content is hidden from assistive technology**
Offscreen content is hidden with display: none or aria-hidden=true. [Learn more.](#)
- ▼ **Headings don't skip levels**
Headings are used to create an outline for the page and heading levels are not skipped. [Learn more.](#)
- ▼ **HTML5 landmark elements are used to improve navigation**
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more.](#)

Best Practices

We've compiled some recommendations for modernizing your web app and avoiding performance pitfalls.

81

3 Failed Audits

- ▼ **Does not use passive listeners to improve scrolling performance** ✗
Consider marking your touch and wheel event listeners as `passive` to improve your page's scroll performance. [Learn more.](#)

▼ View Details


URL	Location
...api/js?key=AlzaSyCJx...&libraries=places&callback=initMap (maps.googl...	line: 153
...api/js?key=AlzaSyCJx...&libraries=places&callback=initMap (maps.googl...	line: 153

URL	Location
...en_gb/util.js (maps.googleapis.com)	line: 36
...en_gb/util.js (maps.googleapis.com)	line: 36

- ▼ Manifest's short_name will be truncated when displayed on homescreen ✗
Make your app's `short_name` fewer than 12 characters to ensure that it's not truncated on homescreens. [Learn more](#).

- ▼ Displays images with incorrect aspect ratio
Image display dimensions should match natural aspect ratio.

▼ View Details

	URL	Aspect Ratio (Displayed)	Aspect Ratio (Natural)
	...images/spotlight-poi2_hdpi.png (maps.gstatic.com)	43 x 59 (0.73)	54 x 86

▼ 13 Passed Audits

- ▼ Avoids Application Cache ✓
Application Cache is deprecated. [Learn more](#).
- ▼ Avoids WebSQL DB ✓
Web SQL is deprecated. Consider using IndexedDB instead. [Learn more](#).
- ▼ Uses HTTPS ✓
All sites should be protected with HTTPS, even ones that don't handle sensitive data. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more](#).
- ▼ Uses HTTP/2 for its own resources ✓
HTTP/2 offers many benefits over HTTP/1.1, including binary headers, multiplexing, and server push. [Learn more](#).
- ▼ Avoids Mutation Events in its own scripts ✓
Mutation Events are deprecated and harm performance. Consider using Mutation Observers instead. [Learn more](#).
- ▼ Avoids document.write() ✓
For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn more](#).
- ▼ Opens external anchors using rel="noopener" ✓
Open new tabs using `rel="noopener"` to improve performance and prevent security vulnerabilities. [Learn more](#).
- ▼ Avoids requesting the geolocation permission on page load ✓
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to user gestures instead. [Learn more](#).
- ▼ Avoids front-end JavaScript libraries with known security vulnerabilities ✓
Some third-party scripts may contain known security vulnerabilities that are easily identified and exploited by attackers.

- ▼ Avoids requesting the notification permission on page load ✓
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more](#).
- ▼ Avoids deprecated APIs ✓
Deprecated APIs will eventually be removed from the browser. [Learn more](#).
- ▼ Allows users to paste into password fields ✓
Preventing password pasting undermines good security policy. [Learn more](#)
- ▼ No browser errors logged to the console ✓
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns.

SEO

These checks ensure that your page is optimized for search engine results ranking. There are additional factors Lighthouse does not check that may affect your search ranking. [Learn more](#).

89

Content Best Practices

Format your HTML in a way that enables crawlers to better understand your app's content.

- ▼ Document does not have a meta description ✗
Meta descriptions may be included in search results to concisely summarize page content. [Learn more](#).

▼ 8 Passed Audits

- ▼ Mobile Friendly
Make sure your pages are mobile friendly so users don't have to pinch or zoom in order to read the content pages. [Learn more](#).
- ▼ Has a `<meta name="viewport">` tag with width or initial-scale ✓
Add a viewport meta tag to optimize your app for mobile screens. [Learn more](#).
- ▼ Document uses legible font sizes
Font sizes less than 16px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read the content. Strive to have >75% of page text ≥16px. [Learn more](#).

▼ View Details

Source	Selector	% of Page Text
/css/styles.css:1:326 (mws-restaurant-1519596698262.firebaseio.com)	li, ul	4.2
/css/styles.css:1:1899 (mws-restaurant-1519596698262.firebaseio.com)	.c-footer	2.7

Source	Selector	% of Page T
dynamic	.gm-style .gm-style-cc span, .gm-style .gm-style-cc a, .gm-style .gm-style-mtc div	2.0
User Agent Stylesheet	input, textarea, select, button	1.4
/css/styles.css:1:6662 (mws-restaurant-1519596698262.firebaseio.com)	.c-review .c-review__rate	1.3
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<div style="font-size: 13px;">	1.0
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<div style="font-family: Roboto, Arial, sans-serif; font-size: 11px; color: rgb(68, 68, 68); direction: ltr; text-align: right; background-color: rgb(245, 245, 245);">	1.0
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<div role="button" tabindex="0" title="Show satellite imagery" aria-label="Show	0.4

Source	Selector	% of Page T
	<pre>satellite imagery" aria- pressed="fa lse" draggable=" false" style="dire ction: ltr; overflow: hidden; text-align: center; position: relative; color: rgb(86, 86, 86); font- family: Roboto, Arial, sans-serif; user- select: none; font- size: 11px; background- color: rgb(255, 255, 255); padding: 11px; border- bottom- right- radius: 2px; border-top- right- radius: 2px; background- clip: padding- box; box- shadow: rgba(0, 0, 0, 0.3) 0px 1px 4px -1px; min- width: 39px; border- left: 0px;"></pre>	

Source	Selector	% of Page T
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<label style="vertical-align: middle; cursor: pointer;">	0.3
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<label style="vertical-align: middle; cursor: pointer;">	0.3
/restaurant.html?id=1 (mws-restaurant-1519596698262.firebaseio.com)	<div role="button" tabindex="0" title="Show street map" aria-label="Show street map" aria-pressed="true" draggable="false" style="direction: ltr; overflow: hidden; text-align: center; position: relative; color: rgb(0, 0, 0); font-family: Roboto, Arial, sans-serif; user-select: none; font-size: 11px; background-color: rgb(255, 255, 255); padding: 11px; border-bottom-	0.1

Source	Selector	% of Page T
	<pre> left- radius: 2px; border-top- left- radius: 2px; background- clip: padding- box; box- shadow: rgba(0, 0, 0, 0.3) 0px 1px 4px -1px; min- width: 21px; font- weight: 500;"> </pre>	
Legible text		84.8

▼ Content Best Practices

Format your HTML in a way that enables crawlers to better understand your app's content.

- ▼ Document has a <title> element ✓
Screen reader users use page titles to get an overview of the contents of the page. [Learn more.](#)
- ▼ Links have descriptive text ✓
Descriptive link text helps search engines understand your content. [Learn more.](#)
- ▼ Document has a valid hreflang ✓
hreflang allows crawlers to discover alternate translations of the page content. [Learn more.](#)
- ▼ Document avoids plugins ✓
Most mobile devices do not support plugins, and many desktop browsers restrict them.

▼ Crawling and Indexing

To appear in search results, crawlers need access to your app.

- ▼ Page has successful HTTP status code ✓
Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more.](#)
- ▼ Page isn't blocked from indexing ✓
The "Robots" directives tell crawlers how your content should be indexed. [Learn more.](#)

▼ 1 Not Applicable Audits

▼ Content Best Practices

Format your HTML in a way that enables crawlers to better understand your app's content.

- ▼ Document has a valid `rel=canonical`
Canonical links suggest which URL to show in search results. Read more in [Use canonical URLs](#).
-

▼ Additional items to manually check

Run these additional validators on your site to check additional SEO best practices.

- ▼ Page is mobile friendly
Take the [Mobile-Friendly Test](#) to check for audits not covered by Lighthouse, like sizing tap targets appropriately. [Learn more](#).
- ▼ Structured data is valid
Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more](#).

Generated by **Lighthouse** 2.9.1 on Jul 14, 2018, 11:01 AM GMT+2 | [File an issue](#)