Lab – File System Commands

Introduction

In this lab, you will use CLI commands to manage files and folders in Windows.

Recommended Equipment

- A computer running Windows

Instructions

Step 1: Access the Windows command prompt.

a. Log on to a Windows computer. The account **ITEUser** is used as the example user account throughout this lab.

b. To access the Windows command prompt, click **Start** and enter **cmd**. Select **Command Prompt** or **cmd.exe** to continue.

Step 2: Create and change directories.

In this step, you will use the change directory (**cd**), make directory (**md**), and directory (**dir**) commands.

Note: A directory is another word for folder. Directory and folder are used interchangeably throughout this lab.

a. Type **cd** at the command prompt.

Question:

What is the current directory?

C:\Users\TIPQC



b. Type **dir** at the command prompt to list the files and folders that are in the current folder.


```
C:\Users\ITEUser> dir
 Volume in drive C has no label.
 Volume Serial Number is 9055-35E9

 Directory of C:\Users\ITEUser

04/27/2019  09:21 AM    <DIR>          .
04/27/2019  09:21 AM    <DIR>          ..
04/25/2019  11:39 AM    <DIR>          3D Objects
04/25/2019  11:39 AM    <DIR>          Contacts
04/26/2019  10:29 AM    <DIR>          Desktop
04/25/2019  11:39 AM    <DIR>          Documents
04/25/2019  11:39 AM    <DIR>          Downloads
<some output omitted>
               0 File(s)              0 bytes
```


© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
               15 Dir(s)  32,671,969,280 bytes free
```

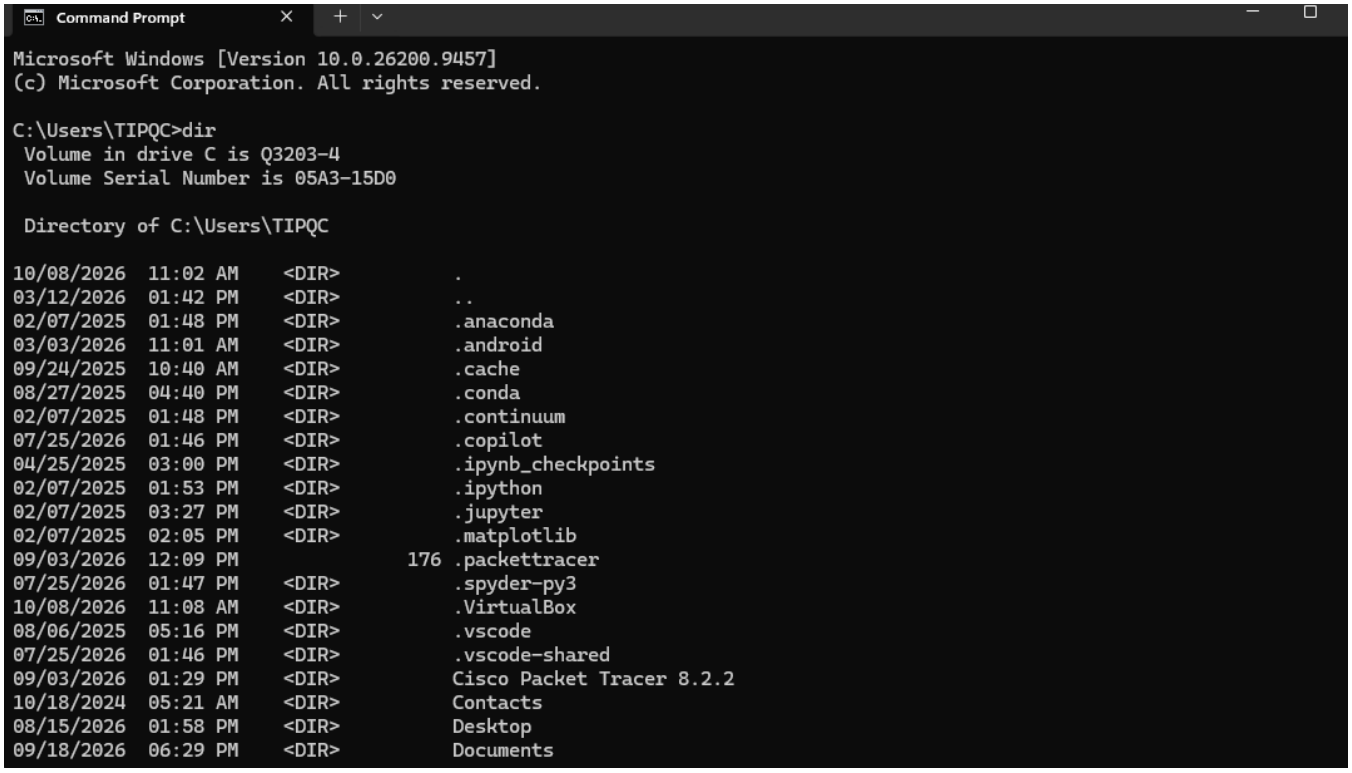

c. In the current directory, use the **md** command to create three new folders: **ITEfolder1**, **ITEfolder2**, and **ITEfolder3**. Type **md ITEfolder1** and press **Enter**. Create **ITEfolder2** and **ITEfolder3**. (**Note**: The command **mkdir** performs the same function as the command **md**.)

```
C:\Users\ITEUser> md ITEfolder1
C:\Users\ITEUser> md ITEfolder2 ITEfolder3
```

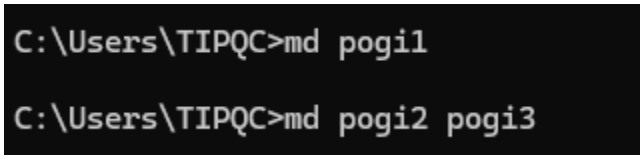

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

d. Type **dir** to verify that the folders have been created.

```
10/08/2026  11:22 AM    <DIR>          pogi1
10/08/2026  11:22 AM    <DIR>          pogi2
10/08/2026  11:22 AM    <DIR>          pogi3
```

e. Type **cd ITEfolder3** at the command prompt and press **Enter**.

```
C:\Users\TIPQC>cd pogi3

C:\Users\TIPQC\pogi3>
```

Question:

Which folder are you in now?

I am in the third folder that I created using the command prompt.

f. Create **ITEfolder4** in the current directory. Within the **ITEfolder4** folder, create a folder named **ITEfolder5**. Use the **dir** command to verify the folder creation.

```
C:\Users\TIPQC\pogi3>md pogi4

C:\Users\TIPQC\pogi3>
C:\Users\TIPQC>cd pogi3

C:\Users\TIPQC\pogi3>cd pogi4

C:\Users\TIPQC\pogi3\pogi4>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi3\pogi4

10/08/2026  11:30 AM    <DIR>          .
10/08/2026  11:28 AM    <DIR>          ..
10/08/2026  11:30 AM    <DIR>          pogi5
               0 File(s)              0 bytes
               3 Dir(s)  592,129,708,032 bytes free

C:\Users\TIPQC\pogi3\pogi4>
```


Question:

What command or commands did you use to create the nested folders?

I used the simple command of md filename to create the designated nested file.


© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

g. Change directory as necessary until you are in ITEfolder5.

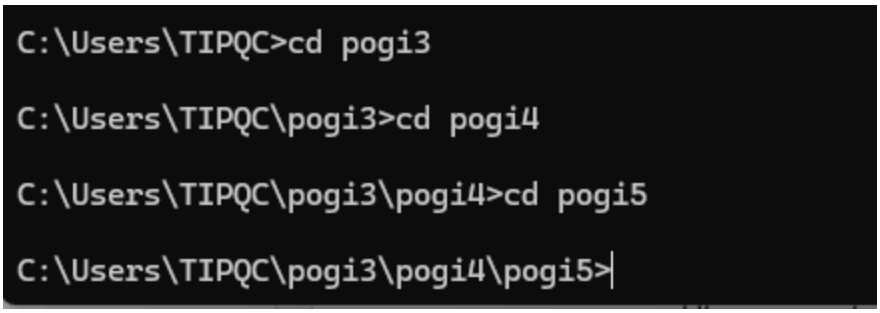

h. Type **cd ..** to change the current directory. Each **..** is a shortcut to move up one level in the directory tree.

Question:

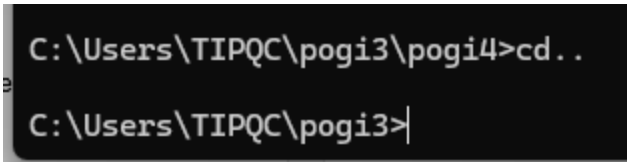

After issuing the **cd ..** command, what is your directory now?

I am at the C:\Users\TIPQC\pogi3, back in the third file that I created.

What would be the current directory if you issue this command at C:\Users\ITEUser\ITEfolder3\ITEFolder4?


The directory would be C:\Users\ITEUser\ITEfolder3 .

Step 3: Create text files.

a. Navigate to the **C:\Users\ITEUser\ITEfolder1** directory. Type **cd ..\ITEfolder1** at the prompt.

b. Type **echo This is doc1.txt > doc1.txt** at the command prompt. The **echo** command is used to display a message at the command prompt. The **>** is used to redirect the message from the screen to a file. For example, in the first line, the message **This is doc1.txt** is redirected into a new file named **doc1.txt**. Use the **echo** command and **>** redirect to create these files: **doc2.txt**, **file1.txt**, and **file2.txt**.


```
C:\Users\ITEUser\ITEfolder1> echo This is doc1.txt > doc1.txt
C:\Users\ITEUser\ITEfolder1> echo This is doc2.txt > doc2.txt
C:\Users\ITEUser\ITEfolder1> echo This is file1.txt > file1.txt
C:\Users\ITEUser\ITEfolder1> echo This is file2.txt > file2.txt
```

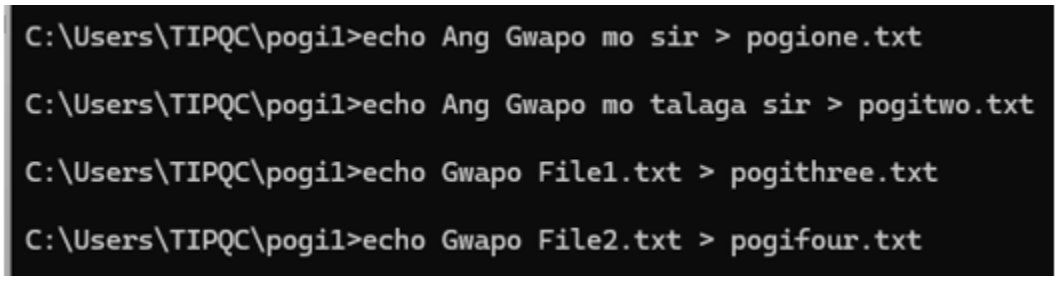

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

c. Use the **dir** command to verify the files are in the **ITEfolder1** folder.'


```
C:\Users\ITEUser\ITEFolder1> dir
<some output omitted>
04/29/2019  08:05 AM                19 doc1.txt
04/29/2019  08:06 AM                19 doc2.txt
04/29/2019  08:08 AM                20 file1.txt
04/29/2019  08:08 AM                20 file2.txt
               4 File(s)             78 bytes
               2 Dir(s)  32,625,397,760 bytes free
```

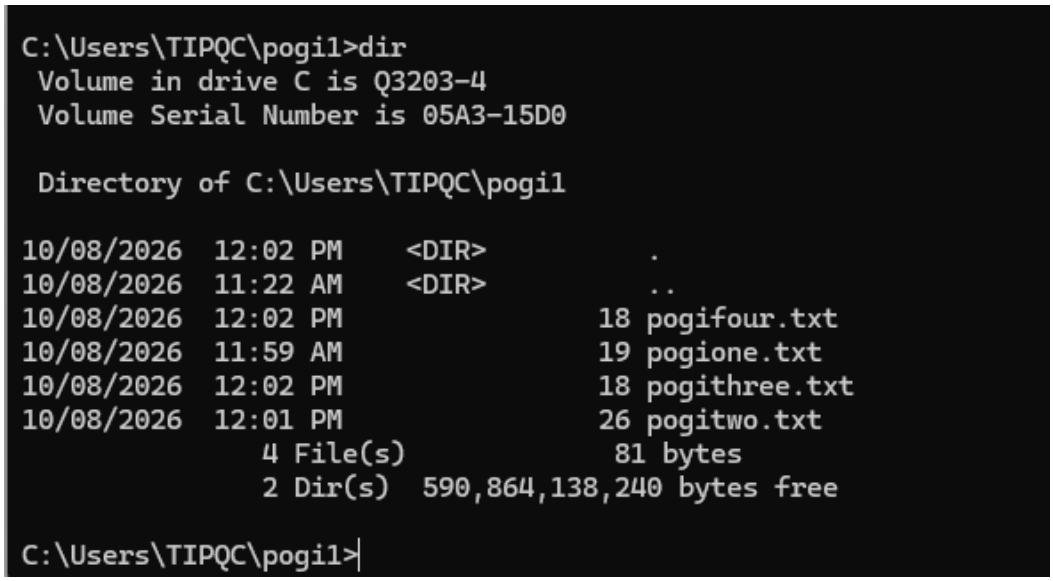

d. Use the **more** or **type** command to view the content of the newly created text files.

```
C:\Users\ITEUser\ITEfolder1> more doc1.txt
This is doc1.txt

C:\Users\ITEUser\ITEfolder1> type doc2.txt
This is doc2.txt
```

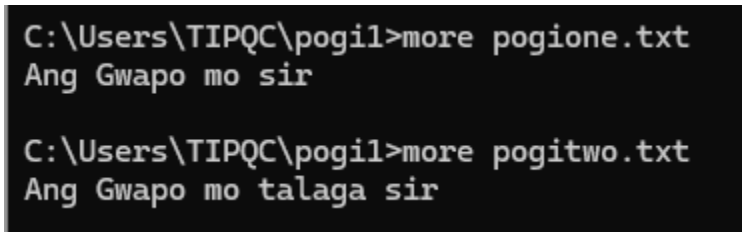

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

Step 4: Copy, delete, and move files.

a. At the command prompt, type **move doc2.txt C:\Users\ITEUser\ITEfolder2** to move the file **doc2.txt** to the **C:\Users\ITEUser\ITEfolder2** directory.

```
C:\Users\ITEUser\ITEfolder1> move doc2.txt C:\Users\ITEUser\ITEfolder2
        1 file(s) moved.
```

```
C:\Users\TIPQC\pogi1>move pogithree.txt C:\Users\TIPQC\pogi2
        1 file(s) moved.
```

b. Type **dir** at the prompt to verify that **doc2.txt** is no longer in the current directory.

```
C:\Users\TIPQC\pogi1>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi1

10/08/2026  12:09 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 pogifour.txt
10/08/2026  11:59 AM                19 pogione.txt
10/08/2026  12:01 PM                26 pogitwo.txt
               3 File(s)             63 bytes
               2 Dir(s)  590,861,520,896 bytes free
```

c. Navigate to **C:\Users\ITEUser\ITEfolder2** to change the directory to **ITEfolder2**. Type **dir** at the prompt to verify **doc2.txt** has been moved.

```
C:\Users\TIPQC>cd pogi2

C:\Users\TIPQC\pogi2>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi2

10/08/2026  12:09 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 pogithree.txt
               1 File(s)             18 bytes
               2 Dir(s)  590,860,685,312 bytes free
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

d. Type **copy doc2.txt doc2_copy.txt** to create a copy of **doc2.txt**. Type **dir** at the prompt to verify a copy of the file has been created.

```
C:\Users\ITEUser\ITEfolder2> dir
<some output omitted>
Directory of C:\Users\ITEUser\ITEfolder2

04/30/2019  09:07 AM                19 doc2.txt
04/30/2019  09:07 AM                19 doc2_copy.txt
               2 File(s)             38 bytes
               2 Dir(s)  31,753,068,544 bytes free
```

```
C:\Users\TIPQC\pogi2>copy pogithree.txt pogitatlo.txt
        1 file(s) copied.

C:\Users\TIPQC\pogi2>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi2

10/08/2026  12:11 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 pogitatlo.txt
10/08/2026  12:02 PM                18 pogithree.txt
               2 File(s)             36 bytes
               2 Dir(s)  590,864,699,392 bytes free
```

e. Use the **move** command to move **doc2_copy.txt** to **ITEfolder1**. Type **move doc2_copy.txt ..\ITEfolder1**.

```
C:\Users\ITEUser\ITEfolder2> move doc2_copy.txt ..\ITEfolder1
        1 file(s) moved.
```

```
C:\Users\TIPQC\pogi2>move pogitatlo.txt C:\Users\TIPQC\pogi1
        1 file(s) moved.
```

f. A copy of the file **doc2.txt** can be created in a new location using the **copy** command. At the prompt, enter the **copy doc2.txt ..\ITEfolder1\doc2_new.txt**.

```
C:\Users\ITEUser\ITEfolder2> copy doc2.txt ..\ITEfolder1\doc2_new.txt
        1 file(s) copied.
```

```
C:\Users\TIPQC\pogi2>copy pogithree.txt ..\pogi1\pogithree_new
        1 file(s) copied.
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

g. The file **doc2.txt** can also be moved to a new location with a new filename using the **move** command. Type **move doc2.txt ..\ITEfolder1\doc2_new.txt** at the prompt.

```
C:\Users\ITEUser\ITEfolder2> move doc2.txt ..\ITEfolder1\doc2_move.txt
        1 file(s) moved.
```

h. Type **dir ..\ITEfolder1** to view the content in **ITEfolder1** without leaving the current directory.

```
C:\Users\ITEUser\ITEfolder2> dir ..\ITEfolder1
<some output omitted>
 Directory of C:\Users\ITEUser\ITEfolder1

04/29/2019  12:08 PM    <DIR>          .
04/29/2019  12:08 PM    <DIR>          ..
04/29/2019  08:05 AM                19 doc1.txt
04/29/2019  08:06 AM                19 doc2_copy.txt
04/29/2019  08:06 AM                19 doc2_move.txt
04/29/2019  08:06 AM                19 doc2_new.txt
04/29/2019  08:08 AM                20 file1.txt
04/29/2019  08:08 AM                20 file2.txt
               6 File(s)            116 bytes
               2 Dir(s)  31,467,700,224 bytes free
```

```
C:\Users\TIPQC\pogi2>move pogithree.txt ..\pogi1\pogithree_move.txt
        1 file(s) moved.

C:\Users\TIPQC\pogi2>dir ..\pogi1
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi1

10/08/2026  12:22 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 pogifour.txt
10/08/2026  11:59 AM                19 pogione.txt
10/08/2026  12:02 PM                18 pogitatlo.txt
10/08/2026  12:02 PM                18 pogithree_move.txt
10/08/2026  12:02 PM                18 pogithree_new
10/08/2026  12:01 PM                26 pogitwo.txt
               6 File(s)            117 bytes
               2 Dir(s)  590,863,560,704 bytes free
```

i. Change the current directory to **ITEfolder1**. Type **cd ..\ITEfolder1** at the prompt.

```
C:\Users\TIPQC\pogi2>cd..\pogi1

C:\Users\TIPQC\pogi1>
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

j. Move **file1.txt** and **file2.txt** into **ITEfolder3**. To move all the files that contain the word **file** into **ITEfolder3** with one command, use a **wildcard** (*) character to represent one or more characters. Type **move file* ..\ITEfolder3**.

```
C:\Users\ITEUser\ITEfolder1> move file* ..\ITEfolder3
C:\Users\ITEUser\ITEfolder1\file1.txt
C:\Users\ITEUser\ITEfolder1\file2.txt
        2 file(s) moved.
```

```
C:\Users\TIPQC\pogi1>move pogi* ..\pogi3
C:\Users\TIPQC\pogi1\pogifour.txt
C:\Users\TIPQC\pogi1\pogione.txt
C:\Users\TIPQC\pogi1\pogitatlo.txt
C:\Users\TIPQC\pogi1\pogithree_move.txt
C:\Users\TIPQC\pogi1\pogithree_new.txt
C:\Users\TIPQC\pogi1\pogitwo.txt
        6 file(s) moved.
```

k. To view the content of the file doc2_new.txt, use the **type** or **more** command at the prompt.

```
C:\Users\ITEUser\ITEfolder1> type doc2_new.txt
This is doc2.txt
```

```
C:\Users\TIPQC\pogi3>type pogithree_new.txt
Gwapo File1.txt

C:\Users\TIPQC\pogi3>
```

l. Use the **ren** command to rename doc2_new.txt to doc3.txt. Use the **dir** command to display the content in the directory.

```
c:\Users\ITEUser\ITEfolder1> ren doc2_new.txt file.log
```

m. Use the **type** or **more** command to view the content of the newly rename file **file.log.**

```
C:\Users\ITEUser\ITEfolder1> more file.log
This is doc2.txt
```

```
C:\Users\TIPQC\pogi3>ren pogithree_new.txt file.log

C:\Users\TIPQC\pogi3>more file.log
Gwapo File1.txt
```

n. To delete a file or multiple files, use the **del** command with the file names at the prompt.

```
C:\Users\TIPQC\pogi3>del doc*
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

Question:

What single command would you use to delete all the files with doc2 in the filename? Use the command to remove the files with doc2 in the filename.

The command should be del doc2*

What command would you use to delete all the files in the directory? Use the command to remove the files.

del *.*


Step 5: Use the xcopy and robocopy commands.

In this step, the **xcopy** and **robocopy** commands are used to copy the content in a directory.

a. View the content of ITEfolder3.

```
C:\Users\ITEUser\ITEfolder1> dir ..\ITEfolder3
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder3

04/29/2019  03:11 PM    <DIR>          .
04/29/2019  03:11 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
04/29/2019  03:01 PM    <DIR>          ITEfolder4
               2 File(s)             40 bytes
               3 Dir(s)  31,492,157,440 bytes free
```

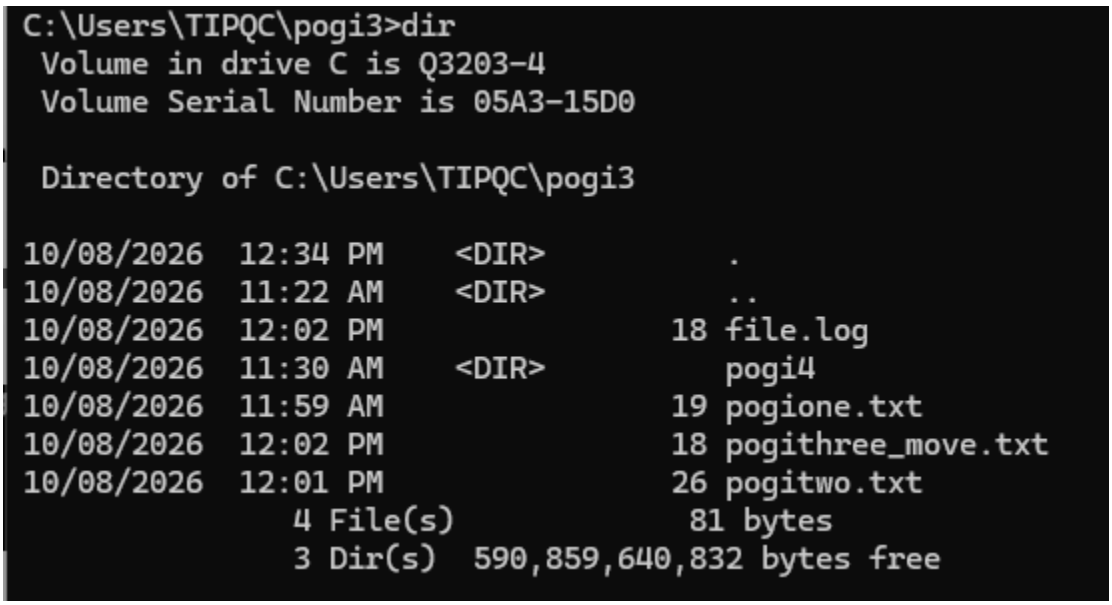

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

b. Type **xcopy ..\ITEfolder3 .** at the prompt to copy the content of **ITEfolder3** to **ITEfolder1**. Note the **.** at the end of the command. It is a shortcut for the current directory.

```
C:\Users\ITEUser\ITEfolder1> xcopy ..\ITEfolder3 .
..\ITEfolder3\file1.txt
..\ITEfolder3\file2.txt
2 File(s) copied
```

```
C:\Users\TIPQC\pogi1>xcopy ..\pogi3 .
..\pogi3\file.log
..\pogi3\pogione.txt
..\pogi3\pogithree_move.txt
..\pogi3\pogitwo.txt
4 File(s) copied
```

c. At the prompt, type **dir** to display the content of **ITEfolder1**. Only the files in the **ITEfolder3** were copied into **ITEfolder1**. The directory **ITEfolder4** was not copied into **ITEfolder3**.

```
C:\Users\ITEUser\ITEfolder1> dir
<some output omitted>
 Directory of C:\Users\ITEUser\ITEfolder1
04/29/2019  03:16 PM    <DIR>          .
04/29/2019  03:16 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
               2 File(s)             40 bytes
               2 Dir(s)  31,491,321,856 bytes free
```

```
C:\Users\TIPQC\pogi1>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi1

10/08/2026  12:41 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 file.log
10/08/2026  11:59 AM                19 pogione.txt
10/08/2026  12:02 PM                18 pogithree_move.txt
10/08/2026  12:01 PM                26 pogitwo.txt
               4 File(s)             81 bytes
               2 Dir(s)  596,190,924,800 bytes free
```

d. Use **help xcopy** or **xcopy /?** to determine which switch would allow the **xcopy** command to copy **all** the files and directories.

Question:

What option allows you to copy all the files and directories, including the empty directories?

Xcopy /S to copy all the files. /E for empty directories.

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

e. Because **ITEfolder4** is a subfolder and **ITEfolder5** is both a subfolder and an empty folder, **/E** is needed to copy all the contents of **ITEfolder3** and the empty subfolder.

Type **xcopy /E ..\ITEfolder3 .** at the prompt to copy the files. When prompted, type **a** to allow overwriting the existing files.

```
c:\Users\ITEUser\ITEfolder1> xcopy /E ..\ITEfolder3
Overwrite C:\Users\ITEUser\ITEfolder1\file1.txt (Yes/No/All)? a
..\ITEfolder3\file1.txt
..\ITEfolder3\file2.txt
2 File(s) copied
```

```
C:\Users\TIPQC\pogi1>xcopy /E ..\pogi3
Overwrite C:\Users\TIPQC\pogi1\file.log (Yes/No/All)? a
..\pogi3\file.log
..\pogi3\pogione.txt
..\pogi3\pogithree_move.txt
..\pogi3\pogitwo.txt
4 File(s) copied
```

f. Verify that the **ITEfolder4** and **ITEfolder5** were also copied in **ITEfolder1**.

```
c:\Users\ITEUser\ITEfolder1> dir
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder1

04/29/2019  04:41 PM    <DIR>          .
04/29/2019  04:41 PM    <DIR>          ..
04/29/2019  03:05 PM                20 file1.txt
04/29/2019  03:05 PM                20 file2.txt
04/29/2019  04:41 PM    <DIR>          ITEfolder4
               2 File(s)             40 bytes
               3 Dir(s)  31,493,193,728 bytes free

c:\Users\ITEUser\ITEfolder1> dir ITEfolder4
<some output omitted>
 Directory of c:\Users\ITEUser\ITEfolder1\ITEfolder4

04/29/2019  04:41 PM    <DIR>          .
04/29/2019  04:41 PM    <DIR>          ..
04/29/2019  03:00 PM    <DIR>          ITEfolder5
               0 File(s)              0 bytes
               3 Dir(s)  31,493,193,728 bytes free
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC\pogi1>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi1

10/08/2026  12:49 PM    <DIR>          .
10/08/2026  11:22 AM    <DIR>          ..
10/08/2026  12:02 PM                18 file.log
10/08/2026  12:49 PM    <DIR>          pogi4
10/08/2026  11:59 AM                19 pogione.txt
10/08/2026  12:02 PM                18 pogithree_move.txt
10/08/2026  12:01 PM                26 pogitwo.txt
               4 File(s)             81 bytes
               3 Dir(s)  596,200,353,792 bytes free

C:\Users\TIPQC\pogi1>dir pogi4
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC\pogi1\pogi4

10/08/2026  12:49 PM    <DIR>          .
10/08/2026  12:49 PM    <DIR>          ..
10/08/2026  11:30 AM    <DIR>          pogi5
               0 File(s)              0 bytes
               3 Dir(s)  596,197,498,880 bytes free
```

g. The robocopy command can also be used to copy the content of a directory to a new destination. The robocopy command has more capabilities than the built-in Windows copy and xcopy command, such as resume copying after a network interruption, skip files that appear to be identical to the files in the destination folders, and mirror a directory by keeping the destination directory in sync with the source directory.

Copy the ITEfolder4 content to ITEUser folder using the robocopy command.

```
C:\Users\ITEUser\ITEfolder1> robocopy /E
C:\Users\ITEUser\ITEfolder3\ITEfolder4\ C:\Users\ITEUser
```

Note the information provided by the command during the copying process.

```
               Total    Copied   Skipped  Mismatch    FAILED    Extras
    Dirs :         2         1         1         0         0        45
   Files :         0         0         0         0         0        19
   Bytes :         0         0         0         0         0   26.20 m
   Times :   0:00:00   0:00:00                       0:00:00   0:00:00
   Ended : Thursday, October 8, 2026 12:55:00 PM
```

h. Navigate to **C:\Users\ITEUser** to verify that the folder ITEfolder5 is copied.


© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

Step 6: Delete directories.


In this step, you will delete an empty and a non-empty directory using the **rd** command.

a. Use the **rd ITEfolder2** to delete the empty directory and verify that the directory was deleted.

```
C:\Users\ITEUser> rd ITEfolder2
```

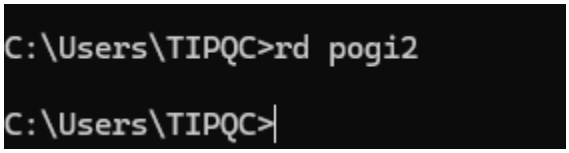

b. Navigate to the **C:\Users\ITEUser\ITEfolder3** directory.



c. Use the **rd ITEfolder1** to delete the directory. Verify the directory removal using the **dir** command.

Were you able to delete the directory? Explain.

Unable to delete because I am in file3 directory.

d. Use **rd /?** command to determine the switch that allows the deletion of a non-empty directory.

```
c:\Users\ITEUser\ITEfolder3> rd /S ITEfolder1
ITEfolder4, Are you sure (Y/N)? y
```



e. Use the appropriate commands to delete all the text files and folders that you have created in this lab. Type **exit** to close the command prompt window.

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\Users\TIPQC>dir
 Volume in drive C is Q3203-4
 Volume Serial Number is 05A3-15D0

 Directory of C:\Users\TIPQC

10/08/2026  01:04 PM    <DIR>          .
03/12/2026  01:42 PM    <DIR>          ..
02/07/2025  01:48 PM    <DIR>          .anaconda
03/03/2026  11:01 AM    <DIR>          .android
09/24/2025  10:40 AM    <DIR>          .cache
08/27/2025  04:40 PM    <DIR>          .conda
02/07/2025  01:48 PM    <DIR>          .continuum
07/25/2026  01:46 PM    <DIR>          .copilot
04/25/2025  03:00 PM    <DIR>          .ipynb_checkpoints
02/07/2025  01:53 PM    <DIR>          .ipython
02/07/2025  03:27 PM    <DIR>          .jupyter
02/07/2025  02:05 PM    <DIR>          .matplotlib
09/03/2026  12:09 PM               176 .packettracer
07/25/2026  01:47 PM    <DIR>          .spyder-py3
10/08/2026  12:46 PM    <DIR>          .VirtualBox
08/06/2025  05:16 PM    <DIR>          .vscode
07/25/2026  01:46 PM    <DIR>          .vscode-shared
09/03/2026  01:29 PM    <DIR>          Cisco Packet Tracer 8.2.2
10/18/2024  05:21 AM    <DIR>          Contacts
08/15/2026  01:58 PM    <DIR>          Desktop
09/18/2026  06:29 PM    <DIR>          Documents
10/08/2026  11:14 AM    <DIR>          Downloads
04/25/2025  08:38 AM    <DIR>          Favorites
02/10/2026  11:02 AM    <DIR>          flutter
02/07/2025  03:24 PM    <DIR>          Jedi
10/18/2024  05:21 AM    <DIR>          Links
10/18/2024  05:21 AM    <DIR>          Music
10/18/2024  05:23 AM    <DIR>          OneDrive
05/26/2025  01:19 PM    <DIR>          Pictures
10/18/2024  05:21 AM    <DIR>          Saved Games
10/17/2024  03:58 PM    <DIR>          Searches
10/22/2025  08:43 AM    <DIR>          VHDPlus
10/21/2024  01:20 PM    <DIR>          Videos
10/08/2026  11:07 AM    <DIR>          VirtualBox VMs
               1 File(s)            176 bytes
              33 Dir(s)  596,195,135,488 bytes free
```

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public

Reflection Question

What are the advantages of using CLI vs. GUI?

Using a CLI can be faster and more efficient because users can type commands directly instead of clicking through different menus. It also gives users more control over the system and is useful for automating repetitive tasks with scripts. A GUI is usually easier to learn because it uses buttons, icons, and visual menus. However, a CLI can be better for programmers and IT professionals who need to manage files, run programs, or troubleshoot systems quickly. Overall, CLI is more powerful and efficient for technical tasks, while GUI is more user-friendly for beginners

.End of Document

© 2015 - 2026 Cisco and/or its affiliates. All rights reserved. Cisco Public