
Y DominickNola / assignment-one-DominickNola

forked from msu-denver-cs/assignment-one-DominickNola

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also compare across forks.

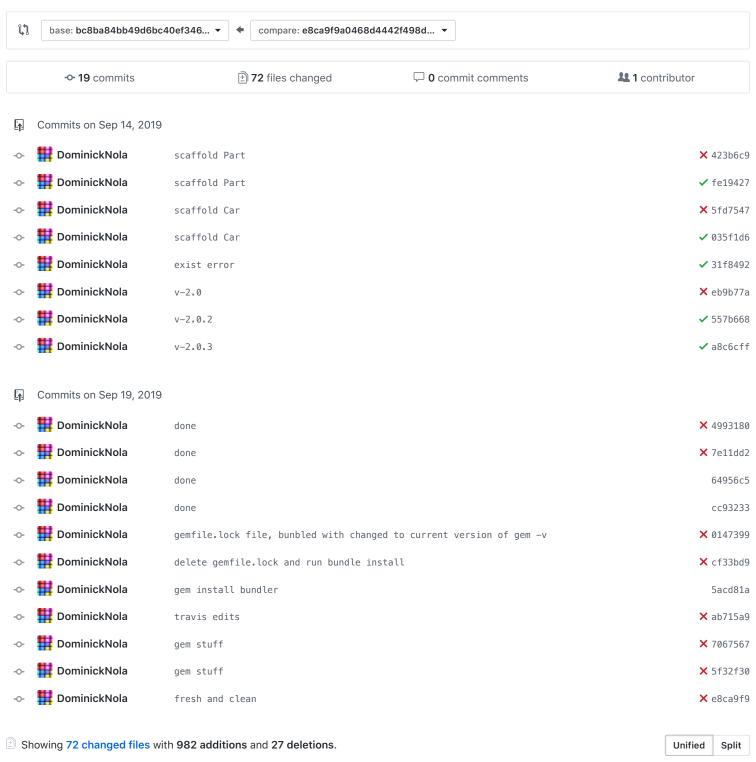

```
3 ■■■ .idea/assignment-one-DominickNola.iml 🚉
43
        43
                    <orderEntry type="library" scope="PROVIDED" name="bindex (v0.8.1, RVM: ruby-2.5.3) [gem]" level="application" />
                    <orderEntry type="library" scope="PROVIDED" name="bootsnap (v1.4.5, RVM: ruby-2.5.3) [gem]" level="application" />
45
        45
                    <orderEntry type="library" scope="PROVIDED" name="builder (v3.2.3, RVM: ruby-2.5.3) [gem]" level="application" />
        46
                    <orderEntry type="library" scope="PROVIDED" name="bundler (v2.0.2, RVM: ruby-2.5.3) [gem]" level="application" />
        47
                    <orderEntry type="library" scope="PROVIDED" name="byebug (v11.0.1, RVM: ruby-2.5.3) [gem]" level="application" />
                    orderEntry type="library" scope="PROVIDED" name="capybara (v3.29.0, RVM: ruby-2.5.3) [gem]" level="application"
47
        49
                    <orderEntry type="library" scope="PROVIDED" name="childprocess (v2.0.0, RVM: ruby-2.5.3) [gem]" level="application"</pre>
                    <orderEntry type="library" scope="PROVIDED" name="thor (v0.20.3, RVM: ruby-2.5.3) [gem]" level="application" />
                    <orderEntry type="library" scope="PROVIDED" name="thread_safe (v0.3.6, RVM: ruby-2.5.3) [gem]" level="application"</pre>
                    <orderEntry type="library" scope="PROVIDED" name="tilt (v2.0.9, RVM: ruby-2.5.3) [gem]" level="application" />
100
                    <orderEntry type="library" scope="PROVIDED" name="turbolinks (v5.2.0, RVM: ruby-2.5.3) [gem]" level="application"</pre>
                    <orderEntry type="library" scope="PROVIDED" name="turbolinks (v5.2.1, RVM: ruby-2.5.3) [gem]" level="application"</pre>
                    <orderEntry type="library" scope="PROVIDED" name="turbolinks-source (v5.2.0, RVM: ruby-2.5.3) [gem]" level="applic"</pre>
                    <orderEntry type="library" scope="PROVIDED" name="tzinfo (v1.2.5, RVM: ruby-2.5.3) [gem]" level="application" />
                    <orderEntry type="library" scope="PROVIDED" name="uglifier (v4.1.20, RVM: ruby-2.5.3) [gem]" level="application"</pre>
```

```
11 _____idea/workspace.xml 🚉
                 <component name="ChangeListManager">
       4
                   default="true" id="7f7445ab-8682-4a77-8c2c-48758454bd46" name="Default Changelist" comment="">
                     <change beforePath="$PROJECT_DIR$/.idea/workspace.xml" beforeDir="false" afterPath="$PROJECT_DIR$/.idea/workspace.xml"</pre>
6
                     <change beforePath="$PROJECT_DIR$/app/models/invoice_part.rb" beforeDir="false" afterPath="$PROJECT_DIR$/app/models/invoice_part.rb" beforeDir="false" afterPath="$PROJECT_DIR$/app/models/invoice_part.rb"</pre>
                   </list>
                   <option name="EXCLUDED_CONVERTED_TO_IGNORED" value="true" />
                   <option name="SHOW_DIALOG" value="false" />
                   cproperty name="RailsGeneratorsPopup.hiddenIncluded" value="false" />
                   cproperty name="WebServerToolWindowFactoryState" value="false" />
                   cproperty name="last_opened_file_path" value="$PROJECT_DIR$" />
                   <property name="settings.editor.selected.configurable" value="org.jetbrains.plugins.ruby.settings.RubyActiveModule</pre>
                   <property name="settings.editor.selected.configurable" value="MTConfigurable" />
                 </component>
                 <component name="RecentsManager">
                   <key name="CopyFile.RECENT_KEYS">
                     <workItem from="1568334326719" duration="57000" />
                     <workItem from="1568500771790" duration="143000" />
                     <workItem from="1568502441781" duration="117000" />
                     <workItem from="1568502560970" duration="3290000" />
                     <workItem from="1568502560970" duration="12839000" />
                     <workItem from="1568760294374" duration="1327000" />
                     <workItem from="1568914134514" duration="2996000" />
                     <workItem from="1568919739143" duration="763000" />
                     <workItem from="1568926403169" duration="22000" />
                   </task>
                   <servers />
                 </component>
                   </option>
```

```
Comparing bc8ba84bb49d6bc40ef346783bb0ef208ed73aee...e8ca9f...1a97a9c0b3a30489 · DominickNola/assignment-one-DominickNola
                                                                                                                                                                                                                                                                                                                    9/19/19, 10:20 PM
           254
                                                      </component>
                                                      <component name="com.intellij.coverage.CoverageDataManagerImpl">
                                                           <SUITE FILE_PATH="coverage/assignment_one_DominickNola@Development__assignment_one_DominickNola.rcov" NAME="Development__assignment_one_DominickNola.rcov" NAME="Development_one_DominickNola.rcov" NAME="Development_one_DominickNo
                            259
                                                            <SUITE FILE_PATH="coverage/assignment_one_DominickNola@Development__assignment_one_DominickNola.rcov" NAME="Development__assignment_one_DominickNola.rcov" NAME="Development__assignment_one_DominickNola.rcov"</pre>
                                                       </component>
                                                  </project> ⊘↔
                  2 ■■■ .travis.yml 🚉
                                          @@ -1,5 +1,5 @@
                            . . .
           . . .
                                                 language: ruby
                                                  rvm:
                                                   - 2.5
                                          + - 2.5.3
                                 4
                                                 script:
                                                   - bundle exec rails test
                  2 ■■■■ Gemfile 🚉
                                 3
               4
                                 4
                                                  ruby '2.5.3'
               5
               6
                                           - # Bundle edge Rails instead: gem 'rails', github: 'rails/rails'
                                          + # Bundled edge Rails instead: gem 'rails', github: 'rails/rails'
                                                 gem 'rails', '~> 5.2.3'
               8
                                 8
                                                 # Use sqlite3 as the database for Active Record
               9
                                 9
                                                 gem 'sqlite3'
                    4 Gemfile.lock
                                                            thor (0.20.3)
           170
                                                           thread_safe (0.3.6)
                                                           tilt (2.0.9)
                                                           turbolinks (5.2.0)
                                                           turbolinks (5.2.1)
                                                                turbolinks-source (~> 5.2)
           174
                            174
                                                           turbolinks-source (5.2.0)
                                                           tzinfo (1.2.5)
           214
                            214
                                                         ruby 2.5.3p105
                                                 BUNDLED WITH
                                                         1.17.3
                                                         2.0.2
                  3 ■■■ app/assets/javascripts/cars.coffee 🚉
                                          @@ -0,0 +1,3 @@
                                 1
                                          + # Place all the behaviors and hooks related to the matching controller here.
                                 2
                                           + # All this logic will automatically be available in application.js.
                                               # You can use CoffeeScript in this file: http://coffeescript.org/
```

```
@@ -0,0 +1,3 @@
    . . .
         + # Place all the behaviors and hooks related to the matching controller here.
          # All this logic will automatically be available in application.js.
```

```
3 + # You can use CoffeeScript in this file: http://coffeescript.org/
  3 ■ app/assets/javascripts/parts.coffee 🚉
           @@ -0,0 +1,3 @@
           + # Place all the behaviors and hooks related to the matching controller here.
           + # All this logic will automatically be available in application.js.
           + # You can use CoffeeScript in this file: http://coffeescript.org/
  3 ■ app/assets/stylesheets/cars.scss 🚉
          @@ -0,0 +1,3 @@
           + // Place all the styles related to the Cars controller here.
           + // They will automatically be included in application.css.
          + // You can use Sass (SCSS) here: http://sass-lang.com/
@@ -0,0 +1,3 @@
     . . .
       1
           + // Place all the styles related to the Makes controller here.
       2
           + // They will automatically be included in application.css.
          + // You can use Sass (SCSS) here: http://sass-lang.com/

→ 3 app/assets/stylesheets/parts.scss 

☐
          @@ -0,0 +1,3 @@
       1
           + // Place all the styles related to the Parts controller here.
          + // They will automatically be included in application.css.
          + // You can use Sass (SCSS) here: http://sass-lang.com/
@@ -0,0 +1,74 @@
     . . .
       1
           + class CarsController < ApplicationController
               before_action :set_car, only: [:show, :edit, :update, :destroy]
       4
              # GET /cars ...
              # GET /cars.json
       6
               def index
                 @cars = Car.all
       8
       9
      10
               # GET /cars/1
               # GET /cars/1.json
               def show
               end
               # GET /cars/new
               def new
                 @car = Car.new
      18
               end
      19
      20
               # GET /cars/1/edit
               def edit
               end
```

```
24
         # POST /cars
         # POST /cars.json
         def create
           @car = Car.new(car_params)
           respond_to do |format|
             if @car.save
                format.html { redirect_to @car, notice: 'Car was successfully created.' }
                format.json { render :show, status: :created, location: @car }
             else
                format.html { render :new }
                format.json { render json: @car.errors, status: :unprocessable_entity }
           end
40
         # PATCH/PUT /cars/1
41
         # PATCH/PUT /cars/1.json
42
         def update
43
           respond_to do |format|
44
             if @car.update(car_params)
45
                format.html { redirect_to @car, notice: 'Car was successfully updated.' }
                format.json { render :show, status: :ok, location: @car }
47
             else
48
               format.html { render :edit }
49
                format.json { render json: @car.errors, status: :unprocessable_entity }
50
           end
          end
54
         # DELETE /cars/1
         # DELETE /cars/1.json
56
         def destroy
           @car.destroy
           respond_to do |format|
59
             format.html { redirect_to cars_url, notice: 'Car was successfully destroyed.' }
             format.json { head :no_content }
           end
         end
63
         private
65
           # Use callbacks to share common setup or constraints between actions.
           def set_car
67
             @car = Car.find(params[:id])
            end
70
           # Never trust parameters from the scary internet, only allow the white list through.
           def car_params
             params.require(:car).permit(:make, :model, :vin, :country)
            end
74
```

```
# GET /makes
5
         # GET /makes.json
6
         def index
           @makes = Make.all
8
         end
10
         # GET /makes/1
     +
         # GET /makes/1.json
         def show
          end
14
         # GET /makes/new
         def new
           @make = Make.new
18
         end
20
         # GET /makes/1/edit
         def edit
         end
         # POST /makes
         # POST /makes.json
         def create
           @make = Make.new(make_params)
28
29
           respond_to do |format|
             if @make.save
               format.html { redirect_to @make, notice: 'Make was successfully created.' }
                format.json { render :show, status: :created, location: @make }
             else
                format.html { render :new }
                format.json { render json: @make.errors, status: :unprocessable_entity }
           end
38
          end
40
         # PATCH/PUT /makes/1
41
         # PATCH/PUT /makes/1.json
42
         def update
43
            respond_to do |format|
             if @make.update(make_params)
               format.html { redirect_to @make, notice: 'Make was successfully updated.' }
45
46
               format.json { render :show, status: :ok, location: @make }
47
             else
48
                format.html { render :edit }
                format.json { render json: @make.errors, status: :unprocessable_entity }
50
             end
            end
         end
54
         # DELETE /makes/1
         # DELETE /makes/1.json
         def destroy
           @make.destroy
58
           respond_to do |format|
              format.html { redirect_to makes_url, notice: 'Make was successfully destroyed.' }
     +
```

```
60
             format.json { head :no_content }
61
           end
         end
         private
65
           # Use callbacks to share common setup or constraints between actions.
67
             @make = Make.find(params[:id])
70
           # Never trust parameters from the scary internet, only allow the white list through.
           def make_params
             params.require(:make).permit(:name, :country)
            end
74
     + end
```

```
@@ -0,0 +1,74 @@
      . . .
             class PartsController < ApplicationController</pre>
                before_action :set_part, only: [:show, :edit, :update, :destroy]
       4
               # GET /parts
       5
                # GET /parts.json
       6
               def index
                 @parts = Part.all
       8
                end
      10
               # GET /parts/1
           +
                # GET /parts/1.json
                def show
      14
                # GET /parts/new
                def new
                 @part = Part.new
                end
      19
      20
                # GET /parts/1/edit
                def edit
                end
                # POST /parts
                # POST /parts.json
      26
                def create
                 @part = Part.new(part_params)
      28
                 respond_to do |format|
      30
                   if @part.save
                      format.html { redirect_to @part, notice: 'Part was successfully created.' }
                      format.json { render :show, status: :created, location: @part }
                   else
      34
                     format.html { render :new }
                     format.json { render json: @part.errors, status: :unprocessable_entity }
      36
                   end
                  end
      38
                end
```

```
40
               # PATCH/PUT /parts/1
      41
               # PATCH/PUT /parts/1.json
      42
               def update
      43
                 respond_to do |format|
      44
                   if @part.update(part_params)
      45
                     format.html { redirect_to @part, notice: 'Part was successfully updated.' }
      46
                     format.json { render :show, status: :ok, location: @part }
      47
      48
                     format.html { render :edit }
      49
                     format.json { render json: @part.errors, status: :unprocessable_entity }
      50
                 end
               end
      54
               # DELETE /parts/1
               # DELETE /parts/1.json
               def destroy
                 @part.destroy
                 respond_to do |format|
      59
                   format.html { redirect_to parts_url, notice: 'Part was successfully destroyed.' }
                   format.json { head :no_content }
      61
                 end
               end
      63
               private
      65
                 # Use callbacks to share common setup or constraints between actions.
                 def set_part
                   @part = Part.find(params[:id])
      70
                 # Never trust parameters from the scary internet, only allow the white list through.
                 def part_params
                   params.require(:part).permit(:name, :inventory)
      74
             end
@@ -0,0 +1,2 @@
           + module CarsHelper
             end
```

```
@@ -0,0 +1,3 @@
         + class Car < ActiveRecord::Base
      2
            has_and_belongs_to_many :parts
           end
@@ -0,0 +1,2 @@
         + class CarsParts < ActiveRecord::Base
         + end
@@ -0,0 +1,3 @@
         + class Make < ActiveRecord::Base
      2
           has_many :cars
         + end
@@ -0,0 +1,3 @@
         + class Part < ActiveRecord::Base
      2
           has_and_belongs_to_many :cars
         + end
@@ -0,0 +1,2 @@
    . . .
         + json.extract! car, :id, :make, :model, :vin, :country, :created_at, :updated_at
         + json.url car_url(car, format: :json)
@@ -0,0 +1,42 @@
         + <%= form_with(model: car, local: true) do |form| %>
             <% if car.errors.any? %>
              <div id="error_explanation">
      4
                <h2><%= pluralize(car.errors.count, "error") %> prohibited this car from being saved:</h2>
      6
               <% car.errors.full_messages.each do |message| %>
      8
                 <%= message %>
      9
                <% end %>
     10
                </div>
             <% end %>
     14
             <div class="field">
              <%= form.label :make %>
              <%= form.collection_select :make, Make.all, :id, :name %>
             </div>
     18
             <div class="field">
     19
         +
```

```
20
           <%= form.label :model %>
           <%= form.text_field :model %>
         </div>
24
         <div class="field">
           <%= form.label :vin %>
26
           <%= form.text_field :vin %>
         </div>
28
29
         <div class="field">
30
           <%= form.label :country %>
           <%= form.text_field :country %>
         </div>
         <div class="field">
          <%= form.label :part_id %>
36
           <%= form.collection_select :part_ids, Part.all, :id, :name %>
         </div>
38
39
         <div class="actions">
40
           <%= form.submit %>
41
         </div>
    + <% end %>
```

```
35 app/views/cars/index.html.erb
     @@ -0,0 +1,35 @@
   1
      + + <%= notice %>
   2
   3
      + <h1>Cars</h1>
   4
   5
      + 
   6
        <thead>
         8
          Make
   9
          Model
   10
          Vin
          Country
           Parts
          14
         </thead>
   16
        18
         <% @cars.each do |car| %>
   19
```

```
20
              <</td>
              <</td>
              <</td>
              <</td>
   24
             <<= car.parts.name %>
             <%= link_to 'Show', car %>
   26
              <%= link_to 'Edit', edit_car_path(car) %>
              <= link_to 'Destroy', car, method: :delete, data: { confirm: 'Are you sure?' } %>
            29
           <% end %>
   30
         + 
      + <br>
   34
        <%= link_to 'New Car', new_car_path %>
1 ■ app/views/cars/index.json.jbuilder 🚉
```

```
@@ -0,0 +1 @@
+ json.array! @cars, partial: "cars/car", as: :car
```

```
→ 5 ■■■ app/views/cars/new.html.erb 

②

           @@ -0,0 +1,5 @@
       1
           + <h1>New Car</h1>
       2
             <%= render 'form', car: @car %>
       4
           + <%= link_to 'Back', cars_path %>
```

```
→ 35 page app/views/cars/show.html.erb 

②

          @@ -0,0 +1,35 @@
       1
          + + <%= notice %>
       2
       3
       4
             <strong>Make:</strong>
              <%= @car.make %>
       6
          + 
       7
       8
          + 
       9
              <strong>Model:</strong>
      10
              <%= @car.model %>
          + 
          + 
      14
             <strong>Vin:</strong>
              <%= @car.vin %>
          + 
      18
      19
              <strong>Country:</strong>
      20
              <%= @car.country %>
          + 
          +
```

```
+ 
24
      <strong>Part:</strong>
       <%= @car.parts.name %>
26
    + 
    + 
28
       <% @car.parts.each do |part| %>
         <%= part.name %>
30
        <% end %>
    + 
34
    + <%= link_to 'Edit', edit_car_path(@car) %> |
    + <%= link_to 'Back', cars_path %>
```

```
→ 1 ■ app/views/cars/show.json.jbuilder 註

... @@ -0,0 +1 @@

1 + json.partial! "cars/car", car: @car
```

```
@@ -1,7 +1,7 @@
. . .
      1
           <!DOCTYPE html>
 2
      2
           <html>
      3
             <head>
 4
              <title>AssignmentOneDominicknola</title>
      4
              <title>Parts</title>
              <%= csrf_meta_tags %>
 6
      6
               <%= csp_meta_tag %>
```

```
@@ -0,0 +1,27 @@
     . . .
       1
           + <%= form_with(model: make, local: true) do |form| %>
       2
               <% if make.errors.any? %>
       3
                <div id="error_explanation">
                  <h2><%= pluralize(make.errors.count, "error") %> prohibited this make from being saved:</h2>
       6
                  <% make.errors.full_messages.each do |message| %>
       8
                   <= message %>
       9
                  <% end %>
      10
                  </div>
               <% end %>
      14
               <div class="field">
                <%= form.label :name %>
                <%= form.text_field :name %>
               </div>
      18
      19
               <div class="field">
      20
                <%= form.label :country %>
                <%= form.text_field :country %>
               </div>
```

```
@@ -0,0 +1,29 @@
    1
       + <%= notice %>
    2
    3
       + <h1>Makes</h1>
    4
       + 
    6
          <thead>
           8
            Name
    9
            Country
    10
            </thead>
          <% @makes.each do |make| %>
             18
             <</td>
    19
             <%= link_to 'Show', make %>
    20
             <= link_to 'Edit', edit_make_path(make) %>
             <= link_to 'Destroy', make, method: :delete, data: { confirm: 'Are you sure?' } %>
            <% end %>
    24
          + 
    26
       + <br>
    29
        <%= link_to 'New Make', new_make_path %>
```

```
@@ -0,0 +1 @@
          + json.array! @makes, partial: "makes/make", as: :make

y 5 ■■■■ app/views/makes/new.html.erb 

②

          @@ -0,0 +1,5 @@
       1
           + <h1>New Make</h1>
       3
            <%= render 'form', make: @make %>
       4
       5
            <%= link_to 'Back', makes_path %>
 14 app/views/makes/show.html.erb
          @@ -0,0 +1,14 @@
       1
           + <%= notice %>
       2
       3
          + 
       4
              <strong>Name:</strong>
              <%= @make.name %>
       6
          + 
       8
          + 
       9
              <strong>Country:</strong>
      10
              <%= @make.country %>
          + 
          + <%= link_to 'Edit', edit_make_path(@make) %> |
      14
          + <%= link_to 'Back', makes_path %>
 1 ■ app/views/makes/show.json.jbuilder 🚉
          @@ -0,0 +1 @@
          + json.partial! "makes/make", make: @make
 27 app/views/parts/_form.html.erb 🚉
          @@ -0,0 +1,27 @@
          + <%= form_with(model: part, local: true) do |form| %>
       2
              <% if part.errors.any? %>
                <div id="error_explanation">
       4
                  <h2><%= pluralize(part.errors.count, "error") %> prohibited this part from being saved:</h2>
       6
                  <l
                  <% part.errors.full_messages.each do |message| %>
       8
                    <%= message %>
       9
                  <% end %>
      10
                  </div>
               <% end %>
      14
               <div class="field">
                <%= form.label :name %>
      16
                 <%= form.text_field :name %>
```

```
29 app/views/parts/index.html.erb
      @@ -0,0 +1,29 @@
      + <%= notice %>
    3
      + <h1>Parts</h1>
    4
    5
      + 
    6
         <thead>
           8
            Name
    9
            Inventory
   10
            </thead>
   14
         <% @parts.each do |part| %>
   16
             <%= part.name %>
   18
             <%= part.inventory %>
   19
              <\text{show', part %>
   20
              ><= link_to 'Edit', edit_part_path(part) %>
              <= link_to 'Destroy', part, method: :delete, data: { confirm: 'Are you sure?' } %>
            <% end %>
   24
```

```
26
         + <br>
      28
         + <%= link_to 'New Part', new_part_path %>

    ↓ 1 ■ app/views/parts/index.json.jbuilder 

         @@ -0,0 +1 @@
     . . .
          + json.array! @parts, partial: "parts/part", as: :part
@@ -0,0 +1,5 @@
      1
          + <h1>New Part</h1>
      3
           <%= render 'form', part: @part %>
      4
          + <%= link_to 'Back', parts_path %>
@@ -0,0 +1,14 @@
      1
          + <%= notice %>
      2
      3
         + 
      4
            <strong>Name:</strong>
      5
            <%= @part.name %>
      6
          + 
      8
         + 
      9
             <strong>Inventory:</strong>
      10
             <%= @part.inventory %>
         + 
          + <%= link_to 'Edit', edit_part_path(@part) %> |
          + <%= link_to 'Back', parts_path %>
 1 ■ app/views/parts/show.json.jbuilder 🚉
         @@ -0,0 +1 @@
          + json.partial! "parts/part", part: @part
6
      6
            # you've limited to :test, :development, or :production.
      7
            Bundler.require(*Rails.groups)
 8
      8
 9
         - module <u>AssignmentOneDominicknola</u>
      9
         + module Parts
10
      10
             class Application < Rails::Application</pre>
               # Initialize configuration defaults for originally generated Rails version.
               config.load_defaults 5.2
production:
```

```
8
                 8
                                    adapter: redis
  9
                                    url: <%= ENV.fetch("REDIS_URL") { "redis://localhost:6379/1" } %>
10
                                    channel_prefix: assignment-one-DominickNola_production
               10
                                    channel_prefix: Parts_production
@@ -1 +1 @@
             . . .
                               NvHD8hkxVhnxcf+pfWwNhcoch4PwV6E9CtBtJl250J8LyBR0BDUSjdcp4+rKnBlTV+0t3JNqhPvVGZilFTF2Ue27xHCu/C8Fpk0kvPadTbTbpbRPpqfP/tables and the state of the s
                               vwlvjbIGBKxMYNRVnt23XxkH9fuLxSp40D+2UxuU5mLkQIzWfwRKmB0WdjuojTNg5Rju//dKiiqNBgG5289lziwDc61ZIMbGGVeiPmvQVHTvbcYExLqU9\
                                04
61
               61
                                     # Use a real queuing backend for Active Job (and separate queues per environment)
                                    # config.active_job.queue_adapter
                                                                                                                      = :resque
64
                                    # config.active_job.queue_name_prefix = "assignment-one-DominickNola_#{Rails.env}"
               64
                                    # config.active_job.queue_name_prefix = "Parts_#{Rails.env}"
65
               65
                                    config.action_mailer.perform_caching = false
    3 ■ config/routes.rb 🚉
                          00 - 1,3 + 1,6 00
             . . .
                                Rails.application.routes.draw do
                                    resources :makes
                 3
                                 resources :cars
                 4
                                 resources :parts
                                    # For details on the DSL available within this file, see http://guides.rubyonrails.org/routing.html
                 6
                                end
     10 db/migrate/20190917222840_create_parts.rb 🚉
                          @@ -0,0 +1,10 @@
                          + class CreateParts < ActiveRecord::Migration[5.2]
                 2
                                    def change
                 3
                                       create_table :parts do |t|
                 4
                                            t.string :name
                                            t.decimal :inventory
                 6
                                            t.timestamps
                 8
                                         end
                 9
                          +
                                    end
               10
                               end
@@ -0,0 +1,12 @@
             . . .
                          + class CreateCars < ActiveRecord::Migration[5.2]
                                    def change
                 3
                                        create_table :cars do |t|
                                             t.string :make
```

```
5 + t.string:model
6 + t.string:vin
7 + t.string:country
8 +
9 + t.timestamps
10 + end
11 + end
12 + end
```

```
10 db/migrate/20190917223847_create_cars_parts.rb 🚉
         @@ -0,0 +1,10 @@
         + class CreateCarsParts < ActiveRecord::Migration[5.2]
     2
             def change
     3
               create_table :cars_parts do |t|
     4
                 t.references :car, foreign_key: true
     5
                 t.references :part, foreign_key: true
     6
                 t.timestamps
     8
                end
     9
              end
    10
           end
```

```
10 db/migrate/20190919183021_create_makes.rb
         @@ -0,0 +1,10 @@
         + class CreateMakes < ActiveRecord::Migration[5.2]
             def change
     2
     3
               create_table :makes do |t|
     4
                 t.string :name
     5
                 t.string :country
     6
                 t.timestamps
     8
               end
     9
             end
    10
           end
```

```
10
      10
              # It's strongly recommended that you check this file into your version control system.
           - ActiveRecord::Schema.define(version: 2019_09_14_233623) do
           + ActiveRecord::Schema.define(version: 2019_09_19_183021) do
      14
               create_table "invoice_parts", force: :cascade do |t|
               create_table "cars", force: :cascade do |t|
                 t.string "make"
      17
                 t.string "model"
18
      18
                 t.string "vin"
19
                 t.integer "part_inventories_id"
      19
                 t.string "country"
      20
                  t.datetime "created_at", null: false
                 t.datetime "updated_at", null: false
                 t.index ["part_inventories_id"], name: "index_invoice_parts_on_part_inventories_id"
                end
24
```

```
create_table "part_inventories", force: :cascade do |t|
26
                   t.string "name"
                   t.decimal "inventory"
            +
                 create_table "cars_parts", force: :cascade do |t|
                   t.<u>integer "car_id</u>"
       26
                   t.<u>integer "part_id"</u>
                   t.datetime "created_at", null: false
29
       28
                   t.datetime "updated_at", null: false
       29
                   t.index ["car_id"], name: "index_cars_parts_on_car_id"
       30
                   t.index ["part_id"], name: "index_cars_parts_on_part_id"
                 create_table "part_invoices", force: :cascade do |t|
                 create_table "makes", force: :cascade do |t|
                  t.string "name"
                  t.string "country"
                  t.datetime "created_at", null: false
                   t.datetime "updated_at", null: false
                 create_table "part_orders", force: :cascade do |t|
                 create_table "parts", force: :cascade do |t|
       41
                  t.string "name"
       42
                   t.decimal "inventory"
40
                  t.integer "part_inventory_id"
                   t.datetime "created_at", null: false
41
       43
42
       44
                   t.datetime "updated_at", null: false
43
                   t.index ["part_inventory_id"], name: "index_part_orders_on_part_inventory_id"
44
       45
                 end
45
46
       47
               end
```

```
48 test/controllers/cars_controller_test.rb
         @@ -0,0 +1,48 @@
   . . .
     1
         + require 'test_helper'
     3
         + class CarsControllerTest < ActionDispatch::IntegrationTest
             setup do
               @car = cars(:one)
     6
     8
             test "should get index" do
     9
               get cars_url
    10
               assert_response :success
              end
```

```
test "should get new" do
14
           get new_car_url
           assert_response :success
          test "should create car" do
19
           assert_difference('Car.count') do
             post cars_url, params: { car: { country: @car.country, make: @car.make, model: @car.model, vin: @car.vin } }
           end
           assert_redirected_to car_url(Car.last)
26
          test "should show car" do
           get car_url(@car)
           assert_response :success
29
         end
30
         test "should get edit" do
           get edit_car_url(@car)
           assert_response :success
34
         end
36
         test "should update car" do
           patch car_url(@car), params: { car: { country: @car.country, make: @car.make, model: @car.model, vin: @car.vin } ]
38
           assert_redirected_to car_url(@car)
40
41
         test "should destroy car" do
42
           assert_difference('Car.count', -1) do
43
             delete car_url(@car)
44
           end
45
46
           assert_redirected_to cars_url
47
         end
48
     + end
```

```
aa −0,0 +1,48 aa
     . . .
          + require 'test_helper'
      3
          + class MakesControllerTest < ActionDispatch::IntegrationTest
      4
              setup do
               @make = makes(:one)
      6
              end
      8
             test "should get index" do
      9
               get makes_url
      10
               assert_response :success
              test "should get new" do
      14
               get new_make_url
               assert_response :success
          +
```

```
16
         end
     +
18
         test "should create make" do
           assert difference('Make.count') do
20
             post makes_url, params: { make: { country: @make.country, name: @make.name } }
           end
           assert_redirected_to make_url(Make.last)
26
         test "should show make" do
           get make_url(@make)
           assert_response :success
         end
         test "should get edit" do
          get edit_make_url(@make)
           assert_response :success
34
36
         test "should update make" do
           patch make_url(@make), params: { make: { country: @make.country, name: @make.name } }
           assert_redirected_to make_url(@make)
         end
40
41
         test "should destroy make" do
42
           assert_difference('Make.count', -1) do
             delete make_url(@make)
44
           end
45
46
           assert_redirected_to makes_url
47
         end
48
       end
     +
```

```
48 test/controllers/parts_controller_test.rb 🚉
         @@ -0,0 +1,48 @@
         + require 'test_helper'
     2
         + class PartsControllerTest < ActionDispatch::IntegrationTest
     4
             setup do
               @part = parts(:one)
             end
     8
             test "should get index" do
     9
               get parts_url
    10
               assert_response :success
             end
             test "should get new" do
    14
               get new_part_url
               assert_response :success
    16
    18
             test "should create part" do
    19
               assert_difference('Part.count') do
    20
                 post parts_url, params: { part: { inventory: @part.inventory, name: @part.name } }
```

```
+
           end
           assert_redirected_to part_url(Part.last)
24
26
         test "should show part" do
           get part_url(@part)
28
           assert_response :success
29
30
         test "should get edit" do
           get edit_part_url(@part)
           assert_response :success
34
         end
36
         test "should update part" do
           patch part_url(@part), params: { part: { inventory: @part.inventory, name: @part.name } }
38
           assert_redirected_to part_url(@part)
40
41
         test "should destroy part" do
42
           assert_difference('Part.count', -1) do
43
             delete part_url(@part)
44
           end
45
46
           assert_redirected_to parts_url
47
```

```
13 test/fixtures/cars.yml 🚉
         00 - 0.0 + 1.13
         + # Read about fixtures at http://api.rubyonrails.org/classes/ActiveRecord/FixtureSet.html
     3
         + one:
             make: MyString
     5
             model: MyString
     6
             vin: MyString
             country: MyString
     8
     9
         + two:
    10
            make: MyString
              model: MyString
              vin: MyString
              country: MyString
```

```
8
               car: two
               part: two
@@ -0,0 +1,9 @@
           + # Read about fixtures at http://api.rubyonrails.org/classes/ActiveRecord/FixtureSet.html
       2
       3
       4
              name: MyString
       5
              country: MyString
       6
       7
           + two:
       8
           +
               name: MyString
       9
               country: MyString
y 9 ■■■■ test/fixtures/parts.yml <a>E</a>
           @@ -0,0 +1,9 @@
           + # Read about fixtures at http://api.rubyonrails.org/classes/ActiveRecord/FixtureSet.html
       3
           + one:
       4
               name: MyString
       5
              inventory: 9.99
       6
       7
       8
               name: MyString
       9
               inventory: 9.99
@@ -0,0 +1,7 @@
           + require 'test_helper'
       2
       3
           + class CarTest < ActiveSupport::TestCase
               # test "the truth" do
       5
               # assert true
       6
               # end
             end
▼ 7 ■■■■ test/models/cars_parts_test.rb 
          @@ -0,0 +1,7 @@
     . . .
           + require 'test_helper'
       3
          + class CarsPartsTest < ActiveSupport::TestCase
       4
              # test "the truth" do
       5
               # assert true
       6
               # end

√ 7 ■■■■ test/models/make_test.rb 

②

          @@ -0,0 +1,7 @@
           + require 'test_helper'
```

```
+ class MakeTest < ActiveSupport::TestCase
+ # test "the truth" do
+ # assert true
+ # end
+ end
+ end</pre>
```

```
@@ -0,0 +1,49 @@
           + require "application_system_test_case"
       2
       3
           + class CarsTest < ApplicationSystemTestCase
       4
                 @car = cars(:one)
       6
                end
       8
               test "visiting the index" do
       9
                 visit cars_url
      10
                 assert_selector "h1", text: "Cars"
                test "creating a Car" do
      14
                 visit cars_url
                 click_on "New Car"
      16
                 fill_in "Country", with: @car.country
      18
                 fill_in "Make", with: @car.make
                 fill_in "Model", with: @car.model
      20
                 fill_in "Vin", with: @car.vin
                 click_on "Create Car"
                 assert_text "Car was successfully created"
                 click_on "Back"
      24
      26
                test "updating a Car" do
      28
                 visit cars_url
      29
                 click_on "Edit", match: :first
      30
                 fill_in "Country", with: @car.country
                 fill_in "Make", with: @car.make
                 fill_in "Model", with: @car.model
      34
                 fill_in "Vin", with: @car.vin
                 click_on "Update Car"
      36
```

```
assert_text "Car was successfully updated"
           click_on "Back"
         end
40
41
         test "destroying a Car" do
42
           visit cars_url
43
           page.accept_confirm do
             click_on "Destroy", match: :first
45
46
47
           assert_text "Car was successfully destroyed"
48
49
```

```
@@ -0,0 +1,45 @@
      . . .
            + require "application_system_test_case"
       3
            + class MakesTest < ApplicationSystemTestCase</pre>
                setup do
                 @make = makes(:one)
       6
                end
       8
                test "visiting the index" do
       9
                 visit makes_url
       10
                  assert_selector "h1", text: "Makes"
                test "creating a Make" do
       14
                  visit makes_url
                  click_on "New Make"
       16
                  fill_in "Country", with: @make.country
                  fill_in "Name", with: @make.name
                  click_on "Create Make"
                  assert_text "Make was successfully created"
                  click_on "Back"
                test "updating a Make" do
                  visit makes_url
                  click_on "Edit", match: :first
                  fill_in "Country", with: @make.country
       30
                  fill_in "Name", with: @make.name
                  click_on "Update Make"
                  assert_text "Make was successfully updated"
       34
                  click_on "Back"
                end
       36
                test "destroying a Make" do
       38
                  visit makes_url
       39
                  page.accept_confirm do
       40
                    click_on "Destroy", match: :first
```

```
41 + end
42 +
43 + assert_text "Make was successfully destroyed"
44 + end
45 + end
```

```
45 test/system/parts_test.rb
            @@ -0,0 +1,45 @@
. . .
        1
            + require "application_system_test_case"
        2
        3
            + class PartsTest < ApplicationSystemTestCase
        4
                 setup do
        5
                   @part = parts(:one)
        6
        8
                 test "visiting the index" do
        9
                   visit parts_url
       10
                   assert_selector "h1", text: "Parts"
                 end
                 test "creating a Part" do
       14
                   visit parts_url
                   click_on "New Part"
                   fill_in "Inventory", with: @part.inventory
       18
                   fill_in "Name", with: @part.name
                   click_on "Create Part"
       20
                   assert_text "Part was successfully created"
                   click_on "Back"
       24
                 test "updating a Part" do
       26
                   visit parts_url
                   click_on "Edit", match: :first
       28
       29
                   fill_in "Inventory", with: @part.inventory
       30
                   fill_in "Name", with: @part.name
                   click_on "Update Part"
                   assert_text "Part was successfully updated"
       34
                   click_on "Back"
                 end
       36
                 test "destroying a Part" do
       38
                   visit parts_url
                   page.accept_confirm do
                     click_on "Destroy", match: :first
       41
                   end
       42
       43
                   assert_text "Part was successfully destroyed"
       44
                 end
       45
               end
```

No commit comments for this range