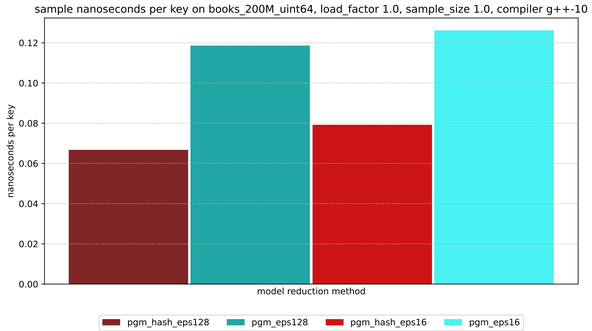
sample nanoseconds per key on books_200M_uint64, load_factor 1.0, sample_size 1.0, compiler g++-10
nanoseconds per key
0.00
0.02
0.04
0.06
0.08
0.10
0.12
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

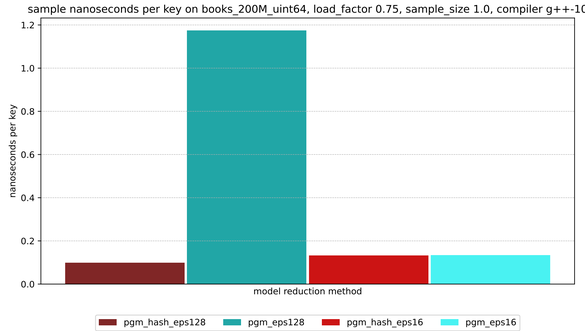
sample nanoseconds per key on books_200M_uint64, load_factor 0.75, sample_size 1.0, compiler g++-10
nanoseconds per key
0.0
0.2
0.4
0.6
0.8
1.0
1.2
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

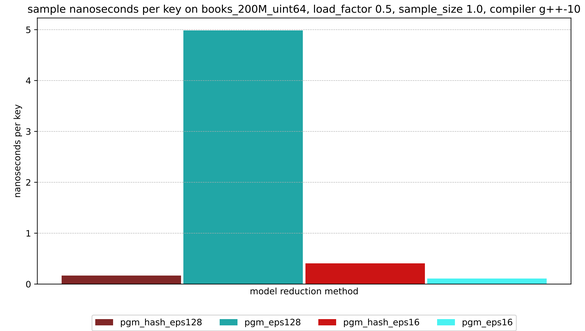
sample nanoseconds per key on books_200M_uint64, load_factor 0.5, sample_size 1.0, compiler g++-10
nanoseconds per key
0
1
2
3
4
5
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

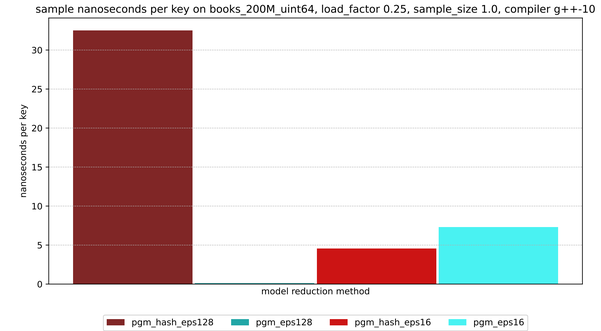
sample nanoseconds per key on books_200M_uint64, load_factor 0.25, sample_size 1.0, compiler g++-10
nanoseconds per key
0
5
10
15
20
25
30
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

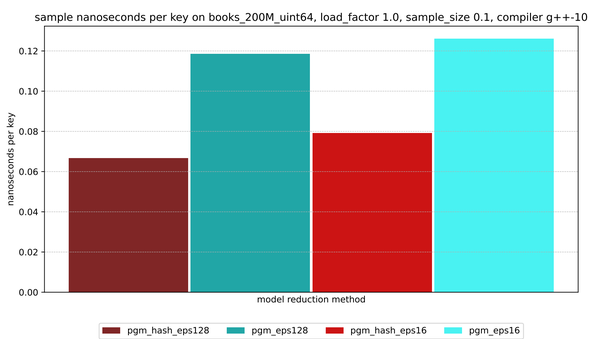
sample nanoseconds per key on books_200M_uint64, load_factor 1.0, sample_size 0.1, compiler g++-10
nanoseconds per key
0.00
0.02
0.04
0.06
0.08
0.10
0.12
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

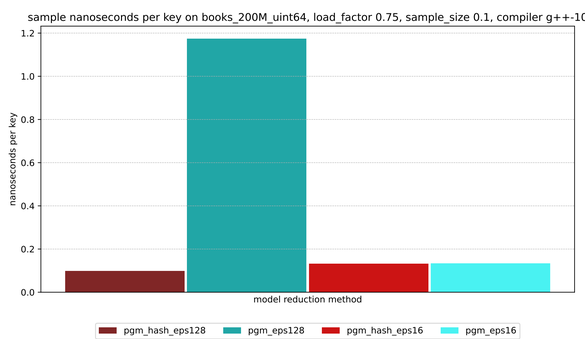
sample nanoseconds per key on books_200M_uint64, load_factor 0.75, sample_size 0.1, compiler g++-10
nanoseconds per key
0.0
0.2
0.4
0.6
0.8
1.0
1.2
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

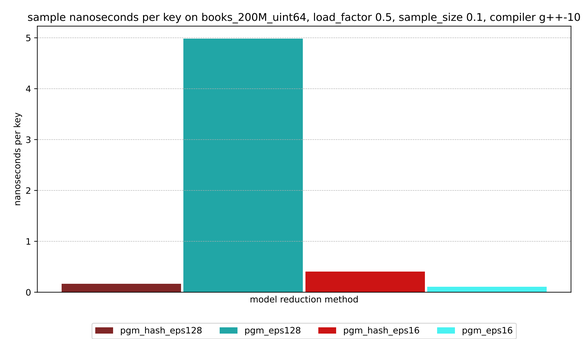
sample nanoseconds per key on books_200M_uint64, load_factor 0.5, sample_size 0.1, compiler g++-10
nanoseconds per key
0
1
2
3
4
5
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

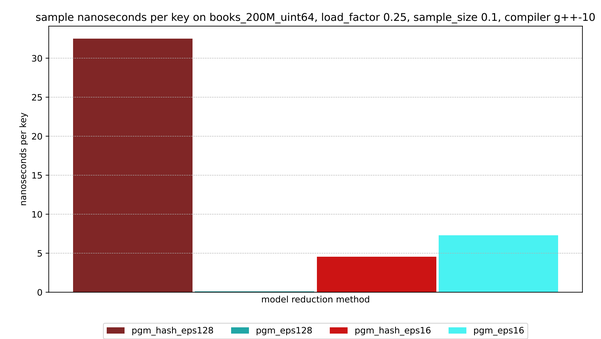
sample nanoseconds per key on books_200M_uint64, load_factor 0.25, sample_size 0.1, compiler g++-10
nanoseconds per key
0
5
10
15
20
25
30
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

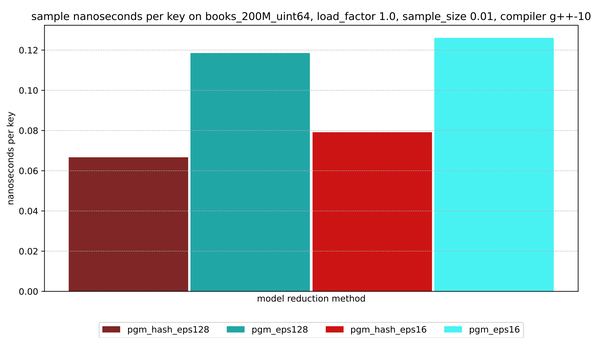
sample nanoseconds per key on books_200M_uint64, load_factor 1.0, sample_size 0.01, compiler g++-10
nanoseconds per key
0.00
0.02
0.04
0.06
0.08
0.10
0.12
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

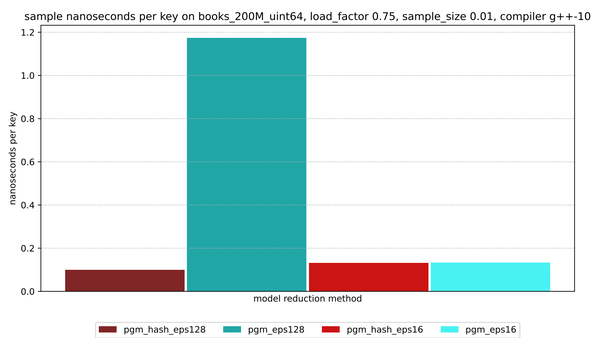
sample nanoseconds per key on books_200M_uint64, load_factor 0.75, sample_size 0.01, compiler g++-10
nanoseconds per key
0.0
0.2
0.4
0.6
0.8
1.0
1.2
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

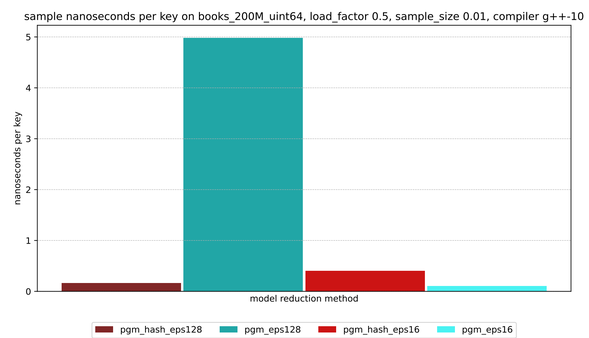
sample nanoseconds per key on books_200M_uint64, load_factor 0.5, sample_size 0.01, compiler g++-10
nanoseconds per key
0
1
2
3
4
5
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

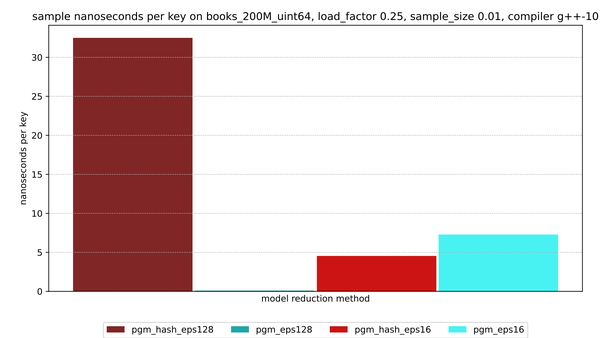
sample nanoseconds per key on books_200M_uint64, load_factor 0.25, sample_size 0.01, compiler g++-10
nanoseconds per key
0
5
10
15
20
25
30
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

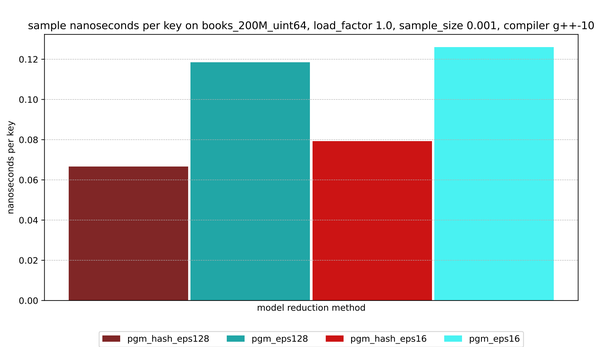
sample nanoseconds per key on books_200M_uint64, load_factor 1.0, sample_size 0.001, compiler g++-10
nanoseconds per key
0.00
0.02
0.04
0.06
0.08
0.10
0.12
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

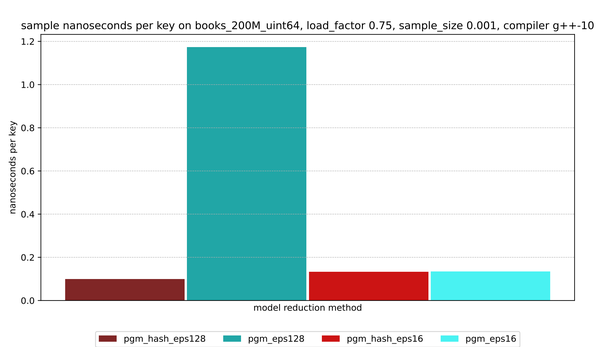
sample nanoseconds per key on books_200M_uint64, load_factor 0.75, sample_size 0.001, compiler g++-10
nanoseconds per key
0.0
0.2
0.4
0.6
0.8
1.0
1.2
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

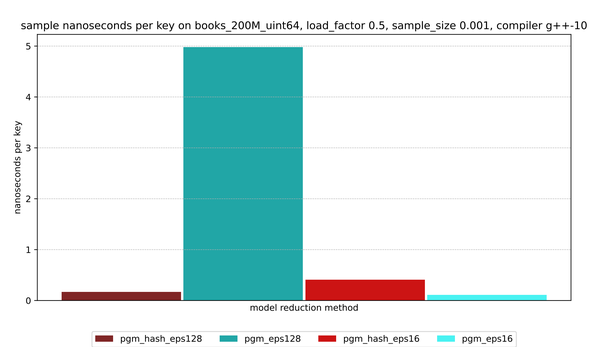
sample nanoseconds per key on books_200M_uint64, load_factor 0.5, sample_size 0.001, compiler g++-10
nanoseconds per key
0
1
2
3
4
5
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

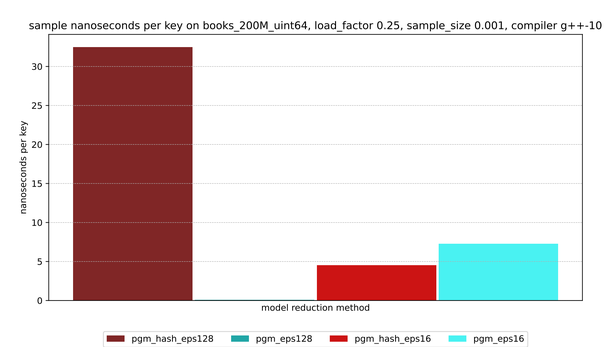
sample nanoseconds per key on books_200M_uint64, load_factor 0.25, sample_size 0.001, compiler g++-10
nanoseconds per key
0
5
10
15
20
25
30
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16