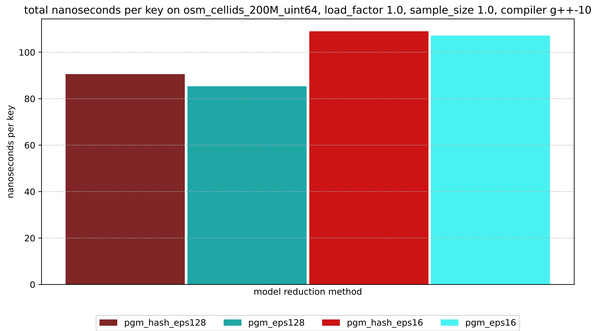
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 1.0, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

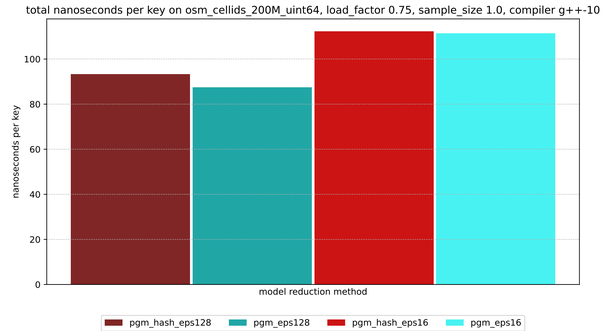
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.75, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

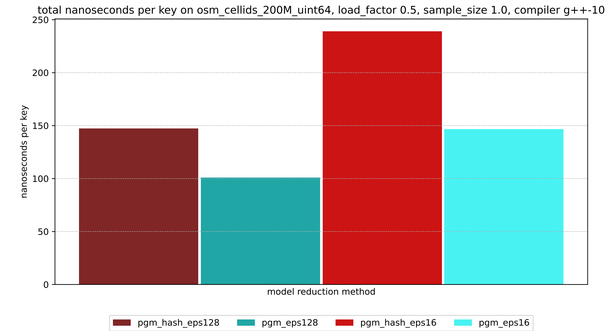
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.5, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

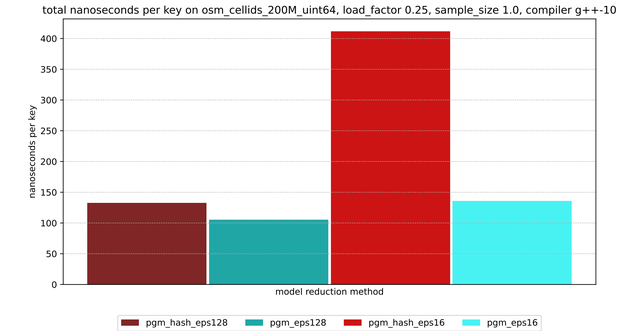
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.25, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

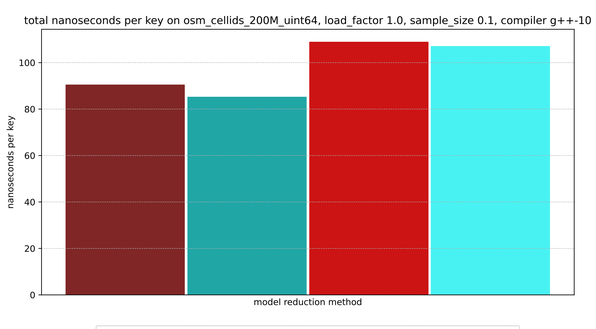
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 1.0, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

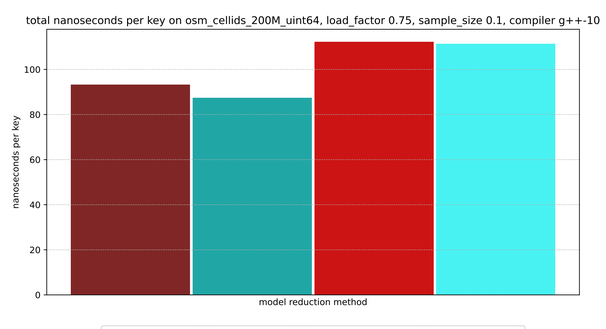
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.75, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

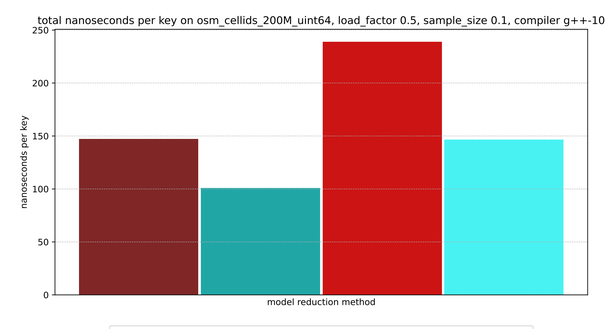
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.5, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

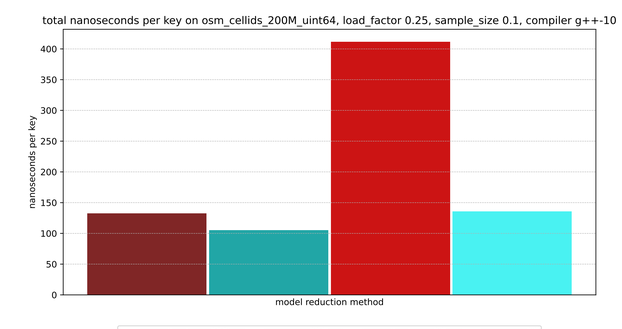
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.25, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

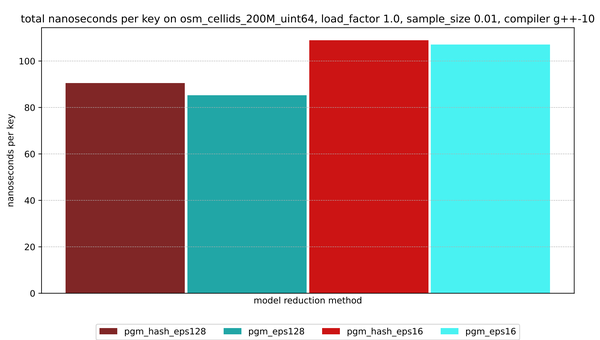
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 1.0, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

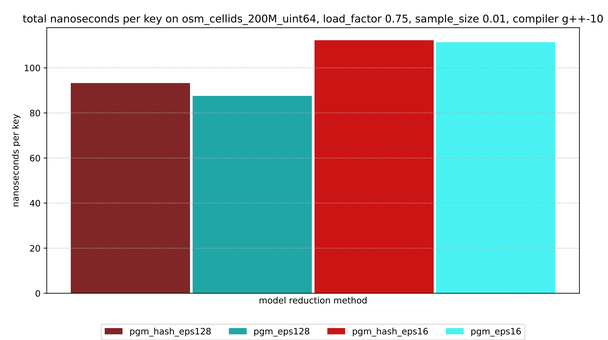
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.75, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

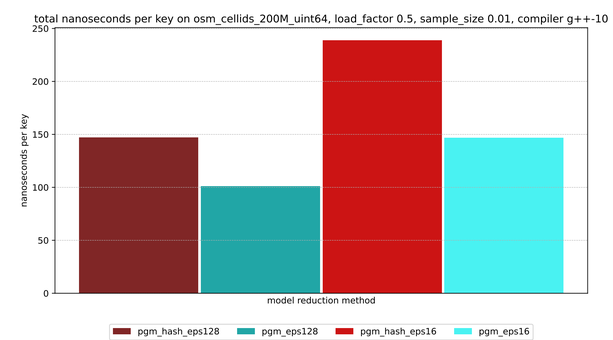
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.5, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

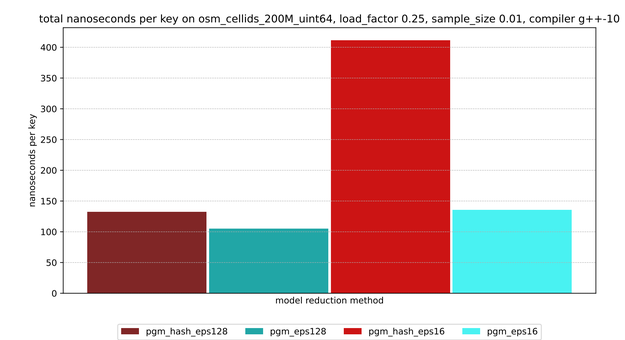
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.25, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

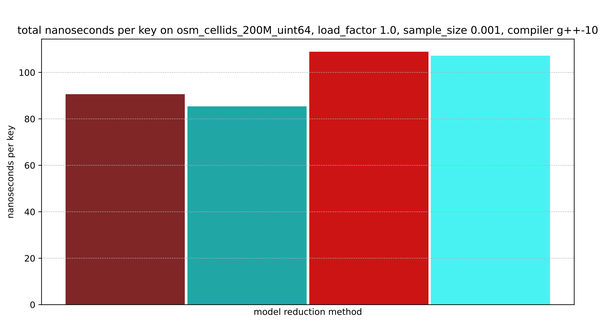
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 1.0, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

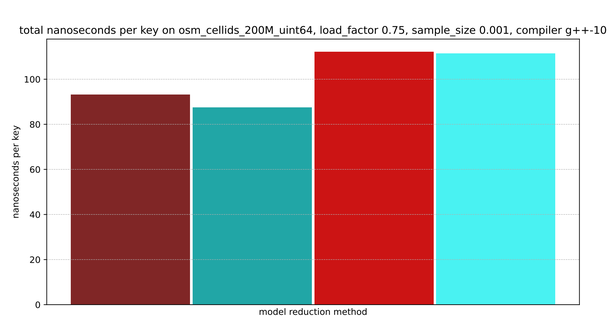
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.75, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

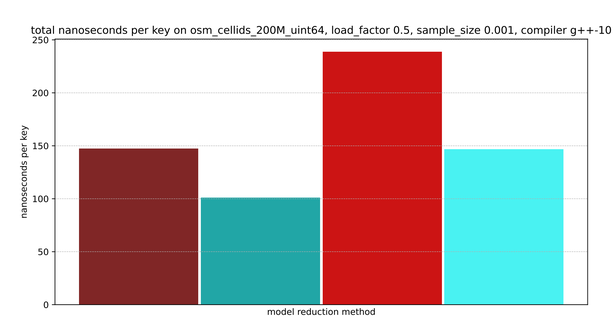
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.5, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

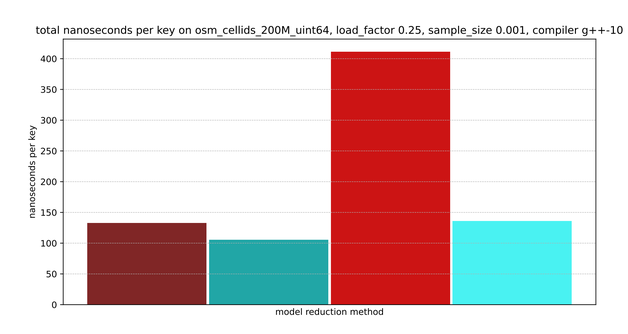
total nanoseconds per key on osm_cellids_200M_uint64, load_factor 0.25, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16