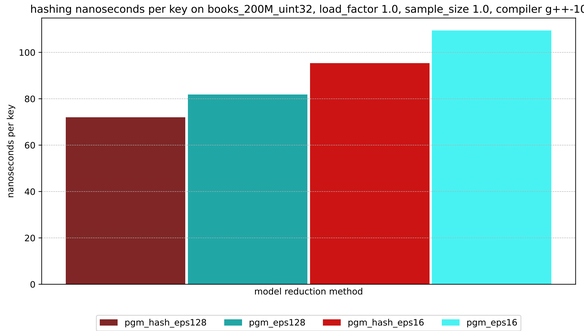
hashing nanoseconds per key on books_200M_uint32, load_factor 1.0, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

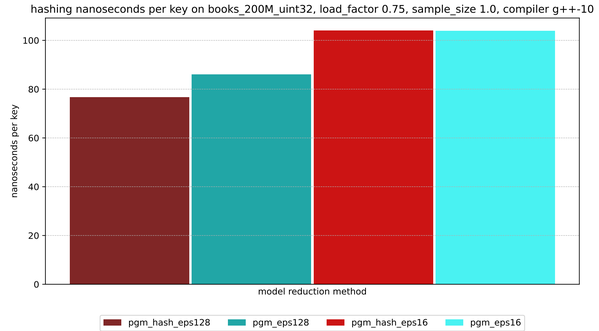
hashing nanoseconds per key on books_200M_uint32, load_factor 0.75, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

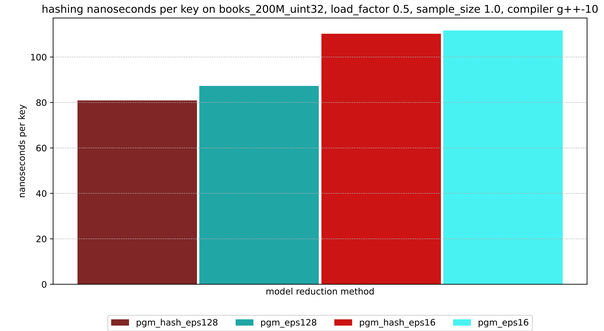
hashing nanoseconds per key on books_200M_uint32, load_factor 0.5, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

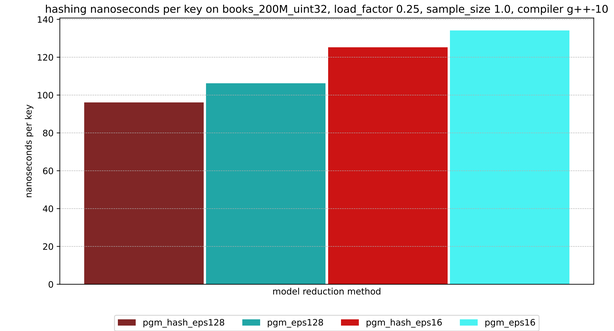
hashing nanoseconds per key on books_200M_uint32, load_factor 0.25, sample_size 1.0, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

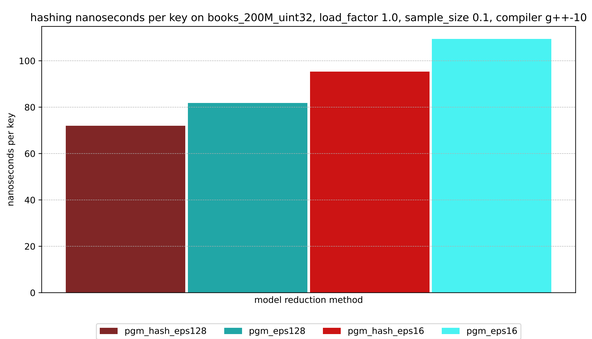
hashing nanoseconds per key on books_200M_uint32, load_factor 1.0, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

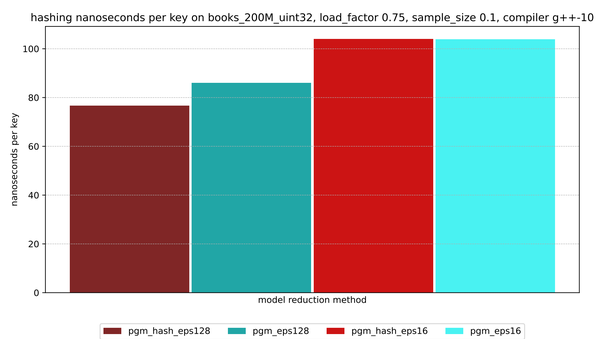
hashing nanoseconds per key on books_200M_uint32, load_factor 0.75, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

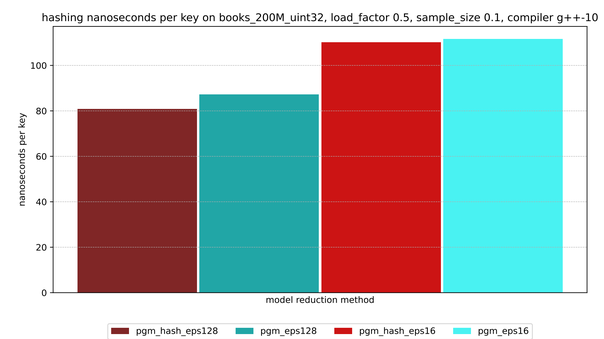
hashing nanoseconds per key on books_200M_uint32, load_factor 0.5, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

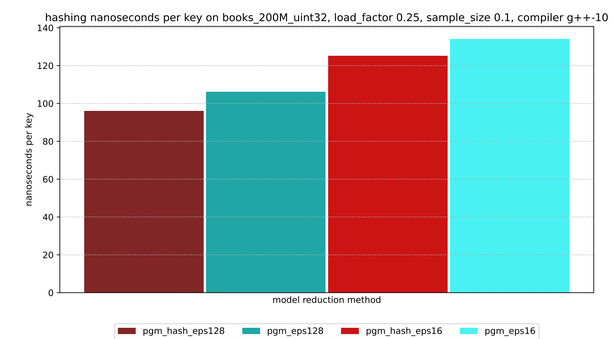
hashing nanoseconds per key on books_200M_uint32, load_factor 0.25, sample_size 0.1, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

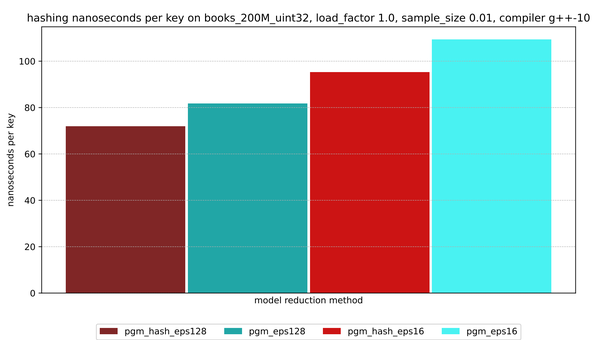
hashing nanoseconds per key on books_200M_uint32, load_factor 1.0, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

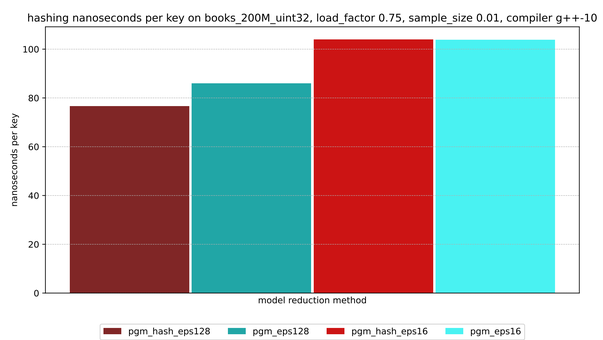
hashing nanoseconds per key on books_200M_uint32, load_factor 0.75, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

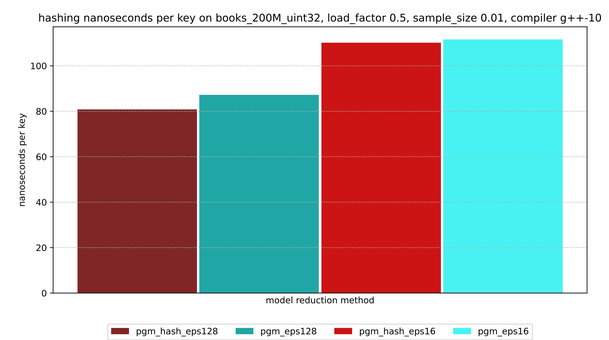
hashing nanoseconds per key on books_200M_uint32, load_factor 0.5, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

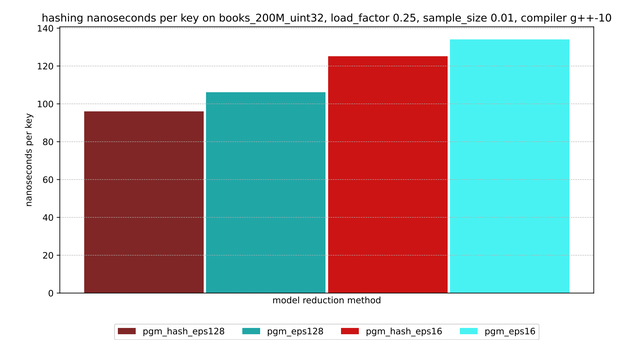
hashing nanoseconds per key on books_200M_uint32, load_factor 0.25, sample_size 0.01, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

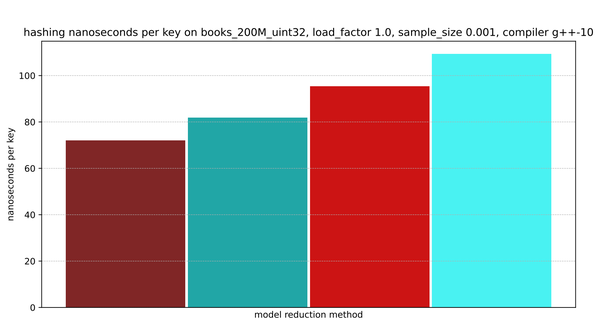
hashing nanoseconds per key on books_200M_uint32, load_factor 1.0, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

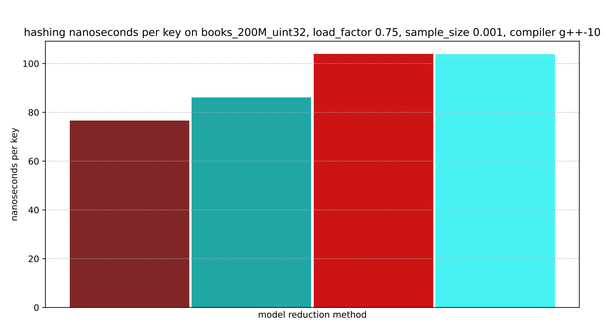
hashing nanoseconds per key on books_200M_uint32, load_factor 0.75, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

hashing nanoseconds per key on books_200M_uint32, load_factor 0.5, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16

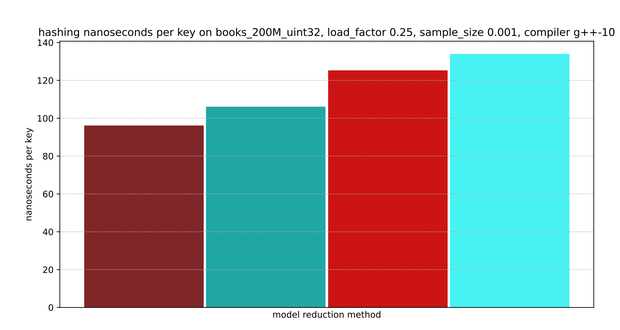
hashing nanoseconds per key on books_200M_uint32, load_factor 0.25, sample_size 0.001, compiler g++-10
nanoseconds per key
model reduction method
pgm_hash_eps128
pgm_eps128
pgm_hash_eps16
pgm_eps16