

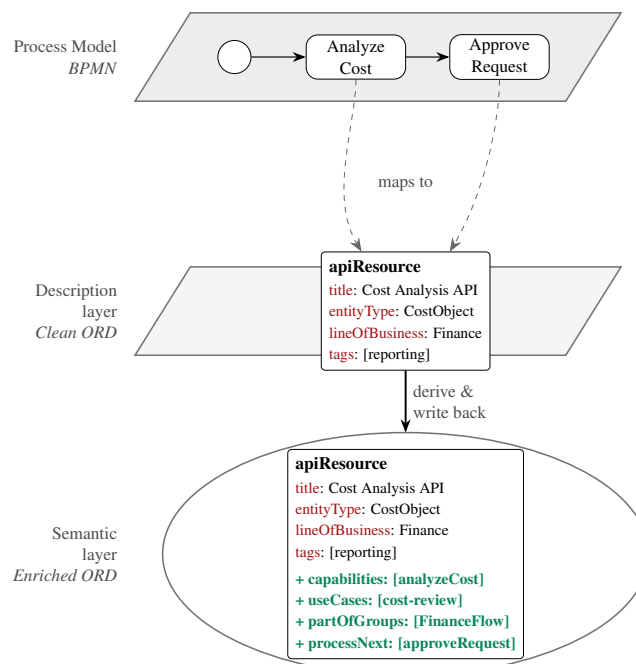


Figure 1: Process-driven semantic enrichment of ORD. A process model (meta level) is mapped onto Clean-ORD resources in the description layer; the mapping deterministically derives four typed fields (*capabilities*, *useCases*, *partOfGroups*, *processNext*) that are written back into the resource, producing its Enriched-ORD state in the semantic layer. The resource identity is preserved; only the semantic layer is added.