BYLINE

THE COMPLETE PROJECT HANDBOOK

Architecture, every file, technology usage, Android installation and operations. Condensed reading edition.

7 November 2026

Every one of the 326 repository files is catalogued. Both npm dependency inventories are included. The companion repository reference preserves 276 full text listings and 41,112 source lines without inflating this PDF.

Includes an installable signed Android APK in releases/android/byline-latest.apk. See the embedded release record for its verified identity and checksum.

Baseline commit before this documentation/release packaging: 012d06be1a1c634a9819b4e97664ecd69f0f5d9a

Working-source hashes in docs/repository-inventory.json identify the exact packaged source independently of that baseline. The final Git commit also contains this document.

Contents

1. What this project is 4

2. Reading paths and basic vocabulary 5

3. The three runtime arrangements 6

4. Technology stack and where each technology is used 7

5. Repository architecture and dependency direction 8

6. Installing the included APK on an Android phone 9

7. Account creation, authentication and session lifecycle 10

8. Onboarding, subjects and writing preferences 11

9. Daily app experience and screen responsibilities 12

10. Discovery, judging and draft generation 13

11. Scheduling, durable jobs and duplicate prevention 14

12. Editing, approval, publishing and uncertain outcomes 15

13. Images and media ownership 16

14. Notifications and background behavior 17

15. Persistence and data ownership 18

16. AI limits, errors and provider boundaries 19

17. API contract guide 20

18. Configuration, secrets and build variants 21

19. Setting up a developer workstation 22

20. Rebuilding and distributing the Android release 23

21. Deployment and operations 24

22. Troubleshooting and recovery 25

23. Testing and what the evidence means 26

24. Security and privacy model 27

25. Known boundaries and maintenance guide 28

26. Release metadata and fresh verification 29

27. Complete file catalogue 31

28. Direct packages and exact resolved dependencies 71

29. Import and configuration-use index 88

30. API and schema navigation index 98

31. Test case index 106

32. Finding the exact implementation 111

33. Mobile UI preview gallery 112

34. Scope and source integrity 120

1. What this project is

ByLine is a LinkedIn writing workspace. It finds source material matching an author's interests, evaluates the material, writes a draft using that author's preferences, and lets the author review, edit, schedule, publish or discard it. It also supports writing posts manually, attaching images and keeping an archive of published posts. Its core promise is assisted writing with a distinct publication decision, rather than indiscriminate automatic posting.

The repository is named link_agent. The root npm package is still named linkedin-creator. The Flutter package is still named linkdin_mobile and several classes retain LinkdIn in their names. These are historical internal names for the same ByLine project, not separate applications. The cloud Android application ID is com.linkdin.byline.

This handbook describes the source snapshot packaged with this document on 7 November 2026. The file catalogue records the included files and their purposes; the machine-readable inventory records their SHA-256 hashes. This condensed PDF retains the explanations and navigation indexes; full project-owned implementation, configuration, tests and historical notes are preserved separately in docs/generated-reference.md. Dependency lockfiles are represented by complete resolved package inventories; their original files remain in Git. Binary assets are identified with sizes and hashes, and one phone-width preview per screen is shown in the gallery, with the other screenshots retained in the repository. Private credentials, customer database rows, SDK installations, downloaded third-party implementation and build caches are deliberately outside the distributable source snapshot.

The implementation is the primary evidence. Older comments and reports are preserved as historical evidence and can describe earlier behavior. In particular, comments that say the mobile app only uses Next.js or only uses a cookie are obsolete for the cloud release. The current mobile transport supports native bearer sessions and the current release points to Cloudflare. Historical claims of successful phone tests are attributed to their dated reports; they are not presented as fresh tests of this release.

Inventory sha256 values describe the captured workstation bytes. Text files also have lf_sha256 values with CRLF normalized to LF, because Git can convert line endings between Windows and other platforms. Binary checksums, including the APK, are byte-exact across platforms.

2. Reading paths and basic vocabulary

A new phone user should read the installation chapter, the onboarding chapter and the daily-use chapter. A developer should then read the architecture, stack, lifecycle, API, persistence, configuration and verification chapters. An operator should also read deployment, recovery and release management. Search the PDF for an exact repository path, endpoint, table or function name to reach its catalogue entry, then open that path in the companion source reference.

An API is the server's request interface. The mobile app sends HTTPS requests and receives JSON. A backend is the service that owns account data and performs privileged work. A database persists records beyond a process restart. OAuth lets the user grant LinkedIn or Google access through the provider's own browser page. A bearer session identifies a signed-in ByLine user; it is distinct from the LinkedIn access token used by the server to publish. A migration is a versioned database structure change. A cron trigger is a recurring timer. A Workflow is durable server-side work whose completed steps can survive retries. An APK is the Android installation package, not a server or an iPhone application.

An agent is the author's server-side writing configuration and workspace. A slot is a recurring posting-time definition. A slot run is one occurrence of that definition on a particular local date. A draft is saved content that has not yet been successfully published. A distribution is the record of a publication attempt. An outbox is a persistent queue of work to deliver after a database change. An idempotency key identifies one intended operation so repeated submissions do not create additional effects. A revision records which version of settings a background job was prepared against.

3. The three runtime arrangements

Cloud Android release

The downloadable APK connects to https://byline-api.byline-b79.workers.dev. Flutter renders the interface. Cloudflare Workers handles API requests. D1 stores data. Cron Triggers starts the maintenance Workflow every five minutes. Content Workflows discover, judge, write and save drafts. Gemini supplies language-model completions. Firebase Cloud Messaging delivers Android alerts. LinkedIn's official API provides identity and publishing. The computer used to build the APK can be shut down after installation; the phone still needs internet and the backend/provider services must be available.

The cloud runtime imports shared pure TypeScript modules from the root lib directory. Its database adapters, authentication, scheduler and HTTP router live in cloud/src. It does not run the Next.js app and does not use the original Neon database. cloud/wrangler.jsonc identifies the dedicated ByLine account, D1 binding and Workflow classes. Account and database identifiers are operational identifiers, not authentication secrets.

Original web and PostgreSQL service

The root application uses Next.js App Router, React and PostgreSQL. app/page.tsx implements the operator dashboard; app/api contains HTTP handlers. lib contains the PostgreSQL adapters and shared business logic. Vercel configuration and GitHub workflows support the original hosted arrangement. Its native endpoints can also serve the Flutter app when that app is built with its origin. The older website and its data were not migrated into D1 merely by adding cloud/.

Isolated local preview

The Windows scripts create a separate PostgreSQL instance under .byline-local and a Next.js server on localhost:3100. The preview APK uses com.linkdin.byline_preview, demonstration content and simulated publication. USB adb reverse maps the phone's port 3100 to the computer. This arrangement needs the computer/server and USB connection. Local fixture mode is not the downloadable cloud release and does not prove Gemini, LinkedIn or physical notification delivery.

4. Technology stack and where each technology is used

TypeScript is the language of the two backends, shared business rules and most backend tests. JavaScript ES modules implement setup, smoke-test and operational scripts. Dart is the Flutter application's language. SQL defines PostgreSQL and SQLite/D1 schemas and queries. Kotlin and Gradle Kotlin DSL configure and host Android. C++ and CMake provide the Windows Flutter runner. CSS styles the Next.js dashboard. JSON, JSONC, YAML and XML describe packages, deployments, workflows, manifests and platform resources. PowerShell coordinates Windows builds and local phone workflows. Python with ReportLab and pypdf generates and validates this handbook; it is documentation tooling, not an application runtime dependency.

Next.js 15 is the root HTTP and web-rendering framework. React 19 and react-dom render app/page.tsx and app/layout.tsx. The pg package supplies the PostgreSQL connection pool in lib/db.ts. @google/genai supplies the original server's Gemini SDK in lib/llm.ts. The cloud AI adapter instead uses fetch against the Gemini REST API, keeping the Worker runtime separate from the Node SDK. TypeScript, tsx and the @types packages support compilation and tests. The package manifests and resolved dependency appendix give the exact ranges and installed lockfile versions; a semver range in package.json is not the same as a resolved version.

Cloudflare Workers provides Request/Response/fetch and Web Crypto. D1 provides a SQLite-compatible database through the DB binding. Workflows bindings CONTENT and MAINTENANCE refer to ContentWorkflow and MaintenanceWorkflow. Wrangler builds, generates binding types, migrates and deploys the cloud service. Miniflare runs isolated Worker/D1 tests locally. The cloud package has no separate production npm dependencies: its code uses platform APIs and shared local modules. Wrangler and Miniflare are development tools.

Flutter supplies widgets, rendering, Material UI, platform channels and compilation to Android, Windows and the checked-in web scaffold. provider exposes AppState through ChangeNotifier. http sends JSON and multipart requests; http_parser supplies upload MIME types. flutter_secure_storage stores native bearer sessions and pending OAuth flow material. shared_preferences stores lightweight settings and legacy cookie information. image_picker selects images. url_launcher opens provider consent and external links in the system browser. firebase_core initializes Firebase and firebase_messaging receives Android FCM messages. flutter_timezone reads the device timezone. flutter_local_notifications_windows participates in desktop notification support; its presence does not establish full cloud push delivery on Windows. cupertino_icons supplies icon assets. flutter_test and flutter_lints support automated checks.

The bundled Barlow Condensed, IBM Plex Sans and IBM Plex Mono fonts define headings, prose and technical/status text. They ship with the client instead of depending on a font CDN. mobile/lib/theme.dart defines the color and typography system; app/globals.css provides the separate web style. The repository's existing UI images are design evidence, not generated screenshots of the current release.

Git records source history. GitHub stores the repository, downloadable APK and documentation. GitHub Actions checks the original backend and mobile client and contains legacy watchdog/backup schedules. Android SDK build tools inspect and verify the signed APK. Java 17 compatibility is configured for Android source and bytecode. The installed Flutter SDK supplies the actual Android compile, target and minimum SDK defaults; release.json records what the built APK declares.

5. Repository architecture and dependency direction

The high-level request path is: Flutter screen -> AppState -> ApiClient -> HTTPS route -> authenticated owner -> domain operation -> database/provider -> JSON view model -> AppState -> widgets. The cloud scheduler follows a separate server path and does not depend on the phone being awake.

cloud/src/index.ts is the cloud route dispatcher and scheduled entry point. It exposes health and native-auth callbacks before authentication, then resolves an Owner for protected requests. Most handlers receive that owner and scope database reads/writes to owner.agentId or owner.userId. cloud/src/models.ts translates stored fields into the same client-facing shapes used by the app.

The split into lib/discovery-core.ts, lib/judge-core.ts, lib/writer-core.ts, lib/persona-prompt.ts, lib/voice-prompt.ts, lib/setup-config.ts and lib/llm-contract.ts lets both backends share editorial behavior without importing PostgreSQL into the cloud runtime. Files such as lib/discovery.ts, lib/judge.ts and lib/writer.ts are original-backend adapters. Dependency injection through the Completion contract allows the cloud adapter to enforce its own AI quotas while reusing the writer.

The generated import index records where declared packages and local modules are used. It is a source-level dependency guide, not a whole-program call graph: runtime dispatch, platform registration and SQL relationships are also significant. The companion source reference in docs/generated-reference.md contains the exact implementation of each conditional branch.

6. Installing the included APK on an Android phone

1. Open the repository on the phone: https://github.com/Don-Gabriel/link_agent. If it is private, sign in to a GitHub account with access. Download access is not granted merely by sharing the URL.

2. Open releases/android/byline-latest.apk and use Download raw file. The stable direct download is https://github.com/Don-Gabriel/link_agent/raw/refs/heads/main/releases/android/byline-latest.apk. Download the APK itself, not the repository ZIP or the GitHub HTML page. The release manifest alongside it identifies version, package ID, file size and SHA-256.

3. Open the downloaded .apk using Downloads or Files. When Android asks, allow that browser or file manager to install unknown apps. Menu names vary by device; on recent Android versions this is a permission for the individual installing app.

4. Tap Install, then Open. Review Android's actual prompts; managed devices or regional verification requirements can impose additional restrictions. Do not assume every Android device permits sideloading. You can turn off that install-source permission again afterwards.

5. Open ByLine and choose an available social sign-in option. Finish consent in the system browser and return to the app. No Gemini API key, database password or server address is required for the prepared cloud APK.

6. Complete subject selection, optional voice customization, a generated sample and acceptance, then choose a posting time/timezone and notification preference. The cloud finish operation requires a current LinkedIn connection. If you sign in through Google, connect LinkedIn as part of setup before finishing.

7. Allow notifications if you want ready/failure alerts. Check Home and My posts to confirm your account loads. The first recurring delivery is scheduled for tomorrow in your selected timezone; a manual prepare action can be used when eligible.

An existing release signed with the same key can normally be updated in place. If Android reports a conflicting package/signature, do not uninstall blindly: an older debug/live build can have the same package ID but a different certificate. Preserve access to the account and confirm the old build's signing identity before planning a replacement. Uninstalling removes local app data. ByLine Preview has a separate package ID and can coexist with the release.

This APK cannot be installed on an iPhone. There is no iOS project, signed IPA or TestFlight distribution in this repository. The checked-in Windows and Flutter web scaffolds do not create iOS support.

For a manual checksum check on Windows, run Get-FileHash -Algorithm SHA256 .\byline-latest.apk and compare the result with releases/android/SHA256SUMS. Developers can run apksigner verify --verbose --print-certs on the APK. Android's official sideloading guidance is at https://developer.android.com/distribute/marketing-tools/alternative-distribution and signature-tool documentation is at https://developer.android.com/tools/apksigner. These references describe the platform installation mechanism; the actual APK manifest and release verification record describe this build.

7. Account creation, authentication and session lifecycle

The cloud GET /api/native-auth response advertises configured Google and LinkedIn providers and reports localTest false. The app generates a cryptographically random verifier, starts an authentication flow and saves pending flow material in secure storage. The backend stores its SHA-256 digest and a short-lived flow record. The browser visits the provider, which redirects to the backend callback. The callback claims the flow once, exchanges the authorization code, obtains the verified provider subject, provisions or finds the ByLine identity and associates any LinkedIn grant.

The app polls with the flow ID and original verifier. The cloud implementation consumes a completed flow and creates one server-side session atomically. Native flows live for ten minutes; cloud bearer sessions expire after thirty days. Cloud requests must use Authorization: Bearer; cookie authentication is deliberately not accepted there. The signed token alone is insufficient: sessionOwner also checks the persisted session, revocation, expiry and account/agent relationship. Logout revokes the server session and the app clears its local state.

Provider identity is keyed by provider and subject. Signing in with Google and signing in with LinkedIn are not automatically an account-merging mechanism. The application does not silently transfer the legacy owner's history to a new social identity. The original Next.js service additionally supports the legacy APP_PASSWORD/cookie flow through lib/auth.ts and middleware.ts. The mobile Existing installation screen exists for that compatibility path; it is not the standard cloud signup route.

Cloud login starts are limited to ten per fifteen-minute window for a keyed hash of the connecting IP. Return addresses are validated by shared native-return logic; callback pages are generated centrally. Provider secrets and encrypted LinkedIn grants stay on the server. Native sessions and unfinished sign-in material use Flutter secure storage. A session expiration returns 401 and is translated into a sign-in message by the client.

8. Onboarding, subjects and writing preferences

Setup persists independently of screen navigation. The state includes industry, topic strings, selected category IDs, tone, optional voice notes/style, up to three writing samples, timezone, time and notification preference. The catalogue contains 1,112 selectable subjects and 55 specialist groups, in addition to the foundational industry choices. lib/category-catalogue.ts stores the specialist vocabulary; lib/categories.ts exposes normalized category records and validation.

parseSetup requires one to twelve distinct topics, each two to eighty characters, and one to twelve distinct valid category IDs when explicitly supplied. Voice notes allow up to 1,200 characters. Up to three samples are accepted, each eighty to 2,400 characters. Timezones must be valid IANA timezone names and times normalize to HH:MM. Ten named tones are available: professional, conversational, storyteller, punchy, analytical, educational, reflective, warm, witty and inspirational.

The cloud setup API uses a revision number. Saving changes increments the revision and clears old preview/acceptance markers. Preview uses a three-minute generation lease and a ten-per-day attempt limit. Acceptance is only valid for a successfully generated sample matching the current revision. Finish requires that acceptance and an unexpired LinkedIn connection, then atomically activates the configuration and creates a daily slot. A stale sample cannot authorize changed voice settings.

New native accounts use no signature by default. Legacy DEFAULT_STYLE retains the original signature configuration for compatibility. Settings cover structure (prose, bullets, short lines, mixed), emoji policy, hook intensity, closing/CTA policy, word range, hashtag count, register, custom rules, banned phrases and optional signature rationing. The nominal word range is subordinate to the final post's character budget. Choosing a long word range does not increase LinkedIn's supported commentary length.

9. Daily app experience and screen responsibilities

The main mobile navigation has Home, My posts and Me. Home uses TodayScreen for native accounts, showing today's timetable entries, preparation progress and other posts. My posts collects drafts/desk actions, writing and the published archive. Me hosts account, connection, scheduling, voice, notification and related settings. Composer is a route above the tab shell, so a card or notification can request it through AppState.

WelcomeScreen loads provider capabilities and resumes a saved pending sign-in when possible. GateScreen implements legacy installation login. OnboardingScreen handles saved setup, subjects, voice, sample review and delivery choices. TimetableScreen edits recurring slots. VoiceScreen edits writing preferences and previews. ComposerScreen creates or edits text, hashtags and images. DeskScreen shows actionable drafts and send outcomes. ArchiveScreen paginates published posts and supports follow-up writing. DeleteAccountScreen requires the destructive confirmation flow.

AppState is the shared observable state and owns status refresh, authentication phase, preparation status, composition requests and navigation requests. ApiClient centralizes transport, timeouts, authentication, persistence and error translation. Ordinary requests have a thirty-second ceiling; writer-facing operations use a longer 135-second timeout. Connection recovery retries bounded GET reads, not publishing mutations. Home refreshes on app resume and periodically retries when an error, missing status or active preparation warrants it. A timeout is not proof that a server-side mutation did not happen.

The app supports unsaved-change guards, draft-specific actions, responsive reading widths and a common editorial widget system. Theme and widget files are separately catalogued. Historical screenshots at widths 390, 900 and 1280 illustrate the responsive design work. Automated widget tests are evidence of specific tested behavior, not proof of universal device accessibility or performance.

10. Discovery, judging and draft generation

Discovery reads RSS/news sources associated with selected subjects. The shared discovery core normalizes source material, decodes entities, filters and deduplicates candidates, and balances selection so one source does not monopolize the batch. Feed health is recorded for diagnosis. Specialist subjects use targeted sources/search routes, so an entry in the catalogue does not guarantee a qualifying story on every day.

Judging is a batched LLM request. Each candidate is scored from zero to ten for persona fit, category fit, novelty, timeliness and non-duplication. Their mean is rounded to two decimals. A candidate must reach 6.5 overall, category fit at least seven and persona fit at least six, and its assigned category must be valid and selected. Invalid score entries are excluded. Category coverage and prior fingerprints help avoid repetitive output without forcing a low-quality story to pass.

The writer receives the selected story, persona, voice/style rules, prior openings, selected writing samples, optional edit notes and continuity context. It produces structured draft data including text, rationale, hashtags, fingerprint and continuity information. Repair attempts address failed constraints. Critique enforces deterministic checks on the generated result. The shared formatting layer assembles the body, exact source link and normalized hashtags in code rather than trusting a model to reproduce URLs accurately.

MAX_BODY_CHARS is 2,400; MAX_COMMENTARY is 3,000 in the LinkedIn client. The implementation checks escaped final text, including appended source and hashtags. The hook/fold marker uses 210 characters as a UI heuristic. Up to fifteen hashtags are permitted by application validation. Model-generated content is not a factual guarantee: the author must inspect source relevance, claims and voice before publishing.

Cloud generation persists stages discovering, judging, writing and saving. It loads the author and slot revisions, runs source/AI steps through Workflows, validates the result, saves one draft using the job identity and settles the job. The source step results can be reused during durable retries. If no source qualifies or providers fail, the job records a failure or waits for a later eligible attempt; it does not manufacture a successful draft status.

The cloud memory context currently has no external facts and source none. The original backend can use optional Breeth graph memory with PostgreSQL fingerprints as fallback. Those are different deployments' capabilities; configuring the cloud backend does not enable the legacy external memory path.

11. Scheduling, durable jobs and duplicate prevention

Cloud cron runs every five minutes, creating a maintenance Workflow keyed to the scheduled interval. Maintenance publishes eligible due posts, scans the timetable, reconciles interrupted jobs, dispatches queued jobs, drains notifications and performs periodic cleanup. The source order is intentional and is visible in cloud/src/scheduler.ts. A cloud scheduler heartbeat older than sixteen minutes makes the scheduler-aware health endpoint return 503.

Each cloud author can have up to five slots. Days are a seven-bit mask, with bits following the weekday mapping in lib/schedule.ts; 127 means every day. Lead time ranges from ten to 720 minutes and defaults to fifteen. Time calculations use the author's timezone. firstDelivery deliberately chooses tomorrow in that timezone. A posting occurrence over forty-five minutes late is treated as missed rather than sent at an arbitrary later time.

Slot runs are unique per slot and local date. Jobs capture author and slot revisions. A changed configuration, disabled slot, paused author or consumed occurrence prevents obsolete work from creating a new eligible draft. A discarded draft remains a consumed occurrence; it is removed from ready/other-post displays without silently generating a replacement for the same slot/date.

generation_jobs persists queued work before dispatch. If creating a Workflow fails, the next tick can retry dispatch with the same identity. Reconciliation inspects stale working jobs, recovers an already-saved draft when possible, or records a real failure. Slot retries are bounded; source code records attempt counts, retry timestamps and maximum attempts. Manual preparation is separately constrained so repeated taps cannot create unlimited jobs.

The original backend instead uses PostgreSQL advisory locking and its own tick orchestration in lib/cycle.ts, lib/slots.ts and lib/reviews.ts. It depends on an external tick request to /api/cron/tick. The isolated local launcher sends that tick every thirty seconds. These mechanisms should not be confused with the cloud Cron Trigger.

12. Editing, approval, publishing and uncertain outcomes

Saving a draft is separate from sending it to LinkedIn. POST /api/posts accepts manual content and an optional clientRequestId so retries can recover the same save. Polish combined with immediate publishing is refused because changed AI text must be reviewed. Scheduled manual posts receive a send time and appropriate clearance. Edits clear prior approval. Reviewed text/hashtags/media can be supplied with a publish or clear action to catch changes between review and execution.

The cloud post action vocabulary is publish, resolve, rewrite, followup, edit, clear, unclear, hold, release, reschedule and discard. Hold lasts fifteen minutes. Rewrite produces alternative content for review; followup applies to a published post. Discard changes the record to rejected and removes the scheduled timestamp. Archive GET returns published posts in pages of twenty with a cursor and hasMore flag.

Publishing first checks LINKEDIN_LIVE, author/post ownership, a usable LinkedIn token, image ownership and final escaped length. An atomic distribution claim uses the key linkedin:{agentId}:{seq}. A send in flight, already sent or unknown blocks a competing send and blocks unsafe editing. Cloud manual sends have a forty-attempt daily cap; automatic sends are capped by the author's configured allowance bounded from one to five. These application limits are not statements of provider quotas.

Automatic publication requires an active, unpaused author, an eligible scheduled time and either explicit clearance or the author and slot automatic-publishing flags. A held, missed or unresolved post is not blindly sent. New accounts and new slots start with automatic publication disabled. The global deployment switch is an additional gate, not a replacement for user approval settings.

A successful LinkedIn response stores the external post URN, marks the distribution sent and the post published. A definite HTTP 4xx rejection records a failed attempt. Timeouts, connection failures and ambiguous server responses are treated as unknown. The application cannot safely assume whether the provider created the post, so it does not automatically replay the mutation. The author checks LinkedIn and resolves the outcome. A sufficiently stale in-flight send can also be resolved. This protects against duplicate public posts at the cost of sometimes requiring manual reconciliation.

13. Images and media ownership

The mobile image picker selects images and the transport sends a multipart upload. The backend checks the request and LinkedIn image requirements, initializes upload, transfers bytes and stores an owned media_assets record. Posts refer to media IDs, not arbitrary untrusted LinkedIn image URNs. The cloud publisher accepts at most twenty distinct IDs and requires all referenced assets to be uploaded and owned by the same agent.

The LinkedIn client centralizes escaping, image and post APIs, OAuth scopes and permalink construction. Do not implement a second sending path that bypasses its text conversion or the distribution claim. For image posts the cloud assembly omits the separate source line in the branch specified by publish.ts; the saved source metadata remains available for editorial context. Full upload validation and byte limits are in the media source files and companion reference.

14. Notifications and background behavior

Android Firebase initialization happens before messaging access, but initialization failure does not prevent the app from opening. Notification permission/registration is tied to the signed-in account and saved preference. Device tokens are registered server-side for that owner. Logout unregisters while still authenticated, and the backend checks ownership so an old account cannot remove a token now associated with another account on the same phone.

The cloud server uses an FCM service account to mint a short-lived OAuth credential and sends through FCM HTTP v1. Notices include draft ready, generation failure, publication outcome, connection expiry and a test notice. Android channels separate routine updates and alerts; MainActivity creates channels and the manifest defines the default channel/icon. A notification carries a target tab and, when applicable, a post sequence. Tapping it opens the relevant app workspace.

Notifications are placed in a durable outbox with dedupe keys. A claim sets a future retry timestamp, and delivery attempts are bounded. The cloud dispatcher processes at most three outbox rows per maintenance batch; a notice targets at most ten devices. The immediate generation step targets the outcome for its own job. The current implementation marks an outbox row delivered if at least one device send succeeds, so it does not prove delivery to every device; provider acceptance also does not prove display on a physical phone.

Battery management, denied permissions, unregistered device tokens, provider outages and network state can delay or prevent visible alerts. The server retains the draft/status regardless of whether a notification appears. Windows support does not provide the Android FCM background path, and local preview deliberately clears server Firebase credentials. Open the app to inspect current state when notification delivery is uncertain.

15. Persistence and data ownership

The primary relationships are: byline_users owns an agent; byline_sessions belongs to a user; onboarding belongs to a user; posts, post_slots, linkedin_accounts, media_assets, distributions and notification records belong to an agent; slot_runs belongs to a recurring slot and date. generation_jobs adds durable cloud job state. post_counters allocates author-scoped post sequences. Identity/session records must not be inferred from client-supplied agent IDs.

AI accounting uses ai_user_days, ai_provider_days, ai_usage and cloud ai_reservations. feed_health and system_status describe operational state. oauth_states and native_auth hold transient consent state. login_attempts limits sign-in starts. review_deliveries, rejections, llm_calls and push_log support existing orchestration/audit paths, with usage differing between the two adapters. A table existing in the cloud migration does not imply every legacy feature actively writes it there.

PostgreSQL uses UUIDs, JSON fields, timestamps, foreign keys, unique indexes and advisory locks. lib/schema.ts is an additive migration body; lib/db.ts records its hash in byline_schema_versions under a transaction lock. BYLINE_REQUIRE_MIGRATIONS can make serving fail closed until an operator has applied the migration. The pool is shared through globalThis to survive Next.js development reloads; it uses up to ten connections and a twenty-second connection timeout.

D1 uses its own two checked-in SQL migrations. JSON-shaped data is stored in text columns and translated by model helpers. Atomic D1 batches and SQL conditions implement concurrency controls; do not copy PostgreSQL BEGIN/COMMIT or advisory-lock assumptions into the Worker adapter. Unique indexes prevent duplicate owner agents, client request saves and slot/day posts. The schema appendix reproduces all columns, defaults, indexes and triggers, and the table-purpose index explains the records they protect.

Cloud deletion requires confirmation exactly DELETE. It refuses while a distribution is in flight and deletes the account's related records in one batch. Deleting application data does not delete already-published LinkedIn posts. Historical backups and any legacy external memory require their own retention handling. Operator recovery must preserve encryption keys as well as database contents: encrypted grants cannot be recovered from a database alone if the key is lost.

16. AI limits, errors and provider boundaries

The current cloud constants are forty AI reservations per author/day, one hundred per model/day shared across authors, and twelve actual AI attempts per completion wrapper invocation. Budget days use America/Los_Angeles in the cloud AI adapter. Reservations and pacing are enforced before transport, and usage stores success plus available token counts. These are application safeguards, not a claim that Google will supply that capacity.

The cloud primary model string is gemini-3.5-flash-lite and fallback is gemini-3.1-flash-lite. The fallback is attempted for selected temporary network/5xx failures after a bounded wait. Quota failures are not treated as transient transport errors. Durable Workflow steps can retry temporary exceptions without repeating successful source steps. The original Node adapter has its own configured primary/fallback/last-resort policy and defaults from .env.example. Read the deployment-specific adapter when diagnosing a model selection.

Cloud discovery is capped at twenty-four fetches including redirects and twelve selected feeds. Provider responses and HTTP request bodies have explicit byte ceilings. Completion responses must contain usable text and the expected finished status; partial/blocked results are not treated as successful drafts. Raw provider details stay in operator logs, while generation-errors translates failures into actionable client messages.

Existing reports describe free-tier verification and model availability on 5 November 2026. That history is not a perpetual price, quota or availability guarantee. Check the actual provider account and current official limits before deploying or increasing capacity. No paid fallback is configured in the current cloud adapter. The application can be unavailable when its free quota or external provider capacity is exhausted.

17. API contract guide

The cloud and Next.js route navigation index follows this narrative; complete handler implementations are in the companion reference. Read cloud/src/index.ts for method dispatch, each cloud handler for request validation and mobile/lib/api/models.dart for the client-side response shapes. The shared URL shape does not mean the two deployments support identical operator endpoints.

Public cloud routes are GET /api/health, GET/POST /api/native-auth and GET OAuth callbacks. All remaining dispatched cloud routes require a native bearer session. JSON body parsing requires an object and limits the body to 64 KiB. Responses disable caching and set nosniff/referrer-policy headers. Unexpected failures produce a generic 500 without returning raw diagnostics.

GET /api/status aggregates account/settings/queue and preparation information. GET/POST /api/onboarding reads or executes save, preview, accept and finish. GET/POST /api/interests reads or changes interests. PATCH /api/settings changes account writing/scheduling controls. GET/POST /api/slots lists/creates slots; PATCH/DELETE /api/slots/{id} edits/deletes one. GET/POST /api/review-delivery reads today's timetable, requests generation or saves notification preference. POST /api/cycle/run requests a manual background draft and returns 202 when accepted.

GET /api/posts reads the published archive; POST creates a manual draft or a reviewed direct publication request. PATCH /api/posts/{seq} executes a named post action. POST /api/compose/rewrite and POST /api/style/preview request AI revisions/previews without silently publishing them. POST /api/media uploads an owned image. POST/DELETE /api/devices registers, tests or unregisters notifications. GET /api/linkedin/connect starts account connection; POST /api/linkedin/disconnect removes the grant and disables automatic publication. DELETE /api/auth revokes the session. POST /api/account/delete executes confirmed deletion.

Typical errors are 400 invalid input, 401 unauthenticated/expired session, 404 unknown owned resource, 409 stale revision/state conflict, 429 allowance/rate limit, 503 temporary service/generation unavailability and 500 unexpected backend failure. Check the actual handler for exact response status and body. Never replay a publish merely because the client did not receive a response. Refresh and inspect its persisted state first.

The original Next.js router additionally exposes operator initialization, password authentication, authenticated cron and watchdog routes. Its middleware and request-agent helper determine legacy/native access. Those operator capabilities are not automatically exposed by the cloud router.

18. Configuration, secrets and build variants

The generated configuration-use index lists variable names with source locations. Root .env.example is a template, not a populated credential file. DATABASE_URL chooses the original PostgreSQL database. APP_SECRET signs sessions; TOKEN_ENCRYPTION_KEY protects stored LinkedIn grants. APP_PASSWORD gates the legacy dashboard. CRON_SECRET authenticates original tick/watchdog work. LINKEDIN_CLIENT_ID/SECRET and redirect URI configure the service-owned LinkedIn app. GOOGLE_CLIENT_ID/SECRET and redirect URI optionally configure Google identity.

GEMINI_API_KEY and the LLM/model/budget settings configure the original AI adapter. BYLINE_PUBLIC_URL supplies public callback context. BYLINE_REQUIRE_MIGRATIONS controls migration enforcement. BYLINE_TEST_MODE together with BYLINE_LOCAL_ONLY enables isolated fixtures; these must not be mistaken for real publishing. The original FCM adapter uses project ID, client email and private key fields; the cloud adapter receives FCM_SERVICE_ACCOUNT_JSON. BREETH_API_KEY is optional legacy memory integration.

Cloud secrets are declared by cloud/src/env.ts and prepared into ignored .byline-local/cloud-secrets.json. Wrangler configuration stores resource bindings, not secret values. Build-time Dart defines include BYLINE_API_URL, BYLINE_APP_VARIANT and public Firebase client configuration. Firebase's Android client configuration identifies the project/app; it is not the server service-account private key. Server OAuth client secrets, Gemini keys, token-encryption keys and signing passwords must never be embedded in Dart defines or committed.

The cloud variant uses BYLINE_APP_VARIANT=cloud, com.linkdin.byline and a private release signing configuration. The live development variant uses the same package ID with its existing development signing behavior and a distinct label. The preview variant uses BYLINE_LOCAL_TEST=true and com.linkdin.byline_preview, disables Google Services processing and uses the local backend. A default build retains com.linkdin.linkdin_mobile and defaults to the Android-emulator backend address, so a plain flutter build apk is not a substitute for the prepared cloud release command.

mobile/android/key.properties and .byline-local/byline-release.p12 remain private. The prepare-cloud script preserves an existing key pair and refuses incomplete signing state. Back up the key and its passwords securely: a different certificate cannot provide an ordinary in-place update to existing installs. The repo contains the signed public APK and certificate fingerprint, not the private signing material.

19. Setting up a developer workstation

Clone the repository and install Node.js/npm, Flutter with the Dart SDK version required by mobile/pubspec.yaml, Android SDK/build tools and a compatible Java installation. CI currently selects Node 24. Use npm ci in the root and cloud directories to honor lockfiles, and flutter pub get in mobile. cloud worker types are generated, ignored files: run npm run types from cloud before typechecking a fresh clone.

For cloud development: change directory to cloud, run npm ci, npm run types, npm run typecheck and npm test. The pretest builds the Worker bundle with wrangler deploy --dry-run, then tests execute against an isolated Miniflare database. This does not deploy the Worker. For an interactive local D1 backend, run npm run db:local and use Wrangler's local development mode with local-only test credentials as required. Do not run remote migration commands against a guessed account.

For the original backend: run npm ci, create a local environment from .env.example and configure a disposable PostgreSQL database. npm run dev starts the web/API service. npm run migrate explicitly applies the schema to the database selected by DATABASE_URL. npm run build:check uses a separate .next-verify directory so verification does not overwrite a running server build. Missing DATABASE_URL can support limited stub views but is not a functioning persistent installation.

For the prepared Windows preview on this workstation: npm run local:setup creates the isolated database; npm run local:dev runs the API and scheduler. scripts/build-local-android.ps1 builds the preview. scripts/install-local-android.ps1 installs through USB and configures adb reverse. npm run local:phone combines these steps and can rebuild when requested. These installer commands modify a connected device; building the release APK and writing this document do not require running them.

To develop the mobile client against a chosen server, use flutter run with --dart-define=BYLINE_API_URL=https://your-server and the correct variant/Firebase defines. Android emulator 10.0.2.2 reaches the host machine; a real phone does not. Cloud release users should use the packaged APK, whose server origin is already configured.

20. Rebuilding and distributing the Android release

Restore the private signing key and ignored key.properties from the owner's secure backup before rebuilding an update. The cloud preparation script also requires .byline-local/firebase-live-google-services.json matching project linkdin-43813 and package com.linkdin.byline. These inputs are intentionally not reconstructed from public repository data.

From the repository root run node scripts/prepare-cloud-android.mjs https://byline-api.byline-b79.workers.dev, then powershell -NoProfile -ExecutionPolicy Bypass -File scripts/build-cloud-android.ps1. The latter builds a release using .byline-local/cloud-dart-defines.json and copies the result to .byline-local/byline-cloud-release.apk. Neither command installs the APK on a phone.

Inspect the output with Android SDK aapt/apkanalyzer and apksigner. Confirm package ID, version, min/target SDK, architectures, release signing and backend origin configuration. Compute SHA-256 after copying the exact artifact to releases/android/byline-latest.apk. Update release.json and SHA256SUMS from that file, then commit the binary with the documentation. Increment mobile/pubspec.yaml for an actual versioned application update; a documentation-only rebuild of identical application source can retain its declared version, but the new file hash must still be recorded.

The versioned build metadata and stable latest filename make the phone download path easy to find. Git preserves earlier committed APKs, but large binaries increase repository size. This release is stored directly in Git so clone and Download raw file work without Git LFS setup. Future releases can additionally use GitHub Releases for distribution while retaining a clear latest download link. No app-store publication or automatic OTA updater is implemented by this step.

21. Deployment and operations

The repository already identifies a dedicated ByLine Cloudflare account and database. Preserve that boundary. Build/test changes locally, verify the selected Wrangler account, back up data and encryption/signing material, apply the checked-in D1 migrations to the intended database, then deploy with the prepared secrets file. cloud/README.md contains the exact commands and ownership constraints. This documentation/repository task does not require deploying a new backend or changing existing users' settings.

Verify basic health and unauthenticated rejection after deployment. /api/health confirms DB access; /api/health?check=scheduler additionally checks recent timer activity. A manually invoked task is not evidence that cron fired naturally. An independent monitor is needed to detect a total provider outage, since a failed provider cannot reliably alert through its own scheduler. The existing GitHub watchdog and backup jobs target the original service configuration; they are not a verified cloud backup/restore solution.

The cloud smoke scripts can create disposable authors and some scripts can consume real AI requests. Read their conditions and use the intended origin. Provider consent, physical push delivery and actual publication require separate end-to-end exercises; isolated tests do not prove external service configuration. The dated release report records earlier evidence and its limits.

For the original Vercel/PostgreSQL deployment, configure the correct environment variables and matching provider callbacks, migrate the selected database and arrange the authenticated cron request. Keep the original and cloud databases conceptually separate. A change to the cloud Worker does not repair, migrate or restart the old Vercel website.

22. Troubleshooting and recovery

Cannot install APK: confirm the file is an APK rather than HTML, download it again, verify its hash, check available storage, Android version and device policy, and compare signing identity if another ByLine package is installed. The APK's actual SDK and ABI values are in release.json. Do not erase an existing installation as the first diagnostic step.

Cannot reach ByLine: check internet access and the prepared origin, then the basic health endpoint. On local preview check the running server and adb reverse. A cloud outage cannot be solved by leaving the development computer awake. A 401 requires sign-in; repeated GET recovery does not fix a revoked session.

OAuth does not finish: confirm the exact registered callback URI, provider credentials and the selected provider's capability response. Return to the app while the ten-minute flow is valid. Cancel and restart expired consent. Treat Google and LinkedIn provider identities as distinct unless an explicit migration/linking workflow is implemented.

Sample or draft fails: inspect the saved job stage/error, selected subjects, source availability and AI allowance. Tighten impossible writing preferences, especially word ranges that exceed the final character budget. A no-source outcome is valid. A provider quota failure is not fixed by repeatedly tapping prepare; retries consume the same bounded allowances.

Draft missing after discard: discarded posts are intentionally excluded from the current ready list, while their slot occurrence remains consumed. Check the correct account and date before assuming data loss. If a save timed out, refresh or retry using the same request identity rather than inventing a new one.

No notification: check system permission, the account's saved preference, device registration and Firebase configuration. Inspect the outbox and provider status, then open the app for the authoritative state. An FCM accepted send is weaker evidence than observing the alert on the actual device.

Post not sent: verify global live switch, LinkedIn token expiry, account/slot automatic settings, explicit clearance, hold state, eligible send window, daily allowance and final text length. If the outcome is unknown, inspect the LinkedIn profile and resolve it through the app. Never reset the distribution claim merely to force a retry.

Recovering after data loss: restore a tested backup into an isolated target, restore the matching token-encryption key, validate schema and ownership, and inspect pending jobs/distributions before enabling scheduling. Keep publishing disabled during recovery until uncertain sends have been reconciled. Cloud-to-PostgreSQL and PostgreSQL-to-cloud migrations require an explicit data transformation; copying SQL files does not transfer history.

23. Testing and what the evidence means

Root npm test checks core formatting, escaping, scheduling, judge handling and health behavior. test:catalogue validates subject uniqueness/discovery/relevance and voice persistence behavior. test:byline checks account/session/setup and timezone/DST logic. test:db exercises real SQL against a disposable PostgreSQL database. test:local orchestrates local API/catalogue/native-return integration scripts. build:check compiles the Next.js production build separately from a serving build.

cloud npm test builds the Worker bundle and runs writer, discovery-budget, database and API suites using Miniflare. Tests cover concurrent identities, session revocation, ownership separation, draft and schedule isolation, notification device ownership, deduplication, publish claims, account deletion and provider failure paths. The companion source reference supplies the exact fixtures and assertions. A mocked provider response does not demonstrate a real LinkedIn grant or FCM arrival.

Flutter analysis checks lib and test. Flutter tests cover model/transport contracts, auth return, notifications, catalogue/voice behavior, onboarding, preparation, reconnect recovery, screen rendering and widgets. The final release verification document records fresh results, command exit status and any limitations. Historical reports are separately dated; they are useful regression context but not replacements for this run.

The PDF is checked for readable page rendering, extracted text, file-catalogue coverage and final artifacts. APK verification checks structure and signing and the hash of the copied file. Git verification checks committed content and that the remote branch has the pushed commit. None of those alone proves every user journey on every phone, so the report distinguishes current automated checks, current read-only live checks and earlier device evidence.

24. Security and privacy model

Principal security boundaries are the phone/server boundary, unauthenticated/authenticated API boundary, user/agent ownership boundary, server/provider credential boundary and draft/publication boundary. Bearer-session verification, persisted revocation, owner-scoped SQL, one-use OAuth flows, parameterized queries, encrypted grants and atomic send claims support these boundaries. Request and provider-response byte caps prevent unbounded body reads in the relevant helpers.

Writing samples, draft text, voice preferences and selected source material can be sent to the configured AI provider when generation is requested. LinkedIn receives posts/images when publication is authorized. Firebase receives device tokens and notification payloads. The database contains identities, preferences and writing history. The app's deployment-specific privacy policy must explain actual providers and retention; source code alone is not a complete privacy notice.

The repo excludes populated .env files, local database storage, private signing material, service-account private keys and live backups. Existing Firebase client configuration is a public app identifier/configuration asset; it must not be confused with administrative credentials. A code repository backup is not a customer-data backup. Preserve operational secrets separately and never print them in CI logs or support screenshots.

25. Known boundaries and maintenance guide

This repository contains a usable Android client and two backend implementations, not a claim of unlimited free hosting or a fully certified multi-tenant commercial service. The cloud API and old web service remain separate. There is no checked-in iOS release project. Full background cloud push on Windows is not established. Provider availability, free quotas, callback registration, permission grants and token expiry can interrupt the experience.

The 5 November release report records an in-place phone update, real notification observations and earlier publication evidence, but explicitly notes no second real person's OAuth sign-in and a manually shortened draft after a provider failure. Those limitations remain relevant context. Public customer launch still needs independent monitoring, tested off-provider restoration, a distribution/update policy and deployment-specific privacy/support operations.

When adding a subject, update catalogue definitions and validate discovery/relevance tests. When changing writing behavior, update shared core logic and exercise both adapters. When changing persisted fields, add database migrations for each affected backend and update view models/mobile parsing. When changing an API, update client transport/model tests. When changing publication behavior, preserve idempotency and ambiguous-outcome handling. When updating the mobile app, preserve its signing key and record the version/build hash.

The PDF reference chapters retain every file and its role, npm dependency resolutions, imports and environment uses, API navigation, D1 table definitions, test titles and selected phone previews. The separate docs/generated-reference.md preserves the full project-owned source, Dart lockfile and historical documents. Use that companion when a question needs an exact branch or assertion. This keeps the PDF within 100-120 pages without discarding the exhaustive repository reference.

26. Release metadata and fresh verification

releases/android/release.json


```
{
  "name": "ByLine",
  "versionName": "1.0.2",
  "versionCode": 3,
  "packageId": "com.linkdin.byline",
  "builtAtUtc": "2026-11-07T06:40:55Z",
  "releaseKind": "cloud",
  "apiOrigin": "https://byline-api.byline-b79.workers.dev",
  "minimumAndroidApi": 24,
  "minimumAndroidVersion": "7.0",
  "targetAndroidApi": 36,
  "compileAndroidApi": 36,
  "architectures": [
    "arm64-v8a",
    "armeabi-v7a",
    "x86_64"
  ],
  "bytes": 56892335,
  "sha256": "8f0b84d52aaad072c4751128bfb3ba98c87766fd8a9b0385bf8654591769c831",
  "signingCertificateSha256": "fcfc5a0a6d34abe8ada3e525f1f5f758a4560b9fa58261f218a0fca3ac61773c",
  "signatureScheme": "APK Signature Scheme v2",
  "flutter": "3.44.1",
  "dart": "3.12.1",
  "buildCommand": "powershell -NoProfile -ExecutionPolicy Bypass -File scripts/build-cloud-android.ps1",
  "sourceInventory": "../../docs/repository-inventory.json",
  "download":
  "https://github.com/Don-Gabriel/link_agent/raw/refs/heads/main/releases/android/byline-latest.apk",
  "phoneInstalledDuringThisBuild": false,
  "note": "Fresh rebuild of current mobile source; declared app version unchanged from 5 November release.
  Private release signing key preserved."
}
```


reports/ByLine-release-verification-2026-11-07.md

ByLine documentation and APK verification - 7 November 2026

Scope

Packaged the current working project, including the previously uncommitted cloud backend and shared-core/mobile changes, for repository publication. Added the complete PDF handbook, every-file purpose/source/dependency reference, machine-readable hash inventory, phone installation guide and signed cloud APK. No production backend was deployed, no phone was installed/uninstalled, no account was deleted and no LinkedIn post was published during this task.

Fresh application checks

- Root `npm test`: passed core self-tests and health readiness/redaction checks. - `npm run test:catalogue`: passed; 1,112 unique subjects, 55 specialist groups. - `npm run test:byline`: passed session, input validation, delivery and DST checks. - `npm run build:check`: passed Next.js 15.5.28 production compilation and type checks. - `npm run test:db`: all 92 checks passed against a new disposable PostgreSQL 18 cluster on loopback port 55449. That test server was stopped afterwards. The original database and existing local preview data were not used. - Cloud `npm run typecheck`: passed. - Cloud `npm test`: all 30 tests passed on the complete rerun, including isolated Worker/D1 ownership, OAuth, jobs, notification budgets and publication idempotency. The initial run passed 29 and failed one OAuth test with a Miniflare internal assertion. The failing test then passed alone, and the complete suite passed without code changes. This is recorded as an intermittent test-runtime failure; its root cause was not established. - `flutter analyze lib test`: no issues. - `flutter test --no-pub`: all 169 tests passed. - `git diff --check`: passed for the working application changes. - Read-only deployed `/api/health?check=scheduler`: HTTP 200, database OK, scheduler healthy; observed heartbeat `2026-11-07T06:40:03.228Z`.

APK

The existing cloud build preparation validated the approved HTTPS origin and matching Firebase package, preserved the private release signing key, and built successfully. The exact resulting APK was copied into

`releases/android/byline-latest.apk`.

- Version 1.0.2, versionCode 3; package `com.linkdin.byline`. - 56,892,335 bytes; universal APK with arm64-v8a, armeabi-v7a and x86_64. - Minimum API 24 (Android 7.0); target/compile API 36. - Backend `https://byline-api.byline-b79.workers.dev`. - APK SHA-256 `8f0b84d52aaad072c4751128bfb3ba98c87766fd8a9b0385bf8654591769c831`. - Signing certificate SHA-256 `fcfc5a0a6d34abe8ada3e525f1f5f758a4560b9fa58261f218a0fca3ac61773c`. - Android SDK `apksigner verify --verbose --print-certs`: signature verifies with APK Signature Scheme v2, one RSA 3072-bit signer, CN=ByLine, O=ByLine. - Android SDK `aapt dump badging`: package/version/SDK/ABI metadata confirmed. - Flutter 3.44.1, Dart 3.12.1; Node 24.15.0 used for backend checks.

The fresh build is byte-identical to the 5 November recorded release. There was no new mobile feature change requiring a version bump in this documentation task. Flutter emitted a future-compatibility warning about flutter_timezone applying the Kotlin Gradle Plugin. The current build succeeded; upgrading the plugin/toolchain is future maintenance, not a failed release check.

Documentation integrity

`scripts/build-handbook.py` builds the narrative and exhaustive generated appendices. `docs/repository-inventory.json` records every publishable file and non-derived hash; `docs/handbook-build.json` records final PDF page count, coverage and checksum. Generated documentation is excluded from recursive source reproduction but included in the catalogue. Binary assets are catalogued, all existing UI preview PNGs are rendered, npm locks receive full resolved package inventories, and the Dart lock is included in full. Secrets, SDKs, third-party dependency source, caches and live data are outside this distributable documentation scope.

Verification boundaries

This task did not repeat real social consent, real AI generation, physical push delivery or publication. See the dated 5 November report for prior device/provider evidence and its limitations. A successful health read is a point-in-time result. The separate local API `test:local` suite was not rerun; root logic, real disposable PostgreSQL, cloud runtime and Flutter suites above were run. This does not establish all third-party behavior or production availability.

The GitHub connector provided read access but not write access. Repository publication uses the workstation's already authenticated owner Git/CLI credentials. Private server and signing credentials remain ignored and are not part of the release.

Condensed reading edition

At the owner's request, the PDF was revised to a 100-120 page reading edition. All file-purpose entries, architecture/stack explanations, phone setup, API/schema and configuration references remain. Full application source and historical reports remain in docs/generated-reference.md. The PDF shows one phone-width preview per screen; wider variants remain in the repository. This is a documentation revision; application code, the APK and the earlier test results are unchanged.

27. Complete file catalogue

Every tracked or non-ignored project file is listed below. Private/generated dependencies and local runtime data are excluded by Git rules. Derived handbook artifacts are listed without recursive content/hashes. Binary assets have metadata instead of source text. The JSON inventory has full SHA-256 values for every non-derived file.

.env.example

Blank original-backend environment variable template with operator comments.

2848 bytes; 67 lines; SHA-256 1f23264c56021bd2da5a52c43cdce2c7233e94a1302edf065748327633f35146

.gitattributes

Preserves PDF/APK binary bytes across Git checkouts and exempts embedded source whitespace in the generated reference.

212 bytes; 6 lines; SHA-256 3204ad4c7307c670dcb1ecf381f07bc629c832bd23c17b64182b9e879e40507d

.github/workflows/backup.yml

Scheduled original PostgreSQL encrypted backup artifact workflow.

3847 bytes; 81 lines; SHA-256 31ea7db0339e553f0ce864a0e67fc352f1694ed2736e8b8e5402f4083abd4080

.github/workflows/ci-mobile.yml

Path-filtered GitHub Actions Flutter analysis and tests.

1618 bytes; 49 lines; SHA-256 8e74e52050eaccd8fe353d34d590f649c8efca820dd87e0b58b63e7aa56a31dd

.github/workflows/ci.yml

GitHub Actions root logic/type/build checks and disposable PostgreSQL integration tests.

2791 bytes; 86 lines; SHA-256 cc7cb67a41aa7953eaff206fa497379d4174f29fa23e948c24fc8e9e44851083

.github/workflows/watchdog.yml

External scheduled original-backend health/reminder watchdog workflow.

4823 bytes; 99 lines; SHA-256 190371ffb864d83cb687786d2a163ffec0d0942a950e9bf39479f5c5b212d336

.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

922 bytes; 43 lines; SHA-256 e249fd530de7618da908e0a6c0bff7246fce680a03bfd6e98d2bd58077d1d989

BYLINE-LIVE.md

Original integration/live workstation operating instructions.

7984 bytes; 74 lines; SHA-256 d7d29034f3025355e44aff7429bf59ee84702508527c91991c32515f95f73de1

BYLINE-LOCAL.md

Isolated demonstration backend/phone setup, verification and boundaries.

7734 bytes; 86 lines; SHA-256 488419a603debaeac918809106e17b12849cdd8866817c1d517acc7192fe0678

DEPLOY.md

Original hosted deployment procedure and infrastructure notes.

13828 bytes; 343 lines; SHA-256 69193dac0c9ea4a2440c9994e18fceab5097de2a80d2800884a2e7bf85203fca

DESIGN.md

Design language, typography, layout and interaction rationale.

15901 bytes; 328 lines; SHA-256 ad112c3fbb63c19adf8886d6af51e3fd72d74c395a59b094f8671b9fc83ddceb

README.md

Repository overview, current download/documentation links and original setup reference.

10269 bytes; 214 lines; SHA-256 42b7137ddec56618f62bd4999e293b0ec433ad91028e399df2f20d9a3e8614a6

app/api/account/delete/route.ts

Next.js App Router HTTP handler for /api/account/delete. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3200 bytes; 50 lines; SHA-256 a6f8fa4710f4a490c768536bf03f00f8663f49acb4bc7f3a304081077c614d55

Declared symbols: POST, dynamic

Imports: ../../../../lib/db, ../../../../lib/request-agent, next/server

app/api/auth/route.ts

Next.js App Router HTTP handler for /api/auth. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3038 bytes; 81 lines; SHA-256 5fd694559989819db8833e41172183ec6f4dba58bd0f872b3b7121de7726e601

Declared symbols: POST, DELETE, dynamic

Imports: ../../../lib/auth, ../../../lib/db, ../../../lib/ratelimit, ../../../lib/request-agent, next/server

app/api/compose/rewrite/route.ts

Next.js App Router HTTP handler for /api/compose/rewrite. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2864 bytes; 68 lines; SHA-256 2fb4fe13d2ccbda887353143871434ca778952cfe47d57be44b5a3380519ff7d

Declared symbols: POST, dynamic, maxDuration

Imports: ../../../../lib/agents, ../../../../lib/format, ../../../../lib/request-agent, ../../../../lib/writer, next/server

app/api/cron/tick/route.ts

Next.js App Router HTTP handler for /api/cron/tick. Validates request/authentication, delegates domain operations and returns the endpoint contract.

7095 bytes; 159 lines; SHA-256 649a8cbc458ec71ec70b2292db8131965f358c8637c7012cdcfcd9109ba9beaa

Declared symbols: announce, authorized, GET, dynamic, maxDuration

Imports: ../../../../lib/cycle, ../../../../lib/distribute, ../../../../lib/push, ../../../../lib/retention, ../../../../lib/reviews, ../../../../lib/slots, ../../../../lib/unified-timetable, next/server

app/api/cycle/run/route.ts

Next.js App Router HTTP handler for /api/cycle/run. Validates request/authentication, delegates domain operations and returns the endpoint contract.

1682 bytes; 44 lines; SHA-256 a836c8acc577ead793a6d97b20b274f58664ff3f884520e65ae90c34f29bdacc

Declared symbols: POST, dynamic, maxDuration

Imports: ../../../../lib/cycle, ../../../../lib/request-agent, next/server

app/api/devices/route.ts

Next.js App Router HTTP handler for /api/devices. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2640 bytes; 58 lines; SHA-256 e5f27bef037733257c1f1071b9d3ef9f06d6cc9bd29dc9d29519d7469fcaabc0

Declared symbols: POST, DELETE, dynamic

Imports: ../../../lib/db, ../../../lib/push, ../../../lib/request-agent, next/server

app/api/health/route.ts

Next.js App Router HTTP handler for /api/health. Validates request/authentication, delegates domain operations and returns the endpoint contract.

877 bytes; 29 lines; SHA-256 8f69ee15ea4b9d952973e0da3ea0bf503be46184bdca2ba6c918793b537e7ef0

Declared symbols: GET, dynamic

Imports: ../../../lib/db, next/server

app/api/init/route.ts

Next.js App Router HTTP handler for /api/init. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3383 bytes; 79 lines; SHA-256 51d484c4b6d2f1ce9b627aa3d31f79addc88a78c82fcf3bde92c3aebebdd3fad

Declared symbols: GET, POST, dynamic, maxDuration

Imports: ../../../lib/agents, ../../../lib/categories, ../../../lib/cycle, ../../../lib/request-agent, next/server

app/api/interests/route.ts

Next.js App Router HTTP handler for /api/interests. Validates request/authentication, delegates domain operations and returns the endpoint contract.

1767 bytes; 27 lines; SHA-256 2fca05665287a41f375fb5b1c522174ce1e5fd468fbbb44c96bce9c662a82b7b

Declared symbols: GET, POST, dynamic

Imports: ../../../lib/db, ../../../lib/request-agent, next/server

app/api/linkedin/callback/route.ts

Next.js App Router HTTP handler for /api/linkedin/callback. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3220 bytes; 70 lines; SHA-256 618c119cc2eb61888febdca037232ed285920619b8e6c238e93dd9719d3d8190

Declared symbols: back, GET, dynamic

Imports: ../../../../lib/accounts, ../../../../lib/db, ../../../../lib/linkedin, ../../../../lib/native-auth, ../../../../lib/native-callback, ../redirect-uri, next/server

app/api/linkedin/connect/route.ts

Next.js App Router HTTP handler for /api/linkedin/connect. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2196 bytes; 45 lines; SHA-256 004911a6d87b9fe3492899d8de15a049ab682351ce50af3a73f599b17d4da911

Declared symbols: GET, dynamic

Imports: ../../../../lib/db, ../../../../lib/linkedin, ../../../../lib/native-return, ../../../../lib/request-agent, ../redirect-uri, next/server, node:crypto

app/api/linkedin/disconnect/route.ts

Next.js App Router HTTP handler for /api/linkedin/disconnect. Validates request/authentication, delegates domain operations and returns the endpoint contract.

829 bytes; 20 lines; SHA-256 9aa3360da73d78f8cc73d98e431c494bc7436ff09a4eaa54bc7b7938e39f7dc2

Declared symbols: POST, dynamic

Imports: ../../../../lib/accounts, ../../../../lib/agents, ../../../../lib/request-agent, next/server

app/api/linkedin/redirect-uri.ts

Resolves and validates the original LinkedIn callback URI for OAuth requests.

685 bytes; 14 lines; SHA-256 6ab92678e26c2c1927f0ecf28fcbe54c8e1884c3282b43903793930e3cc869ce

Declared symbols: redirectUriFor

app/api/media/route.ts

Next.js App Router HTTP handler for /api/media. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3825 bytes; 99 lines; SHA-256 852643c3b94c2444d4d25d9ae1852f06e863cb5bbc241d1c0761f06c872c3ef8

Declared symbols: POST, dynamic, maxDuration

Imports: ../../../lib/accounts, ../../../lib/db, ../../../lib/linkedin, ../../../lib/request-agent, next/server

app/api/native-auth/callback/route.ts

Next.js App Router HTTP handler for /api/native-auth/callback. Validates request/authentication, delegates domain operations and returns the endpoint contract.

427 bytes; 8 lines; SHA-256 3c72844c2ca5b4224de1b731b92ee1711936cff6889aa796ce80d805e22371b6

Declared symbols: GET, dynamic

Imports: ../../../../lib/native-auth, ../../../../lib/native-callback

app/api/native-auth/route.ts

Next.js App Router HTTP handler for /api/native-auth. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3296 bytes; 47 lines; SHA-256 c8ff2f9edddbdc759ecb5eb02e13c7ebeded2143602a402bddf37cc8767751fb

Declared symbols: GET, POST, dynamic

Imports: ../../../lib/db, ../../../lib/linkedin, ../../../lib/native-auth, ../../../lib/native-return, ../../../lib/ratelimit, next/server, node:crypto

app/api/onboarding/route.ts

Next.js App Router HTTP handler for /api/onboarding. Validates request/authentication, delegates domain operations and returns the endpoint contract.

5031 bytes; 62 lines; SHA-256 2b783d2d918575f176710dddf3b9ed86d6c173babb162ef72791134e2e2c8a14

Declared symbols: GET, POST, dynamic, maxDuration

Imports: ../../../lib/categories, ../../../lib/db, ../../../lib/native-auth, ../../../lib/onboarding, ../../../lib/request-agent, next/server

app/api/posts/[seq]/route.ts

Next.js App Router HTTP handler for /api/posts/[seq]. Validates request/authentication, delegates domain operations and returns the endpoint contract.

17045 bytes; 390 lines; SHA-256 a89de41a0f74d08c260ea932211c714b5253cc2b1e7e7dc800773a80dc75647e

Declared symbols: Action, PATCH, dynamic, maxDuration

Imports: ../../../../lib/agents, ../../../../lib/db, ../../../../lib/distribute, ../../../../lib/format, ../../../../lib/media-ownership, ../../../../lib/request-agent, ../../../../lib/slots, ../../../../lib/style, ../../../../lib/writer, next/server

app/api/posts/route.ts

Next.js App Router HTTP handler for /api/posts. Validates request/authentication, delegates domain operations and returns the endpoint contract.

8781 bytes; 197 lines; SHA-256 c5fbf47db7040f04ff7ae80862c3cb85e66deffddf649a4cee3d8b155c5a4cc5

Declared symbols: GET, POST, dynamic, maxDuration

Imports: ../../../lib/agents, ../../../lib/categories, ../../../lib/db, ../../../lib/distribute, ../../../lib/format, ../../../lib/media-ownership, ../../../lib/post-view, ../../../lib/request-agent, ../../../lib/style, ../../../lib/writer, next/server

app/api/review-delivery/route.ts

Next.js App Router HTTP handler for /api/review-delivery. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2627 bytes; 34 lines; SHA-256 1bdffc76fada3b77d7941ceae23831b713009c3a701cbb194bcdad58673c7e02

Declared symbols: GET, POST, dynamic, maxDuration

Imports: ../../../lib/cycle, ../../../lib/db, ../../../lib/request-agent, ../../../lib/timetable-home, next/server

app/api/settings/route.ts

Next.js App Router HTTP handler for /api/settings. Validates request/authentication, delegates domain operations and returns the endpoint contract.

6088 bytes; 131 lines; SHA-256 a3d4ab7266bd9038af9acede1f1aa42af90a5d60df1a662f02314c7810734b3e

Declared symbols: PATCH, dynamic

Imports: ../../../lib/accounts, ../../../lib/agents, ../../../lib/categories, ../../../lib/db, ../../../lib/request-agent, ../../../lib/schedule, ../../../lib/slots, ../../../lib/style, next/server

app/api/slots/[id]/route.ts

Next.js App Router HTTP handler for /api/slots/[id]. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3524 bytes; 91 lines; SHA-256 060727b6f900106de663ee6cb2697b70da06acd85818a7f24c79c5c250b4f7ae

Declared symbols: PATCH, DELETE, dynamic

Imports: ../../../../lib/categories, ../../../../lib/db, ../../../../lib/request-agent, ../../../../lib/slots, cleared, next/server

app/api/slots/route.ts

Next.js App Router HTTP handler for /api/slots. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3436 bytes; 96 lines; SHA-256 99da8946b376ee92b1847a26a5ac3178a65cfa0a885e8b9a724742f50b023819

Declared symbols: GET, POST, dynamic

Imports: ../../../lib/categories, ../../../lib/request-agent, ../../../lib/slots, next/server

app/api/status/route.ts

Next.js App Router HTTP handler for /api/status. Validates request/authentication, delegates domain operations and returns the endpoint contract.

9044 bytes; 215 lines; SHA-256 849bcbb0c2a2f272d4662e3c4e85d396b7af63d7b3d5ab363431a97d9a419bc6

Declared symbols: GET, dynamic

Imports: ../../../lib/accounts, ../../../lib/categories, ../../../lib/crypto, ../../../lib/db, ../../../lib/distribute, ../../../lib/llm, ../../../lib/memory, ../../../lib/post-view, ../../../lib/request-agent, ../../../lib/schedule, ../../../lib/slots, ../../../lib/style, next/server

app/api/style/preview/route.ts

Next.js App Router HTTP handler for /api/style/preview. Validates request/authentication, delegates domain operations and returns the endpoint contract.

4502 bytes; 101 lines; SHA-256 4365d61b006dbd2db8a81ac2740bdaec5cade181c92331929820eecadc79ef89

Declared symbols: POST, dynamic, maxDuration

Imports: ../../../../lib/agents, ../../../../lib/db, ../../../../lib/format, ../../../../lib/request-agent, ../../../../lib/style, ../../../../lib/writer, next/server

app/api/watchdog/route.ts

Next.js App Router HTTP handler for /api/watchdog. Validates request/authentication, delegates domain operations and returns the endpoint contract.

6007 bytes; 139 lines; SHA-256 3619db7c97edf51234abe70c9d1f1dd0d3ba7223ac996ceec567fe15be49da0d

Declared symbols: authorized, GET, dynamic

Imports: ../../../lib/accounts, ../../../lib/agents, ../../../lib/feedhealth, ../../../lib/linkedin, ../../../lib/push, ../../../lib/slots, next/server, nothing was sent because no device has ever registered

app/globals.css

Original web dashboard global styling.

20771 bytes; 899 lines; SHA-256 e7c661213cfe24fcf8c12f8e1fe97e041eef8fe82f5599bf88dbfa3216f9bf32

app/layout.tsx

Root Next.js HTML/layout and metadata wrapper.

709 bytes; 25 lines; SHA-256 a0c268a9bbd8e835a41a6602c430308c0c607969d9f5c56cf718e9c2bb498c9c

Declared symbols: RootLayout, metadata, viewport

Imports: ./globals.css, next, react

app/page.tsx

Original React operator gate, setup and dashboard UI.

49909 bytes; 1396 lines; SHA-256 0cf0a066e89896df83075b7f035b95077de3d2eb9b86cdf6e0e33dccad4147e8

Declared symbols: Post, Status, CategoryPicker, api, downscale, relative, Page, Gate, submit, Setup, toggle, Dashboard, Alerts, Attachment, Composer, upload, Queue, judgeTotal, PostCard, act, History, Connection, Settings, patch, voiceSummary, toLines, fromLines, PreviewResult, Voice, set, save, runPreview, Schedule, Rejections

Imports: ../lib/categories, ../lib/style, react

cloud/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

54 bytes; 4 lines; SHA-256 0eb2d6777b9979ca867f1e507e034d854e4e68e3314ce8a5d8703847d0b93fcc

cloud/README.md

Dedicated cloud ownership, deployment, free-budget limits and recovery guidance.

6387 bytes; 40 lines; SHA-256 0b6842d8be0766946bb0f28c37e32b0e7e4c1392080ea40bc909bdbfa61463dd

cloud/migrations/0001_initial.sql

D1 schema migration: initial complete SQLite tables, ownership keys and indexes.

12607 bytes; 350 lines; SHA-256 ce2a88ab70168959cd1ab951c8ca6fee746ab42704ad58c5c760fd6db6e20255

cloud/migrations/0002_cloud_jobs.sql

D1 schema migration: durable jobs, AI reservation triggers and operational indexes.

2334 bytes; 44 lines; SHA-256 4d4e5d413a06c72d2b52345dca15ff7f709f80385e5847d08c11636fadf26df7

cloud/package-lock.json

Exact npm dependency resolution tree, integrity hashes and platform packages for reproducible installation.

51912 bytes; 1646 lines; SHA-256 1b0670063ec6854e76678a6d6ab12c798d1f0f7eae70b137ce38dd0175c90538

cloud/package.json

npm package identity, direct dependency version ranges and executable task commands for the cloud backend.

525 bytes; 20 lines; SHA-256 9464832fbadda3a439e5b43401f57ae09f2d244be66240b238cfd26d6677fdde

cloud/scripts/live-smoke.ts

Configured integration smoke checks; provider effects depend on the script/environment.

3956 bytes; 42 lines; SHA-256 f2e335f82cc8946a63b71c341f3e91a50d0bd74cc2eba6b74208b0133d2f067c

Imports: ../../lib/setup-config, ../../scripts/google-operator.mjs, ../src/crypto, ../src/identities, miniflare, node:fs, node:url, node:util

cloud/scripts/prepare-secrets.mjs

Builds ignored cloud secret configuration from private operator inputs without committing secrets.

2971 bytes; 28 lines; SHA-256 38e12b91e3747d299931ca604b7ab9fd75d803d94f67020272d52406d64a26ac

Imports: node:crypto, node:fs, node:util

cloud/scripts/remote-smoke.ts

Remote cloud integration smoke exercise using disposable data and configured live AI.

5374 bytes; 70 lines; SHA-256 fbe0390b39dc63ad9953becfa45d78317ce6d098dc7116e178f0680baa2dbb48

Declared symbols: sql, request

Imports: ../../lib/setup-config, ../src/crypto, node:child_process, node:fs, node:url

cloud/scripts/setup-push.mjs

Operator setup helper for dedicated Firebase cloud push service credentials.

1936 bytes; 28 lines; SHA-256 913912dadf68d1260c8f3588553668313473bd7ee320d50f36e171255ede2184

Declared symbols: api

Imports: ../../scripts/google-operator.mjs, node:fs

cloud/src/ai.ts

Gemini REST transport, atomic quota reservations, pacing, bounded transient fallback and usage records.

5882 bytes; 90 lines; SHA-256 a23c641721041d2942e52e66353a76f7b6aa0275719d727222c2dfadf800484a

Declared symbols: reserveAi, withProviderRetry, completion, durableCompletion, singleCompletion, USER_AI_LIMIT, PROVIDER_AI_LIMIT, AI_MODEL, AI_FALLBACK_MODEL, isTransientAiFailure

Imports: ../../lib/http-body, ../../lib/llm-contract, ../../lib/schedule, ./env

cloud/src/auth.ts

Cloud OAuth capability/start/poll/callback, session authentication, login limits and LinkedIn connection.

9833 bytes; 136 lines; SHA-256 6293829e05d7189cf4de2f977d6a0c167fb6d30f95a44b07ccb5c28b50e31c24

Declared symbols: AuthEnv, Owner, authenticate, limitLogin, capabilities, authorizationUrl, nativeAuth, Grant, Identity, exchange, accountStatement, authCallback, connectLinkedIn

Imports: ../../lib/linkedin, ../../lib/native-callback, ../../lib/native-return, ./crypto, ./env, ./http, ./identities

cloud/src/crypto.ts

Web Crypto session MAC signing/verification, digest helpers and authenticated token encryption.

3077 bytes; 47 lines; SHA-256 df4b0d66bc35775296d362f4db435edd3b0718e4d19d8f71a5101802e99ac8a6

Declared symbols: digest, signingKey, signSession, verifySession, unbase64, base64, encryptionKey, encryptToken, decryptToken

cloud/src/delete-account.ts

Atomic author-data deletion with exact confirmation and in-flight-publication guard.

1800 bytes; 17 lines; SHA-256 424a71d7471099dccf0bb9c62549282f1d4d98b475f9e4897aa2b6968164ad7e

Declared symbols: deleteAccount

Imports: ./auth, ./http

cloud/src/drafts.ts

Idempotent draft save, per-author sequence allocation and settings/slot revision enforcement.

2857 bytes; 49 lines; SHA-256 63b3cac6ba7551f0f52d934e6de16a9d1423b0e5515a003ec6470ce0d3e2bd15

Declared symbols: DraftInput, saveDraft

cloud/src/env.ts

Types for secret bindings combined with generated Wrangler resource bindings.

406 bytes; 13 lines; SHA-256 1e63080abf426b2cb97c4431356dad64427e4c67c47e56c763759a5b14b436b6

Declared symbols: Secrets, AppEnv

cloud/src/generation-errors.ts

Converts internal generation failures into bounded client-safe explanations.

1238 bytes; 17 lines; SHA-256 5b4cd37828fb3c0713ce72b98cc1f003e83a3776b42751c88ee78834677a6388

Declared symbols: generationError

cloud/src/generation.ts

Cloud sample and durable job generation using the shared discover/judge/write pipeline.

8387 bytes; 95 lines; SHA-256 5ce2ff506260668f12020cfae7393f0fcf68b3bd63c1178dc160c7f11bba6b6b

Declared symbols: RunStep, feedResult, generatePreview, generateJob, directly

Imports: ../../lib/critique, ../../lib/discovery-core, ../../lib/judge-core, ../../lib/schedule, ../../lib/setup-config, ../../lib/voice-prompt, ../../lib/writer-core, ./ai, ./drafts, ./env, ./generation-errors, ./jobs, ./models, ./slots

cloud/src/http.ts

No-store JSON responses, typed HTTP errors and bounded body/provider JSON parsing.

1135 bytes; 23 lines; SHA-256 5f2ad7a66dffc000596ec81e6b47bc3b0b14c15faac588ead65f8b7b910819f8

Declared symbols: HttpError, json, body, text, responseJson

Imports: ../../lib/http-body

cloud/src/identities.ts

Atomic provider identity provisioning and server-side session-to-author ownership resolution.

2605 bytes; 41 lines; SHA-256 9d2c992aa979fa23e9b215a065e067888089368d6ce87dcd2ca8e317d1a95b4e

Declared symbols: provisionIdentity, sessionOwner

cloud/src/index.ts

Cloud Worker HTTP method/path router, authenticated-owner boundary and five-minute scheduled dispatch.

4889 bytes; 73 lines; SHA-256 16925fbdc0abe93da49132f8a3e706f8764c6638cf3513e8e2e27294b47d6058

Imports: ./auth, ./delete-account, ./env, ./http, ./media, ./notifications, ./onboarding, ./posts, ./scheduler, ./settings, ./slots, ./status, ./workflow

cloud/src/jobs.ts

Persistent manual/slot job enqueue, Workflow dispatch, failure/outbox settlement and stale-job reconciliation.

5981 bytes; 75 lines; SHA-256 08a93f22a0ba193a837028ee7f6f4180072da6acef6bb462ddaa264474e8bf39

Declared symbols: GenerationJob, failJob, enqueueSlot, enqueueManual, dispatchJobs, reconcileJobs

Imports: ./env, ./http, ./slots

cloud/src/media.ts

Bounded multipart image validation, official LinkedIn upload and owned asset persistence.

2105 bytes; 22 lines; SHA-256 eb8b5eb2945767fad3f853f1c161139c006ecedc82f4a00342fd01bada435dd2

Declared symbols: mediaRoute

Imports: ../../lib/linkedin, ./auth, ./env, ./http, ./publish

cloud/src/models.ts

Cloud database row types and conversions to the mobile settings/account/post contracts.

3169 bytes; 42 lines; SHA-256 e6c8a35bd63d095db1e62c829fbfac83a506fda4df736834ebb64f52e4054d26

Declared symbols: AgentRow, agentView, loadAgent, JsonPostKeys, DatePostKeys, CloudPost, postView, accountStatus

Imports: ../../lib/categories, ../../lib/persona-prompt, ../../lib/post-view, ../../lib/style, ../../lib/voice-prompt, ./http

cloud/src/notifications.ts

FCM credentials and send transport, owned device registration and bounded durable outbox dispatch.

6106 bytes; 71 lines; SHA-256 c44c0a0aa64c4c0c730fe6201e8ca91785608e733c4c37636b369f99a3ef106b

Declared symbols: ServiceAccount, pushCredentials, Notice, notification, notify, devicesRoute, drainNotifications

Imports: ../../lib/http-body, ./auth, ./env, ./http

cloud/src/onboarding.ts

Cloud saved setup revision, preview lease, acceptance and atomic first-slot activation.

6165 bytes; 64 lines; SHA-256 2f6fc95082026f8e920b9b472a545c7a2ccc5f30515ab3a19ff0cde8307bf4c5

Declared symbols: SetupRow, setupStatus, onboardingRoute

Imports: ../../lib/categories, ../../lib/schedule, ../../lib/setup-config, ./auth, ./env, ./generation, ./generation-errors, ./http, ./models

cloud/src/posts.ts

Cloud archive, composer saves, rewrite/preview and guarded post actions.

10689 bytes; 121 lines; SHA-256 0227c67093c181a86c73a79f10aced78768aee2c2c7918104f02cf401a32985e

Declared symbols: tags, reviewed, future, voiceContext, postsRoute, postAction, rewriteRoute

Imports: ../../lib/categories, ../../lib/critique, ../../lib/format, ../../lib/style, ../../lib/voice-prompt, ../../lib/writer-core, ./ai, ./auth, ./drafts, ./env, ./http, ./models, ./publish

cloud/src/publish.ts

Cloud publication eligibility, atomic claims, image ownership, result settlement and manual resolution.

7302 bytes; 81 lines; SHA-256 4f9a11435ff0697e7d81198e7c96f5bed5e4a6fd52ba81cbac335a332bc4b0bd

Declared symbols: Reviewed, usableToken, ownedImages, publish, resolveSend

Imports: ../../lib/format, ../../lib/linkedin, ../../lib/schedule, ./crypto, ./env, ./http, ./models

cloud/src/scheduler.ts

Cloud maintenance Workflow, due-slot scanning/publication, cleanup and manual preparation routes.

8149 bytes; 103 lines; SHA-256 e991a4b2f0a0127a710866a46ed848cc04c13358968e7cce9544e600b7984bef

Declared symbols: scanSchedule, publishDue, cleanExpired, MaintenanceWorkflow, reviewRoute, cycleRoute

Imports: ../../lib/schedule, ./auth, ./env, ./http, ./jobs, ./models, ./notifications, ./publish, ./slots, cloudflare:workers

cloud/src/settings.ts

Cloud author settings/interests validation and persistence.

5026 bytes; 45 lines; SHA-256 0138ea776f1a6857e643a8036e75e0748260ceea9610f16c7e7297782797abcd

Declared symbols: settingsRoute, interestsRoute

Imports: ../../lib/categories, ../../lib/schedule, ../../lib/style, ./auth, ./http, ./models, ./slots

cloud/src/slots.ts

Cloud slot CRUD, limits, timezone schedule views and discarded-aware daily timetable.

8461 bytes; 91 lines; SHA-256 1eeb2a33f34e541b661e19b2e9581740fdc24ca0605968d0133ec1a829178e34

Declared symbols: SlotRow, slotView, listSlots, fields, slotsRoute, timetable, SLOT_LIMITS

Imports: ../../lib/categories, ../../lib/schedule, ./auth, ./http, ./models

cloud/src/status.ts

Owner-scoped aggregate status document consumed by the mobile client.

5033 bytes; 40 lines; SHA-256 0751c483b216836d23e88f5232ee8b9bfaa4db7a2f6979b416d1bc352cc7de8b

Declared symbols: statusRoute

Imports: ../../lib/categories, ../../lib/schedule, ../../lib/style, ./ai, ./auth, ./env, ./http, ./models, ./slots

cloud/src/workflow.ts

Content Workflow entry point, durable step retry configuration and outcome notification dispatch.

1096 bytes; 17 lines; SHA-256 93f04f987add1fe76cfad9b79bb99f3875deb66df759e7f9de8d089076dec79a

Declared symbols: ContentWorkflow

Imports: ./env, ./generation, ./jobs, ./notifications, cloudflare:workers

cloud/test/api.test.ts

Cloud Worker/D1 regression suite: api. Exact test titles and assertions appear below.

16347 bytes; 194 lines; SHA-256 560a77827e776eac87a82139d4d49a58d07d1bd378f15f5f9a2d7dc28a9e7cf5

Declared symbols: author, call

Imports: ../../lib/setup-config, ../src/crypto, ../src/drafts, ../src/env, ../src/identities, ../src/publish, miniflare, node:assert/strict, node:fs, node:test, node:url

cloud/test/database.test.ts

Cloud Worker/D1 regression suite: database. Exact test titles and assertions appear below.

13803 bytes; 193 lines; SHA-256 24084cf9ef4f4dd586392e5ccbd2b2604e17f433ea6ab470d3c217489425eb00

Imports: ../src/ai.ts, ../src/auth.ts, ../src/crypto.ts, ../src/drafts.ts, ../src/env.ts, ../src/generation-errors.ts, ../src/identities.ts, ../src/jobs.ts, ../src/notifications.ts, miniflare, node:assert/strict, node:fs, node:test

cloud/test/discovery-budget.test.ts

Cloud Worker/D1 regression suite: discovery-budget. Exact test titles and assertions appear below.

3025 bytes; 52 lines; SHA-256 286af1b71dcbc85ff7b390981930947735175f0d195410f42984f7940be4f9a2

Imports: ../../lib/discovery-core, ../src/ai, node:assert/strict, node:test

cloud/test/writer.test.ts

Cloud Worker/D1 regression suite: writer. Exact test titles and assertions appear below.

2763 bytes; 46 lines; SHA-256 f9abe568b5d71e53af6bcb4a4e4a47cc0855a8c24de868f019cdcbdbbc90d414

Imports: ../../lib/critique, ../../lib/setup-config, ../../lib/style, ../../lib/writer-core, node:assert/strict, node:test

cloud/tsconfig.json

TypeScript compiler settings and included/excluded source scope for this package.

340 bytes; 14 lines; SHA-256 45b371647d0b9328456025c0aa772ba13f097bb962798cabbdce2eb2759c479e

cloud/wrangler.jsonc

Dedicated Worker account, D1 and Workflow bindings, timer and observability configuration.

939 bytes; 37 lines; SHA-256 f036ecfee69fe6aed9a3b2d566054572521a0e48f1a347725be52fb62833863f

docs/README.md

Documentation entry point and reproducible PDF generation instructions.

2213 bytes; 39 lines; SHA-256 3f3217d6dcaf7bb4dd4008d446f55fcd75d9fdeb6a0f984e08d21c62674ccfa0

docs/generated-reference.md

Generated searchable complete file/reference/source appendix in Markdown.

generated bytes

docs/handbook-build.json

Generated PDF page/coverage statistics and PDF SHA-256.

generated bytes

docs/handbook.md

Authored architecture, user/developer/operator manual and implementation explanations for the PDF.

55224 bytes; 287 lines; SHA-256 5508e8c0959de51be459c1adae7a9573ed3e31f21c2700b8669bd22996c3524c

docs/repository-inventory.json

Generated machine-readable file, hash, purpose, symbol and import inventory.

generated bytes

lib/accounts.ts

Loads, encrypts and persists LinkedIn account grants; reports connection and expiry status.

6985 bytes; 185 lines; SHA-256 17931b174d894171a8817f6fb3128aeda695f89855be3a10a9f44f8d18222e5f

Declared symbols: AccountRow, AccountStatus, daysUntil, saveAccount, loadRow, getAccountStatus, TokenLookup, getUsableToken, recordAccountOk, recordAccountError, disconnectAccount, REAUTH_WARNING_DAYS

Imports: ./crypto, ./db, ./linkedin

lib/agents.ts

Creates and updates PostgreSQL author workspaces, settings, persona and voice references.

15735 bytes; 363 lines; SHA-256 94203565bf013dd93432b037050ebae5c24b1298f4fcde33f708c87eb2180f7b

Declared symbols: canonicalize, InitPersona, AgentSettings, ensureAgent, expandStoredPersona, refreshPersonaIfStale, getPersona, SettingsRow, toSettings, getAgentSettings, getPrimaryAgent, VoiceReferences, voiceReferencesFor, SettingsPatch, updateAgentSettings

Imports: ./categories, ./db, ./distribute, ./persona, ./schedule, ./style, ./voice, node:crypto

lib/ai-usage.ts

Reserves and records original-backend per-author/provider AI usage and pacing.

2302 bytes; 36 lines; SHA-256 832bafc361498c7bbed04dda80ff10c498d1a7abe9a0c64804b8453dc8fcde18

Declared symbols: withAgentUsage, usageOwner, reserveUserCall, reserveProviderCall, recordAiUsage

Imports: ./auth, ./db, next/headers, node:async_hooks

lib/auth.ts

Signs and validates the legacy password-dashboard session cookie.

4135 bytes; 96 lines; SHA-256 7cc2cbe6257261713b75bf2bf1888de2d83d8ebdf97460a18e253d37471eb82b

Declared symbols: hmacKey, toHex, timingSafeEqual, sign, authConfigured, createSession, verifySession, createUserSession, sessionIdentity, passwordMatches, SESSION_COOKIE

lib/breeth.ts

Optional external Breeth graph-memory transport and fact operations.

6019 bytes; 176 lines; SHA-256 032b630134890124f48a2f1f301d66844af9bc24cf2388e912c599c58bd768dc

Declared symbols: BreethResult, EpisodeWriteData, SearchEdge, isDegraded, request, writeEpisode, search, healthCheck

lib/categories.ts

Normalizes legacy and specialist subjects; exposes IDs, labels, hashtags and selection validation.

12061 bytes; 196 lines; SHA-256 619fbe10ef0777f9a8a9828cdd0ca30b1e273ffdab79a687f37db01806bc18ad

Declared symbols: CategoryId, LegacyCategoryId, Category, isCategoryId, parseCategories, describeCategories, sameCategorySet, categoryBlock, hashtagsFor, CATEGORIES, ALL_CATEGORY_IDS, MAX_SELECTED_CATEGORIES, LEGACY_CATEGORY_IDS

Imports: ./category-catalogue

lib/category-catalogue.ts

Complete specialist subject vocabulary and stable subject-ID construction.

24781 bytes; 65 lines; SHA-256 4234e680b0786168f0a97182d3aece40a8871075268c214c8d670edbc715b9fb

Declared symbols: subjectId, SUBJECT_GROUPS

lib/critique.ts

Deterministic draft-quality checks, including voice constraints and final character budget.

10975 bytes; 261 lines; SHA-256 3414cef92c0c17c09ef5736f68950e81da64bd443790ac7a3365886e25614590

Declared symbols: Violation, countWords, firstSentence, critique, severity, repairInstruction, summarize

Imports: ./format, ./style

lib/crypto.ts

Original backend AES-GCM encryption/decryption for provider tokens at rest.

2800 bytes; 73 lines; SHA-256 ec9fdc380a9d156a6293bf16415c3dbd819d4cd0aff07de158644141b0be8f94

Declared symbols: key, hasEncryptionKey, encrypt, decrypt

Imports: crypto, node:crypto

lib/cycle.ts

PostgreSQL-backed discovery/judging/writing orchestration and scheduled cycle coordination.

27258 bytes; 634 lines; SHA-256 fc0afd0b2ec8a02554834ebdcdbf2aceda995cda079e2d9d131ed36910b276f7

Declared symbols: AgentSettings, DueSlot, CycleResult, CycleContext, recordCycleRan, runCycle, runCycleWithLock, runCycleLocked, queueAlreadyCovers, runSlotCycle, runSlotCycleInternal, runDueSlots

Imports: ./agents, ./ai-usage, ./categories, ./db, ./discovery, ./format, ./judge, ./memory, ./onboarding, ./push, ./schedule, ./slots, ./writer

lib/db.ts

Shared PostgreSQL pool, query handling, schema hash ledger and migration locking.

6659 bytes; 151 lines; SHA-256 4d966e32195fef6658e5b6ef20cd9ae15dbc97f9aebc38e5655711bc0506accd

Declared symbols: DbGlobals, getPool, ensureSchema, isConnectionError, query

Imports: ./schema, node:crypto, pg

lib/discovery-core.ts

Feed definitions, fetch budgets, redirect handling, parsing, deduplication and balanced source selection.

20480 bytes; 593 lines; SHA-256 7288c52257b5df09f3310c6cee5ddff8f970fc4543262762ae1f45de311fad0b

Declared symbols: FeedRecorder, Candidate, DiscoverOptions, FeedFetch, boundedFeedFetch, fetchText, stripHtml, clip, fromHackerNews, parseFeed, arxivUrl, Feed, isFresh, interleaveByCategory, feedsForCategories, balanceFeeds, discover, FEEDS

Imports: ./categories, ./entities, ./http-body

lib/discovery.ts

PostgreSQL feed-health adapter around shared source discovery.

262 bytes; 4 lines; SHA-256 00128b848caf1fe562289c24ceb39ecac7cc0781f577318e6d1912bc7fb0b295

Declared symbols: discover

Imports: ./discovery-core, ./feedhealth

lib/distribute.ts

Original backend publication claims, daily limits, idempotency and ambiguous-outcome resolution.

22032 bytes; 499 lines; SHA-256 9a55de4143373cf26915e72bbf1b0044a5a7582862960e2f2c36f8fb7561e69b

Declared symbols: PublishSource, ReviewedPost, DistributeResult, PostRow, liveModeEnabled, sendsToday, loadImages, publishPost, DuePostRow, DuePublishResult, publishDuePosts, listAmbiguousSends, resolveAmbiguousSend, MANUAL_DAILY_CAP, LINKEDIN_DAILY_REQUESTS, MAX_AUTO_CAP

Imports: ./accounts, ./db, ./format, ./linkedin, ./schedule, ./slots, ./style, ./voice

lib/entities.ts

HTML/XML entity decoding used when normalizing feed text.

1038 bytes; 40 lines; SHA-256 e98233d68379d08cfadd50234865668caf97d81010ac95c2f0d3df46a733b605

Declared symbols: fromCode, decodeEntities

lib/feedhealth.ts

Persists feed success/failure history and identifies repeated source failures.

4226 bytes; 110 lines; SHA-256 cf8f23f1754981081708404abd3aaf10b35dcbaf9f6b4a983b92e4fcde8902ed

Declared symbols: recordFeedResult, DeadFeed, deadFeeds, DEAD_AFTER_FAILURES, DEAD_AFTER_DAYS

Imports: ./db

lib/format.ts

Assembles exact source/hashtag text, computes escaped LinkedIn length and extracts the hook.

3458 bytes; 90 lines; SHA-256 453263c0be810bdb4a750d8e9d40e5bc5e31a7387d0e76db5a283684a6dd1ddb

Declared symbols: AssembleArgs, normalizeHashtag, tidy, assemblePost, LengthCheck, checkLength, hookOf, MAX_BODY_CHARS, FOLD_CHARS

Imports: ./linkedin, ./style

lib/http-body.ts

Reads HTTP streams with explicit byte limits, cancelling oversized bodies.

731 bytes; 21 lines; SHA-256 cd48b2195da7af2ef13848e8c5eb6c92f1d85945ad9d318fdedbead786a9ca48

Declared symbols: boundedText

lib/judge-core.ts

Batched candidate scoring, relevance thresholds, validation and coverage-aware selection.

12431 bytes; 277 lines; SHA-256 af475ba26f6942f472bf45346ebbd9c78e58926342fbf06cc4c452e34f15ca3f

Declared symbols: relevanceTotal, outputBudgetFor, Scores, ScoredCandidate, RawScore, inRange, isRawScore, isRawScores, coverageBlock, candidateLine, buildUser, JudgeOutcome, judgeCandidates, PUBLISH_THRESHOLD

Imports: ./categories, ./discovery, ./llm-contract, ./memory, ./persona-prompt

lib/judge.ts

Original backend completion adapter for the shared editorial judge.

415 bytes; 6 lines; SHA-256 11304827005fb3324ad19827ead2372344a66aebf7ea17ed48a87598b8525606

Declared symbols: Tail, judgeCandidates

Imports: ./judge-core, ./llm

lib/linkedin.ts

Official LinkedIn OAuth, profile, image and post HTTP client; little-text escaping and permalink rules.

15697 bytes; 450 lines; SHA-256 2fcb5bad5ae99ce8b26cf8af32a7dd3f982f3d99a93216b4d8f9c112b3a1472d

Declared symbols: LinkedInResult, apiVersion, apiVersionAge, versionedHeaders, withTimeout, toFailure, toNetworkFailure, escapeLittle, toLittleText, authorizeUrl, TokenGrant, tokenRequest, exchangeCode, refreshAccessToken, MemberIdentity, getMemberIdentity, RegisteredImage, initializeImageUpload, uploadImageBytes, PostImage, CreatePostArgs, buildContent, createPost, postPermalink, SCOPES, MAX_COMMENTARY

lib/llm-contract.ts

Shared completion request/result types and structured JSON parsing helpers.

722 bytes; 28 lines; SHA-256 a35c6d1883e9746f78b448e065011f6279fefa87ba5f7c139b8acfdfdc364d7d

Declared symbols: CompleteArgs, CompleteResult, Completion, parseJson

lib/llm.ts

Original Node/Gemini SDK adapter with configured models, accounting and response handling.

8629 bytes; 211 lines; SHA-256 46bf3e55afcd3ade2759f880aa7442dacfc22e158c3769f395e991c9fb25a89c

Declared symbols: cascade, rpdCap, isGemma, paced, pacificToday, todayCount, bumpCount, getTodayCalls, client, is429, callGemini, completeGemini, complete

Imports: ./ai-usage, ./db, ./llm-contract, @google/genai, node:crypto, node:fs/promises

lib/media-ownership.ts

Validates that referenced original-backend media assets belong to the requesting author.

397 bytes; 7 lines; SHA-256 035356bd6c305ac56eff112d6c44b086b9bf1c20b65baa17d604eed644a4e384

Declared symbols: ownsMedia

Imports: ./db

lib/memory.ts

Original editorial memory abstraction with optional Breeth and database fallback.

4248 bytes; 108 lines; SHA-256 4b635d2a17137419d7554f56e4f9e2f35a27c2fa5561fc58d23aa44baf8b731c

Declared symbols: MemoryContext, recordBreethStatus, fingerprintFallback, recall, rememberPublish, rememberRejections, memoryDegraded

Imports: ./breeth, ./db

lib/native-auth.ts

PostgreSQL native identities, verifier-protected OAuth flows, bearer sessions and revocation.

4571 bytes; 70 lines; SHA-256 0c984d3348693c8752ff41d54982079eb27427e21b7394754b5cea83d5eeca51

Declared symbols: provisionUser, issueSession, completeNativeAuth, localTestMode, digest

Imports: ./accounts, ./auth, ./db, ./linkedin, node:crypto

lib/native-callback.ts

Browser completion page and Android/desktop return signal without putting credentials in app links.

1902 bytes; 11 lines; SHA-256 e63294dcf6f1bf2a3bdf0de1853a21703091c45b0a657670b43c818ed6fb9c58

Declared symbols: nativeCallbackPage

Imports: ./native-return

lib/native-return.ts

Strict validation of random-path loopback desktop OAuth return URLs.

573 bytes; 10 lines; SHA-256 d79a0c8183bd857b8067c72b3ff956460d3f76f41679518dd7a95e0b5ba9aa13

Declared symbols: nativeReturnUri

lib/onboarding.ts

PostgreSQL saved setup, sample generation/acceptance, activation and review-delivery coordination.

4067 bytes; 44 lines; SHA-256 9feb0155754bcda2319239263d4fcd501a9f2937c65b8b2cd7ac9f69c28a5502

Declared symbols: Sample, generateSetupSample, setupStatus

Imports: ./accounts, ./categories, ./category-catalogue, ./critique, ./db, ./discovery, ./judge, ./native-auth, ./persona, ./schedule, ./setup-config, ./style, ./writer

lib/persona-prompt.ts

Runtime-neutral persona types and prompt text construction.

1171 bytes; 32 lines; SHA-256 12a958496fb0a5ae3110a0be396ee120f8c94e7bce1b49eae1e05599a658e4f4

Declared symbols: PersonaIdentity, PersonaRecord, personaBlock

Imports: ./categories

lib/persona.ts

Original persona generation/persistence adapter and shared persona exports.

5332 bytes; 114 lines; SHA-256 3c196944a1e1294bb5880ad2fd0560789412c7527d0c1992353a124334658b64

Declared symbols: isIdentity, expandPersona

Imports: ./categories, ./llm, ./persona-prompt

lib/post-view.ts

Converts persisted original-backend posts into client-facing display/status fields.

1891 bytes; 57 lines; SHA-256 f6f45bacaaaf22fd2d538515a5b91ea375bf79b77947cda72305ed703b672757

Declared symbols: PostRow, serializePost, POST_COLUMNS

Imports: ./format

lib/push.ts

Original Firebase push transport, device registration, reminder eligibility and logging.

16728 bytes; 421 lines; SHA-256 0e6e13e450441d1a15fc93b5b0911728629c5bbd1b1c4c584c4f96d8df0e8007

Declared symbols: pushConfigured, CachedToken, pemToBytes, base64url, mintAccessToken, checkCredentials, accessToken, registerDevice, forgetDevice, devicesFor, PushEvent, Rendered, render, withinCooldown, notify

Imports: ./db, node:fs/promises

lib/ratelimit.ts

Original dashboard login-failure rate limiting and reset helpers.

4423 bytes; 102 lines; SHA-256 e136b9df3399940c69ea12fcb5fae11b1e2cfe3bba81bc1ec57e84eaf908afee

Declared symbols: clientKey, RateVerdict, checkLoginAllowed, recordLoginFailure, clearLoginFailures, MAX_ATTEMPTS, WINDOW_MINUTES

Imports: ./db

lib/request-agent.ts

Resolves the authenticated request to its authorized agent for original API handlers.

1544 bytes; 33 lines; SHA-256 f99658e2715ce41fc24cf3e466541898d1353e313744d4ad714e784ae04b608f

Declared symbols: credential, requestIdentity, getRequestAgent

Imports: ./agents, ./auth, ./db, next/headers

lib/retention.ts

Bounded original-backend cleanup policies for operational records.

4632 bytes; 105 lines; SHA-256 a6619a1999f976f4baa9eab210d1c5975d944e1991a7080ab9aa07d43358a417

Declared symbols: SweepResult, sweepIfDue, RETENTION

Imports: ./db

lib/review-feedback.ts

Maps preparation/review outcomes to meaningful user-facing feedback.

2963 bytes; 45 lines; SHA-256 912c8e1bcc3e8fd7af7f69c84add6455c5a926fbc2b4fb24ae4c0bc4ccc95dd4

Declared symbols: ReviewAttempt, reviewFeedback

lib/review-progress.ts

Preparation stage/progress contracts and UI-facing state helpers.

1320 bytes; 20 lines; SHA-256 6c2486d86b8e6b72da0305ff2c2636b9a10b3686db668ca3b2ca3a3d5da47d0d

Declared symbols: reviewProgress

Imports: ./db, ./review-feedback

lib/reviews.ts

PostgreSQL review-delivery generation, retries, leases and notification outbox orchestration.

5544 bytes; 71 lines; SHA-256 8c539533013ce5a4aca8ce6cf0b80cef7cf0dc1a74f8cf64f5a33804231f5a46

Declared symbols: runDueReviews, advance, flushNotifications

Imports: ./cycle, ./db, ./native-auth, ./onboarding, ./push, ./schedule

lib/schedule.ts

Timezone-aware clock, local date/time validation and next-run calculations.

8501 bytes; 209 lines; SHA-256 25c70dca4e907d41fca499bdd3f3d0c747bf29643b47c78e8c399532961ccf87

Declared symbols: LocalClock, isValidTimeZone, safeTimeZone, localClock, normalizeHhMm, parseHhMm, nextDailyRun, isDayEnabled, parseDaysMask, describeDays, nextSlotRun, formatInZone, MASK_DAILY, MASK_WEEKDAYS, MASK_WEEKENDS

lib/schema.ts

Complete additive PostgreSQL schema SQL, ownership relationships, indexes and migration-compatible changes.

21904 bytes; 439 lines; SHA-256 bd44b5dd064b4056bb58ac5dc1b0e0e6d5fd4a2e50899bb6222b48549678d38e

Declared symbols: SCHEMA_SQL

Imports: draft

lib/setup-config.ts

Shared onboarding catalogue, tones, validation and conversion to persona/style/schedule.

6020 bytes; 63 lines; SHA-256 76b6e186e96a9816a6e4b0ec12cdea1ea3d3a508a669eb04f97564a5b532b2a7

Declared symbols: SetupConfig, parseSetup, setupStyle, setupCategories, setupPersona, firstDelivery, INDUSTRIES, VOICES, defaultSetup

Imports: ./categories, ./category-catalogue, ./persona-prompt, ./schedule, ./style

lib/slots.ts

Original recurring posting slots, occurrence claims, scheduler heartbeat and timeline.

26340 bytes; 683 lines; SHA-256 a8f17166e2e3ec101a1d7bbed0cacf43d7b4028bb3866a26905fba9ad716f875

Declared symbols: SlotOutcome, PostSlot, SlotRow, toSlot, clampLead, listSlots, getSlot, syncAutoCap, rescheduleSlot, rescheduleAllSlots, SlotInput, SlotWriteResult, createSlot, updateSlot, deleteSlot, setSlotCount, ensureSlotsMigrated, DueSlot, DueRow, listDueSlots, claimSlotRun, settleSlotRun, withSlotLock, recordTick, recordWatchdog, watchdogHealth, SchedulerHealth, schedulerHealth, TimelineEntry, slotTimeline, MAX_SLOTS, MIN_LEAD_MINUTES, MAX_LEAD_MINUTES, MISSED_AFTER_MINUTES, GENERATION_BUFFER_MINUTES, HOLD_MINUTES, SLOT_COLUMN_NAMES, SLOT_COLUMNS_QUALIFIED, TICK_STALE_MINUTES

Imports: ./categories, ./db, ./schedule, ./unified-timetable

lib/style.ts

Writing style types, defaults, presets, normalization and prompt constraints.

17448 bytes; 365 lines; SHA-256 32d6c444ead03fe3e17b5dc445d08f4d41d4de01f3bf1b94af11581f0c5ede45

Declared symbols: Structure, EmojiPolicy, HookIntensity, CtaPolicy, Register, SignatureConfig, StyleConfig, oneOf, clamp, stringList, parseSignature, parseStyle, styleBlock, signatureBudget, MAX_HASHTAGS, BULLET_MARK, DEFAULT_STYLE, PRESETS

lib/timetable-home.ts

Derives home preparation/ready state from the unified timetable.

3797 bytes; 53 lines; SHA-256 62b46026a108a044accd26c4a0bac18b4fbdd76b4762076f9b7e16a150f0609c

Declared symbols: timetableDay, manualOccurrences

Imports: ./db, ./post-view, ./review-feedback, ./schedule, ./slots, ./unified-timetable

lib/unified-timetable.ts

Combines slot runs and saved drafts into a single day-oriented timetable model.

3174 bytes; 44 lines; SHA-256 b878e6f86a04508d27084a2875506a87fc9404416b20544d26a99b8c1a22be73

Declared symbols: migrateTimetable

Imports: ./db, ./schedule

lib/voice-prompt.ts

Shared writing-sample selection and voice-reference prompt construction.

3941 bytes; 103 lines; SHA-256 df147546dcc9d7719ad72b43bd80b1b3353a29e7e99c9d4141942528c800313d

Declared symbols: VoiceSample, parseCorpus, pickSamples, voiceBlock, SAMPLES_IN_PROMPT, MIN_PAIRS_FOR_NOTES

lib/voice.ts

Original database-backed selection of writing samples and feedback for voice conditioning.

5911 bytes; 143 lines; SHA-256 31f3631b093e44fd980367dfe56c9bbbfd94fee961d38f3c559c1896fc16007c

Declared symbols: EditPair, deriveEditNotes, refreshEditNotes

Imports: ./db, ./llm, ./voice-prompt

lib/writer-core.ts

Shared writer prompts, output validation, repair budgets and draft/rewrite/follow-up operations.

24052 bytes; 492 lines; SHA-256 2d1135b4b1f726f9edc8fde1e3515966d816499feb35e9d3621a76e3c373840e

Declared symbols: PriorPost, DraftPost, isDraft, buildSystem, WriteArgs, writerOutputBudget, writePost, repairIfNeeded, VoiceOpt, withVoice, rewriteDraft, writeFollowUp, polishCustomPost

Imports: ./categories, ./critique, ./judge, ./llm-contract, ./memory, ./persona-prompt, ./style, ./voice-prompt

lib/writer.ts

Original completion adapter for shared generation, rewriting, follow-up and polishing.

783 bytes; 9 lines; SHA-256 e3b4c92ec81258df5c531917959b2df9196cac8c92e1167a99d567c0cbfa7c3f

Declared symbols: Tail, writePost, rewriteDraft, writeFollowUp, polishCustomPost

Imports: ./llm, ./writer-core

middleware.ts

Original Next.js request authentication/gating middleware.

1944 bytes; 46 lines; SHA-256 d348620450b4d13b508031c1df2122a797a918c8cecaa85fbd6b0f8cec2e6304

Declared symbols: middleware, config

Imports: ./lib/auth, next/server

mobile/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

765 bytes; 46 lines; SHA-256 a1f01b43d33301703190b720e89b82bb94357a6d33133c9970b7a839c810f03c

mobile/.metadata

Flutter project/platform creation metadata used by migration tooling.

998 bytes; 30 lines; SHA-256 d1931f3f99c4b1dcb9d09bf19907e2aa1545af075d75585936c322964df16e24

mobile/README.md

Directory-specific usage, asset provenance or platform instructions.

653 bytes; 17 lines; SHA-256 61692ea556fedb09810e66ca61a6bca63f6f1e191cd4a3f87fd53bcb66005c7b

mobile/analysis_options.yaml

Dart analyzer and Flutter lint configuration.

1448 bytes; 28 lines; SHA-256 b63207cf529949ec4727b68c23dbb38ce255b6f6f4ae1effcb5c1dcf2852d238

mobile/android/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

267 bytes; 14 lines; SHA-256 c9af75dbc2c8aa867476a09426c80b178c4aeed8b9393ae48503eedfa3273d71

mobile/android/app/build.gradle.kts

Android package variants, Dart-define routing, Firebase input, SDK defaults and release signing.

3555 bytes; 87 lines; SHA-256 2c7b148f8e76393dd1579ee698257e6741aca7ecce39a09a002028f54ca0ecef

mobile/android/app/google-services.json

Firebase Android client project/app identifiers; not a service-account private key.

710 bytes; 29 lines; SHA-256 abfde0b2572e39324402e86e4456291855d56a82054e4f048caf6afcab538df6

mobile/android/app/src/debug/AndroidManifest.xml

Android debug build manifest overlay and permissions.

854 bytes; 17 lines; SHA-256 4a71fa702ed6823ea913739122d4b405fbb0a139e688fff64540bb8bdcf22b73

mobile/android/app/src/main/AndroidManifest.xml

Android permissions, application/activity identity, OAuth intent and notification metadata.

3844 bytes; 71 lines; SHA-256 ccc44d063a86e685264c69fa01e4c5e5fdcc8faac58c778dda774b8ddebb9922

mobile/android/app/src/main/kotlin/com/linkdin/linkdin_mobile/MainActivity.kt

Android Flutter host and native notification channel/platform integration.

6722 bytes; 132 lines; SHA-256 89a8d324ad3ada38b3eca59de78088c27820150e869b8c49b8546f233f5ba2fd

Declared symbols: MainActivity

mobile/android/app/src/main/res/drawable-v21/launch_background.xml

Android launch/splash background drawable for this resource variant.

450 bytes; 12 lines; SHA-256 dca312ec77de83e43ef70a825c299b51451247286c29167d62f19165750b8793

mobile/android/app/src/main/res/drawable/ic_notification.xml

Android monochrome notification status-bar icon vector.

393 bytes; 7 lines; SHA-256 e5eb03b94a3834ea9b9cc7ee92c6e12b3492fbe2ec054f4827169a526b62d384

mobile/android/app/src/main/res/drawable/launch_background.xml

Android launch/splash background drawable for this resource variant.

446 bytes; 12 lines; SHA-256 2df60e2cfbee873ce2858088cf003e6b93498f2f568476da437610467ea1a9d7

mobile/android/app/src/main/res/mipmap-hdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

544 bytes; SHA-256 6a7c8f0d703e3682108f9662f813302236240d3f8f638bb391e32bfb96055fef

mobile/android/app/src/main/res/mipmap-mdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

442 bytes; SHA-256 c7c0c0189145e4e32a401c61c9bdc615754b0264e7afae24e834bb81049eaf81

mobile/android/app/src/main/res/mipmap-xhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

721 bytes; SHA-256 e14aa40904929bf313fded22cf7e7ffcbf1d1aac4263b5ef1be8bfce650397aa

mobile/android/app/src/main/res/mipmap-xxhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

1031 bytes; SHA-256 4d470bf22d5c17d84edc5f82516d1ba8a1c09559cd761cefb792f86d9f52b540

mobile/android/app/src/main/res/mipmap-xxxhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

1443 bytes; SHA-256 3c34e1f298d0c9ea3455d46db6b7759c8211a49e9ec6e44b635fc5c87dfb4180

mobile/android/app/src/main/res/values-night/styles.xml

Android startup/normal activity theme for dark mode.

1013 bytes; 18 lines; SHA-256 ea763597dc1a84c8034251caee98d7753e0fbf57340ffc94677427de4b537516

mobile/android/app/src/main/res/values/styles.xml

Android startup/normal activity theme for default mode.

1014 bytes; 18 lines; SHA-256 cca15a99b59380a548bf6a890f7ca5380ee509b1f9bbb2f5f9ec3589fa25c2f7

mobile/android/app/src/profile/AndroidManifest.xml

Android profile build manifest overlay and permissions.

385 bytes; 7 lines; SHA-256 b01a4541a8144c15bc617bab7eb267c99fa1476368fbbda5a12cdbf4e316a34c

mobile/android/build.gradle.kts

Android build/toolchain configuration: build.gradle.kts; controls project build and plugin setup.

561 bytes; 24 lines; SHA-256 218f400e3fff31c9c986a2535dfb974560e1b4d33cc27b7c1fee96a2b7e44454

mobile/android/gradle.properties

Android build/toolchain configuration: gradle.properties; controls project build and plugin setup.

306 bytes; 6 lines; SHA-256 7714698de712a7872e371f0dbae626c255fc83ac1c15e52e7cd9fcaa241b5092

mobile/android/gradle/wrapper/gradle-wrapper.properties

Android build/toolchain configuration: gradle-wrapper.properties; controls Gradle distribution bootstrap.

207 bytes; 5 lines; SHA-256 670071e5c2e25f86f82bc9db52f5d8d7c8f7b1788686a9d4c967753c69d9a2b4

mobile/android/settings.gradle.kts

Android build/toolchain configuration: settings.gradle.kts; controls project build and plugin setup.

999 bytes; 29 lines; SHA-256 2ed245d2e8ac9bc1634685b970772f0167e5c43471dad447deee5b2636f92cc1

mobile/assets/fonts/BarlowCondensed-Bold.ttf

Bundled BarlowCondensed-Bold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

109912 bytes; SHA-256 e476562ec9c1e16cf16475895b511f08c804f438cc9a9f80a44ea50a0eeb5b65

mobile/assets/fonts/BarlowCondensed-Medium.ttf

Bundled BarlowCondensed-Medium font asset used by Flutter typography; see pubspec.yaml and theme.dart.

103360 bytes; SHA-256 262bd143292ce479ee0cd09a42b47ab173fca8e9c6eb5ed0b5c8a845bc371d17

mobile/assets/fonts/BarlowCondensed-SemiBold.ttf

Bundled BarlowCondensed-SemiBold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

109428 bytes; SHA-256 7b619d14bc2327509a9ef32b0890f709626f7ecc9ff61191c2a4314c5499d2d9

mobile/assets/fonts/IBMPlexMono-Bold.ttf

Bundled IBMPlexMono-Bold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

137784 bytes; SHA-256 ac27abd6450a64dd94467580a02fe6235156d5b92f2926ebbc8e7489df64e0be

mobile/assets/fonts/IBMPlexMono-Regular.ttf

Bundled IBMPlexMono-Regular font asset used by Flutter typography; see pubspec.yaml and theme.dart.

135580 bytes; SHA-256 6a3412f058c7d8dfd9170c41e85ade48e5156ecb89356110ca57a0a27734af46

mobile/assets/fonts/IBMPlexMono-SemiBold.ttf

Bundled IBMPlexMono-SemiBold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

140216 bytes; SHA-256 d3c38e55c78f5b0f28009fddba4834ec503278936a5986032424c9bd2d23aa46

mobile/assets/fonts/IBMPlexSans.ttf

Bundled IBMPlexSans font asset used by Flutter typography; see pubspec.yaml and theme.dart.

537244 bytes; SHA-256 3b031aa4216174205bd8471f88a49b91f093169e9e87bd5262242bc5967fe2e3

mobile/assets/fonts/OFL.txt

Bundled font license terms.

4456 bytes; 93 lines; SHA-256 7e6b2818edbd8f6a01ae80641cc8f16a51080d08fb4e532be3a0b6f74adb07da

mobile/assets/fonts/README.md

Directory-specific usage, asset provenance or platform instructions.

958 bytes; 19 lines; SHA-256 efaee9d08cc553074bbaf38883b4ee807cdbdae458421498a0c35244a5707ad0

mobile/lib/android_notifications.dart

Android notification platform-channel helpers and payload handling.

2135 bytes; 63 lines; SHA-256 12c3dc4700f7e96e1de79319f2169b8308223577686dfa2c821c928573b538bf

Imports: package:firebase_messaging/firebase_messaging.dart, package:flutter/foundation.dart, package:flutter/services.dart

mobile/lib/api/client.dart

Authenticated JSON/multipart transport, secure session/pending flow storage, timeout and reconnect handling.

15857 bytes; 422 lines; SHA-256 6d958b6a74ceb1674d7177f1827a8c13931a44b82f30910b46704980ac0a0949

Declared symbols: ApiException, ApiClient

Imports: dart:async, dart:convert, package:flutter_secure_storage/flutter_secure_storage.dart, package:http/http.dart, package:http_parser/http_parser.dart, package:shared_preferences/shared_preferences.dart

mobile/lib/api/models.dart

Dart JSON response models used by app state and screens.

27266 bytes; 848 lines; SHA-256 ff8b5f29881975cbc61332fa33a3b4f1de20aa4e2dcd475451755b1bfc5e726c

Declared symbols: StyleConfig, SignatureConfig, CategoryInfo, StylePreset, Agent, Account, Post, PostSlot, TimelineEntry, SchedulerHealth, SlotLimits, Budget, Rejection, LlmUsage, AppStatus

Imports: nothing has been running since Tuesday

mobile/lib/auth_return.dart

Desktop loopback sign-in return listener and cancellation.

3374 bytes; 94 lines; SHA-256 7f6660d7ddd77fdc07be1d40ea4a2bbfc77e6750cfec2465affab2e37285ab4f

Declared symbols: LoopbackAuthReturn

Imports: dart:async, dart:convert, dart:io, dart:math, package:flutter/foundation.dart, package:flutter/services.dart

mobile/lib/desktop_notifications.dart

Desktop notification capability/handling abstraction.

3274 bytes; 101 lines; SHA-256 6ea0f753586e6ef82fd0a108211666834e250060a3f4d2d74e103582e597bf5b

Imports: dart:async, package:flutter_local_notifications_windows/flutter_local_notifications_windows.dart, package:shared_preferences/shared_preferences.dart, state/app_state.dart

mobile/lib/main.dart

Flutter startup, Firebase/session bootstrap, provider and authenticated/onboarding root routing.

7141 bytes; 220 lines; SHA-256 92e5bb7bcff35d1cb0cab0cc2662f0ddcb25095d6ff5fb7b5b91f93fd1345941

Declared symbols: LinkdInApp, _SignedIn, _SignedInState, _Root, _NativeRoot, _NativeRootState

Imports: api/client.dart, package:firebase_core/firebase_core.dart, package:flutter/material.dart, package:flutter/services.dart, package:provider/provider.dart, push.dart, screens/home_screen.dart, screens/onboarding_screen.dart, screens/welcome_screen.dart, state/app_state.dart, theme.dart, widgets/experience.dart

mobile/lib/main_preview.dart

Deterministic mock-data visual-preview entry point for UI scenarios.

14806 bytes; 423 lines; SHA-256 ef8806c54d3e7f1ec7f7568a90d8c73efef1cd9e053099378b78c899febf43f7

Declared symbols: _Preview, _PreviewState

Imports: api/client.dart, api/models.dart, package:flutter/material.dart, package:flutter/services.dart, package:provider/provider.dart, screens/composer_screen.dart, screens/home_screen.dart, screens/settings_screen.dart, screens/timetable_screen.dart, screens/voice_screen.dart, state/app_state.dart, theme.dart

mobile/lib/push.dart

Firebase token registration, permission, foreground/background and notification-tap integration.

7106 bytes; 194 lines; SHA-256 9417ebff5e43a6bd2070ded818265c5e025b9566f01d0d4e690b2ad5472a43a2

Declared symbols: PushListener, _PushListenerState

Imports: android_notifications.dart, dart:async, desktop_notifications.dart, package:firebase_messaging/firebase_messaging.dart, package:flutter/foundation.dart, package:flutter/material.dart, package:provider/provider.dart, state/app_state.dart

mobile/lib/screens/archive_screen.dart

Published-post history pagination and follow-up entry points.

8296 bytes; 269 lines; SHA-256 ad9865b00517844c9cf149a5b636c3248535ccf81444b30c020d3b0e77bb91cb

Declared symbols: _Shelf, ArchiveScreen, _ArchiveScreenState, _ShelfBar, _PassedOver

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/draft_card.dart, ../widgets/editorial.dart, ../widgets/form_select.dart, ../widgets/primitives.dart, draft_commands.dart, package:flutter/material.dart, package:provider/provider.dart, package:url_launcher/url_launcher.dart

mobile/lib/screens/composer_screen.dart

Manual/edit/follow-up composer with tags, images, rewriting, preview and save/send controls.

40598 bytes; 1171 lines; SHA-256 2f7a2b49ad4707ba2c9322f52aff51e6953a7211e0482372e733d200abb92c0d

Declared symbols: ComposerScreen, _ComposerScreenState, _CommitBar, _PreviewSheet, _Hashtags, _Variant, _Attachments

Imports: ../api/client.dart, ../state/app_state.dart, ../theme.dart, ../widgets/draft_card.dart, ../widgets/editorial.dart, ../widgets/experience.dart, ../widgets/primitives.dart, dart:convert, dart:io, dart:math, package:flutter/material.dart, package:image_picker/image_picker.dart, package:provider/provider.dart

mobile/lib/screens/delete_account_screen.dart

Account deletion explanation and explicit confirmation interface.

3884 bytes; 107 lines; SHA-256 f15d0c8c812249028e3c6ebfdf19160230d68ae91f14c0f728ceff482a27d84d

Declared symbols: DeleteAccountScreen, _DeleteAccountScreenState

Imports: ../state/app_state.dart, ../theme.dart, ../widgets/experience.dart, package:flutter/material.dart, package:provider/provider.dart, package:url_launcher/url_launcher.dart

mobile/lib/screens/delivery_settings_screen.dart

Delivery-time and notification-preference interface.

3251 bytes; 93 lines; SHA-256 a10dbe4adb5f6d70a1507d8eaf12b402ba92fcdc69d976cfa3ea5141148e0a7f

Declared symbols: DeliverySettingsScreen, _DeliverySettingsScreenState

Imports: ../desktop_notifications.dart, ../push.dart, ../state/app_state.dart, ../widgets/editorial.dart, ../widgets/experience.dart, package:flutter/foundation.dart, package:flutter/material.dart, package:provider/provider.dart

mobile/lib/screens/desk_screen.dart

Actionable draft workspace, preparation feedback and publication outcome controls.

15829 bytes; 461 lines; SHA-256 a4ad50fb227bd672ccec4212ee821f937f5e7d9f59e3fd38d94523f056d0087d

Declared symbols: DeskScreen, _Masthead, _Waiting

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/day_rail.dart, ../widgets/draft_card.dart, ../widgets/editorial.dart, ../widgets/preparation_progress.dart, ../widgets/primitives.dart, draft_commands.dart, package:flutter/material.dart, package:provider/provider.dart, settings_screen.dart

mobile/lib/screens/draft_commands.dart

Shared UI commands for draft review, editing, scheduling and publication actions.

11770 bytes; 326 lines; SHA-256 ef1cbbade8d91a68cfcfca37602fefd0e9a54bcb60dd3976f3229b4589d0c7ec

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/draft_card.dart, composer_screen.dart, package:flutter/material.dart, package:provider/provider.dart

mobile/lib/screens/gate_screen.dart

Legacy server/password installation sign-in and connection settings.

5537 bytes; 152 lines; SHA-256 67f1462e1df59e12c727f3be25e3c8115df056bf8197ddacbae9f41032bb30ee

Declared symbols: GateScreen, _GateScreenState

Imports: ../api/client.dart, ../state/app_state.dart, ../theme.dart, ../widgets/primitives.dart, package:flutter/material.dart, package:provider/provider.dart

mobile/lib/screens/home_screen.dart

Home/My posts/Me navigation shell, lifecycle reconnect and composition/notification routing.

11108 bytes; 327 lines; SHA-256 64012dd3eb19b7c52f0a78386c0713286be9396db5a06a1cee2f972a1fde2ea8

Declared symbols: HomeScreen, _HomeScreenState, _PostsWorkspace, _PostsWorkspaceState, _PostsIcon, _SettingsIcon

Imports: ../state/app_state.dart, ../theme.dart, ../widgets/experience.dart, ../widgets/form_select.dart, ../widgets/profile_card.dart, archive_screen.dart, composer_screen.dart, dart:async, desk_screen.dart, package:flutter/material.dart, package:provider/provider.dart, settings_screen.dart, timetable_screen.dart, today_screen.dart, voice_screen.dart

mobile/lib/screens/onboarding_screen.dart

Resumable first-run subject, voice, sample acceptance and delivery setup.

24982 bytes; 657 lines; SHA-256 29d4e46b7b9c4d1d2412f186506ce5424ba9676e77b273ef847586ddbcce4009

Declared symbols: OnboardingScreen, _OnboardingScreenState

Imports: ../api/client.dart, ../api/models.dart, ../push.dart, ../state/app_state.dart, ../theme.dart, ../widgets/editorial.dart, ../widgets/experience.dart, ../widgets/form_select.dart, ../widgets/writing_preferences.dart, dart:async, package:flutter/material.dart, package:flutter_timezone/flutter_timezone.dart, package:provider/provider.dart, package:url_launcher/url_launcher.dart

mobile/lib/screens/settings_screen.dart

Account/settings navigation, connection health, pause and operational controls.

20305 bytes; 569 lines; SHA-256 b0480f340177707aa9c1b04cfbf42835734ff97923140bb580e462ec7784670b

Declared symbols: SettingsPage, _SettingsPageState, SettingsScreen, TopicsScreen, LinkedInScreen, _LinkedInScreenState, DiagnosticsScreen

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/experience.dart, ../widgets/form_select.dart, ../widgets/personal_topics.dart, ../widgets/primitives.dart, ../widgets/profile_card.dart, delete_account_screen.dart, delivery_settings_screen.dart, package:flutter/material.dart, package:provider/provider.dart, package:url_launcher/url_launcher.dart, timetable_screen.dart, voice_screen.dart

mobile/lib/screens/timetable_screen.dart

Recurring posting-slot editor with days, lead time and automatic-publication controls.

23468 bytes; 671 lines; SHA-256 660eadf7d0fb1876b0111741a79ad0482097e013cf25a6db2c1560711976509a

Declared symbols: TimetableScreen, _SlotCard, _DayPicker, _LeadRow, _Step, _CapStepper, _Budget

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/form_select.dart, ../widgets/primitives.dart, package:flutter/material.dart, package:provider/provider.dart, settings_screen.dart

mobile/lib/screens/today_screen.dart

Native account daily timetable and preparation progress/ready-post presentation.

10336 bytes; 299 lines; SHA-256 0c86316e5859ec5c9a7db9ae24b8ddf163b2b63b317c3fbe5798afe58fe176b3

Declared symbols: TodayScreen, _TodayScreenState

Imports: ../api/client.dart, ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/draft_card.dart, ../widgets/editorial.dart, ../widgets/preparation_progress.dart, composer_screen.dart, dart:async, draft_commands.dart, package:flutter/material.dart, package:provider/provider.dart, timetable_screen.dart

mobile/lib/screens/voice_screen.dart

Writing preferences, samples, voice preview and persistence interface.

22732 bytes; 681 lines; SHA-256 f648cd1adf91d1289fc3fdbad0e07f3ffcddde08c0f9cdb451f6f976146b4acf

Declared symbols: VoiceScreen, _VoiceScreenState, _ActionBar, _WritingSamples, _WritingSamplesState, _Sample, _Stepper, _StepButton, _Preview

Imports: ../api/models.dart, ../state/app_state.dart, ../theme.dart, ../widgets/editorial.dart, ../widgets/experience.dart, ../widgets/form_select.dart, ../widgets/primitives.dart, ../widgets/unsaved_changes_guard.dart, ../widgets/writing_preferences.dart, package:flutter/material.dart, package:provider/provider.dart

mobile/lib/screens/welcome_screen.dart

Social sign-in, provider capabilities, secure pending-flow resume and browser return.

11292 bytes; 309 lines; SHA-256 89718ee25488c517964e3cf83a7b50f6ce252bb04d3ab2ff398e3fdc3d29ab29

Declared symbols: WelcomeScreen, _WelcomeScreenState, _WelcomeIntro

Imports: ../api/client.dart, ../auth_return.dart, ../state/app_state.dart, ../theme.dart, ../widgets/editorial.dart, ../widgets/experience.dart, dart:async, dart:convert, dart:math, gate_screen.dart, package:flutter/material.dart, package:provider/provider.dart, package:url_launcher/url_launcher.dart

mobile/lib/state/app_state.dart

Observable account/status state, refresh, preparation and cross-screen navigation commands.

30195 bytes; 799 lines; SHA-256 414037dd417152d923df5ff14fac827a4a06210d8e0d61bd0aab080e1d64509c

Declared symbols: AuthPhase, AppState

Imports: ../api/client.dart, ../api/models.dart, ../auth_return.dart, ../push.dart, asked once, dart:async, package:flutter/foundation.dart

mobile/lib/theme.dart

ByLine Flutter colors, typography, layout tokens and system chrome style.

16460 bytes; 498 lines; SHA-256 a6e246e5205dc53aaec045b842be1dc91f04a0b0158a57ae4ae3942440e6f40f

Imports: package:flutter/foundation.dart, package:flutter/material.dart, package:flutter/services.dart

mobile/lib/widgets/day_rail.dart

Day/timetable visual rail and occurrence selection presentation.

5946 bytes; 178 lines; SHA-256 7b18a53d54b6e925ed6f688934d27b6d4a4104a1453c1936cd1132584043a717

Declared symbols: RailStop, DayRail, _Stop

Imports: ../api/models.dart, ../theme.dart, package:flutter/material.dart, primitives.dart

mobile/lib/widgets/draft_card.dart

Reusable draft summary, source/status and associated actions.

37473 bytes; 1071 lines; SHA-256 4846834196544a0f2e8ce244c44cda814ada1d3a994d69138d3b12ba70d68abf

Declared symbols: CountdownTicker, FoldedCopy, _FoldedCopyState, FoldRule, _DashedCut, _DashPainter, ClockStrip, _ClockStripState, HeroClock, _HeroClockState, OfferATime, DraftActions, DraftCard, _SlugLine, _Judgement, _Actions, _MenuRow, _SwipeHint

Imports: ../api/models.dart, ../theme.dart, dart:async, package:flutter/material.dart, package:url_launcher/url_launcher.dart, primitives.dart

mobile/lib/widgets/editorial.dart

Brand/editorial artwork and visual components.

10179 bytes; 342 lines; SHA-256 4fea92f41826db9b76c7d9214a7ea0a090312277ea8b5a25746f0e67d7fc8455

Declared symbols: StudioScene, StudioArt, StudioBanner, WritingPrompt, _StudioPainter

Imports: ../theme.dart, dart:math, package:flutter/material.dart

mobile/lib/widgets/experience.dart

Shared page/reading-width and experience layout components.

9276 bytes; 287 lines; SHA-256 2154f66b817f809876e165b958359fa8896e4e90d42f19d766827df74c15ed69

Declared symbols: ReadingWidth, PageSurface, ByLineMark, TimeChoice, ZoneField, _ZoneFieldState, SetupFrame

Imports: ../theme.dart, package:flutter/material.dart

mobile/lib/widgets/form_select.dart

Reusable accessible-to-Flutter selection/form controls.

7233 bytes; 211 lines; SHA-256 cd9d51490490e01ffb294169af652cb9e0a10940cdaae29f735f70b8c463d422

Declared symbols: FormSelect, MultiSelectField, _SelectionDialog, _SelectionDialogState

Imports: ../theme.dart, package:flutter/material.dart

mobile/lib/widgets/personal_topics.dart

Subject catalogue browsing/search and personalized topic selection.

4672 bytes; 161 lines; SHA-256 938f259b8b681dfa215aa1c4b259b1a6832d0f3003407e852fe00cae37df2e5c

Declared symbols: PersonalTopics, _PersonalTopicsState

Imports: ../state/app_state.dart, ../theme.dart, editorial.dart, form_select.dart, package:flutter/material.dart, package:provider/provider.dart, unsaved_changes_guard.dart

mobile/lib/widgets/preparation_progress.dart

Visible multi-stage draft preparation and failure feedback.

3789 bytes; 105 lines; SHA-256 faad86f533450a20d0e3912440fb48260f7d4980bb9cfaef5176dcd67e37a595

Declared symbols: PreparationProgress

Imports: ../theme.dart, package:flutter/material.dart

mobile/lib/widgets/primitives.dart

Basic reusable typography, spacing, status and interaction widgets.

24808 bytes; 798 lines; SHA-256 606d0f6d20db10cdca9c513f4f199e6c41ad15e27b52cb3d0030478eecb064c1

Declared symbols: Tone, SectionRule, ObjectCard, Field, Slug, Meter, Notice, ConditionStrip, ErrorNote, Empty, Choice, PickChip, SwitchRow, _SwitchRowState, Readout, NavRow, Disclosure, _DisclosureState, WriteButton

Imports: ../theme.dart, editorial.dart, form_select.dart, package:flutter/material.dart

mobile/lib/widgets/profile_card.dart

Profile/account summary visual component.

3893 bytes; 126 lines; SHA-256 83b5ef19782461e647e79f060a92cb80d679a256f9f49a240e5d3062b861e773

Declared symbols: ProfileCard, FormSection

Imports: ../state/app_state.dart, ../theme.dart, editorial.dart, package:flutter/material.dart, package:provider/provider.dart

mobile/lib/widgets/unsaved_changes_guard.dart

Prevents silently leaving a screen with unsaved edits.

1670 bytes; 54 lines; SHA-256 d39005dda96ce5074d44f89f4cc3b6a0fb675fa6233d68e1f58d15e00d76e33d

Declared symbols: UnsavedChangesGuard, _UnsavedChangesGuardState

Imports: package:flutter/material.dart

mobile/lib/widgets/writing_preferences.dart

Shared controls for structure, tone, word range, hashtags and voice constraints.

3326 bytes; 95 lines; SHA-256 a224daed5ad12570d91a53b1168e17c14455516b56fae1a9ffc349e0771ac1d1

Declared symbols: WritingPreferences

Imports: ../api/models.dart, form_select.dart, package:flutter/material.dart

mobile/pubspec.lock

Exact resolved Dart/Flutter dependency versions and source checksums.

27257 bytes; 874 lines; SHA-256 a311101d94cfb879ed67b17e8d0f3bb131100f62b851b3d3691ed348e77cbb1b

mobile/pubspec.yaml

Flutter package metadata, version, Dart constraint, direct plugins, font and asset declarations.

6833 bytes; 150 lines; SHA-256 f3721aeebae92d26228aa71c02dcfac906709f7231c3ca8196805452a14f28b7

mobile/test/android_notifications_test.dart

Flutter widget/transport regression suite: android notifications. Exact test titles and assertions appear below.

2877 bytes; 84 lines; SHA-256 e648cc6f68cbc77c6fdbbc6acb008656f743f11516ebc362609919854cd30029

Imports: package:firebase_messaging/firebase_messaging.dart, package:flutter/foundation.dart, package:flutter/services.dart, package:flutter_test/flutter_test.dart, package:linkdin_mobile/android_notifications.dart

mobile/test/api_test.dart

Flutter widget/transport regression suite: api. Exact test titles and assertions appear below.

26684 bytes; 772 lines; SHA-256 73eb694293cc96af7780eb47ec6519f49f01ba5fb75fed94a4cf35df29bc2d85

Declared symbols: _Call

Imports: dart:convert, dart:io, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/state/app_state.dart, package:shared_preferences/shared_preferences.dart

mobile/test/auth_return_test.dart

Flutter widget/transport regression suite: auth return. Exact test titles and assertions appear below.

1478 bytes; 45 lines; SHA-256 b43de1f21702e10081eafa84ac165e43c157c3fdac51b0d04b46427f2c2ddfa3

Imports: dart:io, package:flutter_test/flutter_test.dart, package:linkdin_mobile/auth_return.dart

mobile/test/catalogue_voice_test.dart

Flutter widget/transport regression suite: catalogue voice. Exact test titles and assertions appear below.

8473 bytes; 235 lines; SHA-256 b049d8c6664db5a1ceb3d845bf1243c232d7fc7da39864e5cd6fac99ae796746

Imports: dart:convert, dart:io, dart:ui, onboarding_test.dart, package:flutter/material.dart, package:flutter/rendering.dart, package:flutter/services.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/screens/onboarding_screen.dart, package:linkdin_mobile/state/app_state.dart, package:linkdin_mobile/theme.dart, package:linkdin_mobile/widgets/form_select.dart,

package:linkdin_mobile/widgets/writing_preferences.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart

mobile/test/daily_preparation_test.dart

Flutter widget/transport regression suite: daily preparation. Exact test titles and assertions appear below.

9440 bytes; 272 lines; SHA-256 329dd2fbcc2bf6bf65dab6e62aecfc4ee46eb3e9c79afa957a0ec779c2cca8e1

Imports: dart:convert, package:flutter/material.dart, package:flutter/services.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/screens/home_screen.dart, package:linkdin_mobile/screens/today_screen.dart, package:linkdin_mobile/state/app_state.dart, package:linkdin_mobile/theme.dart, package:linkdin_mobile/widgets/form_select.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart, screens_test.dart

mobile/test/onboarding_test.dart

Flutter widget/transport regression suite: onboarding. Exact test titles and assertions appear below.

11711 bytes; 318 lines; SHA-256 213ae76ff4a77d9709fe3969836fcf60353cf54f50c101270a9de97072ddadf6

Imports: dart:convert, package:flutter/material.dart, package:flutter/services.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/main.dart, package:linkdin_mobile/screens/onboarding_screen.dart, package:linkdin_mobile/screens/today_screen.dart, package:linkdin_mobile/state/app_state.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart, screens_test.dart

mobile/test/reconnect_test.dart

Flutter widget/transport regression suite: reconnect. Exact test titles and assertions appear below.

3772 bytes; 111 lines; SHA-256 433f82fdfe6b99135a8cbcaadd1b4394824fa35a9a60ddb64aca596be2f7571f

Imports: dart:convert, package:flutter/material.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/screens/home_screen.dart, package:linkdin_mobile/state/app_state.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart, screens_test.dart

mobile/test/redesign_test.dart

Flutter widget/transport regression suite: redesign. Exact test titles and assertions appear below.

8260 bytes; 238 lines; SHA-256 cd9305c1d0e9cde1549f6e56bd396a8bb6e3519187851397b27f08386d94801b

Imports: dart:convert, dart:io, dart:ui, onboarding_test.dart, package:flutter/material.dart, package:flutter/rendering.dart, package:flutter/services.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/screens/delivery_settings_screen.dart, package:linkdin_mobile/screens/home_screen.dart, package:linkdin_mobile/screens/onboarding_screen.dart, package:linkdin_mobile/screens/settings_screen.dart, package:linkdin_mobile/screens/timetable_screen.dart, package:linkdin_mobile/screens/voice_screen.dart, package:linkdin_mobile/screens/welcome_screen.dart, package:linkdin_mobile/state/app_state.dart, package:linkdin_mobile/theme.dart, package:linkdin_mobile/widgets/experience.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart, screens_test.dart

mobile/test/screens_test.dart

Flutter widget/transport regression suite: screens. Exact test titles and assertions appear below.

39004 bytes; 1050 lines; SHA-256 cb0c7a643742c5e2c08ce596b72eb9032c6485996b7e2a8e1d11f2c2aae9abc5

Imports: dart:convert, package:flutter/material.dart, package:flutter_test/flutter_test.dart, package:http/http.dart, package:http/testing.dart, package:linkdin_mobile/api/client.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/screens/archive_screen.dart, package:linkdin_mobile/screens/composer_screen.dart, package:linkdin_mobile/screens/desk_screen.dart, package:linkdin_mobile/screens/gate_screen.dart, package:linkdin_mobile/screens/settings_screen.dart, package:linkdin_mobile/screens/timetable_screen.dart, package:linkdin_mobile/screens/voice_screen.dart, package:linkdin_mobile/state/app_state.dart, package:linkdin_mobile/theme.dart, package:linkdin_mobile/widgets/day_rail.dart, package:linkdin_mobile/widgets/form_select.dart, package:provider/provider.dart, package:shared_preferences/shared_preferences.dart

mobile/test/widget_test.dart

Flutter widget/transport regression suite: widget. Exact test titles and assertions appear below.

13608 bytes; 426 lines; SHA-256 7b0984fcaa4ae65025e428e31c1ccfc9d60b7b9ed837ba82f749ab4d63ea9562

Imports: package:flutter/material.dart, package:flutter_test/flutter_test.dart, package:linkdin_mobile/api/models.dart, package:linkdin_mobile/theme.dart, package:linkdin_mobile/widgets/draft_card.dart

mobile/web/favicon.png

Flutter web scaffold icon/branding asset.

917 bytes; SHA-256 7ab2525f4b86b65d3e4c70358a17e5a1aaf6f437f99cbcc046dad73d59bb9015

mobile/web/icons/Icon-192.png

Flutter web scaffold icon/branding asset.

5292 bytes; SHA-256 3dce99077602f70421c1c6b2a240bc9b83d64d86681d45f2154143310c980be3

mobile/web/icons/Icon-512.png

Flutter web scaffold icon/branding asset.

8252 bytes; SHA-256 baccb205ae45f0b421be1657259b4943ac40c95094ab877f3bcbe12cd544dcbe

mobile/web/icons/Icon-maskable-192.png

Flutter web scaffold icon/branding asset.

5594 bytes; SHA-256 d2c842e22a9f4ec9d996b23373a905c88d9a203b220c5c151885ad621f974b5c

mobile/web/icons/Icon-maskable-512.png

Flutter web scaffold icon/branding asset.

20998 bytes; SHA-256 6aee06cdcab6b2aef74b1734c4778f4421d2da100b0ff9e52b21b55240202929

mobile/web/index.html

Flutter web scaffold bootstrap document and application metadata.

1579 bytes; 46 lines; SHA-256 54dcca5fdebd8308f9f85e0dc4b0b937eda9539c7f5a54e9e56b188783551fa7

mobile/web/manifest.json

Flutter web scaffold bootstrap document and application metadata.

959 bytes; 35 lines; SHA-256 a32a34849ca62f07936f3806c555bd9c18008b1d33e54fe0085b694e1d2772c4

mobile/windows/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

308 bytes; 17 lines; SHA-256 955e3110cb16494ee76e1cd5df47e2c212309eb94a49a123fe87f718de413cb8

mobile/windows/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

4572 bytes; 112 lines; SHA-256 77a8dc026588db1ad66f090eeb2fe2d3e91285504f07e5bb9c23bd68c657a5a8

mobile/windows/flutter/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

3851 bytes; 109 lines; SHA-256 bd05e3268b2f246bcbafdb778165fe67a7bafdba04eb73599502563a67b8ae7e

mobile/windows/flutter/generated_plugin_registrant.cc

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

1051 bytes; 26 lines; SHA-256 5d88dbdb032d59c59e72e76fa12e177800f895d4f2e96c7145fe762449c693b2

mobile/windows/flutter/generated_plugin_registrant.h

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

302 bytes; 15 lines; SHA-256 dbc11635d7b1ba1887adf40df5b83d634e9c3ab0bee34510c71528bb4d73602a

mobile/windows/flutter/generated_plugins.cmake

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

902 bytes; 30 lines; SHA-256 558642bc4979856f3368a7754664853b9e3c5a835bdcca7e43eead6c55a60339

mobile/windows/runner/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

1836 bytes; 40 lines; SHA-256 d765fdd05f63ad099e585a2cced0cbff13ec3229b7de68c8681b2107db850089

mobile/windows/runner/Runner.rc

Windows Flutter host resource definition for Runner.

3174 bytes; 121 lines; SHA-256 e209205db69a9a4315d4406165b39313378d09829199485c562eefab2ad7ee04

mobile/windows/runner/flutter_window.cpp

Windows Flutter host implementation for flutter window.

3444 bytes; 99 lines; SHA-256 62e6f005c5dec7129b9c452548696d8d99d4fbe84d73dc30b403342d2872a0c8

mobile/windows/runner/flutter_window.h

Windows Flutter host header for flutter window.

1121 bytes; 36 lines; SHA-256 34748242b0a0a5b97e2b63294a384f18f7225c4cf5d8d52d6249e4d02a92880b

Declared symbols: FlutterWindow

mobile/windows/runner/main.cpp

Windows Flutter host implementation for main.

1302 bytes; 43 lines; SHA-256 b0d93d944335f04b22c1394d7d55d730c1933884bd8935448d7f7518e3341485

mobile/windows/runner/resource.h

Windows Flutter host header for resource.

448 bytes; 16 lines; SHA-256 d0e8bf7835468b4b6b1f8f0747f2e8f25c19841f2df2ac60aaa584ddae3aa7c6

mobile/windows/runner/resources/app_icon.ico

Windows Flutter host application icon for app icon.

33772 bytes; SHA-256 c098d3fc85cacff98b8e69811b48e9f0d852fcee278132d794411d978869cbf8

mobile/windows/runner/runner.exe.manifest

Windows Flutter host executable compatibility manifest for runner.exe.

616 bytes; 14 lines; SHA-256 639a56233fcd8cbcb8bbefcd93e4680ec2664f32d9acfb3d2ec1d8726a96e090

mobile/windows/runner/utils.cpp

Windows Flutter host implementation for utils.

2237 bytes; 69 lines; SHA-256 a128b67b9f3c2579e2ecef5b0dde2c33f222a097cdfe5da2a3067c73d1485b39

mobile/windows/runner/utils.h

Windows Flutter host header for utils.

691 bytes; 19 lines; SHA-256 832e246b6758253f89016fb0374b30791242e97ad950d27fc678b3d9feacfdc4

mobile/windows/runner/win32_window.cpp

Windows Flutter host implementation for win32 window.

8822 bytes; 288 lines; SHA-256 4e4f4dcf8e86ea6e097562cb3476039e693449bd8045367538afee579c017511

Declared symbols: WindowClassRegistrar

mobile/windows/runner/win32_window.h

Windows Flutter host header for win32 window.

3624 bytes; 102 lines; SHA-256 d154cf89ba85f820631a9b5bedacbe64fc5815e428fe6bc5da579ce649f69841

Declared symbols: Win32Window

next-env.d.ts

Next.js generated TypeScript framework declarations reference.

275 bytes; 6 lines; SHA-256 89e7b0f564d74669040e17280f17fdd383b30389af36d0e2c4e54eb9db6089c2

next.config.ts

Next.js build/runtime configuration and output directory settings.

2686 bytes; 54 lines; SHA-256 f69ee3beea2e641f3bf55b30a5bdaf07b5fadd248ef5ebc9854fdccc7ed29109

Imports: next

output/pdf/ByLine-Complete-Project-Handbook.pdf

Condensed human-readable handbook with every-file catalogue and linked exhaustive source reference.

generated bytes

package-lock.json

Exact npm dependency resolution tree, integrity hashes and platform packages for reproducible installation.

73773 bytes; 2190 lines; SHA-256 e03b6436092ea4b65b0560830ccf9953ed584a26f5a73020c6b0bee74821b31c

package.json

npm package identity, direct dependency version ranges and executable task commands for the original backend.

1819 bytes; 46 lines; SHA-256 73107bab58a2737324b1fc9cdb9711e3bb884eaa38cb47547428ac6f83e73f07

Imports: crypto

releases/android/README.md

Phone download/install/update instructions and release provenance.

2828 bytes; 53 lines; SHA-256 dc6713c7d6f569a83d38783ba460fee3657189f3f59fe19cd13e43df7250e821

releases/android/SHA256SUMS

SHA-256 verification line for the exact downloadable APK.

84 bytes; 1 lines; SHA-256 d88b6f53253958e3108636aaba6ec4ae20a9ad0f044e58467074cc702b2ee131

releases/android/byline-latest.apk

Signed universal Android cloud release ready for phone download and installation.

56892335 bytes; SHA-256 8f0b84d52aaad072c4751128bfb3ba98c87766fd8a9b0385bf8654591769c831

releases/android/release.json

Verified downloadable APK version, identity, SDK, ABI, signing and checksum metadata.

1210 bytes; 29 lines; SHA-256 cd76718b1b588eca2710709ea3ee0c345d3cfc00dcfeea240a03443db415a9dc

reports/ByLine-UX-redesign-plan.md

Dated project evidence, plan or verification record: UX redesign plan. Historical claims retain their original date.

10728 bytes; 72 lines; SHA-256 cfdd8b093309212215b48241d4d14431bb8fc8f61a775b8732b7bfe5b937c622

reports/ByLine-UX-v2-plan.md

Dated project evidence, plan or verification record: UX v2 plan. Historical claims retain their original date.

4749 bytes; 31 lines; SHA-256 06ac29ddd6666f30a37f23be90e828e160904f20cdc8178c34e1bb060552da27

reports/ByLine-build-status-2026-09-06.md

Dated project evidence, plan or verification record: build status 2026 09 06. Historical claims retain their original date.

6927 bytes; 48 lines; SHA-256 ea09ee3a48213f903d9ae3e53bf8546cd6aa7dc741d1b7703014a84e3d3daca8

reports/ByLine-finance-preparation-fix-2026-09-06.md

Dated project evidence, plan or verification record: finance preparation fix 2026 09 06. Historical claims retain their original date.

2578 bytes; 47 lines; SHA-256 8a28c2cf7459ef6f2d834aefcb7c19aad5e86f7a253208624710fcdb3e5bbe06

reports/ByLine-functional-gap-audit-2026-09-06.md

Dated project evidence, plan or verification record: functional gap audit 2026 09 06. Historical claims retain their original date.

11385 bytes; 77 lines; SHA-256 412d273c73dd361cdf1bac18ac7f95b8e4f1eda09c84bd19f915d1862d25d052

reports/ByLine-illustrated-design-plan.md

Dated project evidence, plan or verification record: illustrated design plan. Historical claims retain their original date.

2049 bytes; 17 lines; SHA-256 1d896f430375a8ec7976d7d523f7c0b30ab9d865989b0d762f48af7e992ccb93

reports/ByLine-layout-and-workflow-review.md

Dated project evidence, plan or verification record: layout and workflow review. Historical claims retain their original date.

2413 bytes; 18 lines; SHA-256 da9ae5c980ab541d8be07d477c835aa44bee69602783c62018cda21c92695ffc

reports/ByLine-phone-verification-2026-10-27.md

Dated project evidence, plan or verification record: phone verification 2026 10 27. Historical claims retain their original date.

2964 bytes; 37 lines; SHA-256 180eee72583e9651b0f941deadc6f442f637bdfd3ad9733b0c6adb47303afb56

reports/ByLine-preparation-progress-2026-09-06.md

Dated project evidence, plan or verification record: preparation progress 2026 09 06. Historical claims retain their original date.

1564 bytes; 25 lines; SHA-256 0d95a98f9e1536512bc809623950f7f15c59d83359b6e1a300b48ead1fe07be3

reports/ByLine-product-readiness-and-client-onboarding.md

Dated project evidence, plan or verification record: product readiness and client onboarding. Historical claims retain their original date.

52967 bytes; 418 lines; SHA-256 5b7bc3b42662129ad903357731aee093934faae2a44eb9b8e3f4a34d2e60d420

reports/ByLine-professional-polish-2026-09-07.md

Dated project evidence, plan or verification record: professional polish 2026 09 07. Historical claims retain their original date.

3763 bytes; 28 lines; SHA-256 402d413d1b418cce27ab993666ae244f94a0f3dd5b76a90a05027792facf02bb

reports/ByLine-project-state-2026-10-27.md

Dated project evidence, plan or verification record: project state 2026 10 27. Historical claims retain their original date.

6109 bytes; 49 lines; SHA-256 77a188592a9bce5895ce8a8deccc6b0f428efb20a28208d6e54289f01045ae18

reports/ByLine-release-verification-2026-11-05.md

Dated project evidence, plan or verification record: release verification 2026 11 05. Historical claims retain their original date.

5756 bytes; 46 lines; SHA-256 87721b9e981a30a64210323d79231c9cd11b6eadf8687fd7473b5f8d82a10bff

reports/ByLine-release-verification-2026-11-07.md

Dated project evidence, plan or verification record: release verification 2026 11 07. Historical claims retain their original date.

5282 bytes; 88 lines; SHA-256 3a8468ebdcb1e4f844ac2751d315e55400d6f097efe439902ad60bc7c0917b72

reports/ByLine-unified-timetable-plan.md

Dated project evidence, plan or verification record: unified timetable plan. Historical claims retain their original date.

3652 bytes; 56 lines; SHA-256 868488e25698d5d3826eaf918ff783bda9ed65a0665b36506c0ce38d7960a625

reports/ByLine-zero-cost-cloud-plan.md

Dated project evidence, plan or verification record: zero cost cloud plan. Historical claims retain their original date.

5233 bytes; 35 lines; SHA-256 84b885bb6178584bc34d916f88609684a20d529d7a082bae8d993aea56bd78e7

reports/ui-preview/daily-1280.png

Historical UI preview of daily at viewport width 1280 pixels.

112476 bytes; SHA-256 c244d45a2d99d4088c00d80e5eae0e0721f1bf44fd472b79a5b6c2e432cc3abb

reports/ui-preview/daily-390.png

Historical UI preview of daily at viewport width 390 pixels.

53001 bytes; SHA-256 9a3ef73b74bad4b4cc6d0c64889e12e5ee173c24f337544fadc7c32f3071e3c4

reports/ui-preview/daily-900.png

Historical UI preview of daily at viewport width 900 pixels.

91684 bytes; SHA-256 ddb43d529940a7898fdd8427a4d9cfa695ee9a9d049b4ced8fde3feee6ad0104

reports/ui-preview/delivery-1280.png

Historical UI preview of delivery at viewport width 1280 pixels.

32795 bytes; SHA-256 f8882aa762738d399e33c6ef600ac303cff720a92162c8ac06a4ba8e1bc52d1c

reports/ui-preview/delivery-390.png

Historical UI preview of delivery at viewport width 390 pixels.

27819 bytes; SHA-256 805ff1cccb3866cd174d5bd08bd7afa913f7eee9dd95804e6204305a0044dbfd

reports/ui-preview/delivery-900.png

Historical UI preview of delivery at viewport width 900 pixels.

30916 bytes; SHA-256 fecc9ba1ef5335e29473c3c74ae8dd2cbb50a3160174798e26123875de067e59

reports/ui-preview/interests-onboarding-1280.png

Historical UI preview of interests-onboarding at viewport width 1280 pixels.

56870 bytes; SHA-256 8733319755e636143026ad325efb8da72f5da32bac963c9d0dbdffe6a28ab5ef

reports/ui-preview/interests-onboarding-390.png

Historical UI preview of interests-onboarding at viewport width 390 pixels.

29136 bytes; SHA-256 bfcc297c3ab084c6695197fa9ec669bbc5b1b0480a105dcfd5d523aa980e63c7

reports/ui-preview/interests-onboarding-900.png

Historical UI preview of interests-onboarding at viewport width 900 pixels.

54483 bytes; SHA-256 c5827da00efb54975cfa4af3ed7c7dbf6c16bd90b9eb5f6d044f3778fcdb3db8

reports/ui-preview/sample-1280.png

Historical UI preview of sample at viewport width 1280 pixels.

52012 bytes; SHA-256 52d8dbaab68da676da6ea9de0f425af4f9c0cbe6d93b05c196a0ad13a1fa26f4

reports/ui-preview/sample-390.png

Historical UI preview of sample at viewport width 390 pixels.

25557 bytes; SHA-256 80bec7d01215ffcfa1f09f3de39b1e65ee5fe9c6da8b08e6a82ae69cb104d025

reports/ui-preview/sample-900.png

Historical UI preview of sample at viewport width 900 pixels.

50397 bytes; SHA-256 aefb45ca5cfcf5663bd3501a562d4a2408f0aea87b07345597760a9c5a775252

reports/ui-preview/timetable-1280.png

Historical UI preview of timetable at viewport width 1280 pixels.

76089 bytes; SHA-256 aaf213bba884a6659454eef2ce7a92eb5e1de029aca5bde637a34b04c0a1a93f

reports/ui-preview/timetable-390.png

Historical UI preview of timetable at viewport width 390 pixels.

60049 bytes; SHA-256 1ec4c61cea13cb130fcafe6a7c679b99a4110afa842c10e5e79b2a0c2d17eb9c

reports/ui-preview/timetable-900.png

Historical UI preview of timetable at viewport width 900 pixels.

73234 bytes; SHA-256 5bc3bf5b0d7a71894eedb63b99828e25ba93aed28fba4846078ca9352f6dad4d

reports/ui-preview/topics-1280.png

Historical UI preview of topics at viewport width 1280 pixels.

42243 bytes; SHA-256 b58bd5a684928ecb6dfee0437af1b1402a1cdf39e1fd25a9ca44b214c93f01aa

reports/ui-preview/topics-390.png

Historical UI preview of topics at viewport width 390 pixels.

37565 bytes; SHA-256 66990bd16d4e6c2eca01fe1e6a4f6b14aaa0d68a3fd82531227992301c9a3661

reports/ui-preview/topics-900.png

Historical UI preview of topics at viewport width 900 pixels.

40064 bytes; SHA-256 cc2d19ce6bdecfafe023d97e11778a3980d379d9d205c37c3ed6abf35a4c4e11

reports/ui-preview/voice-1280.png

Historical UI preview of voice at viewport width 1280 pixels.

54725 bytes; SHA-256 68be84898867eb3e88201cd0cec18820c7032de2d418c9571e81984ca1e98aaf

reports/ui-preview/voice-390.png

Historical UI preview of voice at viewport width 390 pixels.

45424 bytes; SHA-256 6b8bad09b129d34eed51ae2b53dbeb103070f25efed1038cfbcb1cb4c68568df

reports/ui-preview/voice-900.png

Historical UI preview of voice at viewport width 900 pixels.

52394 bytes; SHA-256 0aea93abb80b64e24ebcc5a1085dde2a87dcb9c22950bd3a668f222708dd4a4e

reports/ui-preview/welcome-1280.png

Historical UI preview of welcome at viewport width 1280 pixels.

56272 bytes; SHA-256 fbb648efe5df37469d1da41f9d57217224c8149cb3ef2b07c46914d5a84a873c

reports/ui-preview/welcome-390.png

Historical UI preview of welcome at viewport width 390 pixels.

35794 bytes; SHA-256 9f288f451e6ba4af1f0c1ab5ed13f41e6eec4f200705a9dcad260dcf4873c2d7

reports/ui-preview/welcome-900.png

Historical UI preview of welcome at viewport width 900 pixels.

54506 bytes; SHA-256 1a21acfc53318a5f2188232d82959030df56c528a01256ef83b149936311dee3

scripts/backup-live.mjs

Creates a backup of the configured live PostgreSQL installation.

1029 bytes; 14 lines; SHA-256 ae0b5078420f0918934f40ca7eb0d3d2a8e97750dbea3be5f1e22040278126b6

Imports: ./live-env.mjs, node:child_process, node:fs, node:path

scripts/bench-api.mjs

Measures API response timings for diagnostic comparison.

2640 bytes; 79 lines; SHA-256 9a71652e8166971a5a94cdfe58bf687e01e5bee933d48e9e9cc36516037c36c3

Declared symbols: envValue, sample

Imports: node:fs

scripts/bench-db.mjs

Measures database/query latency for original-backend diagnostics.

3772 bytes; 98 lines; SHA-256 5f856c41d32135cb1e15b2ecff4a6d0284f4bbc33bd00a005c3a8b94c70c9e4d

Declared symbols: databaseUrl, run

Imports: node:fs, pg

scripts/build-check.mjs

Runs a production Next.js verification build in .next-verify.

1166 bytes; 27 lines; SHA-256 7195afedd9f1e0234e3cea0407bcd66b3fdf1a0ecc8f7b0d949a70e0ad7e2d2d

Imports: node:child_process

scripts/build-cloud-android.ps1

Builds the privately signed cloud APK from prepared Dart defines; installs nothing.

1083 bytes; 14 lines; SHA-256 deabdb27b5b7c2dac8ed18480fe262005ff8e520c4b763f78a745ce95371d8f3

scripts/build-handbook.py

Rebuilds PDF, exhaustive file/source/dependency reference and hash inventory from publishable Git files.

47000 bytes; 568 lines; SHA-256 14c7ed0e564e3d4eb9645374360e03f360e003c7633d10238cbd4aa58d863369

Declared symbols: Handbook

scripts/build-live-android.ps1

Builds the integration/live Android variant from local configuration.

869 bytes; 12 lines; SHA-256 bbd2923cee1830505255b7cf658e78e6d825dbfbddcc2ab5709f60b26328d6a9

scripts/build-local-android.ps1

Builds the isolated demonstration Android preview variant.

1025 bytes; 22 lines; SHA-256 f591796179808ba15d697db1e3534eda0d48ec418f05af7ebef996340060e02e

scripts/byline-logic-test.ts

Pure native-session, setup validation, first-delivery and DST assertions.

2707 bytes; 35 lines; SHA-256 7e9cad3d1a9bdac800943c51ae4c5baf0cfffa58fa5e5908d5b3c533e1bd3286

Declared symbols: main

Imports: ../lib/auth, ../lib/native-callback, ../lib/native-return, ../lib/onboarding, ../lib/schedule, node:assert/strict

scripts/byline-test.mjs

Local API integration coverage for account, setup, timetable and author-owned data.

10486 bytes; 107 lines; SHA-256 e0c76c3c2b27094d845e9663f6fccc3c270a5a35b92f909c8954ae954079b348

Declared symbols: check, api, today, waitForDraft, signup

Imports: ./local-env.mjs, node:assert/strict, node:crypto, pg

scripts/catalogue-api-test.mjs

Local API subject catalogue and settings persistence integration checks.

3627 bytes; 41 lines; SHA-256 7789a037de094ba0745da1181efd74e176c5840b7d2b3b82c6c3113eb623da41

Declared symbols: request

Imports: ./local-env.mjs, node:assert/strict, node:crypto

scripts/catalogue-test.ts

Subject uniqueness, source routing, relevance and voice consistency assertions.

4363 bytes; 52 lines; SHA-256 fd506c3778160c17573bf7eeb94d3aa71d12e01a49e489530e2eb8dbc25eabcf

Declared symbols: main

Imports: ../lib/categories, ../lib/category-catalogue, ../lib/discovery, ../lib/judge, ../lib/onboarding, ../lib/style, node:assert/strict

scripts/check-feeds.mjs

Probes configured source feeds and reports reachability.

3197 bytes; 78 lines; SHA-256 a37098309cd5a32a23057a1c014bbb34ac9112ffc7b7d4253e2cb69f3789fc48

Imports: node:fs/promises, node:path, node:url

scripts/check-live-services.mjs

Checks configured live provider/service readiness.

1366 bytes; 12 lines; SHA-256 1cc4f31b4b43cf732a26023e179c3e08ac270545a98a1e6d86cb07738b944373

Declared symbols: get

Imports: ./google-operator.mjs, node:fs

scripts/dbtest.ts

Integration assertions against a disposable real PostgreSQL database.

22420 bytes; 481 lines; SHA-256 1908983c13f72526c5687f66a7a0c90b1d9a8cfc09450c069c420e8f9bb58668

Declared symbols: check, runs, main

Imports: ../lib/accounts, ../lib/agents, ../lib/db, ../lib/distribute, ../lib/feedhealth, ../lib/llm, ../lib/memory, ../lib/push, ../lib/ratelimit, ../lib/retention, ../lib/slots, node:crypto

scripts/google-operator.mjs

Operator helper for Google/Firebase configuration tasks; inspect its flags before use.

1226 bytes; 20 lines; SHA-256 c807347dece9b907be97bafeff894b45fb90a4b5beaeca26767c0981a5973145

Declared symbols: googleOperatorToken, googleOperatorCredentials, googleOperatorFetch

Imports: node:child_process, node:module, node:path

scripts/health-test.ts

Health endpoint tests for readiness, missing configuration and safe error responses.

1378 bytes; 31 lines; SHA-256 d275b73251d59ce129ac527988eb8e286a73dc8d081c751d2a3db6ab0a14ab1e

Declared symbols: main

Imports: ../app/api/health/route, node:assert/strict

scripts/install-live-android.ps1

Installs/launches the live integration APK on a connected Android device.

791 bytes; 14 lines; SHA-256 e33c5b700b05d3145426fece138e777ea427fd947d6c0f0ed5e9f483a4e785a3

scripts/install-local-android.ps1

Installs/launches the preview APK and configures USB port reversal.

1102 bytes; 18 lines; SHA-256 9f0094610a0e2310b2bc2e03ce24f7a3a5d1c012123475de8280b9240f81c10d

scripts/live-cycle-smoke.ts

Integration smoke exercise of a configured live content cycle.

1484 bytes; 21 lines; SHA-256 0c13f8a76d7e17cedfb2ba1739fd99713fd937101738b633a02fb8da7ceb7b78

Declared symbols: main

Imports: ../lib/cycle, ../lib/db, ../lib/native-auth, ../lib/onboarding, node:crypto, node:fs

scripts/live-dev.mjs

Starts the original integration backend with its dedicated live environment.

2255 bytes; 24 lines; SHA-256 6b569465cdaffa24253546cc3c1fb7aee9b8b87f61e9b85d2d879ccbc09741a3

Declared symbols: save, refreshCredentials

Imports: ./google-operator.mjs, ./live-env.mjs, node:child_process, node:crypto, node:fs

scripts/live-env.mjs

Loads/validates the dedicated live integration environment.

843 bytes; 10 lines; SHA-256 66b579b4fabc579376ff174a2aea6a29d48b5d8c8860efb839394f2e23d1dd2f

Declared symbols: readEnvFile, liveEnv

Imports: node:fs

scripts/live-setup.mjs

Prepares the original live integration environment and database configuration.

3126 bytes; 29 lines; SHA-256 4cdcfdc3ae13ccc5becbabcf081d2e5f760da7c56ffcd51eac194f9b19d0f274

Imports: ./google-operator.mjs, ./live-env.mjs, node:crypto, node:fs, node:path, pg

scripts/live-smoke.ts

Configured integration smoke checks; provider effects depend on the script/environment.

703 bytes; 12 lines; SHA-256 8da252c4af71dd44936bdc8265f4a608ce990635e6d8c52964b0a13eb3f76240

Declared symbols: main

Imports: ../lib/db, ../lib/onboarding, ../lib/push, node:fs

scripts/local-dev.mjs

Starts isolated Next.js preview and its local scheduler tick.

764 bytes; 11 lines; SHA-256 2ffca57daa0551203f148a523e41d456ff8f8ec749e5a85a2236ae49642d005f

Imports: ./local-env.mjs, node:child_process

scripts/local-env.mjs

Loads validated loopback-only PostgreSQL fixture configuration and clears external credentials.

904 bytes; 11 lines; SHA-256 8fd4765a3c3ba944321788f0c72922caa1096da86bd199e80cb9cf10110ada4d

Declared symbols: localEnv

Imports: node:fs

scripts/local-phone.ps1

Coordinates isolated server, preview build, USB installation and app launch.

1892 bytes; 38 lines; SHA-256 e63c80d14f36963e0baaa59a03d58c6fc285c9b8e0a471190af571ec04b3e64f

Declared symbols: Get

scripts/local-setup.mjs

Creates the isolated local PostgreSQL data directory and preview environment.

2078 bytes; 23 lines; SHA-256 78fcefe7374456443f8b262626826e284de4d77e2f9285d4e6a64d42e2039906

Declared symbols: run

Imports: node:child_process, node:crypto, node:fs, node:path

scripts/migrate.ts

Applies the additive PostgreSQL schema to the explicitly configured database.

456 bytes; 10 lines; SHA-256 e0708e8b2e59bae12980e1afd0aef07689672a46e07c8d2ff6f9e55da3c04e9f

Declared symbols: main

Imports: ../lib/db, @next/env

scripts/native-return-test.mjs

Local API and browser-return contract checks for native sign-in.

3692 bytes; 41 lines; SHA-256 8cb5e78ed150c752e53b269fbf46da0db85db2699a8cd65349480ecdc284309d

Declared symbols: check, post

Imports: ./local-env.mjs, node:assert/strict, node:crypto, pg

scripts/prepare-cloud-android.mjs

Validates the cloud origin/Firebase app and prepares preserved private signing and Dart defines.

2056 bytes; 21 lines; SHA-256 02c32b129efc4f8ec18c95618b32c97caa01c6e5650b11e0f6dec6bc9bffdf03

Imports: node:child_process, node:crypto, node:fs, node:path

scripts/selftest.ts

Core deterministic formatting, escaping, style, source, judge and scheduling regression checks.

45628 bytes; 872 lines; SHA-256 28f888fcb9c56ee9470fa18c55d21151d3b32313680f2126325302f6b07e7808

Declared symbols: check

Imports: ../lib/categories, ../lib/critique, ../lib/discovery, ../lib/distribute, ../lib/format, ../lib/judge, ../lib/linkedin, ../lib/push, ../lib/schedule, ../lib/slots, ../lib/style, ../lib/voice, node:crypto, node:fs

scripts/zero-budget-test.ts

Verifies zero-budget/local behavior and provider-call safeguards.

1127 bytes; 22 lines; SHA-256 a6a10fba2d6953e7bd08672b9c5287ea1247c7b6a6f5a08e7d866e1c891bda99

Declared symbols: main

Imports: ../lib/llm, node:assert/strict, node:crypto, node:fs

tsconfig.json

TypeScript compiler settings and included/excluded source scope for this package.

886 bytes; 46 lines; SHA-256 daa31dad1217a442dc0be2493fa00c9267a1f0b4f4a1f015ac91a163c8786d44

vercel.json

Original Vercel deployment/runtime configuration.

578 bytes; 14 lines; SHA-256 dabe37a88fd969aaa6e60b64a74ec59e3d4c67425214a7c628951f285840c6ed

28. Direct packages and exact resolved dependencies

package.json

```
{
  "name": "linkedin-creator",
  "version": "0.1.0",
  "private": true,
  "scripts": {
    "dev": "next dev",
    "build": "next build",
    "build:check": "node scripts/build-check.mjs",
    "start": "next start",
    "test": "tsx scripts/selftest.ts && tsx scripts/health-test.ts",
    "test:db": "tsx scripts/dbtest.ts",
    "test:catalogue": "tsx scripts/catalogue-test.ts",
    "test:catalogue:api": "node scripts/catalogue-api-test.mjs",
    "test:local": "node scripts/byline-test.mjs && node scripts/catalogue-api-test.mjs && node
  scripts/native-return-test.mjs",
    "test:byline": "tsx scripts/byline-logic-test.ts",
    "check:feeds": "node scripts/check-feeds.mjs",
    "keygen": "node -e \"console.log('TOKEN_ENCRYPTION_KEY=' +
  require('crypto').randomBytes(32).toString('base64')); console.log('APP_SECRET=' +
  require('crypto').randomBytes(32).toString('hex')); console.log('CRON_SECRET=' +
  require('crypto').randomBytes(24).toString('hex'))\"",
    "local:setup": "node scripts/local-setup.mjs",
    "local:dev": "node scripts/local-dev.mjs",
    "local:phone": "powershell -NoProfile -ExecutionPolicy Bypass -File scripts/local-phone.ps1",
    "migrate": "tsx scripts/migrate.ts",
    "live:setup": "node scripts/live-setup.mjs",
    "live:dev": "node scripts/live-dev.mjs",
    "live:backup": "node scripts/backup-live.mjs"
  },
  "dependencies": {
    "@google/genai": "^2.16.0",
    "next": "^15.5.28",
    "pg": "^8.13.1",
    "react": "^19.1.0",
    "react-dom": "^19.1.0"
  },
  "overrides": {
    "next": {
      "postcss": "8.5.32"
    }
  },
  "devDependencies": {
    "@types/node": "^22.10.0",
    "@types/pg": "^8.11.10",
    "@types/react": "^19.1.0",
    "@types/react-dom": "^19.1.0",
    "tsx": "^4.23.12",
    "typescript": "^5.7.0"
  }
}
```

cloud/package.json

```
{
  "name": "byline-cloud",
  "version": "0.1.0",
  "private": true,
  "type": "module",
  "scripts": {
    "pretest": "wrangler deploy --dry-run --outdir .wrangler/test-build",
    "test": "tsx --test test/*.test.ts",
    "typecheck": "tsc --noEmit",
    "types": "wrangler types",
    "db:local": "wrangler d1 migrations apply byline --local"
  },
  "devDependencies": {
    "@types/node": "^22.10.0",
    "miniflare": "5.20261023.0-beta",
    "tsx": "^4.23.12",
    "typescript": "^5.7.0",
    "wrangler": "4.153.0"
  }
}
```

mobile/pubspec.yaml

```
name: linkdin_mobile
description: "ByLine: your LinkedIn writing workspace."
# The following line prevents the package from being accidentally published to
# pub.dev using `flutter pub publish`. This is preferred for private packages.
publish_to: 'none' # Remove this line if you wish to publish to pub.dev

# The following defines the version and build number for your application.
# A version number is three numbers separated by dots, like 1.2.43
# followed by an optional build number separated by a +.
# Both the version and the builder number may be overridden in flutter
# build by specifying --build-name and --build-number, respectively.
# In Android, build-name is used as versionName while build-number used as versionCode.
# Read more about Android versioning at https://developer.android.com/studio/publish/versioning
# In iOS, build-name is used as CFBundleShortVersionString while build-number is used as CFBundleVersion.
# Read more about iOS versioning at
# https://developer.apple.com/library/archive/documentation/General/Reference/InfoPlistKeyReference/Articles
  /CoreFoundationKeys.html
# In Windows, build-name is used as the major, minor, and patch parts
# of the product and file versions while build-number is used as the build suffix.
version: 1.0.2+3

environment:
  sdk: ^3.12.1

# Dependencies specify other packages that your package needs in order to work.
# To automatically upgrade your package dependencies to the latest versions
# consider running `flutter pub upgrade --major-versions`. Alternatively,
# dependencies can be manually updated by changing the version numbers below to
# the latest version available on pub.dev. To see which dependencies have newer
# versions available, run `flutter pub outdated`.
dependencies:
  flutter:
    sdk: flutter

  # The following adds the Cupertino Icons font to your application.
  # Use with the CupertinoIcons class for iOS style icons.
  cupertino_icons: ^1.0.8

  # Kept small on purpose. Every package here is a thing that can break a build
  # months from now, and this app's whole job is rendering one JSON document and
  # PATCHing bits of it back  -  so each one below earns its place by doing
  # something the app genuinely cannot do without.
  http: ^1.2.2 # API calls
  provider: ^6.1.2 # app-wide state
  shared_preferences: ^2.3.2 # session cookie + server address
  image_picker: ^1.1.2 # attach photos; also does the downscale (see media upload)
  http_parser: ^4.0.2 # MediaType for multipart uploads  -  see _imageSubtype
  # Opens LinkedIn's consent page in the SYSTEM browser. OAuth cannot happen
  # inside the app's own HTTP client: the consent screen needs a real browser,
  # and a token minted anywhere else would not be the one the session carries.
  url_launcher: ^6.3.0
  # Push notifications. Comfortably the largest thing in this file, and taken
  # deliberately: there is no way to reach an Android app that is not currently
  # running without FCM, and the whole point of the alerts is hearing that the
  # agent has stopped on a day you never opened it. The alternative was routing
  # them through a second app, which trades this weight for a notification that
  # is not ours and cannot open the right tab.
  firebase_core: ^3.8.0
  firebase_messaging: ^15.1.5
  flutter_secure_storage: 10.0.0
  flutter_timezone: ^5.1.0
  flutter_local_notifications_windows: ^3.1.1

dev_dependencies:
  flutter_test:
    sdk: flutter

  # The "flutter_lints" package below contains a set of recommended lints to
  # encourage good coding practices. The lint set provided by the package is
  # activated in the `analysis_options.yaml` file located at the root of your
  # package. See that file for information about deactivating specific lint
  # rules and activating additional ones.
  flutter_lints: ^6.0.0

# For information on the generic Dart part of this file, see the
# following page: https://dart.dev/tools/pub/pubspec

# The following section is specific to Flutter packages.
flutter:
  # The following line ensures that the Material Icons font is
```

```
  # included with your application, so that you can use the icons in
  # the material Icons class.
  uses-material-design: true

  assets:
    - assets/fonts/OFL.txt

  # Three faces, three jobs  -  see DESIGN.md \xa73. All bundled rather than
  # fetched: a CDN font is a silent single point of failure, and a family that
  # does not resolve falls back without an error.
  #
  # Plex Sans is the VARIABLE cut  -  google/fonts no longer publishes static
  # instances of it. Flutter does not map TextStyle.fontWeight onto a variable
  # axis, so weight comes from fontVariations in theme.dart rather than from
  # extra `weight:` entries here, which would silently do nothing.
  #
  # Barlow Condensed is deliberately the STATIC cut for the opposite reason: a
  # fontVariations list makes a TextStyle non-const, and these styles sit in
  # const widget trees across every screen.
  fonts:
    - family: BarlowCondensed
      fonts:
        - asset: assets/fonts/BarlowCondensed-Medium.ttf
          weight: 500
        - asset: assets/fonts/BarlowCondensed-SemiBold.ttf
          weight: 600
        - asset: assets/fonts/BarlowCondensed-Bold.ttf
          weight: 700
    - family: PlexSans
      fonts:
        - asset: assets/fonts/IBMPlexSans.ttf
    - family: PlexMono
      fonts:
        - asset: assets/fonts/IBMPlexMono-Regular.ttf
          weight: 400
        - asset: assets/fonts/IBMPlexMono-SemiBold.ttf
          weight: 600
        - asset: assets/fonts/IBMPlexMono-Bold.ttf
          weight: 700

  # To add assets to your application, add an assets section, like this:
  # assets:
  #   - images/a_dot_burr.jpeg
  #   - images/a_dot_ham.jpeg

  # An image asset can refer to one or more resolution-specific "variants", see
  # https://flutter.dev/to/resolution-aware-images

  # For details regarding adding assets from package dependencies, see
  # https://flutter.dev/to/asset-from-package

  # To add custom fonts to your application, add a fonts section here,
  # in this "flutter" section. Each entry in this list should have a
  # "family" key with the font family name, and a "fonts" key with a
  # list giving the asset and other descriptors for the font. For
  # example:
  # fonts:
  #   - family: Schyler
  #     fonts:
  #       - asset: fonts/Schyler-Regular.ttf
  #       - asset: fonts/Schyler-Italic.ttf
  #         style: italic
  #   - family: Trajan Pro
  #     fonts:
  #       - asset: fonts/TrajanPro.ttf
  #       - asset: fonts/TrajanPro_Bold.ttf
  #         weight: 700
  #
  # For details regarding fonts from package dependencies,
  # see https://flutter.dev/to/font-from-package
```

The following npm inventories preserve every resolved package path (including nested/platform variants), version, flags, dependencies, peers, engine/platform restrictions, source URL and integrity. They are complete package-entry inventories, not third-party implementation source. Flutter exact resolutions are in mobile/pubspec.lock and the companion repository source reference.

package-lock.json

```
node_modules/@emnapi/runtime | version=1.11.3 | dev=False | optional=True | license=MIT
  requires: tslib ^2.4.0
  integrity: sha512-Xz4Tpyki7XyrpbUK1jR1AhdAdaXyhhY4lZ3neLodmhpuWfy2PAQN5B46sAiU4liOXGLkHypn/qU+jvfWSCYYLA==
  resolved: https://registry.npmjs.org/@emnapi/runtime/-/runtime-1.11.3.tgz
node_modules/@esbuild/aix-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["aix"], "cpu": ["ppc64"]}
  integrity: sha512-XExcO+dvLKvVtNTibSTBej1NCAbaGhWn9Ww1ZPx80qsahhPFe/8jgWP0IchNe0F3HwkU7n8ejhH8bjonqht8mQ==
  resolved: https://registry.npmjs.org/@esbuild/aix-ppc64/-/aix-ppc64-0.28.2.tgz
node_modules/@esbuild/android-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm"]}
  integrity: sha512-kXXoiPVVGQcnIYGOeaovwOURpniDBpSq4A03qkQ+BMQqtGG6HYap3xne9C1O1yo4TR3qxlCX5IqqmX6fFo2Lqg==
  resolved: https://registry.npmjs.org/@esbuild/android-arm/-/android-arm-0.28.2.tgz
node_modules/@esbuild/android-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm64"]}
  integrity: sha512-5YfKeeI8qWfBZIX+u2xZC3Zlb3Os/gLS2sbEKM+I4ZOcsWmHS2WLysCcQZDAFRslDUU5Oiq44gf6PYN1vGwG5A==
  resolved: https://registry.npmjs.org/@esbuild/android-arm64/-/android-arm64-0.28.2.tgz
node_modules/@esbuild/android-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["x64"]}
  integrity: sha512-O387ite7SzUyCcy3JQX4P4bLtEA7bLLkx+esve5JHnyYfNTxcVpXZo9jhdB0lTKN44gztELTdU7nS8Nr16Fs1Q==
  resolved: https://registry.npmjs.org/@esbuild/android-x64/-/android-x64-0.28.2.tgz
node_modules/@esbuild/darwin-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-n4KqkOQrraxHJcgjM1RvwbigfQKIKJVpM7xp+KsxiyUSrRdIXnt73VhrPAx0fV44hgfmIVKjxMN9J1t5jySVkw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-arm64/-/darwin-arm64-0.28.2.tgz
node_modules/@esbuild/darwin-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-uq6suIWYP37qzGddBKPw5QEQPi6HiLGsO7UmkpfyaYNQ3D+rN6w6WfwH+nuqcGXWvawGwxOEroO4YGnFh95azw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-x64/-/darwin-x64-0.28.2.tgz
node_modules/@esbuild/freebsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["arm64"]}
  integrity: sha512-n+I0BTSRIoy+d6RPKnEVwql5UwBJolytvY4mAOIEJorKlqgPII8ix6slVVrfZ5Tnj7glIZvloylbB/EJPMWEXw==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-arm64/-/freebsd-arm64-0.28.2.tgz
node_modules/@esbuild/freebsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["x64"]}
  integrity: sha512-78XJTJkvPs0kz2w61301PJjXl4g7q3JqiYMZ/M/yVI73EHBrCRTgkhu9oqG7vPqq+a/yadEW8aD+agKlk5xrmg==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-x64/-/freebsd-x64-0.28.2.tgz
node_modules/@esbuild/linux-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-XlDnu2q5yoqems+xay6wSAcg9DDD7K9RLKZEBOMZm3ckNpJBvOX20tSfby8KfrrhINDyv9V2YVZKY/SpoGJI8w==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm/-/linux-arm-0.28.2.tgz
node_modules/@esbuild/linux-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-pW4AC0P3it8c7do9MVM4p51FzHzdM/TZrerurgRcHJ2WTa1VQ1CIq18xncfpBJw4ojkiZZrKW2yIBWBP92j6Ug==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm64/-/linux-arm64-0.28.2.tgz
node_modules/@esbuild/linux-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ia32"]}
  integrity: sha512-CYbnj78HsIeA+DhgUKgFCfvNsTHFhMMrinUrMZpDXJXKN8T3XViTZ/+wtHeVxEWY8ewSzTFN+nRmSwO2tZaLUQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ia32/-/linux-ia32-0.28.2.tgz
node_modules/@esbuild/linux-loong64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["loong64"]}
  integrity: sha512-buwkd8nsph4R+ajRvw0qM5Hja/TXQow3ptzWO2EbG/cqcIkHloRrdlBtQlshyYGTNFvfkfJ5tpPLVkY4DtsPfQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-loong64/-/linux-loong64-0.28.2.tgz
node_modules/@esbuild/linux-mips64el | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["mips64el"]}
  integrity: sha512-ZVykbDyk7519VwiNb9Lcj9m8XM6v5V9uKPvrEMkkEedVewf+0itkhahp4HDpgERXhwLRpWFypsGbG/J8s0QjJA==
  resolved: https://registry.npmjs.org/@esbuild/linux-mips64el/-/linux-mips64el-0.28.2.tgz
node_modules/@esbuild/linux-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-CAXl+Dtd9UUuJd8pKKdwh6MLm3MUMiqMPmhZ3tTSXPqfyQ3vDl6R5hZdZ/kYojK4ofXtdfSv1tFq8XzWx3heNQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ppc64/-/linux-ppc64-0.28.2.tgz
node_modules/@esbuild/linux-riscv64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-GeXCej4IQtU1B+QlDV8W/RRvbzI3O/Stss+/bCXv4lZls5WGRtu2a+3JkA3i4qIUlMXpcHebWpF8AkJhATowuA==
  resolved: https://registry.npmjs.org/@esbuild/linux-riscv64/-/linux-riscv64-0.28.2.tgz
node_modules/@esbuild/linux-s390x | version=0.28.2 | dev=True | optional=True | license=MIT
```

```
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-3H1weTYZPxt/WOhByszQZybS9w5lKzUn1FDMsgEChbHWQwHYQQRfBxgCcZvPhjHfKyJjIievvMmEUawJrdY9Dg==
  resolved: https://registry.npmjs.org/@esbuild/linux-s390x/-/linux-s390x-0.28.2.tgz
node_modules/@esbuild/linux-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4xTZr1FUmSoQW4XIWmit3tzQrUTZM+N3P0XV8xROKYF50XfI7xeO90+1bZvNwxIufQ9hDQVRJH5YhgPVF8A/HQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-x64/-/linux-x64-0.28.2.tgz
node_modules/@esbuild/netbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["arm64"]}
  integrity: sha512-sSATRjPeDBg3pdgHoQfoYBob11Kk1FGa9lui5RIHZCoCkJa9QKlvl3/vKz2usCmYYjs7ymJR/2Nnsqe+Hjt5nw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-arm64/-/netbsd-arm64-0.28.2.tgz
node_modules/@esbuild/netbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["x64"]}
  integrity: sha512-lqnzCV+mM0gIADaKihiCg6ifgfU2L3h5E33rNQBN1Y4MaVGnzryzmvvf7UHxprpQdE8hpqLolJ9Rl+SkIRDpyw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-x64/-/netbsd-x64-0.28.2.tgz
node_modules/@esbuild/openbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["arm64"]}
  integrity: sha512-AL2qJILH7lNjrDmCQDvdxMfAUIv8KMNZOvrwAQ8i8//ntL9FflhOyMJ8OZSMBb8/AWXe3/5v5S20y3zCoZWKoQ==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-arm64/-/openbsd-arm64-0.28.2.tgz
node_modules/@esbuild/openbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["x64"]}
  integrity: sha512-QtiuPytchRyC4rwUKhexJdQKvDuZ6hWloi3igqPQNUJCS1/v9EiO3UTOXR6A3FoMo4fnAKbWJdqaIwhOzh8qEw==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-x64/-/openbsd-x64-0.28.2.tgz
node_modules/@esbuild/openharmony-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openharmony"], "cpu": ["arm64"]}
  integrity: sha512-WkhYDmpTjLvGlScA1rwjRUmhl4k8oXR3cIbtqWmELgU/dFeHHlEllxDvdWcNJV9rbzCexB5vz8gtNewWLgCT7Q==
  resolved: https://registry.npmjs.org/@esbuild/openharmony-arm64/-/openharmony-arm64-0.28.2.tgz
node_modules/@esbuild/sunos-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["sunos"], "cpu": ["x64"]}
  integrity: sha512-GPMSkTOtMnv2U2F8gxe4Io6qmVs+YKyp832EtqqxrhFngmXQ3rzwytelm3GIn7T4VviRUlf3sOgBOiTdvaf7g==
  resolved: https://registry.npmjs.org/@esbuild/sunos-x64/-/sunos-x64-0.28.2.tgz
node_modules/@esbuild/win32-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-PIhhEkE9uPBleRBrQEJpUn7MBnibZzbGzYWPmY3x+YoVg/95zbjB4CxPPOQ8l5tYYM4mMaCthF8/1DIfBQQyWQ==
  resolved: https://registry.npmjs.org/@esbuild/win32-arm64/-/win32-arm64-0.28.2.tgz
node_modules/@esbuild/win32-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-YmJbfTlvU7Sdn9BB+4PRES4oB6pxgS37MAONj+hBr/cpXS1aBPKXxNnDbu+QCWPj0o9dgyxeq79g6c5P8KeuYA==
  resolved: https://registry.npmjs.org/@esbuild/win32-ia32/-/win32-ia32-0.28.2.tgz
node_modules/@esbuild/win32-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-5ebpxr3nWMzrL/rnUI755Jkuee0bHL/Gq0WTF9lvcpv73wAp5eu8MfBUgWK9bhWvZjj7yX8etf/8tI8Ney695g==
  resolved: https://registry.npmjs.org/@esbuild/win32-x64/-/win32-x64-0.28.2.tgz
node_modules/@google/genai | version=2.16.0 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=20.0.0"}
  requires: google-auth-library ^10.3.0, p-retry ^4.6.2, protobufjs ^7.5.4, ws ^8.18.0
  peers: {"@modelcontextprotocol/sdk": "^1.25.2"}
  integrity: sha512-K+1C1sqR0u7NJ5xpKJCQBws0QXpfuklo3WTNuUIMvtbQfNW2O5OohX0BYT2V+PXzsUzQEwGCXPWQxttLyGQ6xw==
  resolved: https://registry.npmjs.org/@google/genai/-/genai-2.16.0.tgz
node_modules/@img/colour | version=1.1.0 | dev=False | optional=True | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-Td76q7j57o/tLVdgS746cYARfSyxk8iEfRxewL9h4OMzYhbW4TAcppl0mT4eyqXddh6L/jwoM75mo7ixa/pCeQ==
  resolved: https://registry.npmjs.org/@img/colour/-/colour-1.1.0.tgz
node_modules/@img/sharp-darwin-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-QRUlFQ0WxvdWyqqG/WtI3iupfD5rBzmCHXSdPsY91sAtVtTo7Q4cb6zOccZ3gqEqkr0f1As1ehLqmEpDsRf+lg==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-arm64/-/sharp-darwin-arm64-0.35.5.tgz
node_modules/@img/sharp-darwin-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-+BR255RhDlpygUpOc/Jdt1nT6DQ3XG/ERo5wbcdOf5Q320dKtPCKPLR1LJs9VGXRaMa8l1uUa0tkCNOXiAxZUw==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-x64/-/sharp-darwin-x64-0.35.5.tgz
node_modules/@img/sharp-freebsd-wasm32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["freebsd"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-Y/z91nEZ4uIBX5X3nfTovjU9lHNKFYbL2lpHCLVNmXQK03VIZvXBBt0KxbPGp2SdGSF+2mQU4e+hQaWOt86iAw==
  resolved: https://registry.npmjs.org/@img/sharp-freebsd-wasm32/-/sharp-freebsd-wasm32-0.35.5.tgz
node_modules/@img/sharp-libvips-darwin-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
```

```
  integrity: sha512-5R89nBYiRdUlSWJxPhO+GVtaXzXSxKnRu/xqMn3KTA3L9EB9Oy/P+Nn2f2vlhPuUdy/Zusb2DarbyTpGCfEDuw==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-darwin-arm64/-/sharp-libvips-darwin-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-darwin-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-iR2OKH80yi0U+dUplyh3/xdpFvps6YkCwsXenIJxqxR1v9o+xtKTGbS9H7cps+2Vxjc8B1j96p75NmTGjIhtpQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-darwin-x64/-/sharp-libvips-darwin-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LmRtTsOHuvM2+wlO2Db37dx5MiZhB0FvSunciw48YjdOkZz9KAiRbm8ujeMOA1INqmei5NapFxYEK1D1ZSidmw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm/-/sharp-libvips-linux-arm-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-Y3dgX/6lE2QhQb+Gxy0WZxfg9MEm/JBjamZpS2IklP7xIQoKN4hzAm7KcMVGtaVDt3neE9OKBC7vAfonA/Lr1A==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm64/-/sharp-libvips-linux-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-ppc64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-Le6boB8Tai0Nis+gIxIpKx68UDVVIqdR8Tin5Yf1z2LJJQLDJvCDRqRu+jC2qCoD+eIomonmOwB4smBRxfVpYQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-ppc64/-/sharp-libvips-linux-ppc64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-riscv64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-aHkkIEHPRdQEegJN20MLmGtxYD9R2wQr3Cwpddnu5+YKMt6Uzax7S9h5gpZTo8wyrGuZSlfQ63OevL5mTyOC7Q==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linux-riscv64/-/sharp-libvips-linux-riscv64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-s390x | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-ra/mB6MikESDUO7Yg+Mi95bFBb9GsObURuhnOv3OqknjGe9sZrG8tCe9q0xSIGrtLgvgw0gKnFWcK4blSgQOuQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-s390x/-/sharp-libvips-linux-s390x-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-GJ//SSXbnwSDes02umB3nDJLFcQzw8a18V8fyhqr6tV515tOEMdImjjxj1AoafMRz56F3PHgftnj1QEKSU1zkw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-x64/-/sharp-libvips-linux-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-hvulFwtjUcagsis6BBxHwGFwWoNZjgYmULGVrZcyfNbjA8hKILbRxGg15/7w5HDyXHXUos/j6baAWqnCyQ2DWA==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-arm64/-/sharp-libvips-linuxmusl-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-6zXKeE/p39I1AmA3cJG35eyBGNqNddLnUXjhwBnsGjFPWqf5VKkDBEqaEkPDoTEtkxwi2vv8Tcr2mDyP4So7Fg==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-x64/-/sharp-libvips-linuxmusl-x64-1.3.4.tgz
node_modules/@img/sharp-linux-arm | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LEaXK2WdXVK5ykcw0buWyPMsmLLL2vpHLD6yrNSW+JGEL3BZPA4tpKN6iaMc4AxTTAoaX/sU1rOL51lcIz48ZQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm/-/sharp-linux-arm-0.35.5.tgz
node_modules/@img/sharp-linux-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-LYVx5JTsOM2CBzmxreh+nl64/3H6Xb09iSLknqH47z2T2DFFxDeFLP5y4dJwe6H7uGQlHPyEEtIqyo3DYsRwdQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm64/-/sharp-linux-arm64-0.35.5.tgz
node_modules/@img/sharp-linux-ppc64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-QVxAAq8evVRI9ia2vqgwrmWucn5Dfv+JdWzj75pD8omHLPSP7f8p20O8jxzjCcuCEQEOtYOZUmX1hkiZ0kdevA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-ppc64/-/sharp-linux-ppc64-0.35.5.tgz
node_modules/@img/sharp-linux-riscv64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-LtdreXguaavKODPIfzJ4kffx7UNt1omwtK0rch4EBbbSTXPnxWmYSayXdLJw0fJzQ97kHt1gL/yh4tvU+nCyRQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-riscv64/-/sharp-linux-riscv64-0.35.5.tgz
node_modules/@img/sharp-linux-s390x | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-UZasTOFiYzotTsGOCu42BfUzP6Tu6Do/947iRm1RsLKvlllxwGcn4RN27LibGWceix4Y+Pmw3jsnTcCQIgWjqA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-s390x/-/sharp-linux-s390x-0.35.5.tgz
node_modules/@img/sharp-linux-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-SxFtLTeJInhAA9Q836kux2vZNeOBQEx658qvbboZScr0wIARym3IcGmW7KpVD5sbVg0Ojy+udFQdayYIZyoNog==
  resolved: https://registry.npmjs.org/@img/sharp-linux-x64/-/sharp-linux-x64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
```

```
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-9HbMclmI1zlNkFRs3z9/eBtDjfD0sGlrX1z6b1qwmiFY5ElDLh4BC0LPBdVp7z1DXFiKlIcznf+ZlsuZzLxQqg==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-arm64/-/sharp-linuxmusl-arm64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4KOphqB035HrVdqLZfCgMzzERrQkkzOwRhl4OAkRO1YCldbaFjySXMaK534Mo0V+LndnlJk+sbUyLeU0ULyD1A==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-x64/-/sharp-linuxmusl-x64-0.35.5.tgz
node_modules/@img/sharp-wasm32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later AND MIT
  engines: {"node": ">=20.9.0"}
  requires: @emnapi/runtime ^1.11.3
  integrity: sha512-Ptsga1su4tQx+LLF1ECS9U6nz5kmrXKo6XVbtR48Ke3ZRxxgaWBu7IDtEe1quo8hiupwm6WFqxVlXaSf7IINGQ==
  resolved: https://registry.npmjs.org/@img/sharp-wasm32/-/sharp-wasm32-0.35.5.tgz
node_modules/@img/sharp-webcontainers-wasm32 | version=0.35.5 | dev=False | optional=True |
  license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"cpu": ["wasm32"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-hfhF/FmoQyTUkA0bIKFOtw536BQSeBMe6BF6QyWlrPxT754+TFLaZ7sKKTfvvM0yJgKgaYTwnFCIZ/GuDw5SUA==
  resolved:
  https://registry.npmjs.org/@img/sharp-webcontainers-wasm32/-/sharp-webcontainers-wasm32-0.35.5.tgz
node_modules/@img/sharp-win32-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-X4t7g+7ZA5DKblCBEXGjUqqemj4vczING/5viFwAL8h4N3qYeyjwdCvRLHi4EdOUI+2Z7UFlp1VM+p/AuEtm6Q==
  resolved: https://registry.npmjs.org/@img/sharp-win32-arm64/-/sharp-win32-arm64-0.35.5.tgz
node_modules/@img/sharp-win32-ia32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": "^20.9.0"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-5Zm82LoBc43nhwNybZlG7Y1KO//Zhsn306fQl29ZOuStHLGTo3BWL83q3cznX0poxSAMuYL1On/BHBxkBeKr6A==
  resolved: https://registry.npmjs.org/@img/sharp-win32-ia32/-/sharp-win32-ia32-0.35.5.tgz
node_modules/@img/sharp-win32-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-x76eH0vEiHlcMQu8Y8IenntaACtddpT6W0wmXtWrnKcnKI7ME5DdgqhAD6SEWOEl1v2zDvkZDhFA9KnURwpfqg==
  resolved: https://registry.npmjs.org/@img/sharp-win32-x64/-/sharp-win32-x64-0.35.5.tgz
node_modules/@next/env | version=15.5.28 | dev=False | optional=False | license=MIT
  integrity: sha512-xxW5EBI8fMPuVTPBW7LL980IRbuDXlbkUAwp9DDhtb4Lnich3nJ13uYpvrX4VE74hWPf6AvHHAMmGCidcHjbfg==
  resolved: https://registry.npmjs.org/@next/env/-/env-15.5.28.tgz
node_modules/@next/swc-darwin-arm64 | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-dPoQYXcfSIqx5o+TOXVXO7kONK5qbtNRDeiTfII0bT3puGIT6VF5e0QwmxNZfEZ5Zety5f3m9P/p4xqwfiLlPg==
  resolved: https://registry.npmjs.org/@next/swc-darwin-arm64/-/swc-darwin-arm64-15.5.28.tgz
node_modules/@next/swc-darwin-x64 | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-RgCJ7buBivTH+6sddqaVm+/v8kwMHlFkobvdt3DfETutws5HrxnToMIWSN9X3MZ3aAi7BbKrGZZWUDQLEycXqw==
  resolved: https://registry.npmjs.org/@next/swc-darwin-x64/-/swc-darwin-x64-15.5.28.tgz
node_modules/@next/swc-linux-arm64-gnu | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-OHXQe13olE59aKe++zHavGcJPh5SLHXi6Anret3BBeq1+qhSuOJDNAli/EDDfxs6UTqA4Qddo4uyYry2slyjiQ==
  resolved: https://registry.npmjs.org/@next/swc-linux-arm64-gnu/-/swc-linux-arm64-gnu-15.5.28.tgz
node_modules/@next/swc-linux-arm64-musl | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-nTB7bB6vfn4ezCJNYP43ukt2o8L3+WxKF/sTcTxepdXsJh3SM9RhlU7wrZYbH7L4HO5M87dqDTwm8587vAkCiw==
  resolved: https://registry.npmjs.org/@next/swc-linux-arm64-musl/-/swc-linux-arm64-musl-15.5.28.tgz
node_modules/@next/swc-linux-x64-gnu | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-WXCfVI32rW3xCusoUX1RpZKtyChWU2Zwe27JUDmM3KrXwcDNc9vV4zEq0GKFAURnuQ/Ouo/XqPvB0yh445XZCg==
  resolved: https://registry.npmjs.org/@next/swc-linux-x64-gnu/-/swc-linux-x64-gnu-15.5.28.tgz
node_modules/@next/swc-linux-x64-musl | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-Miq+NDb/HWsXuxseYxMM6fuEOQXgTziarkKIRpVKCn8W69cEfhQaQr+90pO+u4q2CbJR2wzXmUuCFyZaJs/Nng==
  resolved: https://registry.npmjs.org/@next/swc-linux-x64-musl/-/swc-linux-x64-musl-15.5.28.tgz
node_modules/@next/swc-win32-arm64-msvc | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-5LR79lemgDlgxvG7MQJ+zHCkVcrUoQuO7CiIvq3I58vNW4goSOE2b+19Z6FujRWMouvni4gvudYFuFuNxolGWA==
  resolved: https://registry.npmjs.org/@next/swc-win32-arm64-msvc/-/swc-win32-arm64-msvc-15.5.28.tgz
node_modules/@next/swc-win32-x64-msvc | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-GNipvXUYROSTf4PXEyH95FrWImIB5zdaK6uEOg0RP1/X2drnvoMwiBkJ0VWdzX7w3iiBm3y5g2TxkKDGVTOQcg==
  resolved: https://registry.npmjs.org/@next/swc-win32-x64-msvc/-/swc-win32-x64-msvc-15.5.28.tgz
```

```
node_modules/@protobufjs/aspromise | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-j+gKExEuLmKwvz3OgROXtrJ2UG2x8Ch2YZUxahh+s1F2HZ+wAceUNLkvy6zKCPVRkU++ZWQrdxsUeQXmcg4uoQ==
  resolved: https://registry.npmjs.org/@protobufjs/aspromise/-/aspromise-1.1.2.tgz
node_modules/@protobufjs/base64 | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-AZkcAA5vnN/v4PDqKyMR5lx7hZttPDgClv83E//FMNhR2TMcLUhfRUBHCmSl0oi9zMgDDqRUJkSxO3wm85+XLg==
  resolved: https://registry.npmjs.org/@protobufjs/base64/-/base64-1.1.2.tgz
node_modules/@protobufjs/codegen | version=2.0.5 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-zgXFLzW3Ap33e6d0Wlj4MGIm6Ce8O89n/apUaGNB/jx+hw+ruWEp7EwGUshdLKVRCxZW12fp9r40E1mQrf/34g==
  resolved: https://registry.npmjs.org/@protobufjs/codegen/-/codegen-2.0.5.tgz
node_modules/@protobufjs/eventemitter | version=1.1.1 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-vW1GmwMZNnL+gMRaovlh9yZX74kc+TTU3FObkkurpMaRtBfLP3ldjS9KQWlwZgraRE0+dheEEoAxdzcJQ8eXZg==
  resolved: https://registry.npmjs.org/@protobufjs/eventemitter/-/eventemitter-1.1.1.tgz
node_modules/@protobufjs/fetch | version=1.1.1 | dev=False | optional=False | license=BSD-3-Clause
  requires: @protobufjs/aspromise ^1.1.1
  integrity: sha512-GpptLrs57adMSuHi3VNj0mAF8dwh36LMaYF6XyJ6JMWlVsc+t42tm1HSEDmOs3A8fC9yyeisgLhsTVQokOZ0zw==
  resolved: https://registry.npmjs.org/@protobufjs/fetch/-/fetch-1.1.1.tgz
node_modules/@protobufjs/float | version=1.0.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-Ddb+kVXlXst9d+R9PfTIxh1EdNkgoRe5tOX6t01f1lYWOvJnSPDBlG241QLzcyPdoNTsblLUdujGSE4RzrTZGQ==
  resolved: https://registry.npmjs.org/@protobufjs/float/-/float-1.0.2.tgz
node_modules/@protobufjs/path | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-6JOcJ5Tm08dOHAbdR3GrvP+yUUfkjG5ePsHYczMFLq3ZmMkAD98cDgcT2iA1lJ9NVwFd4tH/iSSoe44YWkltEA==
  resolved: https://registry.npmjs.org/@protobufjs/path/-/path-1.1.2.tgz
node_modules/@protobufjs/pool | version=1.1.0 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-0kELaGSIDBKvcgS4zkjz1PeddatrjYcmMWOlAuAPwAeccUrPHdUqo/J6LiymHHEiJT5NrF1UVwxY14f+fy4WQw==
  resolved: https://registry.npmjs.org/@protobufjs/pool/-/pool-1.1.0.tgz
node_modules/@protobufjs/utf8 | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-b1UQwcEZ4yCnMCD8DAL1VlbvBJE9/IX4FTIp7BG1xYpf29SLazLSrqUkj4w7Y5y7cCVP6E5tcqqcI0xemPkHug==
  resolved: https://registry.npmjs.org/@protobufjs/utf8/-/utf8-1.1.2.tgz
node_modules/@swc/helpers | version=0.5.15 | dev=False | optional=False | license=Apache-2.0
  requires: tslib ^2.8.0
  integrity: sha512-JQ5TuMi45Owi4/BIMAJBoSQoOJu12oOk/gADqlcUL9JEdHB8vyjUSsxqeNXnmXHjYKMi2WcYtezGEEhqUI/E2g==
  resolved: https://registry.npmjs.org/@swc/helpers/-/helpers-0.5.15.tgz
node_modules/@types/node | version=22.20.1 | dev=False | optional=False | license=MIT
  requires: undici-types ~6.21.0
  integrity: sha512-EANqOCF9QFyra+4pfxUcX9STKJpCLjMbObVzljIJomAWSnuSIEAvyzEU53GaajbXJEgdh0iEcPL+DGvpUd4k1Q==
  resolved: https://registry.npmjs.org/@types/node/-/node-22.20.1.tgz
node_modules/@types/pg | version=8.21.0 | dev=True | optional=False | license=MIT
  requires: @types/node *, pg-protocol *, pg-types ^2.2.0
  integrity: sha512-AYdtudzabjLZgVgRZmAnU8bAnVUXzuJX2IYHeSIiIHm68olD+LgQYCGWdtcNYnP0uq9c4S4NibVG3Ni7VbKW7Q==
  resolved: https://registry.npmjs.org/@types/pg/-/pg-8.21.0.tgz
node_modules/@types/react | version=19.2.18 | dev=True | optional=False | license=MIT
  requires: csstype ^3.2.2
  integrity: sha512-AnzbBERsrLKtk2XSfTbYRLjQPdy116Sty4q+T+Bp3IC4l6jNBvreVPAHmpq9qhXQM7CXZPjLVmGMw9sy+hxQ3w==
  resolved: https://registry.npmjs.org/@types/react/-/react-19.2.18.tgz
node_modules/@types/react-dom | version=19.2.4 | dev=True | optional=False | license=MIT
  peers: {"@types/react": "^19.2.0"}
  integrity: sha512-Bsc+QHgp+P/F02XDzNCY9jnZNCUuLki36KT7VKrTXXLdHf+vHMNZnW1rVu5DNW/rCK+fya3DATySbLM4yhtKUw==
  resolved: https://registry.npmjs.org/@types/react-dom/-/react-dom-19.2.4.tgz
node_modules/@types/retry | version=0.12.0 | dev=False | optional=False | license=MIT
  integrity: sha512-wWKOClTTiizcZhXnPY4wikVAwmdYHp8q6DmC+EJUzAMsycb7HB32Kh9RN4+0gExjmPmZSAQjgURXIGATPegAvA==
  resolved: https://registry.npmjs.org/@types/retry/-/retry-0.12.0.tgz
node_modules/agent-base | version=7.1.4 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 14"}
  integrity: sha512-MnA+YT8fwfJPgBx3m60MNqakm30XOkyIoH1y6huTQvC0PwZG7ki8NacLBcrPbNoo8vEZy7Jpuk7+jMO+CUovTQ==
  resolved: https://registry.npmjs.org/agent-base/-/agent-base-7.1.4.tgz
node_modules/base64-js | version=1.5.1 | dev=False | optional=False | license=MIT
  integrity: sha512-AKpaYlHn8t4SVbOHCy+b5+KKgvR4vrsD8vbvrbiQJps7fKDTkjkDry6ji0rUJjC0kzbNePLwzxq8iypo41qeWA==
  resolved: https://registry.npmjs.org/base64-js/-/base64-js-1.5.1.tgz
node_modules/bignumber.js | version=9.3.1 | dev=False | optional=False | license=MIT
  engines: {"node": "*"}
  integrity: sha512-Ko0uX15oIUS7wJ3Rb30Fs6SkVbLmPBAKdlm7q9+ak9bbIeFf0MwuBsQV6z7+X768/cHsfg+WlysDWJcmthjsjQ==
  resolved: https://registry.npmjs.org/bignumber.js/-/bignumber.js-9.3.1.tgz
node_modules/buffer-equal-constant-time | version=1.0.1 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-zRpUiDwd/xk6ADqPMATG8vc9VPrkck7T07OIx0gnjmJAnHnTVXNQG3vfvWNuiZIkwu9KrKdA1iJKfsfTVxE6NA==
  resolved: https://registry.npmjs.org/buffer-equal-constant-time/-/buffer-equal-constant-time-1.0.1.tgz
node_modules/caniuse-lite | version=1.0.30001809 | dev=False | optional=False | license=CC-BY-4.0
  integrity: sha512-xxWVywk6a6Arlk+hymeycyn/VgqEfLDxupvhH/xiY5SJ/18kmi9o6MiO320DCUzypORHLtvh0I4i04tUhCNHNQ==
  resolved: https://registry.npmjs.org/caniuse-lite/-/caniuse-lite-1.0.30001809.tgz
node_modules/client-only | version=0.0.1 | dev=False | optional=False | license=MIT
  integrity: sha512-IV3Ou0jSMzZrd3pZ48nLkT9DA7Ag1pnPzaiQhpW7c3Rbcqqzvzzvu+L8gfqMp/8IM2MQtSiqaCxrrcfu8I8rMA==
  resolved: https://registry.npmjs.org/client-only/-/client-only-0.0.1.tgz
node_modules/csstype | version=3.2.3 | dev=True | optional=False | license=MIT
  integrity: sha512-z1HGKcYy2xA8AGQfwrn0PAy+PB7X/GSj3UVJW9qKyn43xWa+gl5nXmU4qqLMRzWVLFC8KusUX8T/0kCiOYpAIQ==
  resolved: https://registry.npmjs.org/csstype/-/csstype-3.2.3.tgz
node_modules/data-uri-to-buffer | version=4.0.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 12"}
  integrity: sha512-0R9ikRb668HB7QDxT1vkpuUBtqc53YyAwMwGeUFKRojY/NWKvdZ+9UYtRfGmhqNbRkTSVpMbmyhXipFFv2cb/A==
  resolved: https://registry.npmjs.org/data-uri-to-buffer/-/data-uri-to-buffer-4.0.1.tgz
node_modules/debug | version=4.4.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">=6.0"}
  requires: ms ^2.1.3
  integrity: sha512-RGwwWnwQvkVfavKVt22FGLw+xYSdzARwm0ru6DhTVA3umU5hZc28V3kO4stgYryrTlLpuvgI9GiijltAjNbcqA==
  resolved: https://registry.npmjs.org/debug/-/debug-4.4.3.tgz
```

```
node_modules/detect-libc | version=2.1.2 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=8"}
  integrity: sha512-Btj2BOOO83o3WyH59e8MgXsxEQVcarkUOpEYrubB0urwnN10yQ364rsiByU11nZlqWYZm05i/of7io4mzihBtQ==
  resolved: https://registry.npmjs.org/detect-libc/-/detect-libc-2.1.2.tgz
node_modules/ecdsa-sig-formatter | version=1.0.11 | dev=False | optional=False | license=Apache-2.0
  requires: safe-buffer ^5.0.1
  integrity: sha512-nagl3RYrbNv6kQkeJIpt6NJZy8twLB/2vtz6yN9Z4vRKHN4/QZJIEbqohALSgwKdnksuY3k5Addp5lg8sVoVcQ==
  resolved: https://registry.npmjs.org/ecdsa-sig-formatter/-/ecdsa-sig-formatter-1.0.11.tgz
node_modules/esbuild | version=0.28.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-HKVLS8dvII+xoKW9kmqxbRKrnWEXfJJr/FZhhJmiqIB0e053QNYFqOBouTMO/k5sID4MvCiUCvv8b9M4h32wIA==
  resolved: https://registry.npmjs.org/esbuild/-/esbuild-0.28.2.tgz
node_modules/extend | version=3.0.2 | dev=False | optional=False | license=MIT
  integrity: sha512-fjquC59cD7CyW6urNXK0FBufkZcoiGG80wTuPujX590cB5Ttln20E2UB4S/WARVqhXffZl2LNgS+gQdPIIim/g==
  resolved: https://registry.npmjs.org/extend/-/extend-3.0.2.tgz
node_modules/fetch-blob | version=3.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": "^12.20 || >= 14.13"}
  requires: node-domexception ^1.0.0, web-streams-polyfill ^3.0.3
  integrity: sha512-7yAQpD2UMJzLi1Dqv7qFYnPbaPx7ZfFK6PiIxQ4PfkGPyNyl2Ugx+a/umUonmKqjhM4DnfbMvdX6otXq83soQQ==
  resolved: https://registry.npmjs.org/fetch-blob/-/fetch-blob-3.2.0.tgz
node_modules/formdata-polyfill | version=4.0.10 | dev=False | optional=False | license=MIT
  engines: {"node": ">=12.20.0"}
  requires: fetch-blob ^3.1.2
  integrity: sha512-buewHzMvYL29jdeQTVILecSaZKnt/RJWjoZCF5OW60Z67/GmSLBkOFM7qh1PI3zFNtJbaZL5eQu1vLfazOwj4g==
  resolved: https://registry.npmjs.org/formdata-polyfill/-/formdata-polyfill-4.0.10.tgz
node_modules/fsevents | version=2.3.3 | dev=True | optional=True | license=MIT
  engines: {"node": "^8.16.0 || ^10.6.0 || >=11.0.0"}
  platform: {"os": ["darwin"]}
  integrity: sha512-5xoDfX+fL7faATnagmWPpbFtwh/R77WmMMqqHGS65C3vvB0YHrgF+B1YmZ3441tMj5n63k0212XNoJwzlhffQw==
  resolved: https://registry.npmjs.org/fsevents/-/fsevents-2.3.3.tgz
node_modules/gaxios | version=7.3.0 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: extend ^3.0.2, https-proxy-agent ^7.0.1, node-fetch ^3.3.2
  integrity: sha512-RB5vLV+vvQeoFPCX4QMK6/hjVkbIamPp1QSUD0CiZcnj12qbpiL+pLbYtgD+oZkWl0tl9z+o2Utp+MpM3QRhBA==
  resolved: https://registry.npmjs.org/gaxios/-/gaxios-7.3.0.tgz
node_modules/gcp-metadata | version=8.1.2 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: gaxios ^7.0.0, google-logging-utils ^1.0.0, json-bigint ^1.0.0
  integrity: sha512-zV/5HKTfCeKWnxG0Dmrw51hEWFGfcF2xiXqcA3+J90WDuP0SvoiSO5ORvcBsifmx/FoIjgQN3oNOGaQ5PhLFkg==
  resolved: https://registry.npmjs.org/gcp-metadata/-/gcp-metadata-8.1.2.tgz
node_modules/google-auth-library | version=10.9.1 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: base64-js ^1.3.0, ecdsa-sig-formatter ^1.0.11, gaxios ^7.1.4, gcp-metadata 8.1.2,
  google-logging-utils 1.1.3, jws ^4.0.0
  integrity: sha512-i1ydyHrqcIxXkWh/uBmVkzCvIuq5yiK2ATndIe5XxKholrG/MTYP9xGYka4sQhrbIAgGjL2B6NOE7rFaiF3fXw==
  resolved: https://registry.npmjs.org/google-auth-library/-/google-auth-library-10.9.1.tgz
node_modules/google-logging-utils | version=1.1.3 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=14"}
  integrity: sha512-eAmLkjDjAFCVXg7A1unxHsLf961m6y17QFqXqAXGj/gVkKFrEICfStRfwUlGNfeCEjNRa32JEWOUTlYXPyyKvA==
  resolved: https://registry.npmjs.org/google-logging-utils/-/google-logging-utils-1.1.3.tgz
node_modules/https-proxy-agent | version=7.0.6 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 14"}
  requires: agent-base ^7.1.2, debug 4
  integrity: sha512-vK9P5/iUfdl95AI+JVyUuIcVtd4ofvtrOr3HNtM2yxC9bnMbEdp3x01OhQNnjb8IJYi38VlTE3mBXwcfvywuSw==
  resolved: https://registry.npmjs.org/https-proxy-agent/-/https-proxy-agent-7.0.6.tgz
node_modules/json-bigint | version=1.0.0 | dev=False | optional=False | license=MIT
  requires: bignumber.js ^9.0.0
  integrity: sha512-SiPv/8VpZuWbvLSMtTDU8hEfrZWg/mH/nV/b4o0CYbSxu1UIQPLdwKOCIyLQX+VIPO5vrLX3i8qtqFyhdPSUSQ==
  resolved: https://registry.npmjs.org/json-bigint/-/json-bigint-1.0.0.tgz
node_modules/jwa | version=2.0.1 | dev=False | optional=False | license=MIT
  requires: buffer-equal-constant-time ^1.0.1, ecdsa-sig-formatter 1.0.11, safe-buffer ^5.0.1
  integrity: sha512-hRF04fqJIP8Abbkq5NKGN0Bbr3JxlQ+qhZufXVr0DvujKy93ZCbXZMHDL4EOtodSbCWxOqR8MS1tXA5hwqCXDg==
  resolved: https://registry.npmjs.org/jwa/-/jwa-2.0.1.tgz
node_modules/jws | version=4.0.1 | dev=False | optional=False | license=MIT
  requires: jwa ^2.0.1, safe-buffer ^5.0.1
  integrity: sha512-EKI/M/yqPncGUUh44xz0PxSidXFr/+r0pA70+gIYhjv+et7yxM+s29Y+VGDkovRofQem0fs7Uvf4+YmAdyRduA==
  resolved: https://registry.npmjs.org/jws/-/jws-4.0.1.tgz
node_modules/long | version=5.3.2 | dev=False | optional=False | license=Apache-2.0
  integrity: sha512-mNAgZ1GmyNhD7AuqnTG3/VQ26o760+ZYBPKjPvugO8+nLbYfX6TVpJPseBvopbdY+qpZ/lKUnmEc1LeZYS3QAA==
  resolved: https://registry.npmjs.org/long/-/long-5.3.2.tgz
node_modules/ms | version=2.1.3 | dev=False | optional=False | license=MIT
  integrity: sha512-6FlzubTLZG3J2a/NVCAleEhjzq5oxgHyaCU9yYXvcLsvoVaHJq/s5xXI6/XXP6tz7R9xAOtHnSO/tXtF3WRTlA==
  resolved: https://registry.npmjs.org/ms/-/ms-2.1.3.tgz
node_modules/nanoid | version=3.3.20 | dev=False | optional=False | license=MIT
  engines: {"node": "^10 || ^12 || ^13.7 || ^14 || >=15.0.1"}
  integrity: sha512-uKdg2G3GNCKQn9byYOpxbGqrT2fGO5KRt5J/8b3pok8rT6qxGWF6hxMyJiEYtAf+FVyYuD9hRaDqX5uPFYJ4ZQ==
  resolved: https://registry.npmjs.org/nanoid/-/nanoid-3.3.20.tgz
node_modules/next | version=15.5.28 | dev=False | optional=False | license=MIT
  engines: {"node": "^18.18.0 || ^19.8.0 || >= 20.0.0"}
  requires: @next/env 15.5.28, @swc/helpers 0.5.15, caniuse-lite ^1.0.30001579, postcss 8.4.31, styled-jsx
  5.1.6
  peers: {"@opentelemetry/api": "^1.1.0", "@playwright/test": "^1.51.1", "babel-plugin-react-compiler": "*",
   "react": "^18.2.0 || 19.0.0-rc-de68d2f4-20241204 || ^19.0.0", "react-dom": "^18.2.0 ||
```

```
  19.0.0-rc-de68d2f4-20241204 || ^19.0.0", "sass": "^1.3.0"}
  integrity: sha512-JjhLBBY1PNnuwPtcZ7t8yxVeJVYvD2Jyp633J+gRCNbzSt7N0E+xqCf6uQiff3+3qmUkwcF/ksfSsK1xsZ76Tw==
  resolved: https://registry.npmjs.org/next/-/next-15.5.28.tgz
node_modules/node-domexception | version=1.0.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=10.5.0"}
  integrity: sha512-/jKZoMpw0F8GRwl4/eLROPA3cfcXtLApP0QzLmUT/HuPCZWyB7IY9ZrMeKw2O/nFIqPQB3PVM9aYm0F312AXDQ==
  resolved: https://registry.npmjs.org/node-domexception/-/node-domexception-1.0.0.tgz
node_modules/node-fetch | version=3.3.2 | dev=False | optional=False | license=MIT
  engines: {"node": "^12.20.0 || ^14.13.1 || >=16.0.0"}
  requires: data-uri-to-buffer ^4.0.0, fetch-blob ^3.1.4, formdata-polyfill ^4.0.10
  integrity: sha512-dRB78srN/l6gqWulah9SrxeYnxeddIG30+GOqK/9OlLVyLg3HPnr6SqOWTWOXKRwC2eGYCkZ59NNuSgvSrpgOA==
  resolved: https://registry.npmjs.org/node-fetch/-/node-fetch-3.3.2.tgz
node_modules/p-retry | version=4.6.2 | dev=False | optional=False | license=MIT
  engines: {"node": ">=8"}
  requires: @types/retry 0.12.0, retry ^0.13.1
  integrity: sha512-312Id396EbJdvRONlngUx0NydfrIQ5lsYu0znKVUzVvArzEIt08V1qhtyESbGVd1FGX7UKtiFp5uwKZdM8wIuQ==
  resolved: https://registry.npmjs.org/p-retry/-/p-retry-4.6.2.tgz
node_modules/pg | version=8.23.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 16.0.0"}
  requires: pg-connection-string ^2.14.0, pg-pool ^3.14.0, pg-protocol ^1.16.0, pg-types 2.2.0, pgpass 1.0.5
  peers: {"pg-native": ">=3.0.1"}
  integrity: sha512-Ip2EQCngowJLGOfCwkFhPXU7/ljlhn6Rxlmy4XYfL2Y+vyRM59+8uR2xqRWKdYmbXmxCFOAmKxBuSUCdF34qLg==
  resolved: https://registry.npmjs.org/pg/-/pg-8.23.0.tgz
node_modules/pg-cloudflare | version=1.4.0 | dev=False | optional=True | license=MIT
  integrity: sha512-Vo7z/6rrQYxpNRylp4Tlob2elzbh+N/MOQbxFVWCxS7oEx6jF53GTJFxK2WWpKuBRkmiin4Mt+xofFDjx09R0A==
  resolved: https://registry.npmjs.org/pg-cloudflare/-/pg-cloudflare-1.4.0.tgz
node_modules/pg-connection-string | version=2.14.0 | dev=False | optional=False | license=MIT
  integrity: sha512-XwWDGcLRGCXAR8F/AM5bG7Q+A3Wm2s6QeEjlOKZLlH3UYcguiqCWKyWXVag5TLTIjR7oOJUY8kcADaZgWPyLeg==
  resolved: https://registry.npmjs.org/pg-connection-string/-/pg-connection-string-2.14.0.tgz
node_modules/pg-int8 | version=1.0.1 | dev=False | optional=False | license=ISC
  engines: {"node": ">=4.0.0"}
  integrity: sha512-WCtabS6t3c8SkpDBUlb1kjOs7l66xsGdKpIPZsg4wR+B3+u9UAum2odSsF9tnvxg80h4ZxLWMy4pRjOsFIqQpw==
  resolved: https://registry.npmjs.org/pg-int8/-/pg-int8-1.0.1.tgz
node_modules/pg-pool | version=3.14.0 | dev=False | optional=False | license=MIT
  peers: {"pg": ">=8.0"}
  integrity: sha512-gKtPkFdQPU3DksooVLi9LsjZxrsBUZIpa+7aVx+LV5pNh0KzP4Zleud2po+ConrxbuXGBJ6Hfer6hdgpIBpBaw==
  resolved: https://registry.npmjs.org/pg-pool/-/pg-pool-3.14.0.tgz
node_modules/pg-protocol | version=1.16.0 | dev=False | optional=False | license=MIT
  integrity: sha512-sILXutLVjCLjcDuOmvhX5e2Z4cS5qG/6Bu3VkpFwdf/633ElGLpEh9bgmuI5I4sqKqkifQiGyiCcx1HdtrK7tg==
  resolved: https://registry.npmjs.org/pg-protocol/-/pg-protocol-1.16.0.tgz
node_modules/pg-types | version=2.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=4"}
  requires: pg-int8 1.0.1, postgres-array ~2.0.0, postgres-bytea ~1.0.0, postgres-date ~1.0.4,
  postgres-interval ^1.1.0
  integrity: sha512-qTAAlrEsl8s4OiEQY69wDvcMIdQN6wdz5ojQiOy6YRMuynxenON0O5oCpJI6lshc6scgAY8qvJ2On/p+CXY0GA==
  resolved: https://registry.npmjs.org/pg-types/-/pg-types-2.2.0.tgz
node_modules/pgpass | version=1.0.5 | dev=False | optional=False | license=MIT
  requires: split2 ^4.1.0
  integrity: sha512-FdW9r/jQZhSeohs1Z3sI1yxFQNFvMcnmfuj4WBMUTxOrAyLMaTcE1aAMBiTlbMNaXvBCQuVi0R7hd8udDSP7ug==
  resolved: https://registry.npmjs.org/pgpass/-/pgpass-1.0.5.tgz
node_modules/picocolors | version=1.1.1 | dev=False | optional=False | license=ISC
  integrity: sha512-xceH2snhtb5M9liqDsmEw56le376mTZkEX/jEb/RxNFyegNul7eNslCXP9FDj/Lcu0X8KEyMceP2ntpaHrDEVA==
  resolved: https://registry.npmjs.org/picocolors/-/picocolors-1.1.1.tgz
node_modules/postcss | version=8.5.32 | dev=False | optional=False | license=MIT
  engines: {"node": "^10 || ^12 || >=14"}
  requires: nanoid ^3.3.20, picocolors ^1.1.1, source-map-js ^1.2.2
  integrity: sha512-LJlKCCAUFKOuZxipUdYw1NzIITEsPcgyOG9LkvRJvuKj/bRzbuRY0ARXvL0pWGpsZvn8jku+LMep2eU0seHp8g==
  resolved: https://registry.npmjs.org/postcss/-/postcss-8.5.32.tgz
node_modules/postgres-array | version=2.0.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=4"}
  integrity: sha512-VpZrUqU5A69eQyW2c5CA1jtLecCsN2U/bD6VilrFDWq5+5UIEVO7nazS3TEcHf1zuPYO/sqGvUvW62g86RXZuA==
  resolved: https://registry.npmjs.org/postgres-array/-/postgres-array-2.0.0.tgz
node_modules/postgres-bytea | version=1.0.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  integrity: sha512-5+5HqXnsZPE65IJZSMkZtURARZelel2oXUEO8rH83VS/hxH5vv1uHquPg5wZs8yMAfdv971IU+kcPUczi7NVBQ==
  resolved: https://registry.npmjs.org/postgres-bytea/-/postgres-bytea-1.0.1.tgz
node_modules/postgres-date | version=1.0.7 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  integrity: sha512-suDmjLVQg78nMK2UZ454hAG+OAW+HQPZ6n++TNDUX+L0+uUlLywnoxJKDou51Zm+zTCjrCl0Nq6J9C5hP9vK/Q==
  resolved: https://registry.npmjs.org/postgres-date/-/postgres-date-1.0.7.tgz
node_modules/postgres-interval | version=1.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  requires: xtend ^4.0.0
  integrity: sha512-9ZhXKM/rw350N1ovuWHbGxnGh/SNJ4cnxHiM0rxE4VN41wsg8P8zWn9hv/buK00RP4WvlOyr/RBDiptyxVbkZQ==
  resolved: https://registry.npmjs.org/postgres-interval/-/postgres-interval-1.2.0.tgz
node_modules/protobufjs | version=7.6.5 | dev=False | optional=False | license=BSD-3-Clause
  engines: {"node": ">=12.0.0"}
  requires: @protobufjs/aspromise ^1.1.2, @protobufjs/base64 ^1.1.2, @protobufjs/codegen ^2.0.5,
  @protobufjs/eventemitter ^1.1.1, @protobufjs/fetch ^1.1.1, @protobufjs/float ^1.0.2, @protobufjs/path
  ^1.1.2, @protobufjs/pool ^1.1.0, @protobufjs/utf8 ^1.1.1, @types/node >=13.7.0, long ^5.3.2
  integrity: sha512-/FPD0nUc9jH6rfFjji9IBqOz4pcSE3CsT1m7Ep6Mdb0LxSUMj8hgl6GomOvZzpNpAqqGaXA0P3VSrZLFzIhQrw==
  resolved: https://registry.npmjs.org/protobufjs/-/protobufjs-7.6.5.tgz
node_modules/react | version=19.2.8 | dev=False | optional=False | license=MIT
```

```
  engines: {"node": ">=0.10.0"}
  integrity: sha512-PWaYA1L/q9u2u7xYQi+Y3L3Yfnie7XyLeaJICV1MGD6LprsBxcAqGjYyr0eY3p+QdsA+x/Irkt4Qif8D63+Sbw==
  resolved: https://registry.npmjs.org/react/-/react-19.2.8.tgz
node_modules/react-dom | version=19.2.8 | dev=False | optional=False | license=MIT
  requires: scheduler ^0.27.0
  peers: {"react": "^19.2.8"}
  integrity: sha512-rVprimfGBG3DR+Tq0IQG2DT5PxKth1WIGDmj5yPmlzr4YBe7uyE+Du4oVqTDXZSHGGGXRtTJEGSSePyQCMBglQ==
  resolved: https://registry.npmjs.org/react-dom/-/react-dom-19.2.8.tgz
node_modules/retry | version=0.13.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 4"}
  integrity: sha512-XQBQ3I8W1Cge0Seh+6gjj03LbmRFWuoszgK9ooCpwYIrhhoO80pfq4cUkU5DkknwfOfFteRwlZ56PYOGYyFWdg==
  resolved: https://registry.npmjs.org/retry/-/retry-0.13.1.tgz
node_modules/safe-buffer | version=5.2.1 | dev=False | optional=False | license=MIT
  integrity: sha512-rp3So07KcdmmKbGvgaNxQSJr7bGVSVk5S9Eq1F+ppbRo70+YeaDxkw5Dd8NPN+GD6bjnYm2VuPuCXmpuYvmCXQ==
  resolved: https://registry.npmjs.org/safe-buffer/-/safe-buffer-5.2.1.tgz
node_modules/scheduler | version=0.27.0 | dev=False | optional=False | license=MIT
  integrity: sha512-eNv+WrVbKu1f3vbYJT/xtiF5syA5HPIMtf9IgY/nKg0sWqzAUEvqY/xm7OcZc/qafLx/iO9FgOmeSAp4v5ti/Q==
  resolved: https://registry.npmjs.org/scheduler/-/scheduler-0.27.0.tgz
node_modules/semver | version=7.8.5 | dev=False | optional=True | license=ISC
  engines: {"node": ">=10"}
  integrity: sha512-Y7/KDsb8LjooZpwaqGyulO6DQlksgCnccchHGk+sZIY4SBvUocMBEFH5Ur1fI4dV+Jvl0w6cjvucaIi40puRioA==
  resolved: https://registry.npmjs.org/semver/-/semver-7.8.5.tgz
node_modules/sharp | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  requires: @img/colour ^1.1.0, detect-libc ^2.1.2, semver ^7.8.5
  integrity: sha512-Ywn4OnzGukp7CDMrp08RQ50YKmuwG47brZgIVPTvBaaAfQlRlygrRqSrxdCiL9M+LlzLBiJ68IR1QqvzHyjC7g==
  resolved: https://registry.npmjs.org/sharp/-/sharp-0.35.5.tgz
node_modules/source-map-js | version=1.2.2 | dev=False | optional=False | license=BSD-3-Clause
  engines: {"node": ">=0.10.0"}
  integrity: sha512-KGj/8Y43x35aZVDtt+J4mK1hoLGHULMYfSkODJNQjNDC3oW1PqPoxMwo0pLUsWM/UEGzON/NxeHywEfNXNP3Vw==
  resolved: https://registry.npmjs.org/source-map-js/-/source-map-js-1.2.2.tgz
node_modules/split2 | version=4.2.0 | dev=False | optional=False | license=ISC
  engines: {"node": ">= 10.x"}
  integrity: sha512-UcjcJOWknrNkF6PLX83qcHM6KHgVKNkV62Y8a5uYDVv9ydGQVwAHMKqHdJje1VTWpljG0WYpCDhrCdAOYH4TWg==
  resolved: https://registry.npmjs.org/split2/-/split2-4.2.0.tgz
node_modules/styled-jsx | version=5.1.6 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 12.0.0"}
  requires: client-only 0.0.1
  peers: {"react": ">= 16.8.0 || 17.x.x || ^18.0.0-0 || ^19.0.0-0"}
  integrity: sha512-qSVyDTeMotdvQYoHWLNGwRFJHC+i+ZvdBRYosOFgC+Wg1vx4frN2/RG/NA7SYqqvKNLf39P2LSRA2pu6n0XYZA==
  resolved: https://registry.npmjs.org/styled-jsx/-/styled-jsx-5.1.6.tgz
node_modules/tslib | version=2.8.1 | dev=False | optional=False | license=0BSD
  integrity: sha512-oJFu94HQb+KVduSUQL7wnpmqnfmLsOA/nAh6b6EH0wCEoK0/mPeXU6c3wKDV83MkOuHPRHtSXKKU99IBazS/2w==
  resolved: https://registry.npmjs.org/tslib/-/tslib-2.8.1.tgz
node_modules/tsx | version=4.23.12 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18.0.0"}
  requires: esbuild ~0.28.0
  integrity: sha512-FDf4L4sYzKtzWYhU/Xm0AQFdTjdIxNo9ElTf2mxXM6k8YMHXzYUe4yODVaXP4V9uMFbVg8c0qyBccK2OOxb45Q==
  resolved: https://registry.npmjs.org/tsx/-/tsx-4.23.12.tgz
node_modules/typescript | version=5.9.3 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=14.17"}
  integrity: sha512-jl1vZzPDinLr9eUt3J/t7V6FgNEw9QjvBPdysz9KfQDD41fQrC2Y4vKQdiaUpFT4bXlb1RHhLpp8wtm6M5TgSw==
  resolved: https://registry.npmjs.org/typescript/-/typescript-5.9.3.tgz
node_modules/undici-types | version=6.21.0 | dev=False | optional=False | license=MIT
  integrity: sha512-iwDZqg0QAGrg9Rav5H4n0M64c3mkR59cJ6wQp+7C4nI0gsmExaedaYLNO44eT4AtBBwjbTiGPMlt2Md0T9H9JQ==
  resolved: https://registry.npmjs.org/undici-types/-/undici-types-6.21.0.tgz
node_modules/web-streams-polyfill | version=3.3.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 8"}
  integrity: sha512-d2JWLCivmZYTSIoge9MsgFCZrt571BikcWGYkjC1khllbTeDlGqZ2D8vD8E/lJa8WGWbb7Plm8/XJYV7IJHZZw==
  resolved: https://registry.npmjs.org/web-streams-polyfill/-/web-streams-polyfill-3.3.3.tgz
node_modules/ws | version=8.21.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">=10.0.0"}
  peers: {"bufferutil": "^4.0.1", "utf-8-validate": ">=5.0.2"}
  integrity: sha512-201TZ/kPWxoPr/OKWjquZR1SWKXcvxdH+e1xrx89b3YbmzLMFCLfnaG1HFIgWzJOEWZ7MvpK++odZufgYR50Rw==
  resolved: https://registry.npmjs.org/ws/-/ws-8.21.3.tgz
node_modules/xtend | version=4.0.2 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.4"}
  integrity: sha512-LKYU1iAXJXUgAXn9URjiu+MWhyUXHsvfp7mcuYm9dSUKK0/CjtrUwFAxD82/mCWbtLsGjFIad0wIsod4zrTAEQ==
  resolved: https://registry.npmjs.org/xtend/-/xtend-4.0.2.tgz
```

cloud/package-lock.json

```
node_modules/@cloudflare/kv-asset-handler | version=0.5.0 | dev=True | optional=False | license=MIT OR
  Apache-2.0
  engines: {"node": ">=22.0.0"}
  integrity: sha512-jxQYkj8dSIzc0cD6cMMNdOc1UVjqSqu8BZdor5s8cGjW2I8BjODt/kWPVdY+u9zj3ms75Q5qaZgnxUad83+eAg==
  resolved: https://registry.npmjs.org/@cloudflare/kv-asset-handler/-/kv-asset-handler-0.5.0.tgz
node_modules/@cloudflare/unenv-preset | version=2.16.2 | dev=True | optional=False | license=MIT OR
  Apache-2.0
  peers: {"unenv": "2.0.0-rc.24", "workerd": ">1.20260305.0 <2.0.0-0"}
  integrity: sha512-JBP1+Z7ZSNG/d4mRP+y8VC5dka3tZVMLEZRvS+rzQ4DGV1EoxRFQckcJTTkXbHSQiTj0DtNI01Zwb/V2fX0mvQ==
  resolved: https://registry.npmjs.org/@cloudflare/unenv-preset/-/unenv-preset-2.16.2.tgz
node_modules/@cloudflare/workerd-darwin-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-lsEx0i7nR0PNG/erUFFHmQmiidEhLfDE5uQmAL9421/y4/ycuxDDOSaxu3VGGYFFPK5sduyUeMmjIlX4CwOBFg==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-darwin-64/-/workerd-darwin-64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-darwin-arm64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-5e79fHgabdDD8EgmjOhJ1S+xMsf6DbC7fL7IgTBizMnzOp0P2isDn7pYmUxI9AJZE9FVQ4RUilH/I36YNg+GQQ==
  resolved:
  https://registry.npmjs.org/@cloudflare/workerd-darwin-arm64/-/workerd-darwin-arm64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-linux-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-VHQ6jKFSihjR2+x1buby8XTdBLLJztVnYiB7OLOTYO8aDXB+c1Rd2410PdgFuFYc4AgFEk6PCJLyCLL5L1KBnw==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-linux-64/-/workerd-linux-64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-linux-arm64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-ilpRHzfDN8YFRM5CLRKuFw40x/LJBS89yVdhdQmxehlVDuBqjKpJB++zPFbTgKRRFaNupgnXc8RHktXAIhgCmQ==
  resolved:
  https://registry.npmjs.org/@cloudflare/workerd-linux-arm64/-/workerd-linux-arm64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-windows-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-279WLVjNsMycAwr0EZNiNEf0l2SY6NUtsN80NwZzbTHzakmiN+WSx4w38muxPm+PAU0oSPPAPXKVD+H6Hya8xw==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-windows-64/-/workerd-windows-64-1.20261023.1.tgz
node_modules/@cspotcode/source-map-support | version=0.8.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=12"}
  requires: @jridgewell/trace-mapping 0.3.9
  integrity: sha512-IchNf6dN4tHoMFIn/7OE8LWZ19Y6q/67Bmf6vnGREv8RSbBVb9LPJxEcnwrcwX6ixSvaiGoomAUvu4YSxXrVgw==
  resolved: https://registry.npmjs.org/@cspotcode/source-map-support/-/source-map-support-0.8.1.tgz
node_modules/@emnapi/runtime | version=1.11.3 | dev=True | optional=True | license=MIT
  requires: tslib ^2.4.0
  integrity: sha512-Xz4Tpyki7XyrpbUK1jR1AhdAdaXyhhY4lZ3neLodmhpuWfy2PAQN5B46sAiU4liOXGLkHypn/qU+jvfWSCYYLA==
  resolved: https://registry.npmjs.org/@emnapi/runtime/-/runtime-1.11.3.tgz
node_modules/@esbuild/aix-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["aix"], "cpu": ["ppc64"]}
  integrity: sha512-XExcO+dvLKvVtNTibSTBej1NCAbaGhWn9Ww1ZPx80qsahhPFe/8jgWP0IchNe0F3HwkU7n8ejhH8bjonqht8mQ==
  resolved: https://registry.npmjs.org/@esbuild/aix-ppc64/-/aix-ppc64-0.28.2.tgz
node_modules/@esbuild/android-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm"]}
  integrity: sha512-kXXoiPVVGQcnIYGOeaovwOURpniDBpSq4A03qkQ+BMQqtGG6HYap3xne9C1O1yo4TR3qxlCX5IqqmX6fFo2Lqg==
  resolved: https://registry.npmjs.org/@esbuild/android-arm/-/android-arm-0.28.2.tgz
node_modules/@esbuild/android-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm64"]}
  integrity: sha512-5YfKeeI8qWfBZIX+u2xZC3Zlb3Os/gLS2sbEKM+I4ZOcsWmHS2WLysCcQZDAFRslDUU5Oiq44gf6PYN1vGwG5A==
  resolved: https://registry.npmjs.org/@esbuild/android-arm64/-/android-arm64-0.28.2.tgz
node_modules/@esbuild/android-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["x64"]}
  integrity: sha512-O387ite7SzUyCcy3JQX4P4bLtEA7bLLkx+esve5JHnyYfNTxcVpXZo9jhdB0lTKN44gztELTdU7nS8Nr16Fs1Q==
  resolved: https://registry.npmjs.org/@esbuild/android-x64/-/android-x64-0.28.2.tgz
node_modules/@esbuild/darwin-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-n4KqkOQrraxHJcgjM1RvwbigfQKIKJVpM7xp+KsxiyUSrRdIXnt73VhrPAx0fV44hgfmIVKjxMN9J1t5jySVkw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-arm64/-/darwin-arm64-0.28.2.tgz
node_modules/@esbuild/darwin-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-uq6suIWYP37qzGddBKPw5QEQPi6HiLGsO7UmkpfyaYNQ3D+rN6w6WfwH+nuqcGXWvawGwxOEroO4YGnFh95azw==
```

```
  resolved: https://registry.npmjs.org/@esbuild/darwin-x64/-/darwin-x64-0.28.2.tgz
node_modules/@esbuild/freebsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["arm64"]}
  integrity: sha512-n+I0BTSRIoy+d6RPKnEVwql5UwBJolytvY4mAOIEJorKlqgPII8ix6slVVrfZ5Tnj7glIZvloylbB/EJPMWEXw==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-arm64/-/freebsd-arm64-0.28.2.tgz
node_modules/@esbuild/freebsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["x64"]}
  integrity: sha512-78XJTJkvPs0kz2w61301PJjXl4g7q3JqiYMZ/M/yVI73EHBrCRTgkhu9oqG7vPqq+a/yadEW8aD+agKlk5xrmg==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-x64/-/freebsd-x64-0.28.2.tgz
node_modules/@esbuild/linux-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-XlDnu2q5yoqems+xay6wSAcg9DDD7K9RLKZEBOMZm3ckNpJBvOX20tSfby8KfrrhINDyv9V2YVZKY/SpoGJI8w==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm/-/linux-arm-0.28.2.tgz
node_modules/@esbuild/linux-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-pW4AC0P3it8c7do9MVM4p51FzHzdM/TZrerurgRcHJ2WTa1VQ1CIq18xncfpBJw4ojkiZZrKW2yIBWBP92j6Ug==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm64/-/linux-arm64-0.28.2.tgz
node_modules/@esbuild/linux-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ia32"]}
  integrity: sha512-CYbnj78HsIeA+DhgUKgFCfvNsTHFhMMrinUrMZpDXJXKN8T3XViTZ/+wtHeVxEWY8ewSzTFN+nRmSwO2tZaLUQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ia32/-/linux-ia32-0.28.2.tgz
node_modules/@esbuild/linux-loong64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["loong64"]}
  integrity: sha512-buwkd8nsph4R+ajRvw0qM5Hja/TXQow3ptzWO2EbG/cqcIkHloRrdlBtQlshyYGTNFvfkfJ5tpPLVkY4DtsPfQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-loong64/-/linux-loong64-0.28.2.tgz
node_modules/@esbuild/linux-mips64el | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["mips64el"]}
  integrity: sha512-ZVykbDyk7519VwiNb9Lcj9m8XM6v5V9uKPvrEMkkEedVewf+0itkhahp4HDpgERXhwLRpWFypsGbG/J8s0QjJA==
  resolved: https://registry.npmjs.org/@esbuild/linux-mips64el/-/linux-mips64el-0.28.2.tgz
node_modules/@esbuild/linux-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-CAXl+Dtd9UUuJd8pKKdwh6MLm3MUMiqMPmhZ3tTSXPqfyQ3vDl6R5hZdZ/kYojK4ofXtdfSv1tFq8XzWx3heNQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ppc64/-/linux-ppc64-0.28.2.tgz
node_modules/@esbuild/linux-riscv64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-GeXCej4IQtU1B+QlDV8W/RRvbzI3O/Stss+/bCXv4lZls5WGRtu2a+3JkA3i4qIUlMXpcHebWpF8AkJhATowuA==
  resolved: https://registry.npmjs.org/@esbuild/linux-riscv64/-/linux-riscv64-0.28.2.tgz
node_modules/@esbuild/linux-s390x | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-3H1weTYZPxt/WOhByszQZybS9w5lKzUn1FDMsgEChbHWQwHYQQRfBxgCcZvPhjHfKyJjIievvMmEUawJrdY9Dg==
  resolved: https://registry.npmjs.org/@esbuild/linux-s390x/-/linux-s390x-0.28.2.tgz
node_modules/@esbuild/linux-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4xTZr1FUmSoQW4XIWmit3tzQrUTZM+N3P0XV8xROKYF50XfI7xeO90+1bZvNwxIufQ9hDQVRJH5YhgPVF8A/HQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-x64/-/linux-x64-0.28.2.tgz
node_modules/@esbuild/netbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["arm64"]}
  integrity: sha512-sSATRjPeDBg3pdgHoQfoYBob11Kk1FGa9lui5RIHZCoCkJa9QKlvl3/vKz2usCmYYjs7ymJR/2Nnsqe+Hjt5nw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-arm64/-/netbsd-arm64-0.28.2.tgz
node_modules/@esbuild/netbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["x64"]}
  integrity: sha512-lqnzCV+mM0gIADaKihiCg6ifgfU2L3h5E33rNQBN1Y4MaVGnzryzmvvf7UHxprpQdE8hpqLolJ9Rl+SkIRDpyw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-x64/-/netbsd-x64-0.28.2.tgz
node_modules/@esbuild/openbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["arm64"]}
  integrity: sha512-AL2qJILH7lNjrDmCQDvdxMfAUIv8KMNZOvrwAQ8i8//ntL9FflhOyMJ8OZSMBb8/AWXe3/5v5S20y3zCoZWKoQ==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-arm64/-/openbsd-arm64-0.28.2.tgz
node_modules/@esbuild/openbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["x64"]}
  integrity: sha512-QtiuPytchRyC4rwUKhexJdQKvDuZ6hWloi3igqPQNUJCS1/v9EiO3UTOXR6A3FoMo4fnAKbWJdqaIwhOzh8qEw==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-x64/-/openbsd-x64-0.28.2.tgz
node_modules/@esbuild/openharmony-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openharmony"], "cpu": ["arm64"]}
  integrity: sha512-WkhYDmpTjLvGlScA1rwjRUmhl4k8oXR3cIbtqWmELgU/dFeHHlEllxDvdWcNJV9rbzCexB5vz8gtNewWLgCT7Q==
  resolved: https://registry.npmjs.org/@esbuild/openharmony-arm64/-/openharmony-arm64-0.28.2.tgz
node_modules/@esbuild/sunos-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
```

```
  platform: {"os": ["sunos"], "cpu": ["x64"]}
  integrity: sha512-GPMSkTOtMnv2U2F8gxe4Io6qmVs+YKyp832EtqqxrhFngmXQ3rzwytelm3GIn7T4VviRUlf3sOgBOiTdvaf7g==
  resolved: https://registry.npmjs.org/@esbuild/sunos-x64/-/sunos-x64-0.28.2.tgz
node_modules/@esbuild/win32-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-PIhhEkE9uPBleRBrQEJpUn7MBnibZzbGzYWPmY3x+YoVg/95zbjB4CxPPOQ8l5tYYM4mMaCthF8/1DIfBQQyWQ==
  resolved: https://registry.npmjs.org/@esbuild/win32-arm64/-/win32-arm64-0.28.2.tgz
node_modules/@esbuild/win32-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-YmJbfTlvU7Sdn9BB+4PRES4oB6pxgS37MAONj+hBr/cpXS1aBPKXxNnDbu+QCWPj0o9dgyxeq79g6c5P8KeuYA==
  resolved: https://registry.npmjs.org/@esbuild/win32-ia32/-/win32-ia32-0.28.2.tgz
node_modules/@esbuild/win32-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-5ebpxr3nWMzrL/rnUI755Jkuee0bHL/Gq0WTF9lvcpv73wAp5eu8MfBUgWK9bhWvZjj7yX8etf/8tI8Ney695g==
  resolved: https://registry.npmjs.org/@esbuild/win32-x64/-/win32-x64-0.28.2.tgz
node_modules/@img/colour | version=1.1.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-Td76q7j57o/tLVdgS746cYARfSyxk8iEfRxewL9h4OMzYhbW4TAcppl0mT4eyqXddh6L/jwoM75mo7ixa/pCeQ==
  resolved: https://registry.npmjs.org/@img/colour/-/colour-1.1.0.tgz
node_modules/@img/sharp-darwin-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-QRUlFQ0WxvdWyqqG/WtI3iupfD5rBzmCHXSdPsY91sAtVtTo7Q4cb6zOccZ3gqEqkr0f1As1ehLqmEpDsRf+lg==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-arm64/-/sharp-darwin-arm64-0.35.5.tgz
node_modules/@img/sharp-darwin-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-+BR255RhDlpygUpOc/Jdt1nT6DQ3XG/ERo5wbcdOf5Q320dKtPCKPLR1LJs9VGXRaMa8l1uUa0tkCNOXiAxZUw==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-x64/-/sharp-darwin-x64-0.35.5.tgz
node_modules/@img/sharp-freebsd-wasm32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["freebsd"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-Y/z91nEZ4uIBX5X3nfTovjU9lHNKFYbL2lpHCLVNmXQK03VIZvXBBt0KxbPGp2SdGSF+2mQU4e+hQaWOt86iAw==
  resolved: https://registry.npmjs.org/@img/sharp-freebsd-wasm32/-/sharp-freebsd-wasm32-0.35.5.tgz
node_modules/@img/sharp-libvips-darwin-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-5R89nBYiRdUlSWJxPhO+GVtaXzXSxKnRu/xqMn3KTA3L9EB9Oy/P+Nn2f2vlhPuUdy/Zusb2DarbyTpGCfEDuw==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-darwin-arm64/-/sharp-libvips-darwin-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-darwin-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-iR2OKH80yi0U+dUplyh3/xdpFvps6YkCwsXenIJxqxR1v9o+xtKTGbS9H7cps+2Vxjc8B1j96p75NmTGjIhtpQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-darwin-x64/-/sharp-libvips-darwin-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LmRtTsOHuvM2+wlO2Db37dx5MiZhB0FvSunciw48YjdOkZz9KAiRbm8ujeMOA1INqmei5NapFxYEK1D1ZSidmw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm/-/sharp-libvips-linux-arm-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-Y3dgX/6lE2QhQb+Gxy0WZxfg9MEm/JBjamZpS2IklP7xIQoKN4hzAm7KcMVGtaVDt3neE9OKBC7vAfonA/Lr1A==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm64/-/sharp-libvips-linux-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-ppc64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-Le6boB8Tai0Nis+gIxIpKx68UDVVIqdR8Tin5Yf1z2LJJQLDJvCDRqRu+jC2qCoD+eIomonmOwB4smBRxfVpYQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-ppc64/-/sharp-libvips-linux-ppc64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-riscv64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-aHkkIEHPRdQEegJN20MLmGtxYD9R2wQr3Cwpddnu5+YKMt6Uzax7S9h5gpZTo8wyrGuZSlfQ63OevL5mTyOC7Q==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linux-riscv64/-/sharp-libvips-linux-riscv64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-s390x | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-ra/mB6MikESDUO7Yg+Mi95bFBb9GsObURuhnOv3OqknjGe9sZrG8tCe9q0xSIGrtLgvgw0gKnFWcK4blSgQOuQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-s390x/-/sharp-libvips-linux-s390x-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-GJ//SSXbnwSDes02umB3nDJLFcQzw8a18V8fyhqr6tV515tOEMdImjjxj1AoafMRz56F3PHgftnj1QEKSU1zkw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-x64/-/sharp-libvips-linux-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
```

```
  integrity: sha512-hvulFwtjUcagsis6BBxHwGFwWoNZjgYmULGVrZcyfNbjA8hKILbRxGg15/7w5HDyXHXUos/j6baAWqnCyQ2DWA==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-arm64/-/sharp-libvips-linuxmusl-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-6zXKeE/p39I1AmA3cJG35eyBGNqNddLnUXjhwBnsGjFPWqf5VKkDBEqaEkPDoTEtkxwi2vv8Tcr2mDyP4So7Fg==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-x64/-/sharp-libvips-linuxmusl-x64-1.3.4.tgz
node_modules/@img/sharp-linux-arm | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LEaXK2WdXVK5ykcw0buWyPMsmLLL2vpHLD6yrNSW+JGEL3BZPA4tpKN6iaMc4AxTTAoaX/sU1rOL51lcIz48ZQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm/-/sharp-linux-arm-0.35.5.tgz
node_modules/@img/sharp-linux-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-LYVx5JTsOM2CBzmxreh+nl64/3H6Xb09iSLknqH47z2T2DFFxDeFLP5y4dJwe6H7uGQlHPyEEtIqyo3DYsRwdQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm64/-/sharp-linux-arm64-0.35.5.tgz
node_modules/@img/sharp-linux-ppc64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-QVxAAq8evVRI9ia2vqgwrmWucn5Dfv+JdWzj75pD8omHLPSP7f8p20O8jxzjCcuCEQEOtYOZUmX1hkiZ0kdevA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-ppc64/-/sharp-linux-ppc64-0.35.5.tgz
node_modules/@img/sharp-linux-riscv64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-LtdreXguaavKODPIfzJ4kffx7UNt1omwtK0rch4EBbbSTXPnxWmYSayXdLJw0fJzQ97kHt1gL/yh4tvU+nCyRQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-riscv64/-/sharp-linux-riscv64-0.35.5.tgz
node_modules/@img/sharp-linux-s390x | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-UZasTOFiYzotTsGOCu42BfUzP6Tu6Do/947iRm1RsLKvlllxwGcn4RN27LibGWceix4Y+Pmw3jsnTcCQIgWjqA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-s390x/-/sharp-linux-s390x-0.35.5.tgz
node_modules/@img/sharp-linux-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-SxFtLTeJInhAA9Q836kux2vZNeOBQEx658qvbboZScr0wIARym3IcGmW7KpVD5sbVg0Ojy+udFQdayYIZyoNog==
  resolved: https://registry.npmjs.org/@img/sharp-linux-x64/-/sharp-linux-x64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-9HbMclmI1zlNkFRs3z9/eBtDjfD0sGlrX1z6b1qwmiFY5ElDLh4BC0LPBdVp7z1DXFiKlIcznf+ZlsuZzLxQqg==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-arm64/-/sharp-linuxmusl-arm64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4KOphqB035HrVdqLZfCgMzzERrQkkzOwRhl4OAkRO1YCldbaFjySXMaK534Mo0V+LndnlJk+sbUyLeU0ULyD1A==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-x64/-/sharp-linuxmusl-x64-0.35.5.tgz
node_modules/@img/sharp-wasm32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later AND MIT
  engines: {"node": ">=20.9.0"}
  requires: @emnapi/runtime ^1.11.3
  integrity: sha512-Ptsga1su4tQx+LLF1ECS9U6nz5kmrXKo6XVbtR48Ke3ZRxxgaWBu7IDtEe1quo8hiupwm6WFqxVlXaSf7IINGQ==
  resolved: https://registry.npmjs.org/@img/sharp-wasm32/-/sharp-wasm32-0.35.5.tgz
node_modules/@img/sharp-webcontainers-wasm32 | version=0.35.5 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"cpu": ["wasm32"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-hfhF/FmoQyTUkA0bIKFOtw536BQSeBMe6BF6QyWlrPxT754+TFLaZ7sKKTfvvM0yJgKgaYTwnFCIZ/GuDw5SUA==
  resolved:
  https://registry.npmjs.org/@img/sharp-webcontainers-wasm32/-/sharp-webcontainers-wasm32-0.35.5.tgz
node_modules/@img/sharp-win32-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-X4t7g+7ZA5DKblCBEXGjUqqemj4vczING/5viFwAL8h4N3qYeyjwdCvRLHi4EdOUI+2Z7UFlp1VM+p/AuEtm6Q==
  resolved: https://registry.npmjs.org/@img/sharp-win32-arm64/-/sharp-win32-arm64-0.35.5.tgz
node_modules/@img/sharp-win32-ia32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": "^20.9.0"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-5Zm82LoBc43nhwNybZlG7Y1KO//Zhsn306fQl29ZOuStHLGTo3BWL83q3cznX0poxSAMuYL1On/BHBxkBeKr6A==
  resolved: https://registry.npmjs.org/@img/sharp-win32-ia32/-/sharp-win32-ia32-0.35.5.tgz
node_modules/@img/sharp-win32-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-x76eH0vEiHlcMQu8Y8IenntaACtddpT6W0wmXtWrnKcnKI7ME5DdgqhAD6SEWOEl1v2zDvkZDhFA9KnURwpfqg==
  resolved: https://registry.npmjs.org/@img/sharp-win32-x64/-/sharp-win32-x64-0.35.5.tgz
node_modules/@jridgewell/resolve-uri | version=3.1.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=6.0.0"}
```

```
  integrity: sha512-bRISgCIjP20/tbWSPWMEi54QVPRZExkuD9lJL+UIxUKtwVJA8wW1Trb1jMs1RFXo1CBTNZ/5hpC9QvmKWdopKw==
  resolved: https://registry.npmjs.org/@jridgewell/resolve-uri/-/resolve-uri-3.1.2.tgz
node_modules/@jridgewell/sourcemap-codec | version=1.6.0 | dev=True | optional=False | license=MIT
  integrity: sha512-T7jf+5zgsZHwNJ4lvQ7/aezbyk0nNX+zJVWpmHA7VYsEx7a7qr5Rg5IbtJFqkgze5Y2sruq1RUY8Q837Od7iFw==
  resolved: https://registry.npmjs.org/@jridgewell/sourcemap-codec/-/sourcemap-codec-1.6.0.tgz
node_modules/@jridgewell/trace-mapping | version=0.3.9 | dev=True | optional=False | license=MIT
  requires: @jridgewell/resolve-uri ^3.0.3, @jridgewell/sourcemap-codec ^1.4.10
  integrity: sha512-3Belt6tdc8bPgAtbcmdtNJlirVoTmEb5e2gC94PnkwEW9jI6CAHUeoG85tjWP5WquqfavoMtMwiG4P926ZKKuQ==
  resolved: https://registry.npmjs.org/@jridgewell/trace-mapping/-/trace-mapping-0.3.9.tgz
node_modules/@poppinss/colors | version=4.1.6 | dev=True | optional=False | license=MIT
  requires: kleur ^4.1.5
  integrity: sha512-H9xkIdFswbS8n1d6vmRd8+c10t2Qe+rZITbbDHHkQixH5+2x1FDGmi/0K+WgWiqQFKPSlIYB7jlH6Kpfn6Fleg==
  resolved: https://registry.npmjs.org/@poppinss/colors/-/colors-4.1.6.tgz
node_modules/@poppinss/dumper | version=0.6.5 | dev=True | optional=False | license=MIT
  requires: @poppinss/colors ^4.1.5, @sindresorhus/is ^7.0.2, supports-color ^10.0.0
  integrity: sha512-NBdYIb90J7LfOI32dOewKI1r7wnkiH6m920puQ3qHUeZkxNkQiFnXVWoE6YtFSv6QOiPPf7ys6i+HWWecDz7sw==
  resolved: https://registry.npmjs.org/@poppinss/dumper/-/dumper-0.6.5.tgz
node_modules/@poppinss/exception | version=1.2.3 | dev=True | optional=False | license=MIT
  integrity: sha512-dCED+QRChTVatE9ibtoaxc+WkdzOSjYTKi/+uacHWIsfodVfpsueo3+DKpgU5Px8qXjgmXkSvhXvSCz3fnP9lw==
  resolved: https://registry.npmjs.org/@poppinss/exception/-/exception-1.2.3.tgz
node_modules/@sindresorhus/is | version=7.2.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-P1Cz1dWaFfR4IR+U13mqqiGsLFf1KbayybWwdd2vfctdV6hDpUkgCY0nKOLLTMSoRd/jJNjtbqzf13K8DCCXQw==
  resolved: https://registry.npmjs.org/@sindresorhus/is/-/is-7.2.0.tgz
node_modules/@speed-highlight/core | version=1.2.24 | dev=True | optional=False | license=CC0-1.0
  integrity: sha512-qeW2e1l78afw8VhRPfPQ1Gjj+KU5XFQ/OFV5ti6eTa9bruO7mJyZtA4vw0ofqmA3tKCkROE9xLk3VZoeRc98nw==
  resolved: https://registry.npmjs.org/@speed-highlight/core/-/core-1.2.24.tgz
node_modules/@types/node | version=22.20.5 | dev=True | optional=False | license=MIT
  requires: undici-types ~6.21.0
  integrity: sha512-U2+DNr+wSjpsTS/wZGYHq7GcwfuSmKiKvoPvK22zwTlRhU91yOniN4qRR5KhIjvif7ysw/dz/hKmfDH0Ris4aA==
  resolved: https://registry.npmjs.org/@types/node/-/node-22.20.5.tgz
node_modules/blake3-wasm | version=2.1.5 | dev=True | optional=False | license=MIT
  integrity: sha512-F1+K8EbfOZE49dtoPtmxUQrpXaBIl3ICvasLh+nJta0xkz+9kF/7uet9fLnwKqhDrmj6g+6K3Tw9yQPUg2ka5g==
  resolved: https://registry.npmjs.org/blake3-wasm/-/blake3-wasm-2.1.5.tgz
node_modules/cookie | version=1.1.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-ei8Aos7ja0weRpFzJnEA9UHJ/7XQmqglbRwnf2ATjcB9Wq874VKH9kfjjirM6UhU2/E5fFYadylyhFldcqSidQ==
  resolved: https://registry.npmjs.org/cookie/-/cookie-1.1.1.tgz
node_modules/detect-libc | version=2.1.2 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=8"}
  integrity: sha512-Btj2BOOO83o3WyH59e8MgXsxEQVcarkUOpEYrubB0urwnN10yQ364rsiByU11nZlqWYZm05i/of7io4mzihBtQ==
  resolved: https://registry.npmjs.org/detect-libc/-/detect-libc-2.1.2.tgz
node_modules/error-stack-parser-es | version=1.0.5 | dev=True | optional=False | license=MIT
  integrity: sha512-5qucVt2XcuGMcEGgWI7i+yZpmpByQ8J1lHhcL7PwqCwu9FPP3VUXzT4ltHe5i2z9dePwEHcDVOAfSnHsOlCXRA==
  resolved: https://registry.npmjs.org/error-stack-parser-es/-/error-stack-parser-es-1.0.5.tgz
node_modules/esbuild | version=0.28.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-HKVLS8dvII+xoKW9kmqxbRKrnWEXfJJr/FZhhJmiqIB0e053QNYFqOBouTMO/k5sID4MvCiUCvv8b9M4h32wIA==
  resolved: https://registry.npmjs.org/esbuild/-/esbuild-0.28.2.tgz
node_modules/fsevents | version=2.3.3 | dev=True | optional=True | license=MIT
  engines: {"node": "^8.16.0 || ^10.6.0 || >=11.0.0"}
  platform: {"os": ["darwin"]}
  integrity: sha512-5xoDfX+fL7faATnagmWPpbFtwh/R77WmMMqqHGS65C3vvB0YHrgF+B1YmZ3441tMj5n63k0212XNoJwzlhffQw==
  resolved: https://registry.npmjs.org/fsevents/-/fsevents-2.3.3.tgz
node_modules/kleur | version=4.1.5 | dev=True | optional=False | license=MIT
  engines: {"node": ">=6"}
  integrity: sha512-o+NO+8WrRiQEE4/7nwRJhN1HWpVmJm511pBHUxPLtp0BUISzlBplORYSmTclCnJvQq2tKu/sgl3xVpkc7ZWuQQ==
  resolved: https://registry.npmjs.org/kleur/-/kleur-4.1.5.tgz
node_modules/miniflare | version=5.20261023.0-beta | dev=True | optional=False | license=MIT
  engines: {"node": ">=22.0.0"}
  requires: @cspotcode/source-map-support 0.8.1, sharp 0.35.5, undici 7.30.1, workerd 1.20261023.1, ws
  8.21.0, youch 4.1.0-beta.10
  integrity: sha512-SHY8A98gCvmrnBLqABHRTSh3duAL1z+tHPRZu/tqxHFqVARrZ4oQis/ALYwp3XvzHvs6B/ff/CdcCafqP+cOFA==
  resolved: https://registry.npmjs.org/miniflare/-/miniflare-5.20261023.0-beta.tgz
node_modules/path-to-regexp | version=6.3.0 | dev=True | optional=False | license=MIT
  integrity: sha512-Yhpw4T9C6hPpgPeA28us07OJeqZ5EzQTkbfwuhsUg0c237RomFoETJgmp2sa3F/41gfLE6G5cqcYwznmeEeOlQ==
  resolved: https://registry.npmjs.org/path-to-regexp/-/path-to-regexp-6.3.0.tgz
node_modules/pathe | version=2.0.3 | dev=True | optional=False | license=MIT
  integrity: sha512-WUjGcAqP1gQacoQe+OBJsFA7Ld4DyXuUIjZ5cc75cLHvJ7dtNsTugphxIADwspS+AraAUePCKrSVtPLFj/F88w==
  resolved: https://registry.npmjs.org/pathe/-/pathe-2.0.3.tgz
node_modules/semver | version=7.8.5 | dev=True | optional=False | license=ISC
  engines: {"node": ">=10"}
  integrity: sha512-Y7/KDsb8LjooZpwaqGyulO6DQlksgCncchHGk+sZIY4SBvUocMBEFH5Ur1fI4dV+Jvl0w6cjvucaIi40puRioA==
  resolved: https://registry.npmjs.org/semver/-/semver-7.8.5.tgz
node_modules/sharp | version=0.35.5 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  requires: @img/colour ^1.1.0, detect-libc ^2.1.2, semver ^7.8.5
  integrity: sha512-Ywn4OnzGukp7CDMrp08RQ50YKmuwG47brZgIVPTvBaaAfQlRlygrRqSrxdCiL9M+LlzLBiJ68IR1QqvzHyjC7g==
  resolved: https://registry.npmjs.org/sharp/-/sharp-0.35.5.tgz
node_modules/supports-color | version=10.2.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-SS+jx45GF1QjgEXQx4NJZV9ImqmO2NPz5FNsIHrsDjh2YsHnawpan7SNQ1o8NuhrbHZy9AZhIoCUiCeaW/C80g==
  resolved: https://registry.npmjs.org/supports-color/-/supports-color-10.2.2.tgz
```

```
node_modules/tslib | version=2.8.1 | dev=True | optional=True | license=0BSD
  integrity: sha512-oJFu94HQb+KVduSUQL7wnpmqnfmLsOA/nAh6b6EH0wCEoK0/mPeXU6c3wKDV83MkOuHPRHtSXKKU99IBazS/2w==
  resolved: https://registry.npmjs.org/tslib/-/tslib-2.8.1.tgz
node_modules/tsx | version=4.23.15 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18.0.0"}
  requires: esbuild ~0.28.0
  integrity: sha512-Yiex1Ovn8z2xPpOWckIiysV1SSyRMY9BkLF++q0yKiDxCqRhosKfMg3janKkiLBwZ5c/YryloKwGZcrEmtwxKw==
  resolved: https://registry.npmjs.org/tsx/-/tsx-4.23.15.tgz
node_modules/typescript | version=5.9.3 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=14.17"}
  integrity: sha512-jl1vZzPDinLr9eUt3J/t7V6FgNEw9QjvBPdysz9KfQDD41fQrC2Y4vKQdiaUpFT4bXlb1RHhLpp8wtm6M5TgSw==
  resolved: https://registry.npmjs.org/typescript/-/typescript-5.9.3.tgz
node_modules/undici | version=7.30.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=20.18.1"}
  integrity: sha512-03KrMbjIFDWQR5RNPrSw3bd1r12JpyFQl9/yxjUbJtqkjmllqC5lFjZh6ujeuJCKr8EOQvRW872Oy/az+nLYxg==
  resolved: https://registry.npmjs.org/undici/-/undici-7.30.1.tgz
node_modules/undici-types | version=6.21.0 | dev=True | optional=False | license=MIT
  integrity: sha512-iwDZqg0QAGrg9Rav5H4n0M64c3mkR59cJ6wQp+7C4nI0gsmExaedaYLNO44eT4AtBBwjbTiGPMlt2Md0T9H9JQ==
  resolved: https://registry.npmjs.org/undici-types/-/undici-types-6.21.0.tgz
node_modules/unenv | version=2.0.0-rc.24 | dev=True | optional=False | license=MIT
  requires: pathe ^2.0.3
  integrity: sha512-i7qRCmY42zmCwnYlh9H2SvLEypEFGye5iRmEMKjcGi7zk9UquigRjFtTLz0TYqr0ZGLZhaMHl/foy1bZR+Cwlw==
  resolved: https://registry.npmjs.org/unenv/-/unenv-2.0.0-rc.24.tgz
node_modules/workerd | version=1.20261023.1 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=16"}
  integrity: sha512-NeofJFyaYNpqKpFRJW3ApuonaerPd6/JWlfTtLDYf2A6ygqrDEFnYgEXmc0hhOxqnJsSM+kXJN6VebPojzRrsg==
  resolved: https://registry.npmjs.org/workerd/-/workerd-1.20261023.1.tgz
node_modules/wrangler | version=4.153.0 | dev=True | optional=False | license=MIT OR Apache-2.0
  engines: {"node": ">=22.0.0"}
  requires: @cloudflare/kv-asset-handler 0.5.0, @cloudflare/unenv-preset 2.16.2, blake3-wasm 2.1.5, esbuild
  0.28.2, miniflare 5.20261023.0-beta, path-to-regexp 6.3.0, unenv 2.0.0-rc.24, workerd 1.20261023.1
  peers: {"@cloudflare/workers-types": "^5.20261023.1"}
  integrity: sha512-Hn1AowKzZao/729rMpdpxBZt/RaKQNJ4GtKtHQcOrwT+J/GIq0iwl680+dhJyO00iSsXaCkxoNcLg3yVIwIvyw==
  resolved: https://registry.npmjs.org/wrangler/-/wrangler-4.153.0.tgz
node_modules/ws | version=8.21.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=10.0.0"}
  peers: {"bufferutil": "^4.0.1", "utf-8-validate": ">=5.0.2"}
  integrity: sha512-Vsp28b7DRcimFQvrqu2Wek3z1iYxDCWqHYB8Qsnk/S4RfaCQzPGPyBNuVjJV3cd6UiKtUtp6sNM77gWvzcCH+g==
  resolved: https://registry.npmjs.org/ws/-/ws-8.21.0.tgz
node_modules/youch | version=4.1.0-beta.10 | dev=True | optional=False | license=MIT
  requires: @poppinss/colors ^4.1.5, @poppinss/dumper ^0.6.4, @speed-highlight/core ^1.2.7, cookie ^1.0.2,
  youch-core ^0.3.3
  integrity: sha512-rLfVLB4FgQneDr0dv1oddCVZmKjcJ6yX6mS4pU82Mq/Dt9a3cLZQ62pDBL4AUO+uVrCvtWz3ZFUL2HFAFJ/BXQ==
  resolved: https://registry.npmjs.org/youch/-/youch-4.1.0-beta.10.tgz
node_modules/youch-core | version=0.3.3 | dev=True | optional=False | license=MIT
  requires: @poppinss/exception ^1.2.2, error-stack-parser-es ^1.0.5
  integrity: sha512-ho7XuGjLaJ2hWHoK8yFnsUGy2Y5uDpqSTq1FkHLK4/oqKtyUU1AFbOOxY4IpC9f0fTLjwYbslUz0Po5BpD1wrA==
  resolved: https://registry.npmjs.org/youch-core/-/youch-core-0.3.3.tgz
```

29. Import and configuration-use index

This syntactic index covers static imports and literal environment accesses. Dynamically computed names, CLI flags and generated platform bindings are additionally documented by their source/config files. Values are never read from private environment files.

APPDATA - scripts/google-operator.mjs:10

APP_PASSWORD - lib/auth.ts:48; lib/auth.ts:90

APP_SECRET - cloud/src/auth.ts:18; cloud/src/auth.ts:24; cloud/src/auth.ts:58; lib/auth.ts:48; lib/auth.ts:52; lib/auth.ts:60; lib/auth.ts:72; lib/auth.ts:80; lib/auth.ts:85; lib/auth.ts:93; scripts/byline-logic-test.ts:8

BREETH_API_KEY - lib/breeth.ts:67

BYLINE_AI_CALLS_PER_USER_DAY - lib/ai-usage.ts:19

BYLINE_API_URL - mobile/lib/api/client.dart

BYLINE_CLOUD_ORIGIN - cloud/scripts/remote-smoke.ts:8

BYLINE_LOCAL_ONLY - lib/distribute.ts:169; lib/native-auth.ts:7

BYLINE_PUBLIC_URL - app/api/native-auth/route.ts:35

BYLINE_REQUIRE_MIGRATIONS - lib/db.ts:83; lib/db.ts:91; scripts/migrate.ts:3

BYLINE_TEST_MODE - app/api/status/route.ts:130; lib/cycle.ts:557; lib/distribute.ts:169; lib/distribute.ts:86; lib/llm.ts:184; lib/native-auth.ts:7; scripts/zero-budget-test.ts:8

BYLINE_ZERO_BUDGET_STATE_FILE - lib/llm.ts:185; lib/llm.ts:187; scripts/live-dev.mjs:15; scripts/zero-budget-test.ts:17; scripts/zero-budget-test.ts:9

CONTENT - cloud/src/jobs.ts:47; cloud/src/jobs.ts:48; cloud/src/jobs.ts:60

CRON_SECRET - app/api/cron/tick/route.ts:68; app/api/watchdog/route.ts:34; scripts/live-dev.mjs:20; scripts/local-dev.mjs:7

DATABASE_URL - lib/db.ts:41; lib/db.ts:44; scripts/backup-live.mjs:9; scripts/bench-db.mjs:18; scripts/byline-test.mjs:103; scripts/dbtest.ts:86; scripts/health-test.ts:10; scripts/health-test.ts:25; scripts/native-return-test.mjs:7

DB - cloud/src/ai.ts:52; cloud/src/ai.ts:87; cloud/src/auth.ts:102; cloud/src/auth.ts:108; cloud/src/auth.ts:111; cloud/src/auth.ts:112; cloud/src/auth.ts:115; cloud/src/auth.ts:119; cloud/src/auth.ts:134; cloud/src/auth.ts:20; cloud/src/auth.ts:25; cloud/src/auth.ts:50; cloud/src/auth.ts:51; cloud/src/auth.ts:54; cloud/src/auth.ts:70; cloud/src/auth.ts:91; cloud/src/generation.ts:27; cloud/src/generation.ts:42; cloud/src/generation.ts:44; cloud/src/generation.ts:46; cloud/src/generation.ts:50; cloud/src/generation.ts:51; cloud/src/generation.ts:52; cloud/src/generation.ts:58; cloud/src/generation.ts:76; cloud/src/generation.ts:82; cloud/src/generation.ts:83; cloud/src/generation.ts:84; cloud/src/generation.ts:85; cloud/src/generation.ts:86; cloud/src/generation.ts:87; cloud/src/generation.ts:92; cloud/src/index.ts:22; cloud/src/index.ts:24; cloud/src/index.ts:37; cloud/src/index.ts:42; cloud/src/index.ts:43; cloud/src/index.ts:53; cloud/src/index.ts:56; cloud/src/index.ts:59; cloud/src/index.ts:61; cloud/src/jobs.ts:43; cloud/src/jobs.ts:49; cloud/src/jobs.ts:56; cloud/src/jobs.ts:62; cloud/src/jobs.ts:64; cloud/src/jobs.ts:65; cloud/src/jobs.ts:66; cloud/src/jobs.ts:67; cloud/src/jobs.ts:72; cloud/src/media.ts:17; cloud/src/media.ts:19; cloud/src/notifications.ts:28; cloud/src/notifications.ts:40; cloud/src/notifications.ts:51; cloud/src/notifications.ts:60; cloud/src/notifications.ts:67; cloud/src/notifications.ts:70; cloud/src/onboarding.ts:21; cloud/src/onboarding.ts:22; cloud/src/onboarding.ts:27; cloud/src/onboarding.ts:32; cloud/src/onboarding.ts:39; cloud/src/onboarding.ts:42; cloud/src/onboarding.ts:44; cloud/src/onboarding.ts:51; cloud/src/onboarding.ts:52; cloud/src/onboarding.ts:56; cloud/src/onboarding.ts:58; cloud/src/onboarding.ts:63; cloud/src/posts.ts:106; cloud/src/posts.ts:110; cloud/src/posts.ts:111; cloud/src/posts.ts:38; cloud/src/posts.ts:51; cloud/src/posts.ts:54; cloud/src/posts.ts:57; cloud/src/posts.ts:58; cloud/src/posts.ts:64; cloud/src/posts.ts:69; cloud/src/posts.ts:73; cloud/src/posts.ts:74; cloud/src/posts.ts:84; cloud/src/posts.ts:99; cloud/src/publish.ts:10; cloud/src/publish.ts:23; cloud/src/publish.ts:24; cloud/src/publish.ts:28; cloud/src/publish.ts:35; cloud/src/publish.ts:47; cloud/src/publish.ts:52; cloud/src/publish.ts:53; cloud/src/publish.ts:54; cloud/src/publish.ts:55; cloud/src/publish.ts:56; cloud/src/publish.ts:62; cloud/src/publish.ts:63; cloud/src/publish.ts:64; cloud/src/publish.ts:65; cloud/src/scheduler.ts:101; cloud/src/scheduler.ts:14; cloud/src/scheduler.ts:20; cloud/src/scheduler.ts:22; cloud/src/scheduler.ts:23; cloud/src/scheduler.ts:24; cloud/src/scheduler.ts:26; cloud/src/scheduler.ts:28; cloud/src/scheduler.ts:33; cloud/src/scheduler.ts:35; cloud/src/scheduler.ts:43; cloud/src/scheduler.ts:76; cloud/src/scheduler.ts:80; cloud/src/scheduler.ts:83; cloud/src/scheduler.ts:86; cloud/src/scheduler.ts:87; cloud/src/scheduler.ts:90; cloud/src/scheduler.ts:92; cloud/src/scheduler.ts:98; cloud/src/scheduler.ts:99; cloud/src/status.ts:11; cloud/src/status.ts:13; cloud/src/status.ts:14; cloud/src/status.ts:16; cloud/src/status.ts:17; cloud/src/status.ts:18; cloud/src/status.ts:19; cloud/src/status.ts:20; cloud/src/status.ts:21; cloud/src/status.ts:22; cloud/src/status.ts:23; cloud/src/status.ts:24; cloud/test/api.test.ts:177

FCM_ACCESS_TOKEN_FILE - lib/push.ts:147; lib/push.ts:25; lib/push.ts:68; lib/push.ts:69; scripts/live-dev.mjs:14

FCM_CLIENT_EMAIL - lib/push.ts:25; lib/push.ts:72

FCM_PRIVATE_KEY - lib/push.ts:25; lib/push.ts:76

FCM_PROJECT_ID - lib/push.ts:25; lib/push.ts:367

FCM_SERVICE_ACCOUNT_JSON - cloud/src/notifications.ts:62; cloud/src/notifications.ts:65; cloud/src/notifications.ts:8; cloud/src/notifications.ts:9

FIREBASE_API_KEY - mobile/lib/main.dart; mobile/lib/main.dart:37

FIREBASE_APP_ID - mobile/lib/main.dart; mobile/lib/main.dart:32

FIREBASE_PROJECT_ID - mobile/lib/main.dart; mobile/lib/main.dart:40

FIREBASE_SENDER_ID - mobile/lib/main.dart; mobile/lib/main.dart:39

GEMINI_API_KEY - cloud/scripts/live-smoke.ts:12; cloud/scripts/live-smoke.ts:13; cloud/scripts/live-smoke.ts:22; cloud/src/ai.ts:50; cloud/src/ai.ts:59; cloud/src/ai.ts:69; cloud/src/ai.ts:82; lib/llm.ts:106; lib/llm.ts:188; lib/llm.ts:197; scripts/live-dev.mjs:10; scripts/live-dev.mjs:15; scripts/zero-budget-test.ts:10; scripts/zero-budget-test.ts:7

GEMINI_FALLBACK_MODEL - lib/llm.ts:38

GEMINI_LAST_RESORT_MODEL - lib/llm.ts:39

GEMINI_MODEL - lib/llm.ts:37; lib/llm.ts:44

GEMINI_RPD_LIMIT - lib/llm.ts:45

GOOGLE_CLIENT_ID - app/api/native-auth/route.ts:11; app/api/native-auth/route.ts:40; app/api/native-auth/route.ts:41; cloud/src/auth.ts:31; cloud/src/auth.ts:36; cloud/src/auth.ts:79; lib/native-auth.ts:55

GOOGLE_CLIENT_SECRET - app/api/native-auth/route.ts:11; app/api/native-auth/route.ts:40; cloud/src/auth.ts:31; cloud/src/auth.ts:79; lib/native-auth.ts:55

GOOGLE_REDIRECT_URI - app/api/native-auth/route.ts:36

JAVA_TOOL_OPTIONS - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:11; scripts/build-local-android.ps1:21; scripts/build-local-android.ps1:8

LINKEDIN_API_VERSION - lib/linkedin.ts:40; scripts/selftest.ts:408; scripts/selftest.ts:409; scripts/selftest.ts:413; scripts/selftest.ts:414

LINKEDIN_CLIENT_ID - app/api/native-auth/route.ts:12; cloud/src/auth.ts:31; cloud/src/auth.ts:36; cloud/src/auth.ts:79; lib/linkedin.ts:167; lib/linkedin.ts:187

LINKEDIN_CLIENT_SECRET - app/api/native-auth/route.ts:12; cloud/src/auth.ts:31; cloud/src/auth.ts:79; lib/linkedin.ts:188

LINKEDIN_LIVE - cloud/src/publish.ts:22; cloud/src/scheduler.ts:31; cloud/src/status.ts:29; cloud/test/api.test.ts:177; lib/distribute.ts:86

LINKEDIN_REDIRECT_URI - app/api/linkedin/redirect-uri.ts:11; app/api/native-auth/route.ts:36

LLM_PROVIDER - lib/llm.ts:191

MAINTENANCE - cloud/src/index.ts:71

MANUAL_DAILY_CAP - lib/distribute.ts:49

NEXT_DIST_DIR - next.config.ts:18

NODE_ENV - app/api/auth/route.ts:67

PG_BIN - scripts/backup-live.mjs:6; scripts/local-setup.mjs:5

PORT - scripts/byline-test.mjs:5; scripts/catalogue-api-test.mjs:5; scripts/live-dev.mjs:18; scripts/live-dev.mjs:20; scripts/local-dev.mjs:4; scripts/local-dev.mjs:7; scripts/native-return-test.mjs:5

STAMP - .github/workflows/backup.yml:76; .github/workflows/backup.yml:77

TEMP - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:19; scripts/build-local-android.ps1:6; scripts/build-local-android.ps1:9

TMP - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:10; scripts/build-local-android.ps1:20; scripts/build-local-android.ps1:7

TOKEN_ENCRYPTION_KEY - cloud/src/auth.ts:89; cloud/src/auth.ts:90; cloud/src/publish.ts:12; cloud/src/status.ts:29; cloud/test/api.test.ts:178; cloud/test/database.test.ts:192; lib/crypto.ts:25

VERCEL_GIT_COMMIT_SHA - app/api/health/route.ts:26

Module/package imports and users

../../../../lib/accounts - app/api/linkedin/callback/route.ts; app/api/linkedin/disconnect/route.ts

../../../../lib/agents - app/api/compose/rewrite/route.ts; app/api/linkedin/disconnect/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/categories - app/api/slots/[id]/route.ts

../../../../lib/cycle - app/api/cron/tick/route.ts; app/api/cycle/run/route.ts

../../../../lib/db - app/api/account/delete/route.ts; app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts; app/api/style/preview/route.ts

../../../../lib/distribute - app/api/cron/tick/route.ts; app/api/posts/[seq]/route.ts

../../../../lib/format - app/api/compose/rewrite/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/linkedin - app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts

../../../../lib/media-ownership - app/api/posts/[seq]/route.ts

../../../../lib/native-auth - app/api/linkedin/callback/route.ts; app/api/native-auth/callback/route.ts

../../../../lib/native-callback - app/api/linkedin/callback/route.ts; app/api/native-auth/callback/route.ts

../../../../lib/native-return - app/api/linkedin/connect/route.ts

../../../../lib/push - app/api/cron/tick/route.ts

../../../../lib/request-agent - app/api/account/delete/route.ts; app/api/compose/rewrite/route.ts; app/api/cycle/run/route.ts; app/api/linkedin/connect/route.ts; app/api/linkedin/disconnect/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts; app/api/style/preview/route.ts

../../../../lib/retention - app/api/cron/tick/route.ts

../../../../lib/reviews - app/api/cron/tick/route.ts

../../../../lib/slots - app/api/cron/tick/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts

../../../../lib/style - app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/unified-timetable - app/api/cron/tick/route.ts

../../../../lib/writer - app/api/compose/rewrite/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../lib/accounts - app/api/media/route.ts; app/api/settings/route.ts; app/api/status/route.ts; app/api/watchdog/route.ts

../../../lib/agents - app/api/init/route.ts; app/api/posts/route.ts; app/api/settings/route.ts; app/api/watchdog/route.ts

../../../lib/auth - app/api/auth/route.ts

../../../lib/categories - app/api/init/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts

../../../lib/crypto - app/api/status/route.ts

../../../lib/cycle - app/api/init/route.ts; app/api/review-delivery/route.ts

../../../lib/db - app/api/auth/route.ts; app/api/devices/route.ts; app/api/health/route.ts; app/api/interests/route.ts; app/api/media/route.ts; app/api/native-auth/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/status/route.ts

../../../lib/distribute - app/api/posts/route.ts; app/api/status/route.ts

../../../lib/feedhealth - app/api/watchdog/route.ts

../../../lib/format - app/api/posts/route.ts

../../../lib/linkedin - app/api/media/route.ts; app/api/native-auth/route.ts; app/api/watchdog/route.ts

../../../lib/llm - app/api/status/route.ts

../../../lib/media-ownership - app/api/posts/route.ts

../../../lib/memory - app/api/status/route.ts

../../../lib/native-auth - app/api/native-auth/route.ts; app/api/onboarding/route.ts

../../../lib/native-return - app/api/native-auth/route.ts

../../../lib/onboarding - app/api/onboarding/route.ts

../../../lib/post-view - app/api/posts/route.ts; app/api/status/route.ts

../../../lib/push - app/api/devices/route.ts; app/api/watchdog/route.ts

../../../lib/ratelimit - app/api/auth/route.ts; app/api/native-auth/route.ts

../../../lib/request-agent - app/api/auth/route.ts; app/api/devices/route.ts; app/api/init/route.ts; app/api/interests/route.ts; app/api/media/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts

../../../lib/schedule - app/api/settings/route.ts; app/api/status/route.ts

../../../lib/slots - app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts; app/api/watchdog/route.ts

../../../lib/style - app/api/posts/route.ts; app/api/settings/route.ts; app/api/status/route.ts

../../../lib/timetable-home - app/api/review-delivery/route.ts

../../../lib/writer - app/api/posts/route.ts

../../lib/categories - cloud/src/models.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

../../lib/critique - cloud/src/generation.ts; cloud/src/posts.ts; cloud/test/writer.test.ts

../../lib/discovery-core - cloud/src/generation.ts; cloud/test/discovery-budget.test.ts

../../lib/format - cloud/src/posts.ts; cloud/src/publish.ts

../../lib/http-body - cloud/src/ai.ts; cloud/src/http.ts; cloud/src/notifications.ts

../../lib/judge-core - cloud/src/generation.ts

../../lib/linkedin - cloud/src/auth.ts; cloud/src/media.ts; cloud/src/publish.ts

../../lib/llm-contract - cloud/src/ai.ts

../../lib/native-callback - cloud/src/auth.ts

../../lib/native-return - cloud/src/auth.ts

../../lib/persona-prompt - cloud/src/models.ts

../../lib/post-view - cloud/src/models.ts

../../lib/schedule - cloud/src/ai.ts; cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

../../lib/setup-config - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/test/api.test.ts; cloud/test/writer.test.ts

../../lib/style - cloud/src/models.ts; cloud/src/posts.ts; cloud/src/settings.ts; cloud/src/status.ts; cloud/test/writer.test.ts

../../lib/voice-prompt - cloud/src/generation.ts; cloud/src/models.ts; cloud/src/posts.ts

../../lib/writer-core - cloud/src/generation.ts; cloud/src/posts.ts; cloud/test/writer.test.ts

../../scripts/google-operator.mjs - cloud/scripts/live-smoke.ts; cloud/scripts/setup-push.mjs

../api/client.dart - mobile/lib/screens/composer_screen.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart

../api/models.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/writing_preferences.dart

../app/api/health/route - scripts/health-test.ts

../auth_return.dart - mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart

../desktop_notifications.dart - mobile/lib/screens/delivery_settings_screen.dart

../lib/accounts - scripts/dbtest.ts

../lib/agents - scripts/dbtest.ts

../lib/auth - scripts/byline-logic-test.ts

../lib/categories - app/page.tsx; scripts/catalogue-test.ts; scripts/selftest.ts

../lib/category-catalogue - scripts/catalogue-test.ts

../lib/critique - scripts/selftest.ts

../lib/cycle - scripts/live-cycle-smoke.ts

../lib/db - scripts/dbtest.ts; scripts/live-cycle-smoke.ts; scripts/live-smoke.ts; scripts/migrate.ts

../lib/discovery - scripts/catalogue-test.ts; scripts/selftest.ts

../lib/distribute - scripts/dbtest.ts; scripts/selftest.ts

../lib/feedhealth - scripts/dbtest.ts

../lib/format - scripts/selftest.ts

../lib/judge - scripts/catalogue-test.ts; scripts/selftest.ts

../lib/linkedin - scripts/selftest.ts

../lib/llm - scripts/dbtest.ts; scripts/zero-budget-test.ts

../lib/memory - scripts/dbtest.ts

../lib/native-auth - scripts/live-cycle-smoke.ts

../lib/native-callback - scripts/byline-logic-test.ts

../lib/native-return - scripts/byline-logic-test.ts

../lib/onboarding - scripts/byline-logic-test.ts; scripts/catalogue-test.ts; scripts/live-cycle-smoke.ts; scripts/live-smoke.ts

../lib/push - scripts/dbtest.ts; scripts/live-smoke.ts; scripts/selftest.ts

../lib/ratelimit - scripts/dbtest.ts

../lib/retention - scripts/dbtest.ts

../lib/schedule - scripts/byline-logic-test.ts; scripts/selftest.ts

../lib/slots - scripts/dbtest.ts; scripts/selftest.ts

../lib/style - app/page.tsx; scripts/catalogue-test.ts; scripts/selftest.ts

../lib/voice - scripts/selftest.ts

../push.dart - mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/state/app_state.dart

../redirect-uri - app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts

../src/ai - cloud/test/discovery-budget.test.ts

../src/ai.ts - cloud/test/database.test.ts

../src/auth.ts - cloud/test/database.test.ts

../src/crypto - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/test/api.test.ts

../src/crypto.ts - cloud/test/database.test.ts

../src/drafts - cloud/test/api.test.ts

../src/drafts.ts - cloud/test/database.test.ts

../src/env - cloud/test/api.test.ts

../src/env.ts - cloud/test/database.test.ts

../src/generation-errors.ts - cloud/test/database.test.ts

../src/identities - cloud/scripts/live-smoke.ts; cloud/test/api.test.ts

../src/identities.ts - cloud/test/database.test.ts

../src/jobs.ts - cloud/test/database.test.ts

../src/notifications.ts - cloud/test/database.test.ts

../src/publish - cloud/test/api.test.ts

../state/app_state.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/profile_card.dart

../theme.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/editorial.dart; mobile/lib/widgets/experience.dart; mobile/lib/widgets/form_select.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/preparation_progress.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart

../widgets/day_rail.dart - mobile/lib/screens/desk_screen.dart

../widgets/draft_card.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/today_screen.dart

../widgets/editorial.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart

../widgets/experience.dart - mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart

../widgets/form_select.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/voice_screen.dart

../widgets/personal_topics.dart - mobile/lib/screens/settings_screen.dart

../widgets/preparation_progress.dart - mobile/lib/screens/desk_screen.dart; mobile/lib/screens/today_screen.dart

../widgets/primitives.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/settings_screen.dart;

mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/voice_screen.dart

../widgets/profile_card.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart

../widgets/unsaved_changes_guard.dart - mobile/lib/screens/voice_screen.dart

../widgets/writing_preferences.dart - mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/voice_screen.dart

./accounts - lib/distribute.ts; lib/native-auth.ts; lib/onboarding.ts

./agents - lib/cycle.ts; lib/request-agent.ts

./ai - cloud/src/generation.ts; cloud/src/posts.ts; cloud/src/status.ts

./ai-usage - lib/cycle.ts; lib/llm.ts

./auth - cloud/src/delete-account.ts; cloud/src/index.ts; cloud/src/media.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts; lib/ai-usage.ts; lib/native-auth.ts; lib/request-agent.ts

./breeth - lib/memory.ts

./categories - lib/agents.ts; lib/cycle.ts; lib/discovery-core.ts; lib/judge-core.ts; lib/onboarding.ts; lib/persona-prompt.ts; lib/persona.ts; lib/setup-config.ts; lib/slots.ts; lib/writer-core.ts

./category-catalogue - lib/categories.ts; lib/onboarding.ts; lib/setup-config.ts

./critique - lib/onboarding.ts; lib/writer-core.ts

./crypto - cloud/src/auth.ts; cloud/src/publish.ts; lib/accounts.ts

./cycle - lib/reviews.ts

./db - lib/accounts.ts; lib/agents.ts; lib/ai-usage.ts; lib/cycle.ts; lib/distribute.ts; lib/feedhealth.ts; lib/llm.ts; lib/media-ownership.ts; lib/memory.ts; lib/native-auth.ts; lib/onboarding.ts; lib/push.ts; lib/ratelimit.ts; lib/request-agent.ts; lib/retention.ts; lib/review-progress.ts; lib/reviews.ts; lib/slots.ts; lib/timetable-home.ts; lib/unified-timetable.ts; lib/voice.ts

./delete-account - cloud/src/index.ts

./discovery - lib/cycle.ts; lib/judge-core.ts; lib/onboarding.ts

./discovery-core - lib/discovery.ts

./distribute - lib/agents.ts

./drafts - cloud/src/generation.ts; cloud/src/posts.ts

./entities - lib/discovery-core.ts

./env - cloud/src/ai.ts; cloud/src/auth.ts; cloud/src/generation.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/media.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/status.ts; cloud/src/workflow.ts

./feedhealth - lib/discovery.ts

./format - lib/critique.ts; lib/cycle.ts; lib/distribute.ts; lib/post-view.ts

./generation - cloud/src/onboarding.ts; cloud/src/workflow.ts

./generation-errors - cloud/src/generation.ts; cloud/src/onboarding.ts

./globals.css - app/layout.tsx

./google-operator.mjs - scripts/check-live-services.mjs; scripts/live-dev.mjs; scripts/live-setup.mjs

./http - cloud/src/auth.ts; cloud/src/delete-account.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/media.ts; cloud/src/models.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

./http-body - lib/discovery-core.ts

./identities - cloud/src/auth.ts

./jobs - cloud/src/generation.ts; cloud/src/scheduler.ts; cloud/src/workflow.ts

./judge - lib/cycle.ts; lib/onboarding.ts; lib/writer-core.ts

./judge-core - lib/judge.ts

./lib/auth - middleware.ts

./linkedin - lib/accounts.ts; lib/distribute.ts; lib/format.ts; lib/native-auth.ts

./live-env.mjs - scripts/backup-live.mjs; scripts/live-dev.mjs; scripts/live-setup.mjs

./llm - lib/judge.ts; lib/persona.ts; lib/voice.ts; lib/writer.ts

./llm-contract - lib/judge-core.ts; lib/llm.ts; lib/writer-core.ts

./local-env.mjs - scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/local-dev.mjs; scripts/native-return-test.mjs

./media - cloud/src/index.ts

./memory - lib/cycle.ts; lib/judge-core.ts; lib/writer-core.ts

./models - cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

./native-auth - lib/onboarding.ts; lib/reviews.ts

./native-return - lib/native-callback.ts

./notifications - cloud/src/index.ts; cloud/src/scheduler.ts; cloud/src/workflow.ts

./onboarding - cloud/src/index.ts; lib/cycle.ts; lib/reviews.ts

./persona - lib/agents.ts; lib/onboarding.ts

./persona-prompt - lib/judge-core.ts; lib/persona.ts; lib/setup-config.ts; lib/writer-core.ts

./post-view - lib/timetable-home.ts

./posts - cloud/src/index.ts

./publish - cloud/src/media.ts; cloud/src/posts.ts; cloud/src/scheduler.ts

./push - lib/cycle.ts; lib/reviews.ts

./review-feedback - lib/review-progress.ts; lib/timetable-home.ts

./schedule - lib/agents.ts; lib/cycle.ts; lib/distribute.ts; lib/onboarding.ts; lib/reviews.ts; lib/setup-config.ts; lib/slots.ts; lib/timetable-home.ts; lib/unified-timetable.ts

./scheduler - cloud/src/index.ts

./schema - lib/db.ts

./settings - cloud/src/index.ts

./setup-config - lib/onboarding.ts

./slots - cloud/src/generation.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/status.ts; lib/cycle.ts; lib/distribute.ts; lib/timetable-home.ts

./status - cloud/src/index.ts

./style - lib/agents.ts; lib/critique.ts; lib/distribute.ts; lib/format.ts; lib/onboarding.ts; lib/setup-config.ts; lib/writer-core.ts

./unified-timetable - lib/slots.ts; lib/timetable-home.ts

./voice - lib/agents.ts; lib/distribute.ts

./voice-prompt - lib/voice.ts; lib/writer-core.ts

./workflow - cloud/src/index.ts

./writer - lib/cycle.ts; lib/onboarding.ts

./writer-core - lib/writer.ts

@google/genai - lib/llm.ts

@next/env - scripts/migrate.ts

android_notifications.dart - mobile/lib/push.dart

api/client.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

api/models.dart - mobile/lib/main_preview.dart

archive_screen.dart - mobile/lib/screens/home_screen.dart

asked once - mobile/lib/state/app_state.dart

cleared - app/api/slots/[id]/route.ts

cloudflare:workers - cloud/src/scheduler.ts; cloud/src/workflow.ts

composer_screen.dart - mobile/lib/screens/draft_commands.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/today_screen.dart

crypto - lib/crypto.ts; package.json

dart:async - mobile/lib/api/client.dart; mobile/lib/auth_return.dart; mobile/lib/desktop_notifications.dart; mobile/lib/push.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/widgets/draft_card.dart

dart:convert - mobile/lib/api/client.dart; mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart;

mobile/test/screens_test.dart

dart:io - mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/test/api_test.dart; mobile/test/auth_return_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

dart:math - mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/editorial.dart

dart:ui - mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

delete_account_screen.dart - mobile/lib/screens/settings_screen.dart

delivery_settings_screen.dart - mobile/lib/screens/settings_screen.dart

desk_screen.dart - mobile/lib/screens/home_screen.dart

desktop_notifications.dart - mobile/lib/push.dart

draft - lib/schema.ts

draft_commands.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/today_screen.dart

editorial.dart - mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart

form_select.dart - mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/writing_preferences.dart

gate_screen.dart - mobile/lib/screens/welcome_screen.dart

miniflare - cloud/scripts/live-smoke.ts; cloud/test/api.test.ts; cloud/test/database.test.ts

next - app/layout.tsx; next.config.ts

next/headers - lib/ai-usage.ts; lib/request-agent.ts

next/server - app/api/account/delete/route.ts; app/api/auth/route.ts; app/api/compose/rewrite/route.ts; app/api/cron/tick/route.ts; app/api/cycle/run/route.ts; app/api/devices/route.ts; app/api/health/route.ts; app/api/init/route.ts; app/api/interests/route.ts; app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts; app/api/linkedin/disconnect/route.ts; app/api/media/route.ts; app/api/native-auth/route.ts; app/api/onboarding/route.ts; app/api/posts/[seq]/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/slots/[id]/route.ts; app/api/slots/route.ts; app/api/status/route.ts; app/api/style/preview/route.ts; app/api/watchdog/route.ts; middleware.ts

node:assert/strict - cloud/test/api.test.ts; cloud/test/database.test.ts; cloud/test/discovery-budget.test.ts; cloud/test/writer.test.ts; scripts/byline-logic-test.ts; scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/catalogue-test.ts; scripts/health-test.ts; scripts/native-return-test.mjs; scripts/zero-budget-test.ts

node:async_hooks - lib/ai-usage.ts

node:child_process - cloud/scripts/remote-smoke.ts; scripts/backup-live.mjs; scripts/build-check.mjs; scripts/google-operator.mjs; scripts/live-dev.mjs; scripts/local-dev.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs

node:crypto - app/api/linkedin/connect/route.ts; app/api/native-auth/route.ts; cloud/scripts/prepare-secrets.mjs; lib/agents.ts; lib/crypto.ts; lib/db.ts; lib/llm.ts; lib/native-auth.ts; scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/dbtest.ts; scripts/live-cycle-smoke.ts; scripts/live-dev.mjs; scripts/live-setup.mjs; scripts/local-setup.mjs; scripts/native-return-test.mjs; scripts/prepare-cloud-android.mjs; scripts/selftest.ts; scripts/zero-budget-test.ts

node:fs - cloud/scripts/live-smoke.ts; cloud/scripts/prepare-secrets.mjs; cloud/scripts/remote-smoke.ts; cloud/scripts/setup-push.mjs; cloud/test/api.test.ts; cloud/test/database.test.ts; scripts/backup-live.mjs; scripts/bench-api.mjs; scripts/bench-db.mjs; scripts/check-live-services.mjs; scripts/live-cycle-smoke.ts; scripts/live-dev.mjs; scripts/live-env.mjs; scripts/live-setup.mjs; scripts/live-smoke.ts; scripts/local-env.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs; scripts/selftest.ts; scripts/zero-budget-test.ts

node:fs/promises - lib/llm.ts; lib/push.ts; scripts/check-feeds.mjs

node:module - scripts/google-operator.mjs

node:path - scripts/backup-live.mjs; scripts/check-feeds.mjs; scripts/google-operator.mjs; scripts/live-setup.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs

node:test - cloud/test/api.test.ts; cloud/test/database.test.ts; cloud/test/discovery-budget.test.ts; cloud/test/writer.test.ts

node:url - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/test/api.test.ts; scripts/check-feeds.mjs

node:util - cloud/scripts/live-smoke.ts; cloud/scripts/prepare-secrets.mjs

nothing has been running since Tuesday - mobile/lib/api/models.dart

nothing was sent because no device has ever registered - app/api/watchdog/route.ts

onboarding_test.dart - mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

package:firebase_core/firebase_core.dart - mobile/lib/main.dart

package:firebase_messaging/firebase_messaging.dart - mobile/lib/android_notifications.dart; mobile/lib/push.dart; mobile/test/android_notifications_test.dart

package:flutter/foundation.dart - mobile/lib/android_notifications.dart; mobile/lib/auth_return.dart; mobile/lib/push.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/theme.dart; mobile/test/android_notifications_test.dart

package:flutter/material.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart; mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/theme.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/editorial.dart; mobile/lib/widgets/experience.dart; mobile/lib/widgets/form_select.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/preparation_progress.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart; mobile/lib/widgets/unsaved_changes_guard.dart; mobile/lib/widgets/writing_preferences.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:flutter/rendering.dart - mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

package:flutter/services.dart - mobile/lib/android_notifications.dart; mobile/lib/auth_return.dart; mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/theme.dart; mobile/test/android_notifications_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart

package:flutter_local_notifications_windows/flutter_local_notifications_windows.dart - mobile/lib/desktop_notifications.dart

package:flutter_secure_storage/flutter_secure_storage.dart - mobile/lib/api/client.dart

package:flutter_test/flutter_test.dart - mobile/test/android_notifications_test.dart; mobile/test/api_test.dart; mobile/test/auth_return_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:flutter_timezone/flutter_timezone.dart - mobile/lib/screens/onboarding_screen.dart

package:http/http.dart - mobile/lib/api/client.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:http/testing.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:http_parser/http_parser.dart - mobile/lib/api/client.dart

package:image_picker/image_picker.dart - mobile/lib/screens/composer_screen.dart

package:linkdin_mobile/android_notifications.dart - mobile/test/android_notifications_test.dart

package:linkdin_mobile/api/client.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/api/models.dart - mobile/test/api_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:linkdin_mobile/auth_return.dart - mobile/test/auth_return_test.dart

package:linkdin_mobile/main.dart - mobile/test/onboarding_test.dart

package:linkdin_mobile/screens/archive_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/composer_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/delivery_settings_screen.dart - mobile/test/redesign_test.dart

package:linkdin_mobile/screens/desk_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/gate_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/home_screen.dart - mobile/test/daily_preparation_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart

package:linkdin_mobile/screens/onboarding_screen.dart - mobile/test/catalogue_voice_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart

package:linkdin_mobile/screens/settings_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/timetable_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/today_screen.dart - mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart

package:linkdin_mobile/screens/voice_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/welcome_screen.dart - mobile/test/redesign_test.dart

package:linkdin_mobile/state/app_state.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/theme.dart - mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:linkdin_mobile/widgets/day_rail.dart - mobile/test/screens_test.dart

package:linkdin_mobile/widgets/draft_card.dart - mobile/test/widget_test.dart

package:linkdin_mobile/widgets/experience.dart - mobile/test/redesign_test.dart

package:linkdin_mobile/widgets/form_select.dart - mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/widgets/writing_preferences.dart - mobile/test/catalogue_voice_test.dart

package:provider/provider.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart; mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/profile_card.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:shared_preferences/shared_preferences.dart - mobile/lib/api/client.dart; mobile/lib/desktop_notifications.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:url_launcher/url_launcher.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/draft_card.dart

pg - lib/db.ts; scripts/bench-db.mjs; scripts/byline-test.mjs; scripts/live-setup.mjs; scripts/native-return-test.mjs

primitives.dart - mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart

push.dart - mobile/lib/main.dart

react - app/layout.tsx; app/page.tsx

screens/composer_screen.dart - mobile/lib/main_preview.dart

screens/home_screen.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

screens/onboarding_screen.dart - mobile/lib/main.dart

screens/settings_screen.dart - mobile/lib/main_preview.dart

screens/timetable_screen.dart - mobile/lib/main_preview.dart

screens/voice_screen.dart - mobile/lib/main_preview.dart

screens/welcome_screen.dart - mobile/lib/main.dart

screens_test.dart - mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart

settings_screen.dart - mobile/lib/screens/desk_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/timetable_screen.dart

state/app_state.dart - mobile/lib/desktop_notifications.dart; mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart

theme.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

timetable_screen.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/today_screen.dart

today_screen.dart - mobile/lib/screens/home_screen.dart

unsaved_changes_guard.dart - mobile/lib/widgets/personal_topics.dart

voice_screen.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart

widgets/experience.dart - mobile/lib/main.dart

30. API and schema navigation index

/api/account/delete - POST - app/api/account/delete/route.ts

/api/auth - POST, DELETE - app/api/auth/route.ts

/api/compose/rewrite - POST - app/api/compose/rewrite/route.ts

/api/cron/tick - GET - app/api/cron/tick/route.ts

/api/cycle/run - POST - app/api/cycle/run/route.ts

/api/devices - POST, DELETE - app/api/devices/route.ts

/api/health - GET - app/api/health/route.ts

/api/init - GET, POST - app/api/init/route.ts

/api/interests - GET, POST - app/api/interests/route.ts

/api/linkedin/callback - GET - app/api/linkedin/callback/route.ts

/api/linkedin/connect - GET - app/api/linkedin/connect/route.ts

/api/linkedin/disconnect - POST - app/api/linkedin/disconnect/route.ts

/api/media - POST - app/api/media/route.ts

/api/native-auth/callback - GET - app/api/native-auth/callback/route.ts

/api/native-auth - GET, POST - app/api/native-auth/route.ts

/api/onboarding - GET, POST - app/api/onboarding/route.ts

/api/posts/[seq] - PATCH - app/api/posts/[seq]/route.ts

/api/posts - GET, POST - app/api/posts/route.ts

/api/review-delivery - GET, POST - app/api/review-delivery/route.ts

/api/settings - PATCH - app/api/settings/route.ts

/api/slots/[id] - PATCH, DELETE - app/api/slots/[id]/route.ts

/api/slots - GET, POST - app/api/slots/route.ts

/api/status - GET - app/api/status/route.ts

/api/style/preview - POST - app/api/style/preview/route.ts

/api/watchdog - GET - app/api/watchdog/route.ts

Cloud method dispatch, including its public/authenticated boundary, is reproduced verbatim below. Dynamic post and slot paths are validated by regular expressions.

```
 1 | import { authenticate,authCallback,nativeAuth,connectLinkedIn } from './auth';
 2 | import { json,HttpError } from './http';
 3 | import { onboardingRoute } from './onboarding';
 4 | import { slotsRoute } from './slots';
 5 | import { statusRoute } from './status';
 6 | import { settingsRoute,interestsRoute } from './settings';
 7 | import { postsRoute,postAction,rewriteRoute } from './posts';
 8 | import { devicesRoute } from './notifications';
 9 | import { mediaRoute } from './media';
10 | import { deleteAccount } from './delete-account';
11 | import { reviewRoute,cycleRoute } from './scheduler';
12 | import type { AppEnv } from './env';
13 | export { ContentWorkflow } from './workflow';
14 | export { MaintenanceWorkflow } from './scheduler';
15 |
16 | export default {
17 |   async fetch(request:Request,env:AppEnv):Promise<Response> {
18 |     try {
19 |       const path=new URL(request.url).pathname,method=request.method;
20 |       if(path==='/api/health'&&method==='GET') {
21 |         try {
22 |           await env.DB.prepare('SELECT 1').first();
23 |           if(new URL(request.url).searchParams.get('check')==='scheduler') {
24 |             const heartbeat=await env.DB.prepare("SELECT updated_at FROM system_status WHERE
   > key='cloud_scheduler'").first<{updated_at:string}>();
25 |             const healthy=!!heartbeat&&Date.now()-Date.parse(heartbeat.updated_at)<16*60000;
26 |             return json({ok:healthy,db:'ok',scheduler:{healthy,lastTickAt:heartbeat?.updated_at??nul
   > l}},healthy?200:503);
27 |           }
28 |           return json({ok:true,db:'ok',service:'byline-cloud'});
```

```
29 |         }
30 |         catch{return json({ok:false,db:'unavailable'},503);}
31 |       }
32 |       if(path==='/api/native-auth'&&['GET','POST'].includes(method))return await
   > nativeAuth(request,env);
33 |
   > if(['/api/linkedin/callback','/api/native-auth/callback'].includes(path)&&method==='GET')return
   > await authCallback(request,env);
34 |       const owner=await authenticate(request,env);
35 |       if(!owner)return json({error:'unauthorized'},401);
36 |       if(path==='/api/auth'&&method==='DELETE') {
37 |         await env.DB.prepare('UPDATE byline_sessions SET revoked_at=? WHERE id=? AND
   > user_id=?').bind(new Date().toISOString(),owner.sessionId,owner.userId).run();
38 |         return json({ok:true});
39 |       }
40 |       if(path==='/api/onboarding'&&['GET','POST'].includes(method))return await
   > onboardingRoute(request,env,owner);
41 |       if(path==='/api/status'&&method==='GET')return await statusRoute(env,owner);
42 |       if(path==='/api/settings'&&method==='PATCH')return await settingsRoute(request,env.DB,owner);
43 |       if(path==='/api/interests'&&['GET','POST'].includes(method))return await
   > interestsRoute(request,env.DB,owner);
44 |       if(path==='/api/posts'&&['GET','POST'].includes(method))return await
   > postsRoute(request,env,owner);
45 |       const post=/^\/api\/posts\/([1-9][0-9]{0,8})$/.exec(path);
46 |       if(post&&method==='PATCH')return await postAction(request,env,owner,Number(post[1]));
47 |       if(path==='/api/compose/rewrite'&&method==='POST')return await
   > rewriteRoute(request,env,owner);
48 |       if(path==='/api/style/preview'&&method==='POST')return await
   > rewriteRoute(request,env,owner,true);
49 |       if(path==='/api/review-delivery'&&['GET','POST'].includes(method))return await
   > reviewRoute(request,env,owner);
50 |       if(path==='/api/cycle/run'&&method==='POST')return await cycleRoute(env,owner);
51 |       if(path==='/api/devices'&&['POST','DELETE'].includes(method))return await
   > devicesRoute(request,env,owner);
52 |       if(path==='/api/media'&&method==='POST')return await mediaRoute(request,env,owner);
53 |       if(path==='/api/account/delete'&&method==='POST')return await
   > deleteAccount(request,env.DB,owner);
54 |       if(path==='/api/linkedin/connect'&&method==='GET')return await
   > connectLinkedIn(request,env,owner);
55 |       if(path==='/api/linkedin/disconnect'&&method==='POST') {
56 |         await env.DB.batch([env.DB.prepare('DELETE FROM linkedin_accounts WHERE
   > agent_id=?').bind(owner.agentId),env.DB.prepare('UPDATE agents SET
   > auto_publish=0,revision=revision+1 WHERE id=?').bind(owner.agentId)]);
57 |         return json({ok:true});
58 |       }
59 |       if(path==='/api/slots'&&['GET','POST'].includes(method))return await
   > slotsRoute(request,env.DB,owner);
60 |       const slot=/^\/api\/slots\/([a-f0-9-]{36})$/.exec(path);
61 |       if(slot&&['PATCH','DELETE'].includes(method))return await
   > slotsRoute(request,env.DB,owner,slot[1]);
62 |       return json({error:'not_found'},404);
63 |     } catch(error) {
64 |       if(error instanceof HttpError)return json({error:error.message},error.status);
65 |       console.error(JSON.stringify({event:'request_failed',path:new URL(request.url).pathname}));
66 |       return json({error:'The request could not be completed. Please try again.'},500);
67 |     }
68 |   },
69 |   async scheduled(event:ScheduledController,env:AppEnv) {
70 |     const id=`tick-${Math.floor(event.scheduledTime/300000)}`;
71 |     await env.MAINTENANCE.createBatch([{id,params:{cleanup:new
   > Date(event.scheduledTime).getUTCMinutes()===0}}]);
72 |   },
73 | } satisfies ExportedHandler<AppEnv>;
```

Database table responsibilities

agents - Author workspace, persona, preferences, active/paused state and configuration revision.

ai_provider_days - Per-model shared daily attempts and next permitted request time.

ai_reservations - Cloud atomic AI-attempt reservations that trigger quota accounting.

ai_usage - Attempt success and reported input/output token usage.

ai_user_days - Per-owner daily AI request counts.

byline_schema_versions - Original PostgreSQL applied additive-schema hash ledger.

byline_sessions - Expiring, revocable native sessions owned by users.

byline_users - Verified social-provider identities, keyed by provider and subject.

device_tokens - Current device-to-author FCM ownership.

distributions - Atomic publication claims, idempotency, provider outcome and manual resolution.

feed_health - Source reachability, recent success/failure and failure streak.

generation_jobs - Cloud durable job payload, revision snapshot, queue/working/completed/failed state.

linkedin_accounts - Encrypted provider grants, member identity and connection expiry.

llm_calls - Original model call quota bookkeeping.

login_attempts - Time-windowed sign-in throttling records.

media_assets - Owned LinkedIn image upload metadata and upload status.

native_auth - Short-lived verifier-protected native OAuth handoff state.

notification_outbox - Durable, deduplicated notification work and delivery retry state.

oauth_states - One-use LinkedIn connection consent state and safe return destination.

onboarding - Saved setup, optimistic revisions, preview/acceptance leases and activation state.

post_counters - Atomic per-author post-sequence allocation.

post_slots - Recurring timezone-local posting times, selected days, lead interval and automation flags.

posts - Owned draft/publication content, sources, score metadata, schedule, clearance and status.

push_log - Original push-send/reminder bookkeeping.

rejections - Editorially rejected candidate evidence.

review_deliveries - Original review-delivery occurrence, generation and retry state.

scheduler_state - Per-author cycle count and last-run timestamp.

slot_runs - One slot/date occurrence, preparation attempt/progress and associated post.

system_status - Operational heartbeat and named system status values.

cloud/migrations/0001_initial.sql

```
-- Initial D1 schema. Dates are UTC ISO strings; JSON is validated TEXT.

-- Extracted from the verified local PostgreSQL schema; no user data is included.

-- Subsequent changes must be separate numbered migrations.

CREATE TABLE "agents" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "name" TEXT NOT NULL,
  "domain" TEXT NOT NULL,
  "persona_json" TEXT NOT NULL CHECK ("persona_json" IS NULL OR json_valid("persona_json")),
  "persona_hash" TEXT NOT NULL,
  "is_demo" INTEGER NOT NULL DEFAULT 0 CHECK ("is_demo" IN (0,1)),
  "active" INTEGER NOT NULL DEFAULT 1 CHECK ("active" IN (0,1)),
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  "categories_json" TEXT NOT NULL DEFAULT '[]' CHECK ("categories_json" IS NULL OR
> json_valid("categories_json")),
  "timezone" TEXT NOT NULL DEFAULT 'Asia/Kolkata',
  "post_time_local" TEXT NOT NULL DEFAULT '09:30',
  "auto_publish" INTEGER NOT NULL DEFAULT 0 CHECK ("auto_publish" IN (0,1)),
  "paused" INTEGER NOT NULL DEFAULT 0 CHECK ("paused" IN (0,1)),
  "auto_publish_cap" INTEGER NOT NULL DEFAULT 1,
  "style_json" TEXT NOT NULL DEFAULT '{}' CHECK ("style_json" IS NULL OR json_valid("style_json")),
  "corpus_json" TEXT NOT NULL DEFAULT '[]' CHECK ("corpus_json" IS NULL OR
> json_valid("corpus_json")),
  "edit_notes" TEXT,
  "edit_notes_from" INTEGER NOT NULL DEFAULT 0,
  "owner_id" TEXT,
  FOREIGN KEY (owner_id) REFERENCES byline_users(id),
  PRIMARY KEY (id),
  UNIQUE (persona_hash)
);

CREATE UNIQUE INDEX agents_owner_unique ON agents (owner_id) WHERE (owner_id IS NOT NULL);

CREATE TABLE "ai_provider_days" (
  "model" TEXT NOT NULL,
  "day" TEXT NOT NULL,
  "attempts" INTEGER NOT NULL,
  "next_at" TEXT NOT NULL,
  PRIMARY KEY (model, day)
);

CREATE TABLE "ai_usage" (
  "id" INTEGER PRIMARY KEY AUTOINCREMENT,
  "owner" TEXT NOT NULL,
  "model" TEXT NOT NULL,
  "success" INTEGER NOT NULL CHECK ("success" IN (0,1)),
  "input_tokens" INTEGER,
  "output_tokens" INTEGER,
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
);

CREATE TABLE "ai_user_days" (
  "owner" TEXT NOT NULL,
  "day" TEXT NOT NULL,
  "requests" INTEGER NOT NULL,
  PRIMARY KEY (owner, day)
);

CREATE TABLE "byline_sessions" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "user_id" TEXT NOT NULL,
  "expires_at" TEXT NOT NULL,
  "revoked_at" TEXT,
  FOREIGN KEY (user_id) REFERENCES byline_users(id),
  PRIMARY KEY (id)
);

CREATE TABLE "byline_users" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "provider" TEXT NOT NULL,
  "subject" TEXT NOT NULL,
  "name" TEXT NOT NULL,
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  PRIMARY KEY (id),
  UNIQUE (provider, subject)
```

```
);

CREATE TABLE "device_tokens" (
  "token" TEXT NOT NULL,
  "agent_id" TEXT NOT NULL,
  "platform" TEXT NOT NULL DEFAULT 'android',
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  "last_seen_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  FOREIGN KEY (agent_id) REFERENCES agents(id),
  PRIMARY KEY (token)
);

CREATE INDEX device_tokens_agent ON device_tokens (agent_id);

CREATE TABLE "distributions" (
  "id" INTEGER PRIMARY KEY AUTOINCREMENT,
  "agent_id" TEXT NOT NULL,
  "seq" INTEGER,
  "idempotency_key" TEXT NOT NULL,
  "target" TEXT NOT NULL DEFAULT 'linkedin_member',
  "status" TEXT NOT NULL DEFAULT 'in_flight',
  "external_urn" TEXT,
  "attempts" INTEGER NOT NULL DEFAULT 0,
  "last_error" TEXT,
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  "settled_at" TEXT,
  "source" TEXT NOT NULL DEFAULT 'manual',
  FOREIGN KEY (agent_id) REFERENCES agents(id),
  UNIQUE (idempotency_key)
);

CREATE INDEX distributions_agent_idx ON distributions (agent_id, created_at DESC);

CREATE TABLE "feed_health" (
  "name" TEXT NOT NULL,
  "last_ok_at" TEXT,
  "last_failed_at" TEXT,
  "fails_in_a_row" INTEGER NOT NULL DEFAULT 0,
  "last_error" TEXT,
  "updated_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  PRIMARY KEY (name)
);

CREATE TABLE "linkedin_accounts" (
  "agent_id" TEXT NOT NULL,
  "member_urn" TEXT NOT NULL,
  "member_name" TEXT,
  "member_picture" TEXT,
  "access_token_enc" TEXT NOT NULL,
  "refresh_token_enc" TEXT,
  "scopes" TEXT,
  "expires_at" TEXT NOT NULL,
  "connected_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  "last_ok_at" TEXT,
  "last_error" TEXT,
  FOREIGN KEY (agent_id) REFERENCES agents(id),
  PRIMARY KEY (agent_id)
);

CREATE TABLE "llm_calls" (
  "day" TEXT NOT NULL,
  "model" TEXT NOT NULL,
  "call_count" INTEGER NOT NULL DEFAULT 0,
  PRIMARY KEY (day, model)
);

CREATE TABLE "login_attempts" (
  "id" INTEGER PRIMARY KEY AUTOINCREMENT,
  "client" TEXT NOT NULL,
  "at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
);

CREATE INDEX login_attempts_client_at ON login_attempts (client, at DESC);

CREATE TABLE "media_assets" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "agent_id" TEXT NOT NULL,
  "kind" TEXT NOT NULL DEFAULT 'image',
  "linkedin_urn" TEXT NOT NULL,
  "upload_url" TEXT NOT NULL,
  "alt_text" TEXT,
  "filename" TEXT,
```

```
158 |   "status" TEXT NOT NULL DEFAULT 'initialized',
159 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
160 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
161 |   PRIMARY KEY (id)
162 | );
163 |
164 | CREATE TABLE "native_auth" (
165 |   "id" TEXT NOT NULL,
166 |   "provider" TEXT NOT NULL,
167 |   "verifier_hash" TEXT NOT NULL,
168 |   "redirect_uri" TEXT NOT NULL,
169 |   "user_id" TEXT,
170 |   "error" TEXT,
171 |   "claimed_at" TEXT,
172 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
173 |   "return_uri" TEXT,
174 |   FOREIGN KEY (user_id) REFERENCES byline_users(id),
175 |   PRIMARY KEY (id)
176 | );
177 |
178 | CREATE TABLE "notification_outbox" (
179 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
180 |   "agent_id" TEXT NOT NULL,
181 |   "payload" TEXT NOT NULL CHECK ("payload" IS NULL OR json_valid("payload")),
182 |   "dedupe_key" TEXT NOT NULL,
183 |   "attempts" INTEGER NOT NULL DEFAULT 0,
184 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
185 |   "delivered_at" TEXT,
186 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
187 |   UNIQUE (dedupe_key)
188 | );
189 |
190 | CREATE TABLE "oauth_states" (
191 |   "state" TEXT NOT NULL,
192 |   "agent_id" TEXT NOT NULL,
193 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
194 |   "native" INTEGER NOT NULL DEFAULT 0 CHECK ("native" IN (0,1)),
195 |   "return_uri" TEXT,
196 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
197 |   PRIMARY KEY (state)
198 | );
199 |
200 | CREATE TABLE "onboarding" (
201 |   "user_id" TEXT NOT NULL,
202 |   "config" TEXT NOT NULL DEFAULT '{}' CHECK ("config" IS NULL OR json_valid("config")),
203 |   "revision" INTEGER NOT NULL DEFAULT 0,
204 |   "preview" TEXT CHECK ("preview" IS NULL OR json_valid("preview")),
205 |   "preview_revision" INTEGER,
206 |   "accepted_revision" INTEGER,
207 |   "completed_at" TEXT,
208 |   "next_delivery_at" TEXT,
209 |   "preview_attempts" INTEGER NOT NULL DEFAULT 0,
210 |   "attempts_day" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%d','now')),
211 |   "generating_until" TEXT,
212 |   "timetable_migrated" INTEGER NOT NULL DEFAULT 0 CHECK ("timetable_migrated" IN (0,1)),
213 |   FOREIGN KEY (user_id) REFERENCES byline_users(id),
214 |   PRIMARY KEY (user_id)
215 | );
216 |
217 | CREATE TABLE "post_counters" (
218 |   "agent_id" TEXT NOT NULL,
219 |   "value" INTEGER NOT NULL,
220 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
221 |   PRIMARY KEY (agent_id)
222 | );
223 |
224 | CREATE TABLE "post_slots" (
225 |   "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
    > substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
226 |   "agent_id" TEXT NOT NULL,
227 |   "local_time" TEXT NOT NULL,
228 |   "days_mask" INTEGER NOT NULL DEFAULT 62,
229 |   "lead_minutes" INTEGER NOT NULL DEFAULT 15,
230 |   "auto_publish" INTEGER NOT NULL DEFAULT 0 CHECK ("auto_publish" IN (0,1)),
231 |   "categories_json" TEXT NOT NULL DEFAULT '[]' CHECK ("categories_json" IS NULL OR
    > json_valid("categories_json")),
232 |   "enabled" INTEGER NOT NULL DEFAULT 1 CHECK ("enabled" IN (0,1)),
233 |   "position" INTEGER NOT NULL DEFAULT 0,
234 |   "next_run_at" TEXT,
235 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
236 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
237 |   PRIMARY KEY (id)
238 | );
```

```
239 |
240 | CREATE INDEX post_slots_due_idx ON post_slots (agent_id, enabled, next_run_at);
241 |
242 | CREATE TABLE "posts" (
243 |   "agent_id" TEXT NOT NULL,
244 |   "seq" INTEGER NOT NULL,
245 |   "id" TEXT GENERATED ALWAYS AS ('p' || seq) STORED,
246 |   "text" TEXT NOT NULL,
247 |   "rationale" TEXT NOT NULL,
248 |   "sources_json" TEXT NOT NULL DEFAULT '[]' CHECK ("sources_json" IS NULL OR
    > json_valid("sources_json")),
249 |   "fingerprint" TEXT NOT NULL,
250 |   "scores_json" TEXT CHECK ("scores_json" IS NULL OR json_valid("scores_json")),
251 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
252 |   "continuity" TEXT,
253 |   "cycle_id" INTEGER,
254 |   "status" TEXT NOT NULL DEFAULT 'published',
255 |   "kind" TEXT NOT NULL DEFAULT 'auto',
256 |   "category" TEXT,
257 |   "client_request_id" TEXT,
258 |   "media_json" TEXT NOT NULL DEFAULT '[]' CHECK ("media_json" IS NULL OR json_valid("media_json")),
259 |   "scheduled_for" TEXT,
260 |   "published_at" TEXT,
261 |   "slot_id" TEXT,
262 |   "cleared_at" TEXT,
263 |   "hold_until" TEXT,
264 |   "hashtags_json" TEXT NOT NULL DEFAULT '[]' CHECK ("hashtags_json" IS NULL OR
    > json_valid("hashtags_json")),
265 |   "used_quote" INTEGER NOT NULL DEFAULT 0 CHECK ("used_quote" IN (0,1)),
266 |   "linkedin_text" TEXT,
267 |   "original_text" TEXT,
268 |   "slot_date" TEXT,
269 |   "review_date" TEXT,
270 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
271 |   PRIMARY KEY (agent_id, seq)
272 | );
273 |
274 | CREATE UNIQUE INDEX posts_client_request_idx ON posts (agent_id, client_request_id) WHERE
    > (client_request_id IS NOT NULL);
275 |
276 | CREATE INDEX posts_due_idx ON posts (agent_id, status, scheduled_for);
277 |
278 | CREATE INDEX posts_status_idx ON posts (agent_id, status, created_at DESC);
279 |
280 | CREATE UNIQUE INDEX posts_slot_day ON posts (agent_id, slot_id, slot_date) WHERE (slot_date IS NOT
    > NULL);
281 |
282 | CREATE UNIQUE INDEX posts_review_day ON posts (agent_id, review_date) WHERE (review_date IS NOT
    > NULL);
283 |
284 | CREATE TABLE "push_log" (
285 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
286 |   "agent_id" TEXT NOT NULL,
287 |   "kind" TEXT NOT NULL,
288 |   "sent_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
289 |   FOREIGN KEY (agent_id) REFERENCES agents(id)
290 | );
291 |
292 | CREATE INDEX push_log_agent_kind_at ON push_log (agent_id, kind, sent_at DESC);
293 |
294 | CREATE TABLE "rejections" (
295 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
296 |   "agent_id" TEXT NOT NULL,
297 |   "cycle_id" INTEGER NOT NULL,
298 |   "title" TEXT NOT NULL,
299 |   "url" TEXT NOT NULL,
300 |   "scores_json" TEXT NOT NULL CHECK ("scores_json" IS NULL OR json_valid("scores_json")),
301 |   "reason" TEXT NOT NULL,
302 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
303 |   FOREIGN KEY (agent_id) REFERENCES agents(id)
304 | );
305 |
306 | CREATE TABLE "review_deliveries" (
307 |   "agent_id" TEXT NOT NULL,
308 |   "delivery_date" TEXT NOT NULL,
309 |   "seq" INTEGER,
310 |   "attempts" INTEGER NOT NULL DEFAULT 0,
311 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
312 |   "lease_until" TEXT,
313 |   "last_error" TEXT,
314 |   "stage" TEXT,
315 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
316 |   PRIMARY KEY (agent_id, delivery_date)
```

```
317 | );
318 |
319 | CREATE TABLE "scheduler_state" (
320 |   "agent_id" TEXT NOT NULL,
321 |   "last_run_at" TEXT,
322 |   "next_run_at" TEXT,
323 |   "cycle_count" INTEGER NOT NULL DEFAULT 0,
324 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
325 |   PRIMARY KEY (agent_id)
326 | );
327 |
328 | CREATE TABLE "slot_runs" (
329 |   "slot_id" TEXT NOT NULL,
330 |   "run_date" TEXT NOT NULL,
331 |   "scheduled_for" TEXT NOT NULL,
332 |   "generated_at" TEXT,
333 |   "post_seq" INTEGER,
334 |   "outcome" TEXT NOT NULL DEFAULT 'pending',
335 |   "detail" TEXT,
336 |   "stage" TEXT,
337 |   "attempts" INTEGER NOT NULL DEFAULT 1,
338 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
339 |   FOREIGN KEY (slot_id) REFERENCES post_slots(id) ON DELETE CASCADE,
340 |   PRIMARY KEY (slot_id, run_date)
341 | );
342 |
343 | CREATE INDEX slot_runs_date_idx ON slot_runs (run_date DESC);
344 |
345 | CREATE TABLE "system_status" (
346 |   "key" TEXT NOT NULL,
347 |   "value" TEXT NOT NULL CHECK ("value" IS NULL OR json_valid("value")),
348 |   "updated_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
349 |   PRIMARY KEY (key)
350 | );
```

cloud/migrations/0002_cloud_jobs.sql

```
  1 | -- Durable dispatch outbox: creating a Workflow is retried without losing the request.
  2 | CREATE TABLE generation_jobs (
  3 |   id TEXT PRIMARY KEY,
  4 |   agent_id TEXT NOT NULL REFERENCES agents(id),
  5 |   payload TEXT NOT NULL CHECK(json_valid(payload)),
  6 |   state TEXT NOT NULL DEFAULT 'queued' CHECK(state IN ('queued','working','completed','failed')),
  7 |   stage TEXT,
  8 |   error TEXT,
  9 |   created_at TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
 10 |   updated_at TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
 11 | );
 12 | CREATE INDEX generation_jobs_dispatch ON generation_jobs(state,created_at);
 13 | CREATE INDEX generation_jobs_agent ON generation_jobs(agent_id,state);
 14 |
 15 | -- A single insert reserves both budgets under the same D1 transaction.
 16 | CREATE TABLE ai_reservations (
 17 |   id TEXT PRIMARY KEY,
 18 |   owner TEXT NOT NULL,
 19 |   model TEXT NOT NULL,
 20 |   day TEXT NOT NULL,
 21 |   created_at TEXT NOT NULL
 22 | );
 23 | CREATE INDEX ai_reservations_day ON ai_reservations(day);
 24 | CREATE TRIGGER ai_reservation_counters AFTER INSERT ON ai_reservations BEGIN
 25 |   INSERT INTO ai_user_days(owner,day,requests) VALUES(NEW.owner,NEW.day,1)
 26 |     ON CONFLICT(owner,day) DO UPDATE SET requests=requests+1;
 27 |   INSERT INTO ai_provider_days(model,day,attempts,next_at)
    > VALUES(NEW.model,NEW.day,1,strftime('%Y-%m-%dT%H:%M:%fZ',NEW.created_at,'+4 seconds'))
 28 |     ON CONFLICT(model,day) DO UPDATE SET attempts=attempts+1,
 29 |       next_at=strftime('%Y-%m-%dT%H:%M:%fZ',MAX(NEW.created_at,next_at),'+4 seconds');
 30 | END;
 31 | CREATE INDEX native_auth_created ON native_auth(created_at);
 32 | CREATE INDEX oauth_states_created ON oauth_states(created_at);
 33 | CREATE INDEX byline_sessions_expiry ON byline_sessions(expires_at);
 34 | CREATE INDEX notification_outbox_pending ON notification_outbox(delivered_at,retry_at);
 35 | CREATE INDEX post_slots_next ON post_slots(enabled,next_run_at);
 36 | ALTER TABLE agents ADD COLUMN revision INTEGER NOT NULL DEFAULT 0;
 37 | ALTER TABLE post_slots ADD COLUMN revision INTEGER NOT NULL DEFAULT 0;
 38 | ALTER TABLE slot_runs ADD COLUMN job_id TEXT;
 39 | ALTER TABLE onboarding ADD COLUMN finish_token TEXT;
 40 | ALTER TABLE onboarding ADD COLUMN preview_lease TEXT;
 41 | ALTER TABLE distributions ADD COLUMN send_day TEXT;
 42 | CREATE INDEX distributions_daily ON distributions(agent_id,source,send_day);
 43 | ALTER TABLE distributions ADD COLUMN resolution_token TEXT;
 44 | ALTER TABLE agents ADD COLUMN edit_token TEXT;
```

31. Test case index

cloud/test/api.test.ts

status exposes only the owner's latest job and saved notification preference

the compiled Worker responds to health and rejects protected routes without a session

scheduler monitoring reports missing and stale heartbeats as unavailable

mobile setup, status and timetable contracts work in the Workers runtime

concurrent composer saves stay idempotent; another account cannot read or edit the draft

discard removes manual and timetable drafts from every feed without affecting another author

timetable bounds and schedule updates are enforced by the database

two authors keep drafts, schedules, settings and notification devices isolated

onboarding finish is atomic and duplicate requests cannot create two first slots

deleting an idle account removes only that account and revokes its session

parallel publishers make one provider request and unknown outcomes cannot be retried

cloud/test/database.test.ts

notification batches stay bounded and each author receives only their own draft notice

all application tables migrate with foreign keys and JSON validation

failed workflow reconciliation releases stuck jobs and preserves already saved drafts

simultaneous sign-ins provision exactly one user, agent and onboarding record

sessions cannot cross accounts and revoked or expired sessions are rejected

a database batch rolls back every write when a later write fails

concurrent saves allocate unique sequence numbers and retries preserve text

a repeated timetable occurrence cannot create another draft with a new request ID

AI reservations enforce user and provider limits under concurrency

session MACs reject tampering and token encryption authenticates ciphertext

native OAuth preserves the mobile contract, claims callback once, and issues one session

cloud/test/discovery-budget.test.ts

redirect loops and concurrent sources cannot spend the writing request budget

source selection covers every selected category before adding more feeds

temporary AI failures retry once; quota and runtime budgets do not retry

durable steps retry outages but do not retry exhausted quota

an unavailable primary uses the selected free fallback, while quota failures do not

cloud/test/writer.test.ts

the repair gate checks the complete post length including its source and tags

long drafts receive enough output budget and a second bounded repair can finish them

unsuccessful repairs stay bounded and preserve the better draft

mobile/test/android_notifications_test.dart

received foreground push keeps its channel, grouping and destination

data-only and non-Android messages do not create duplicate notifications

blocked or unavailable platform notifications allow the banner fallback

cold notification tap is consumed when listener starts

mobile/test/api_test.dart

sign-out unregisters the device with an authenticated JSON body
post actions use the verb the route actually exports
clear sends PATCH /api/posts/<seq> with action clear
sendNow sends PATCH with action publish
unclear withdraws the clearance
holdForEditing takes the edit lock
reschedule sends an ISO instant in UTC
reschedule with null lifts a post off the timetable
discard sends PATCH with action discard
editPost sends PATCH with the text
editPost omits mediaIds entirely when not given
editPost sends mediaIds when given, including an explicit empty list
compose sends POST /api/posts - the collection route IS a POST
rewrite sends PATCH with the variant index and returns the text
rewrite rejects an empty result rather than blanking the draft
rewriting UNSAVED text posts the body, since there is no seq yet
an unsaved rewrite also refuses an empty result
image upload
declares a real image content type, not octet-stream
png keeps its own type rather than being called a jpeg
settings
style save sends PATCH /api/settings with the whole config
preset save sends the preset id, not a style blob
session handling
the session cookie is attached to authenticated calls
a 401 clears the session and drops back to the gate
a server error surfaces its detail instead of a generic message
editing target
startEditing sets the target and raises a compose request
editing the same post twice still raises a fresh request
stopEditing clears the target
scheduling state on a post
an unscheduled draft is not scheduled and never overdue
a scheduled draft reports the time remaining
past its time and not cleared is overdue
a published post is never overdue
a missed post is never overdue either
clearedAt and heldUntil are read back
a slot parses its display fields
nextDue picks the soonest pending post, not the newest
settings changes cost one round trip, not two
a style change does not refetch the whole dashboard
the updated agent is taken from the PATCH response
a response without an agent still falls back to a full refresh
the schedule fields still take the full refresh

a category tap shows immediately, before the server answers

a rejected category change is rolled back

calls that wait on a model get a longer ceiling

the writer ceiling outlasts the server, so the server error wins

a follow-up survives longer than a status refresh would

the voice fingerprint notices every part of the voice

a register change moves it

adding a writing sample moves it

edit notes move it

an unchanged voice keeps the same fingerprint

mobile/test/auth_return_test.dart

loopback return rejects unrelated requests and signals only once

mobile/test/catalogue_voice_test.dart

errors explain recovery without exposing service internals

large catalogue search retains choices and cancels safely

mobile/test/daily_preparation_test.dart

preparation handles $outcome through the timetable API

multi-select searches, cancels safely and applies checked choices

desktop dropdown works with keyboard arrows and Enter

draft badge belongs to My posts on phone and desktop

selected navigation survives desktop-to-phone resize

mobile/test/onboarding_test.dart

sign-in resumes after $interruption without opening consent again

completed setup opens the daily screen without restarting

sample acceptance persists before the time step, at phone width

failed acceptance keeps the reviewed sample visible

daily publishing confirms and uses the existing publish route

mobile/test/reconnect_test.dart

a suspended connection retries reads but never repeats a mutation

an unauthorized read is not retried

returning to My posts clears stale connection errors and shows job failure

mobile/test/redesign_test.dart

light palette maintains readable text and control boundaries

${page.key} adapts at ${size.width.toInt()}

${page.key} supports larger text on a small phone

delivery allows a time outside quarter-hour presets

voice instructions are directly editable and enable Save

mobile/test/screens_test.dart

GateScreen renders without overflow

DeskScreen renders a populated desk without overflow

DeskScreen states dry run and a dead token without burying the desk

DeskScreen leads with the next post due, wearing its countdown

a cleared post cools to the send clock

DeskScreen shows the day rail, silence included

DeskScreen makes a stranded approved post actionable again

DeskScreen leaves an ambiguous send inert

DeskScreen invites action rather than showing a blank page

DeskScreen shouts when the scheduler has stopped

DeskScreen distinguishes never-started from stopped

DeskScreen says nothing when the scheduler is healthy

Archive reaches published history and what was passed over

Archive shelves have their own empty states

a draft is never offered a follow-up

ComposerScreen renders without overflow

the composer picks up a follow-up and consumes it

a follow-up is a NEW post, not an edit of the original

ComposerScreen offers rewrite on a NEW post, gated on enough text

ComposerScreen disables sending an empty draft

ComposerScreen in edit mode pre-fills the draft and its tags

ComposerScreen warns when the voice changed under an existing draft

ComposerScreen shows the assembled post before anything is saved

the preview can be backed out of without saving

ComposerScreen asks before dropping typed text

ComposerScreen protects hashtag-only edits when closing

VoiceScreen renders every control without overflow

VoiceScreen keeps Save in reach and stages changes locally

VoiceScreen invites writing samples when there are none

VoiceScreen will not add a sample too short to carry a voice

VoiceScreen lists stored samples and what it learned

TimetableScreen renders the timetable without overflow

TimetableScreen distinguishes a slot switch from the master one

TimetableScreen refuses auto-publish without a usable connection

TimetableScreen shows both publishing budgets separately

TimetableScreen refuses to clear the last enabled day

SettingsScreen answers most questions without being opened

SettingsScreen says so when the scheduler has stopped

LinkedInScreen offers a reconnect rather than a dead end

TopicsScreen will not let the last topic be removed

mobile/test/widget_test.dart

StyleConfig

a null payload is the house style

missing fields fall back rather than throwing

wrong-typed fields fall back

a round trip through JSON preserves every field

clearSignature removes the signature, and a plain copyWith keeps it

the summary reflects the settings a user just changed

AppStatus

an uninitialised backend decodes without an agent

a full payload decodes agent, queue and presets

needsReauth makes an otherwise connected account unusable

a garbage queue entry list does not crash decoding

DraftCard

a short post shows no fold marker

a long post shows the fold where LinkedIn cuts it

see more actually expands and collapses

a short post gets no toggle at all

draft actions appear only when handlers are given

an unscheduled post offers Publish, never Clear

a scheduled post leads with Clear, not Publish

an unscheduled draft is offered a send time

a scheduled draft shows the countdown, not the offer

a cleared post says so and stops offering Clear

The index extracts literal test/group titles. Assertion labels, dynamically generated cases and complete test bodies are preserved in the companion source reference.

32. Finding the exact implementation

This reading edition retains the explanations, every-file catalogue, dependency inventories, configuration/import index, API navigation, D1 schema and test-case index. The thousands of lines of raw application code are available as a separate searchable repository reference, rather than repeated in this PDF.

Open the complete source reference on GitHub

Repository path: docs/generated-reference.md. Download the raw Markdown if GitHub truncates its preview. It contains the full project-owned text listings, historical reports and lockfile resolution details. Individual files remain available at their paths in the repository.

A screen or interaction

Find its mobile/lib/screens or mobile/lib/widgets path in chapter 27, then follow its imports to AppState and ApiClient.

An endpoint or validation rule

Use chapter 30 for method/path routing; inspect the named cloud/src handler or app/api route in the companion reference.

A database field or concurrency rule

Use the D1 schema in chapter 30; inspect lib/schema.ts for PostgreSQL and the relevant adapter for transaction behavior.

An AI prompt or editorial edge case

Inspect lib/writer-core.ts, lib/judge-core.ts, lib/critique.ts and the deployment-specific AI adapter.

A package, configuration key or helper

Use chapters 28-29 for versions and usage locations, then the complete source file for the exact branch.

A historical decision or test assertion


Use reports/ for dated evidence, chapter 31 for test titles and the source reference for complete assertions.

The inventory records source hashes, including LF-normalized text hashes for cross-platform comparison. Source snippets printed in this PDF use line numbers and wrap long lines; the repository contains the original bytes. Historical comments and reports may describe an earlier implementation.


33. Mobile UI preview gallery

One historical phone-width preview per screen is shown. These are design previews already in the repository, not fresh APK captures. Desktop/tablet variants remain in reports/ui-preview and in the file catalogue.


reports/ui-preview/daily-390.png

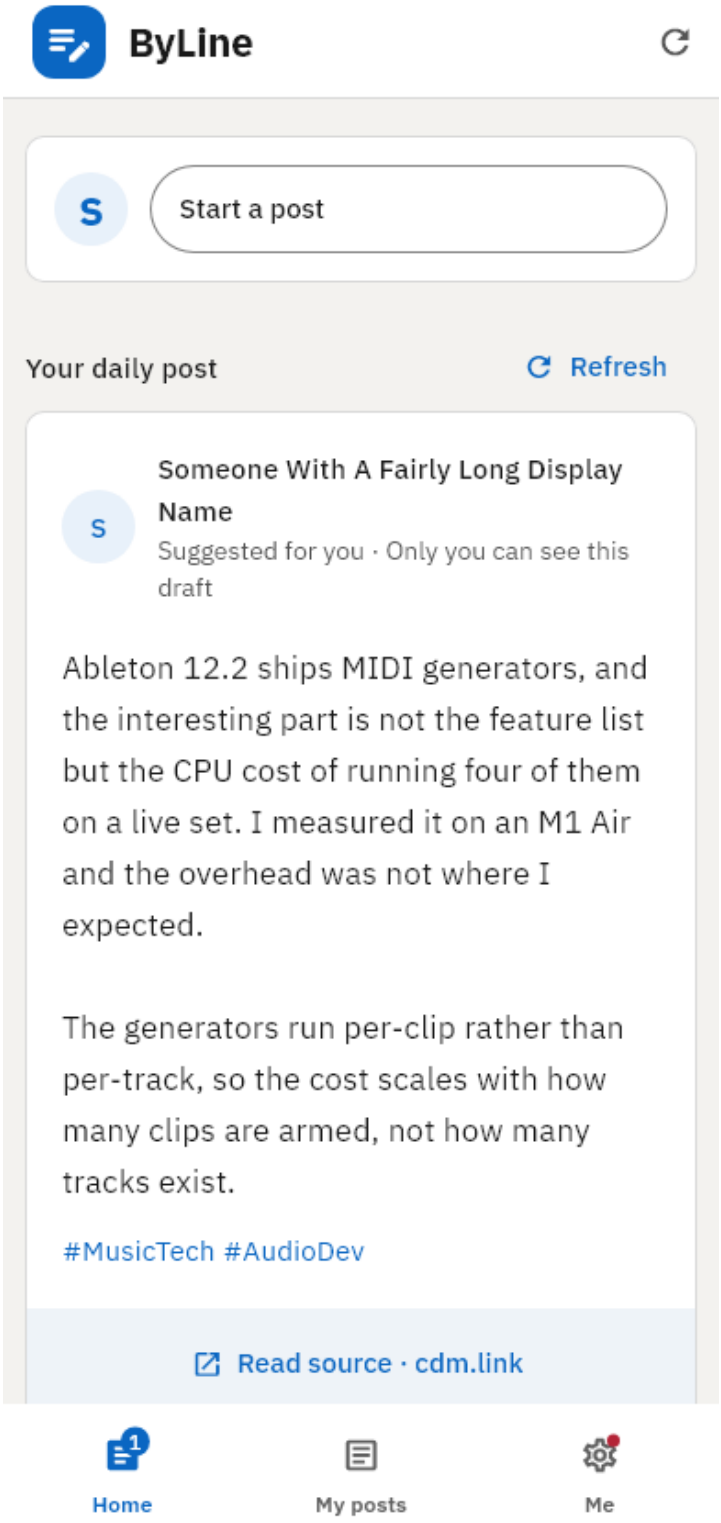


reports/ui-preview/delivery-390.png

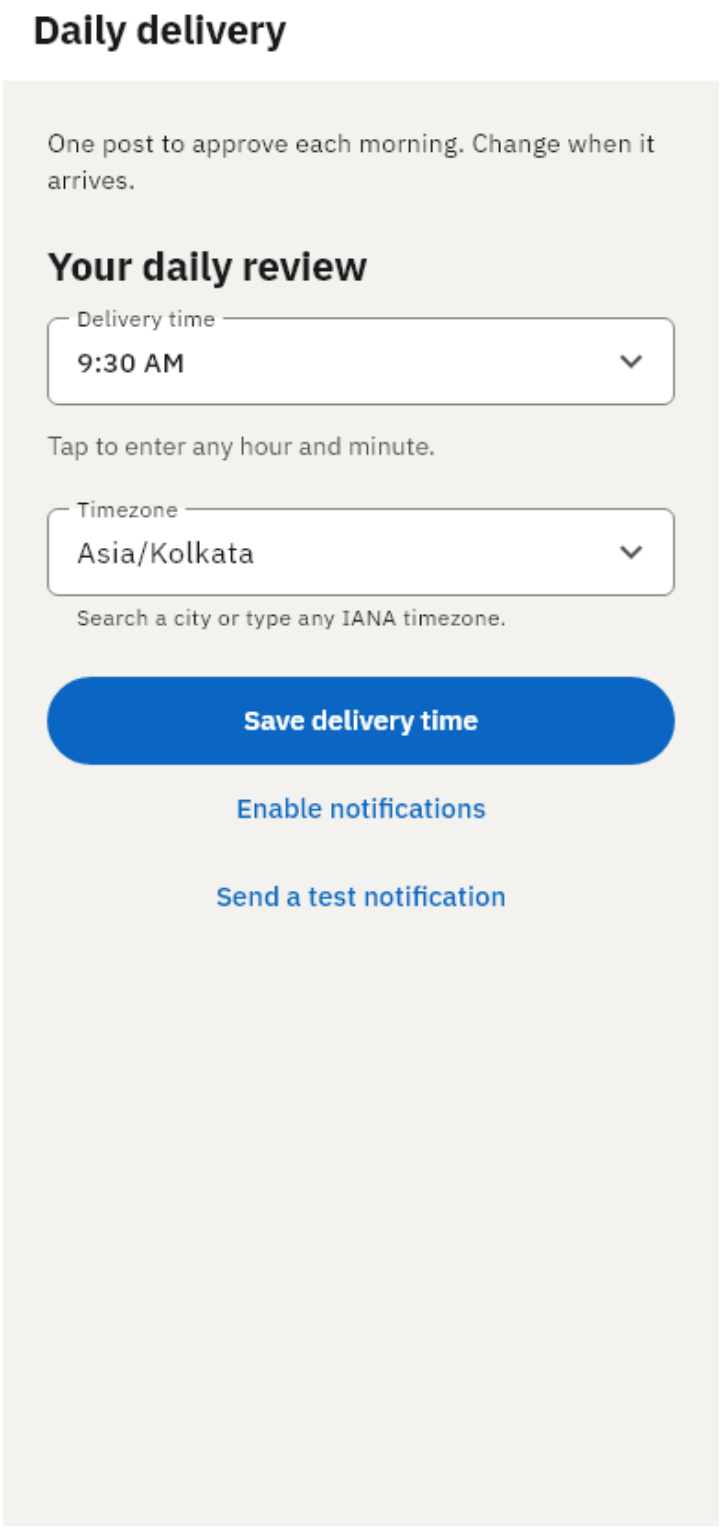


reports/ui-preview/interests-onboarding-390.png

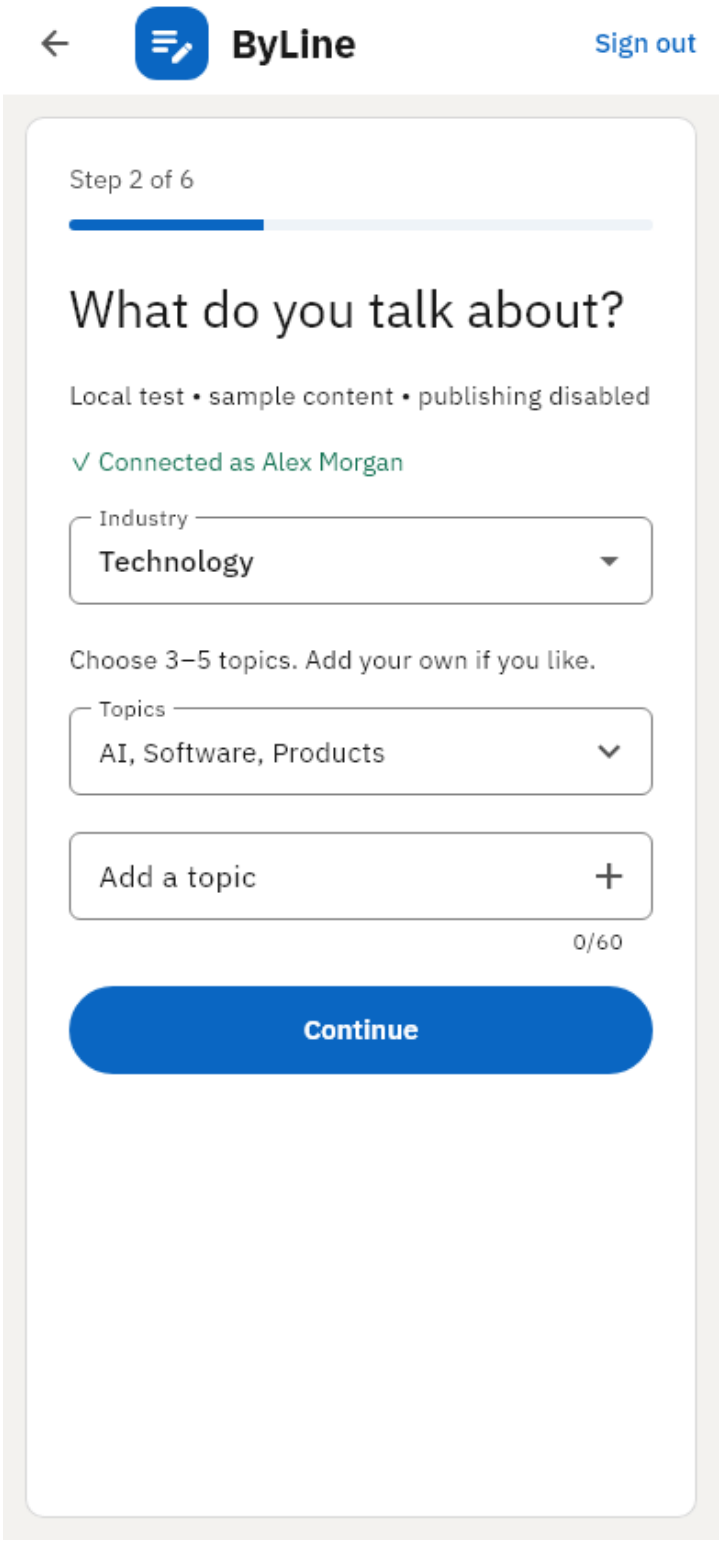


reports/ui-preview/sample-390.png

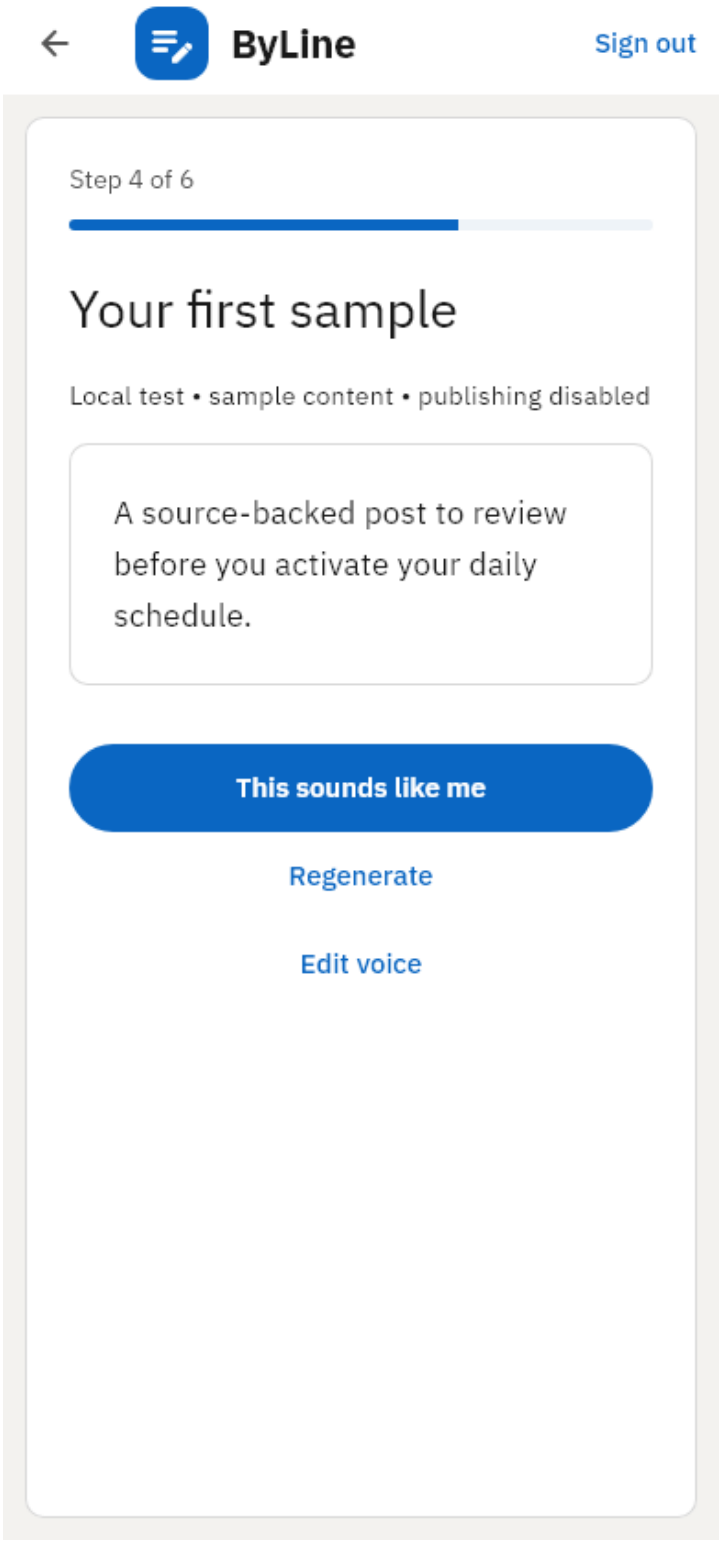


reports/ui-preview/timetable-390.png

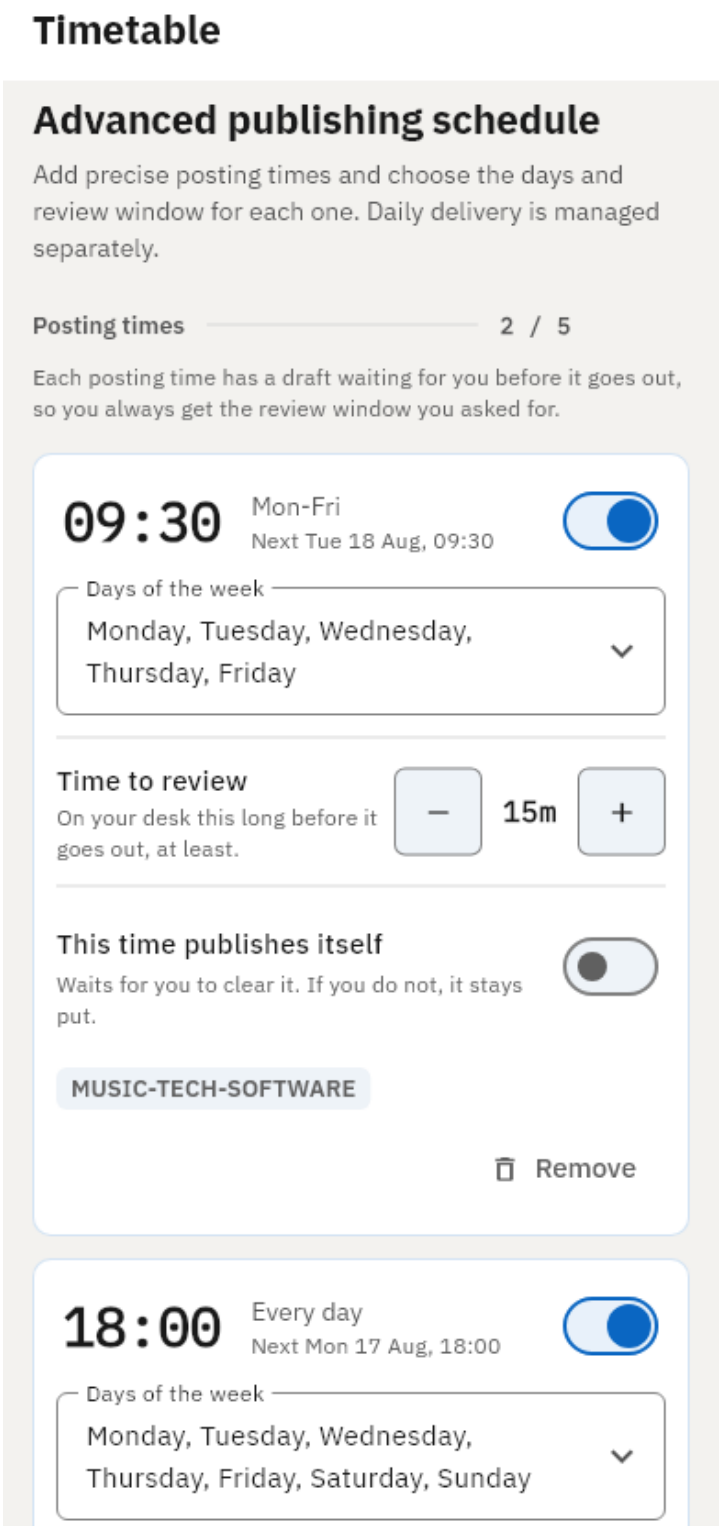


reports/ui-preview/topics-390.png

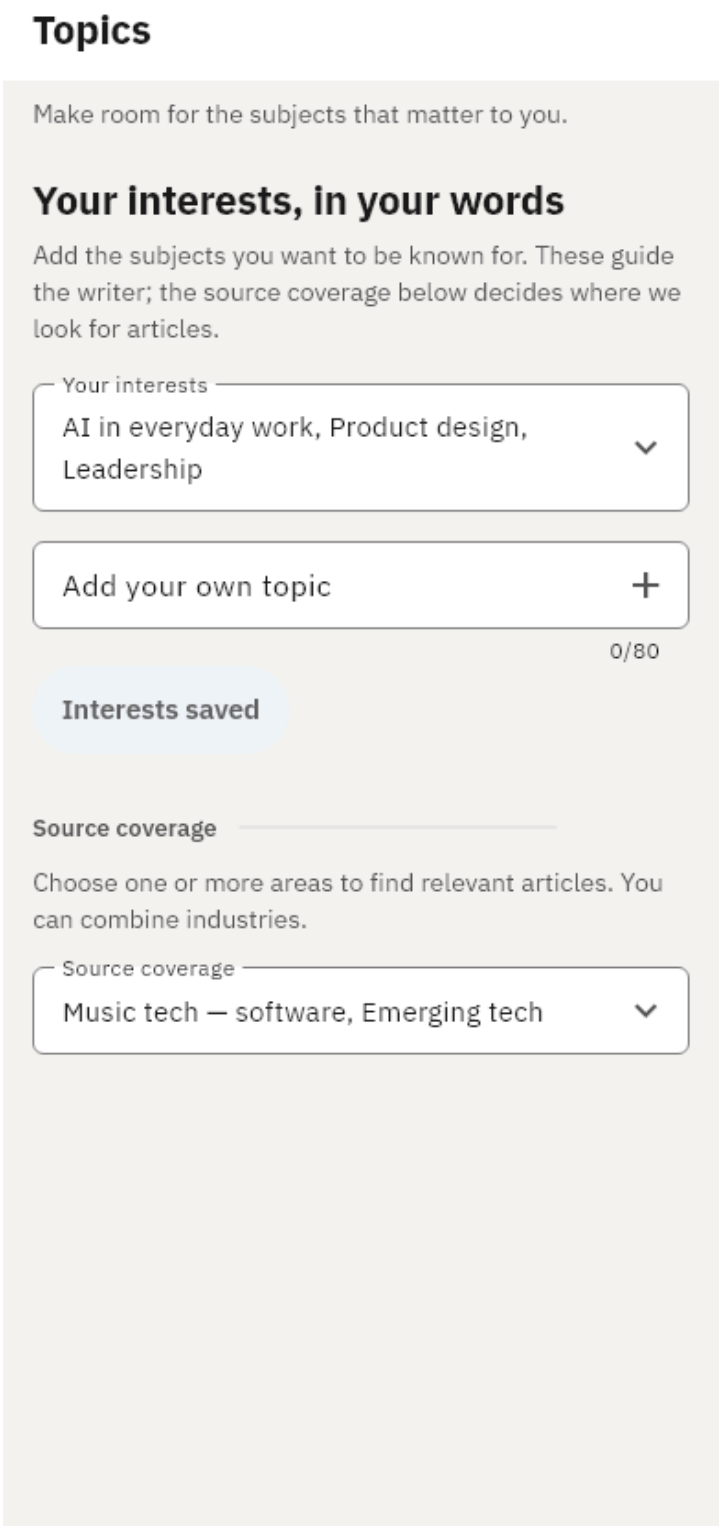

reports/ui-preview/voice-390.png

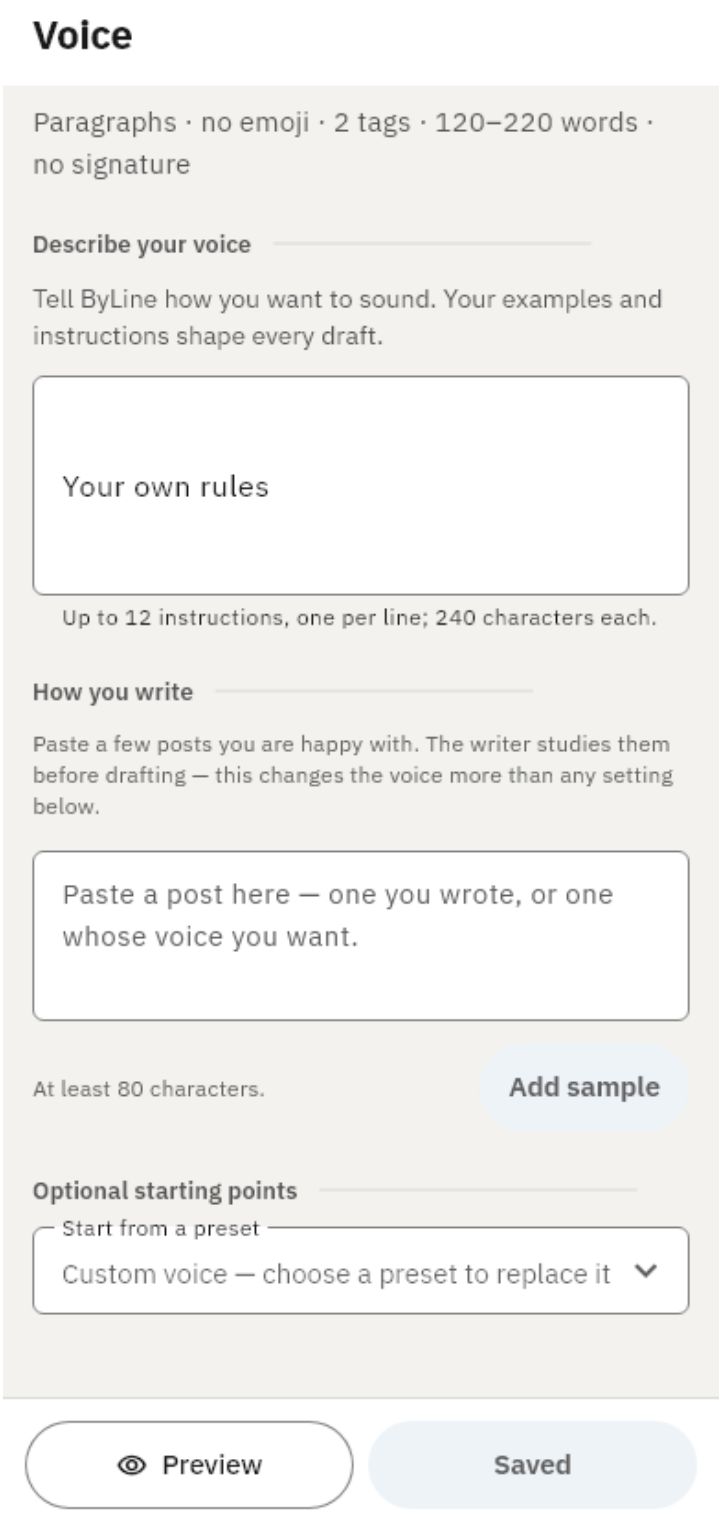

reports/ui-preview/welcome-390.png

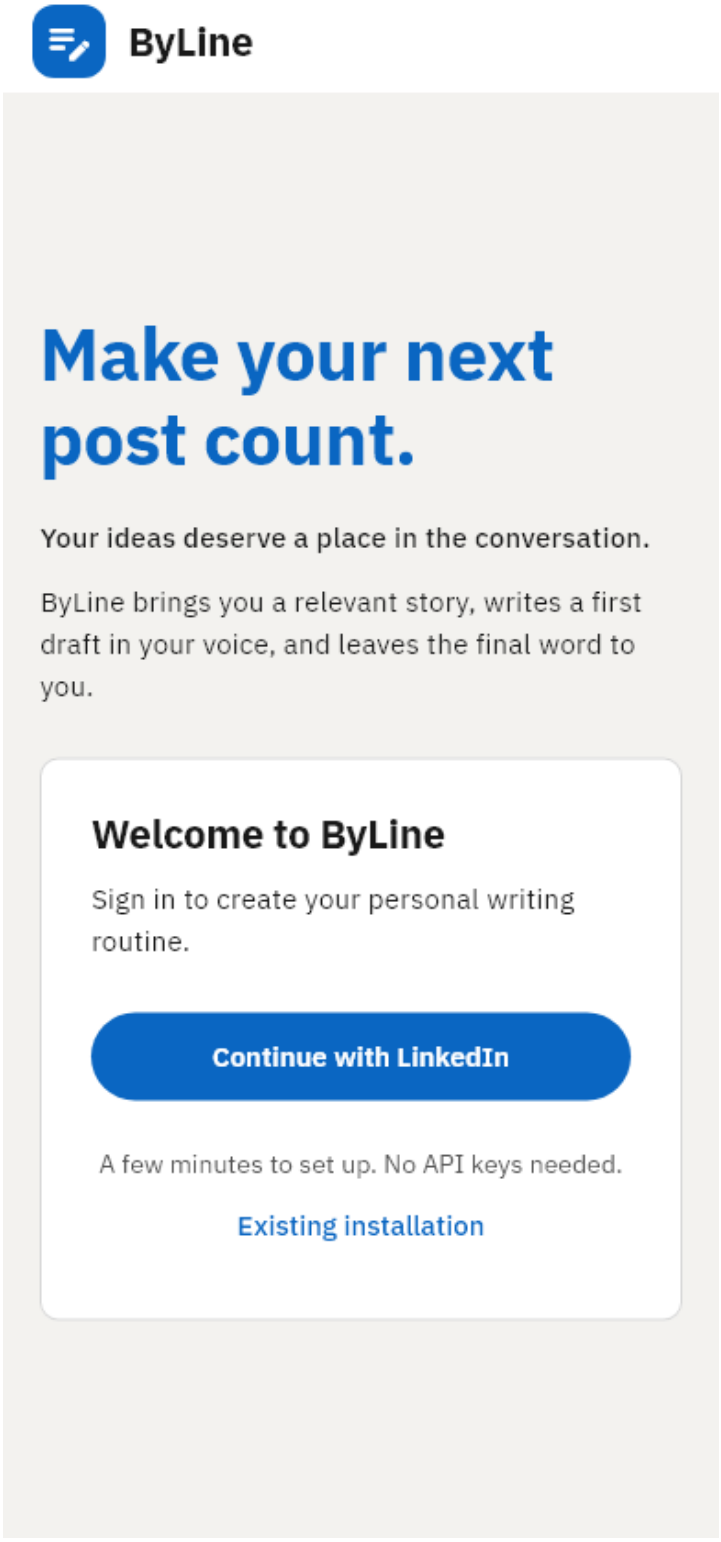

34. Scope and source integrity

PDF catalogue: 326 files. Companion source reference: 276 full text listings and 41,112 original lines. Both npm lockfiles are fully indexed in the PDF. Binary assets are accounted for by path, role, byte size and SHA-256; selected phone previews are rendered in the gallery.

Excluded from publication: Git internals, populated .env files, node_modules, Flutter/Android/Next build caches, local databases, private signing keys, service-account credentials and generated local Worker binding types. These are dependencies, secrets or runtime data, not omitted project source. Recreate generated dependencies with the documented setup commands and restore secrets from authorized secure storage.

This is a source snapshot rather than a warranty about changing third-party services. For any exact condition, use the file catalogue and companion source reference; for subsequent changes use Git history. The generated Markdown reference retains the exhaustive source material outside this condensed PDF.