BYLINE

THE COMPLETE PROJECT HANDBOOK

Architecture, every file, technology usage, Android installation and operations. Condensed reading edition.

7 November 2026

Every one of the 332 repository files is catalogued. Both npm dependency inventories are included. The companion repository reference preserves 282 full text listings and 41,830 source lines without inflating this PDF.

Includes an installable signed Android APK in releases/android/byline-latest.apk. See the embedded release record for its verified identity and checksum.

Baseline commit before this documentation/release packaging: 3e3f8e1dc61233ae847814f963b70fcb37843ffa

Working-source hashes in docs/repository-inventory.json identify the exact packaged source independently of that baseline. The final Git commit also contains this document.

Contents

1. What this project is 4

2. Reading paths and basic vocabulary 5

3. The three runtime arrangements 6

4. Technology stack and where each technology is used 7

5. Repository architecture and dependency direction 8

6. Installing the included APK on an Android phone 9

7. Account creation, authentication and session lifecycle 10

8. Onboarding, subjects and writing preferences 11

9. Daily app experience and screen responsibilities 12

10. Discovery, judging and draft generation 13

11. Scheduling, durable jobs and duplicate prevention 14

12. Editing, approval, publishing and uncertain outcomes 15

13. Images and media ownership 16

14. Notifications and background behavior 17

15. Persistence and data ownership 18

16. AI limits, errors and provider boundaries 19

17. API contract guide 20

18. Configuration, secrets and build variants 21

19. Setting up a developer workstation 22

20. Rebuilding and distributing the Android release 23

21. Deployment and operations 24

22. Troubleshooting and recovery 25

23. Testing and what the evidence means 26

24. Security and privacy model 27

25. Known boundaries and maintenance guide 28

26. Release metadata and fresh verification 29

27. Complete file catalogue 31

28. Direct packages and exact resolved dependencies 67

29. Import and configuration-use index 84

30. API and schema navigation index 94

31. Test case index 102

32. Finding the exact implementation 107

33. Mobile UI preview gallery 108

34. Scope and source integrity 116

1. What this project is

ByLine is a LinkedIn writing workspace. It finds source material matching an author's interests, evaluates the material, writes a draft using that author's preferences, and lets the author review, edit, schedule, publish or discard it. It also supports writing posts manually, attaching images and keeping an archive of published posts. Its core promise is assisted writing with a distinct publication decision, rather than indiscriminate automatic posting.

The repository is named link_agent. The root npm package is still named linkedin-creator. The Flutter package is still named linkdin_mobile and several classes retain LinkdIn in their names. These are historical internal names for the same ByLine project, not separate applications. The cloud Android application ID is com.linkdin.byline.

This handbook describes the source snapshot packaged with this document on 7 November 2026. The file catalogue records the included files and their purposes; the machine-readable inventory records their SHA-256 hashes. This condensed PDF retains the explanations and navigation indexes; full project-owned implementation, configuration, tests and historical notes are preserved separately in docs/generated-reference.md. Dependency lockfiles are represented by complete resolved package inventories; their original files remain in Git. Binary assets are identified with sizes and hashes, and one phone-width preview per screen is shown in the gallery, with the other screenshots retained in the repository. Private credentials, customer database rows, SDK installations, downloaded third-party implementation and build caches are deliberately outside the distributable source snapshot.

The implementation is the primary evidence. Older comments and reports are preserved as historical evidence and can describe earlier behavior. In particular, comments that say the mobile app only uses Next.js or only uses a cookie are obsolete for the cloud release. The current mobile transport supports native bearer sessions and the current release points to Cloudflare. Historical claims of successful phone tests are attributed to their dated reports; they are not presented as fresh tests of this release.

Inventory sha256 values describe the captured workstation bytes. Text files also have lf_sha256 values with CRLF normalized to LF, because Git can convert line endings between Windows and other platforms. Binary checksums, including the APK, are byte-exact across platforms.

2. Reading paths and basic vocabulary

A new phone user should read the installation chapter, the onboarding chapter and the daily-use chapter. A developer should then read the architecture, stack, lifecycle, API, persistence, configuration and verification chapters. An operator should also read deployment, recovery and release management. Search the PDF for an exact repository path, endpoint, table or function name to reach its catalogue entry, then open that path in the companion source reference.

An API is the server's request interface. The mobile app sends HTTPS requests and receives JSON. A backend is the service that owns account data and performs privileged work. A database persists records beyond a process restart. OAuth lets the user grant LinkedIn or Google access through the provider's own browser page. A bearer session identifies a signed-in ByLine user; it is distinct from the LinkedIn access token used by the server to publish. A migration is a versioned database structure change. A cron trigger is a recurring timer. A Workflow is durable server-side work whose completed steps can survive retries. An APK is the Android installation package, not a server or an iPhone application.

An agent is the author's server-side writing configuration and workspace. A slot is a recurring posting-time definition. A slot run is one occurrence of that definition on a particular local date. A draft is saved content that has not yet been successfully published. A distribution is the record of a publication attempt. An outbox is a persistent queue of work to deliver after a database change. An idempotency key identifies one intended operation so repeated submissions do not create additional effects. A revision records which version of settings a background job was prepared against.

3. The three runtime arrangements

Cloud Android release

The downloadable APK connects to https://byline-api.byline-b79.workers.dev. Flutter renders the interface. Cloudflare Workers handles API requests. D1 stores data. Cron Triggers starts the maintenance Workflow every five minutes. Content Workflows discover, judge, write and save drafts. Gemini supplies language-model completions. Firebase Cloud Messaging delivers Android alerts. LinkedIn's official API provides identity and publishing. The computer used to build the APK can be shut down after installation; the phone still needs internet and the backend/provider services must be available.

The cloud runtime imports shared pure TypeScript modules from the root lib directory. Its database adapters, authentication, scheduler and HTTP router live in cloud/src. It does not run the Next.js app and does not use the original Neon database. cloud/wrangler.jsonc identifies the dedicated ByLine account, D1 binding and Workflow classes. Account and database identifiers are operational identifiers, not authentication secrets.

Original web and PostgreSQL service

The root application uses Next.js App Router, React and PostgreSQL. app/page.tsx implements the operator dashboard; app/api contains HTTP handlers. lib contains the PostgreSQL adapters and shared business logic. Vercel configuration and GitHub workflows support the original hosted arrangement. Its native endpoints can also serve the Flutter app when that app is built with its origin. The older website and its data were not migrated into D1 merely by adding cloud/.

Isolated local preview

The Windows scripts create a separate PostgreSQL instance under .byline-local and a Next.js server on localhost:3100. The preview APK uses com.linkdin.byline_preview, demonstration content and simulated publication. USB adb reverse maps the phone's port 3100 to the computer. This arrangement needs the computer/server and USB connection. Local fixture mode is not the downloadable cloud release and does not prove Gemini, LinkedIn or physical notification delivery.

4. Technology stack and where each technology is used

TypeScript is the language of the two backends, shared business rules and most backend tests. JavaScript ES modules implement setup, smoke-test and operational scripts. Dart is the Flutter application's language. SQL defines PostgreSQL and SQLite/D1 schemas and queries. Kotlin and Gradle Kotlin DSL configure and host Android. C++ and CMake provide the Windows Flutter runner. CSS styles the Next.js dashboard. JSON, JSONC, YAML and XML describe packages, deployments, workflows, manifests and platform resources. PowerShell coordinates Windows builds and local phone workflows. Python with ReportLab and pypdf generates and validates this handbook; it is documentation tooling, not an application runtime dependency.

Next.js 15 is the root HTTP and web-rendering framework. React 19 and react-dom render app/page.tsx and app/layout.tsx. The pg package supplies the PostgreSQL connection pool in lib/db.ts. @google/genai supplies the original server's Gemini SDK in lib/llm.ts. The cloud AI adapter instead uses fetch against the Gemini REST API, keeping the Worker runtime separate from the Node SDK. TypeScript, tsx and the @types packages support compilation and tests. The package manifests and resolved dependency appendix give the exact ranges and installed lockfile versions; a semver range in package.json is not the same as a resolved version.

Cloudflare Workers provides Request/Response/fetch and Web Crypto. D1 provides a SQLite-compatible database through the DB binding. Workflows bindings CONTENT and MAINTENANCE refer to ContentWorkflow and MaintenanceWorkflow. Wrangler builds, generates binding types, migrates and deploys the cloud service. Miniflare runs isolated Worker/D1 tests locally. The cloud package has no separate production npm dependencies: its code uses platform APIs and shared local modules. Wrangler and Miniflare are development tools.

Flutter supplies widgets, rendering, Material UI, platform channels and compilation to Android, Windows and the checked-in web scaffold. provider exposes AppState through ChangeNotifier. http sends JSON and multipart requests; http_parser supplies upload MIME types. flutter_secure_storage stores native bearer sessions and pending OAuth flow material. shared_preferences stores lightweight settings and legacy cookie information. image_picker selects images. url_launcher opens ordinary external links and non-Android provider consent. Android OAuth uses auth_browser.dart and the AuthBrowser.kt platform bridge to explicitly target a general web browser, excluding provider app links. firebase_core initializes Firebase and firebase_messaging receives Android FCM messages. flutter_timezone reads the device timezone. flutter_local_notifications_windows participates in desktop notification support; its presence does not establish full cloud push delivery on Windows. cupertino_icons supplies icon assets. flutter_test and flutter_lints support automated checks. Android browser routing is tested with JUnit 4.13.2 and Robolectric 4.17 on API 24 and 35; these are test-only Gradle dependencies, not runtime APK dependencies.

The bundled Barlow Condensed, IBM Plex Sans and IBM Plex Mono fonts define headings, prose and technical/status text. They ship with the client instead of depending on a font CDN. mobile/lib/theme.dart defines the color and typography system; app/globals.css provides the separate web style. The repository's existing UI images are design evidence, not generated screenshots of the current release.

Git records source history. GitHub stores the repository, downloadable APK and documentation. GitHub Actions checks the original backend and mobile client and contains legacy watchdog/backup schedules. Android SDK build tools inspect and verify the signed APK. Java 17 compatibility is configured for Android source and bytecode. The installed Flutter SDK supplies the actual Android compile, target and minimum SDK defaults; release.json records what the built APK declares.

5. Repository architecture and dependency direction

The high-level request path is: Flutter screen -> AppState -> ApiClient -> HTTPS route -> authenticated owner -> domain operation -> database/provider -> JSON view model -> AppState -> widgets. The cloud scheduler follows a separate server path and does not depend on the phone being awake.

cloud/src/index.ts is the cloud route dispatcher and scheduled entry point. It exposes health and native-auth callbacks before authentication, then resolves an Owner for protected requests. Most handlers receive that owner and scope database reads/writes to owner.agentId or owner.userId. cloud/src/models.ts translates stored fields into the same client-facing shapes used by the app.

The split into lib/discovery-core.ts, lib/judge-core.ts, lib/writer-core.ts, lib/persona-prompt.ts, lib/voice-prompt.ts, lib/setup-config.ts and lib/llm-contract.ts lets both backends share editorial behavior without importing PostgreSQL into the cloud runtime. Files such as lib/discovery.ts, lib/judge.ts and lib/writer.ts are original-backend adapters. Dependency injection through the Completion contract allows the cloud adapter to enforce its own AI quotas while reusing the writer.

The generated import index records where declared packages and local modules are used. It is a source-level dependency guide, not a whole-program call graph: runtime dispatch, platform registration and SQL relationships are also significant. The companion source reference in docs/generated-reference.md contains the exact implementation of each conditional branch.

6. Installing the included APK on an Android phone

1. Open the repository on the phone: https://github.com/Don-Gabriel/link_agent. If it is private, sign in to a GitHub account with access. Download access is not granted merely by sharing the URL.

2. Open releases/android/byline-latest.apk and use Download raw file. The stable direct download is https://github.com/Don-Gabriel/link_agent/raw/refs/heads/main/releases/android/byline-latest.apk. Download the APK itself, not the repository ZIP or the GitHub HTML page. The release manifest alongside it identifies version, package ID, file size and SHA-256.

3. Open the downloaded .apk using Downloads or Files. When Android asks, allow that browser or file manager to install unknown apps. Menu names vary by device; on recent Android versions this is a permission for the individual installing app.

4. Tap Install, then Open. Review Android's actual prompts; managed devices or regional verification requirements can impose additional restrictions. Do not assume every Android device permits sideloading. You can turn off that install-source permission again afterwards.

5. Open ByLine and choose an available social sign-in option. Finish consent in the system browser and return to the app. No Gemini API key, database password or server address is required for the prepared cloud APK.

6. Complete subject selection, optional voice customization, a generated sample and acceptance, then choose a posting time/timezone and notification preference. The cloud finish operation requires a current LinkedIn connection. If you sign in through Google, connect LinkedIn as part of setup before finishing.

7. Allow notifications if you want ready/failure alerts. Check Home and My posts to confirm your account loads. The first recurring delivery is scheduled for tomorrow in your selected timezone; a manual prepare action can be used when eligible.

An existing release signed with the same key can normally be updated in place. If Android reports a conflicting package/signature, do not uninstall blindly: an older debug/live build can have the same package ID but a different certificate. Preserve access to the account and confirm the old build's signing identity before planning a replacement. Uninstalling removes local app data. ByLine Preview has a separate package ID and can coexist with the release.

This APK cannot be installed on an iPhone. There is no iOS project, signed IPA or TestFlight distribution in this repository. The checked-in Windows and Flutter web scaffolds do not create iOS support.

For a manual checksum check on Windows, run Get-FileHash -Algorithm SHA256 .\byline-latest.apk and compare the result with releases/android/SHA256SUMS. Developers can run apksigner verify --verbose --print-certs on the APK. Android's official sideloading guidance is at https://developer.android.com/distribute/marketing-tools/alternative-distribution and signature-tool documentation is at https://developer.android.com/tools/apksigner. These references describe the platform installation mechanism; the actual APK manifest and release verification record describe this build.

7. Account creation, authentication and session lifecycle

The cloud GET /api/native-auth response advertises configured Google and LinkedIn providers and reports localTest false. The app generates a cryptographically random verifier, starts an authentication flow and saves pending flow material in secure storage. The backend stores its SHA-256 digest and a short-lived flow record. The browser visits the provider, which redirects to the backend callback. The callback claims the flow once, exchanges the authorization code, obtains the verified provider subject, provisions or finds the ByLine identity and associates any LinkedIn grant.

Android sign-in and LinkedIn connection share the browser-only launcher. It queries public ACTION_VIEW/BROWSABLE intent filters supporting HTTP and HTTPS without host restrictions, selects the default eligible browser or a browser-only chooser, and preserves the complete OAuth URL. No credential WebView is used. No enabled browser produces a retryable error. The backend callback remains HTTPS; Return to ByLine only signals navigation and never carries session credentials.

The app polls with the flow ID and original verifier. The cloud implementation consumes a completed flow and creates one server-side session atomically. Native flows live for ten minutes; cloud bearer sessions expire after thirty days. Cloud requests must use Authorization: Bearer; cookie authentication is deliberately not accepted there. The signed token alone is insufficient: sessionOwner also checks the persisted session, revocation, expiry and account/agent relationship. Logout revokes the server session and the app clears its local state.

Provider identity is keyed by provider and subject. Signing in with Google and signing in with LinkedIn are not automatically an account-merging mechanism. The application does not silently transfer the legacy owner's history to a new social identity. The original Next.js service additionally supports the legacy APP_PASSWORD/cookie flow through lib/auth.ts and middleware.ts. The mobile Existing installation screen exists for that compatibility path; it is not the standard cloud signup route.

Cloud login starts are limited to ten per fifteen-minute window for a keyed hash of the connecting IP. Return addresses are validated by shared native-return logic; callback pages are generated centrally. Provider secrets and encrypted LinkedIn grants stay on the server. Native sessions and unfinished sign-in material use Flutter secure storage. A session expiration returns 401 and is translated into a sign-in message by the client.

8. Onboarding, subjects and writing preferences

Setup persists independently of screen navigation. The state includes industry, topic strings, selected category IDs, tone, optional voice notes/style, up to three writing samples, timezone, time and notification preference. The catalogue contains 1,112 selectable subjects and 55 specialist groups, in addition to the foundational industry choices. lib/category-catalogue.ts stores the specialist vocabulary; lib/categories.ts exposes normalized category records and validation.

parseSetup requires one to twelve distinct topics, each two to eighty characters, and one to twelve distinct valid category IDs when explicitly supplied. Voice notes allow up to 1,200 characters. Up to three samples are accepted, each eighty to 2,400 characters. Timezones must be valid IANA timezone names and times normalize to HH:MM. Ten named tones are available: professional, conversational, storyteller, punchy, analytical, educational, reflective, warm, witty and inspirational.

The cloud setup API uses a revision number. Saving changes increments the revision and clears old preview/acceptance markers. Preview uses a three-minute generation lease and a ten-per-day attempt limit. Acceptance is only valid for a successfully generated sample matching the current revision. Finish requires that acceptance and an unexpired LinkedIn connection, then atomically activates the configuration and creates a daily slot. A stale sample cannot authorize changed voice settings.

While LinkedIn connection is pending, setup checks status every three seconds for up to ten minutes and immediately on app resume. Only one connection check runs at once. A late response updates account status without replacing saved configuration or revision. Transient network failures remain recoverable; browser launch failure, expiration and sample generation failure leave retry paths. Notification denial or unavailable Firebase does not prevent setup completion.

New native accounts use no signature by default. Legacy DEFAULT_STYLE retains the original signature configuration for compatibility. Settings cover structure (prose, bullets, short lines, mixed), emoji policy, hook intensity, closing/CTA policy, word range, hashtag count, register, custom rules, banned phrases and optional signature rationing. The nominal word range is subordinate to the final post's character budget. Choosing a long word range does not increase LinkedIn's supported commentary length.

9. Daily app experience and screen responsibilities

The main mobile navigation has Home, My posts and Me. Home uses TodayScreen for native accounts, showing today's timetable entries, preparation progress and other posts. My posts collects drafts/desk actions, writing and the published archive. Me hosts account, connection, scheduling, voice, notification and related settings. Composer is a route above the tab shell, so a card or notification can request it through AppState.

WelcomeScreen loads provider capabilities and resumes a saved pending sign-in when possible. GateScreen implements legacy installation login. OnboardingScreen handles saved setup, subjects, voice, sample review and delivery choices. TimetableScreen edits recurring slots. VoiceScreen edits writing preferences and previews. ComposerScreen creates or edits text, hashtags and images. DeskScreen shows actionable drafts and send outcomes. ArchiveScreen paginates published posts and supports follow-up writing. DeleteAccountScreen requires the destructive confirmation flow.

AppState is the shared observable state and owns status refresh, authentication phase, preparation status, composition requests and navigation requests. ApiClient centralizes transport, timeouts, authentication, persistence and error translation. Ordinary requests have a thirty-second ceiling; writer-facing operations use a longer 135-second timeout. Connection recovery retries bounded GET reads, not publishing mutations. Home refreshes on app resume and periodically retries when an error, missing status or active preparation warrants it. A timeout is not proof that a server-side mutation did not happen.

The app supports unsaved-change guards, draft-specific actions, responsive reading widths and a common editorial widget system. Theme and widget files are separately catalogued. Historical screenshots at widths 390, 900 and 1280 illustrate the responsive design work. Automated widget tests are evidence of specific tested behavior, not proof of universal device accessibility or performance.

10. Discovery, judging and draft generation

Discovery reads RSS/news sources associated with selected subjects. The shared discovery core normalizes source material, decodes entities, filters and deduplicates candidates, and balances selection so one source does not monopolize the batch. Feed health is recorded for diagnosis. Specialist subjects use targeted sources/search routes, so an entry in the catalogue does not guarantee a qualifying story on every day.

Judging is a batched LLM request. Each candidate is scored from zero to ten for persona fit, category fit, novelty, timeliness and non-duplication. Their mean is rounded to two decimals. A candidate must reach 6.5 overall, category fit at least seven and persona fit at least six, and its assigned category must be valid and selected. Invalid score entries are excluded. Category coverage and prior fingerprints help avoid repetitive output without forcing a low-quality story to pass.

The writer receives the selected story, persona, voice/style rules, prior openings, selected writing samples, optional edit notes and continuity context. It produces structured draft data including text, rationale, hashtags, fingerprint and continuity information. Repair attempts address failed constraints. Critique enforces deterministic checks on the generated result. The shared formatting layer assembles the body, exact source link and normalized hashtags in code rather than trusting a model to reproduce URLs accurately.

MAX_BODY_CHARS is 2,400; MAX_COMMENTARY is 3,000 in the LinkedIn client. The implementation checks escaped final text, including appended source and hashtags. The hook/fold marker uses 210 characters as a UI heuristic. Up to fifteen hashtags are permitted by application validation. Model-generated content is not a factual guarantee: the author must inspect source relevance, claims and voice before publishing.

Cloud generation persists stages discovering, judging, writing and saving. It loads the author and slot revisions, runs source/AI steps through Workflows, validates the result, saves one draft using the job identity and settles the job. The source step results can be reused during durable retries. If no source qualifies or providers fail, the job records a failure or waits for a later eligible attempt; it does not manufacture a successful draft status.

The cloud memory context currently has no external facts and source none. The original backend can use optional Breeth graph memory with PostgreSQL fingerprints as fallback. Those are different deployments' capabilities; configuring the cloud backend does not enable the legacy external memory path.

11. Scheduling, durable jobs and duplicate prevention

Cloud cron runs every five minutes, creating a maintenance Workflow keyed to the scheduled interval. Maintenance publishes eligible due posts, scans the timetable, reconciles interrupted jobs, dispatches queued jobs, drains notifications and performs periodic cleanup. The source order is intentional and is visible in cloud/src/scheduler.ts. A cloud scheduler heartbeat older than sixteen minutes makes the scheduler-aware health endpoint return 503.

Each cloud author can have up to five slots. Days are a seven-bit mask, with bits following the weekday mapping in lib/schedule.ts; 127 means every day. Lead time ranges from ten to 720 minutes and defaults to fifteen. Time calculations use the author's timezone. firstDelivery deliberately chooses tomorrow in that timezone. A posting occurrence over forty-five minutes late is treated as missed rather than sent at an arbitrary later time.

Slot runs are unique per slot and local date. Jobs capture author and slot revisions. A changed configuration, disabled slot, paused author or consumed occurrence prevents obsolete work from creating a new eligible draft. A discarded draft remains a consumed occurrence; it is removed from ready/other-post displays without silently generating a replacement for the same slot/date.

generation_jobs persists queued work before dispatch. If creating a Workflow fails, the next tick can retry dispatch with the same identity. Reconciliation inspects stale working jobs, recovers an already-saved draft when possible, or records a real failure. Slot retries are bounded; source code records attempt counts, retry timestamps and maximum attempts. Manual preparation is separately constrained so repeated taps cannot create unlimited jobs.

The original backend instead uses PostgreSQL advisory locking and its own tick orchestration in lib/cycle.ts, lib/slots.ts and lib/reviews.ts. It depends on an external tick request to /api/cron/tick. The isolated local launcher sends that tick every thirty seconds. These mechanisms should not be confused with the cloud Cron Trigger.

12. Editing, approval, publishing and uncertain outcomes

Saving a draft is separate from sending it to LinkedIn. POST /api/posts accepts manual content and an optional clientRequestId so retries can recover the same save. Polish combined with immediate publishing is refused because changed AI text must be reviewed. Scheduled manual posts receive a send time and appropriate clearance. Edits clear prior approval. Reviewed text/hashtags/media can be supplied with a publish or clear action to catch changes between review and execution.

The cloud post action vocabulary is publish, resolve, rewrite, followup, edit, clear, unclear, hold, release, reschedule and discard. Hold lasts fifteen minutes. Rewrite produces alternative content for review; followup applies to a published post. Discard changes the record to rejected and removes the scheduled timestamp. Archive GET returns published posts in pages of twenty with a cursor and hasMore flag.

Publishing first checks LINKEDIN_LIVE, author/post ownership, a usable LinkedIn token, image ownership and final escaped length. An atomic distribution claim uses the key linkedin:{agentId}:{seq}. A send in flight, already sent or unknown blocks a competing send and blocks unsafe editing. Cloud manual sends have a forty-attempt daily cap; automatic sends are capped by the author's configured allowance bounded from one to five. These application limits are not statements of provider quotas.

Automatic publication requires an active, unpaused author, an eligible scheduled time and either explicit clearance or the author and slot automatic-publishing flags. A held, missed or unresolved post is not blindly sent. New accounts and new slots start with automatic publication disabled. The global deployment switch is an additional gate, not a replacement for user approval settings.

A successful LinkedIn response stores the external post URN, marks the distribution sent and the post published. A definite HTTP 4xx rejection records a failed attempt. Timeouts, connection failures and ambiguous server responses are treated as unknown. The application cannot safely assume whether the provider created the post, so it does not automatically replay the mutation. The author checks LinkedIn and resolves the outcome. A sufficiently stale in-flight send can also be resolved. This protects against duplicate public posts at the cost of sometimes requiring manual reconciliation.

13. Images and media ownership

The mobile image picker selects images and the transport sends a multipart upload. The backend checks the request and LinkedIn image requirements, initializes upload, transfers bytes and stores an owned media_assets record. Posts refer to media IDs, not arbitrary untrusted LinkedIn image URNs. The cloud publisher accepts at most twenty distinct IDs and requires all referenced assets to be uploaded and owned by the same agent.

The LinkedIn client centralizes escaping, image and post APIs, OAuth scopes and permalink construction. Do not implement a second sending path that bypasses its text conversion or the distribution claim. For image posts the cloud assembly omits the separate source line in the branch specified by publish.ts; the saved source metadata remains available for editorial context. Full upload validation and byte limits are in the media source files and companion reference.

14. Notifications and background behavior

Android Firebase initialization happens before messaging access, but initialization failure does not prevent the app from opening. Notification permission/registration is tied to the signed-in account and saved preference. Device tokens are registered server-side for that owner. Logout unregisters while still authenticated, and the backend checks ownership so an old account cannot remove a token now associated with another account on the same phone.

The cloud server uses an FCM service account to mint a short-lived OAuth credential and sends through FCM HTTP v1. Notices include draft ready, generation failure, publication outcome, connection expiry and a test notice. Android channels separate routine updates and alerts; MainActivity creates channels and the manifest defines the default channel/icon. A notification carries a target tab and, when applicable, a post sequence. Tapping it opens the relevant app workspace.

Notifications are placed in a durable outbox with dedupe keys. A claim sets a future retry timestamp, and delivery attempts are bounded. The cloud dispatcher processes at most three outbox rows per maintenance batch; a notice targets at most ten devices. The immediate generation step targets the outcome for its own job. The current implementation marks an outbox row delivered if at least one device send succeeds, so it does not prove delivery to every device; provider acceptance also does not prove display on a physical phone.

Battery management, denied permissions, unregistered device tokens, provider outages and network state can delay or prevent visible alerts. The server retains the draft/status regardless of whether a notification appears. Windows support does not provide the Android FCM background path, and local preview deliberately clears server Firebase credentials. Open the app to inspect current state when notification delivery is uncertain.

15. Persistence and data ownership

The primary relationships are: byline_users owns an agent; byline_sessions belongs to a user; onboarding belongs to a user; posts, post_slots, linkedin_accounts, media_assets, distributions and notification records belong to an agent; slot_runs belongs to a recurring slot and date. generation_jobs adds durable cloud job state. post_counters allocates author-scoped post sequences. Identity/session records must not be inferred from client-supplied agent IDs.

AI accounting uses ai_user_days, ai_provider_days, ai_usage and cloud ai_reservations. feed_health and system_status describe operational state. oauth_states and native_auth hold transient consent state. login_attempts limits sign-in starts. review_deliveries, rejections, llm_calls and push_log support existing orchestration/audit paths, with usage differing between the two adapters. A table existing in the cloud migration does not imply every legacy feature actively writes it there.

PostgreSQL uses UUIDs, JSON fields, timestamps, foreign keys, unique indexes and advisory locks. lib/schema.ts is an additive migration body; lib/db.ts records its hash in byline_schema_versions under a transaction lock. BYLINE_REQUIRE_MIGRATIONS can make serving fail closed until an operator has applied the migration. The pool is shared through globalThis to survive Next.js development reloads; it uses up to ten connections and a twenty-second connection timeout.

D1 uses its own two checked-in SQL migrations. JSON-shaped data is stored in text columns and translated by model helpers. Atomic D1 batches and SQL conditions implement concurrency controls; do not copy PostgreSQL BEGIN/COMMIT or advisory-lock assumptions into the Worker adapter. Unique indexes prevent duplicate owner agents, client request saves and slot/day posts. The schema appendix reproduces all columns, defaults, indexes and triggers, and the table-purpose index explains the records they protect.

Cloud deletion requires confirmation exactly DELETE. It refuses while a distribution is in flight and deletes the account's related records in one batch. Deleting application data does not delete already-published LinkedIn posts. Historical backups and any legacy external memory require their own retention handling. Operator recovery must preserve encryption keys as well as database contents: encrypted grants cannot be recovered from a database alone if the key is lost.

16. AI limits, errors and provider boundaries

The current cloud constants are forty AI reservations per author/day, one hundred per model/day shared across authors, and twelve actual AI attempts per completion wrapper invocation. Budget days use America/Los_Angeles in the cloud AI adapter. Reservations and pacing are enforced before transport, and usage stores success plus available token counts. These are application safeguards, not a claim that Google will supply that capacity.

The cloud primary model string is gemini-3.5-flash-lite and fallback is gemini-3.1-flash-lite. The fallback is attempted for selected temporary network/5xx failures after a bounded wait. Quota failures are not treated as transient transport errors. Durable Workflow steps can retry temporary exceptions without repeating successful source steps. The original Node adapter has its own configured primary/fallback/last-resort policy and defaults from .env.example. Read the deployment-specific adapter when diagnosing a model selection.

Cloud discovery is capped at twenty-four fetches including redirects and twelve selected feeds. Provider responses and HTTP request bodies have explicit byte ceilings. Completion responses must contain usable text and the expected finished status; partial/blocked results are not treated as successful drafts. Raw provider details stay in operator logs, while generation-errors translates failures into actionable client messages.

Existing reports describe free-tier verification and model availability on 5 November 2026. That history is not a perpetual price, quota or availability guarantee. Check the actual provider account and current official limits before deploying or increasing capacity. No paid fallback is configured in the current cloud adapter. The application can be unavailable when its free quota or external provider capacity is exhausted.

17. API contract guide

The cloud and Next.js route navigation index follows this narrative; complete handler implementations are in the companion reference. Read cloud/src/index.ts for method dispatch, each cloud handler for request validation and mobile/lib/api/models.dart for the client-side response shapes. The shared URL shape does not mean the two deployments support identical operator endpoints.

Public cloud routes are GET /api/health, GET/POST /api/native-auth and GET OAuth callbacks. All remaining dispatched cloud routes require a native bearer session. JSON body parsing requires an object and limits the body to 64 KiB. Responses disable caching and set nosniff/referrer-policy headers. Unexpected failures produce a generic 500 without returning raw diagnostics.

GET /api/status aggregates account/settings/queue and preparation information. GET/POST /api/onboarding reads or executes save, preview, accept and finish. GET/POST /api/interests reads or changes interests. PATCH /api/settings changes account writing/scheduling controls. GET/POST /api/slots lists/creates slots; PATCH/DELETE /api/slots/{id} edits/deletes one. GET/POST /api/review-delivery reads today's timetable, requests generation or saves notification preference. POST /api/cycle/run requests a manual background draft and returns 202 when accepted.

GET /api/posts reads the published archive; POST creates a manual draft or a reviewed direct publication request. PATCH /api/posts/{seq} executes a named post action. POST /api/compose/rewrite and POST /api/style/preview request AI revisions/previews without silently publishing them. POST /api/media uploads an owned image. POST/DELETE /api/devices registers, tests or unregisters notifications. GET /api/linkedin/connect starts account connection; POST /api/linkedin/disconnect removes the grant and disables automatic publication. DELETE /api/auth revokes the session. POST /api/account/delete executes confirmed deletion.

Typical errors are 400 invalid input, 401 unauthenticated/expired session, 404 unknown owned resource, 409 stale revision/state conflict, 429 allowance/rate limit, 503 temporary service/generation unavailability and 500 unexpected backend failure. Check the actual handler for exact response status and body. Never replay a publish merely because the client did not receive a response. Refresh and inspect its persisted state first.

The original Next.js router additionally exposes operator initialization, password authentication, authenticated cron and watchdog routes. Its middleware and request-agent helper determine legacy/native access. Those operator capabilities are not automatically exposed by the cloud router.

18. Configuration, secrets and build variants

The generated configuration-use index lists variable names with source locations. Root .env.example is a template, not a populated credential file. DATABASE_URL chooses the original PostgreSQL database. APP_SECRET signs sessions; TOKEN_ENCRYPTION_KEY protects stored LinkedIn grants. APP_PASSWORD gates the legacy dashboard. CRON_SECRET authenticates original tick/watchdog work. LINKEDIN_CLIENT_ID/SECRET and redirect URI configure the service-owned LinkedIn app. GOOGLE_CLIENT_ID/SECRET and redirect URI optionally configure Google identity.

GEMINI_API_KEY and the LLM/model/budget settings configure the original AI adapter. BYLINE_PUBLIC_URL supplies public callback context. BYLINE_REQUIRE_MIGRATIONS controls migration enforcement. BYLINE_TEST_MODE together with BYLINE_LOCAL_ONLY enables isolated fixtures; these must not be mistaken for real publishing. The original FCM adapter uses project ID, client email and private key fields; the cloud adapter receives FCM_SERVICE_ACCOUNT_JSON. BREETH_API_KEY is optional legacy memory integration.

Cloud secrets are declared by cloud/src/env.ts and prepared into ignored .byline-local/cloud-secrets.json. Wrangler configuration stores resource bindings, not secret values. Build-time Dart defines include BYLINE_API_URL, BYLINE_APP_VARIANT and public Firebase client configuration. Firebase's Android client configuration identifies the project/app; it is not the server service-account private key. Server OAuth client secrets, Gemini keys, token-encryption keys and signing passwords must never be embedded in Dart defines or committed.

The cloud variant uses BYLINE_APP_VARIANT=cloud, com.linkdin.byline and a private release signing configuration. The live development variant uses the same package ID with its existing development signing behavior and a distinct label. The preview variant uses BYLINE_LOCAL_TEST=true and com.linkdin.byline_preview, disables Google Services processing and uses the local backend. A default build retains com.linkdin.linkdin_mobile and defaults to the Android-emulator backend address, so a plain flutter build apk is not a substitute for the prepared cloud release command.

mobile/android/key.properties and .byline-local/byline-release.p12 remain private. The prepare-cloud script preserves an existing key pair and refuses incomplete signing state. Back up the key and its passwords securely: a different certificate cannot provide an ordinary in-place update to existing installs. The repo contains the signed public APK and certificate fingerprint, not the private signing material.

19. Setting up a developer workstation

Clone the repository and install Node.js/npm, Flutter with the Dart SDK version required by mobile/pubspec.yaml, Android SDK/build tools and a compatible Java installation. CI currently selects Node 24. Use npm ci in the root and cloud directories to honor lockfiles, and flutter pub get in mobile. cloud worker types are generated, ignored files: run npm run types from cloud before typechecking a fresh clone.

For cloud development: change directory to cloud, run npm ci, npm run types, npm run typecheck and npm test. The pretest builds the Worker bundle with wrangler deploy --dry-run, then tests execute against an isolated Miniflare database. This does not deploy the Worker. For an interactive local D1 backend, run npm run db:local and use Wrangler's local development mode with local-only test credentials as required. Do not run remote migration commands against a guessed account.

For the original backend: run npm ci, create a local environment from .env.example and configure a disposable PostgreSQL database. npm run dev starts the web/API service. npm run migrate explicitly applies the schema to the database selected by DATABASE_URL. npm run build:check uses a separate .next-verify directory so verification does not overwrite a running server build. Missing DATABASE_URL can support limited stub views but is not a functioning persistent installation.

For the prepared Windows preview on this workstation: npm run local:setup creates the isolated database; npm run local:dev runs the API and scheduler. scripts/build-local-android.ps1 builds the preview. scripts/install-local-android.ps1 installs through USB and configures adb reverse. npm run local:phone combines these steps and can rebuild when requested. These installer commands modify a connected device; building the release APK and writing this document do not require running them.

To develop the mobile client against a chosen server, use flutter run with --dart-define=BYLINE_API_URL=https://your-server and the correct variant/Firebase defines. Android emulator 10.0.2.2 reaches the host machine; a real phone does not. Cloud release users should use the packaged APK, whose server origin is already configured.

20. Rebuilding and distributing the Android release

Restore the private signing key and ignored key.properties from the owner's secure backup before rebuilding an update. The cloud preparation script also requires .byline-local/firebase-live-google-services.json matching project linkdin-43813 and package com.linkdin.byline. These inputs are intentionally not reconstructed from public repository data.

From the repository root run node scripts/prepare-cloud-android.mjs https://byline-api.byline-b79.workers.dev, then powershell -NoProfile -ExecutionPolicy Bypass -File scripts/build-cloud-android.ps1. The latter builds a release using .byline-local/cloud-dart-defines.json and copies the result to .byline-local/byline-cloud-release.apk. Neither command installs the APK on a phone.

Inspect the output with Android SDK aapt/apkanalyzer and apksigner. Confirm package ID, version, min/target SDK, architectures, release signing and backend origin configuration. Compute SHA-256 after copying the exact artifact to releases/android/byline-latest.apk. Update release.json and SHA256SUMS from that file, then commit the binary with the documentation. Increment mobile/pubspec.yaml for an actual versioned application update; a documentation-only rebuild of identical application source can retain its declared version, but the new file hash must still be recorded.

The versioned build metadata and stable latest filename make the phone download path easy to find. Git preserves earlier committed APKs, but large binaries increase repository size. This release is stored directly in Git so clone and Download raw file work without Git LFS setup. Future releases can additionally use GitHub Releases for distribution while retaining a clear latest download link. No app-store publication or automatic OTA updater is implemented by this step.

21. Deployment and operations

The repository already identifies a dedicated ByLine Cloudflare account and database. Preserve that boundary. Build/test changes locally, verify the selected Wrangler account, back up data and encryption/signing material, apply the checked-in D1 migrations to the intended database, then deploy with the prepared secrets file. cloud/README.md contains the exact commands and ownership constraints. This documentation/repository task does not require deploying a new backend or changing existing users' settings.

Verify basic health and unauthenticated rejection after deployment. /api/health confirms DB access; /api/health?check=scheduler additionally checks recent timer activity. A manually invoked task is not evidence that cron fired naturally. An independent monitor is needed to detect a total provider outage, since a failed provider cannot reliably alert through its own scheduler. The existing GitHub watchdog and backup jobs target the original service configuration; they are not a verified cloud backup/restore solution.

The cloud smoke scripts can create disposable authors and some scripts can consume real AI requests. Read their conditions and use the intended origin. Provider consent, physical push delivery and actual publication require separate end-to-end exercises; isolated tests do not prove external service configuration. The dated release report records earlier evidence and its limits.

For the original Vercel/PostgreSQL deployment, configure the correct environment variables and matching provider callbacks, migrate the selected database and arrange the authenticated cron request. Keep the original and cloud databases conceptually separate. A change to the cloud Worker does not repair, migrate or restart the old Vercel website.

22. Troubleshooting and recovery

Cannot install APK: confirm the file is an APK rather than HTML, download it again, verify its hash, check available storage, Android version and device policy, and compare signing identity if another ByLine package is installed. The APK's actual SDK and ABI values are in release.json. Do not erase an existing installation as the first diagnostic step.

Cannot reach ByLine: check internet access and the prepared origin, then the basic health endpoint. On local preview check the running server and adb reverse. A cloud outage cannot be solved by leaving the development computer awake. A 401 requires sign-in; repeated GET recovery does not fix a revoked session.

OAuth does not finish: update to build 4 or later if Android opens LinkedIn before ByLine consent, ensure a web browser is enabled, and cancel/restart any old pending attempt. Confirm the exact registered callback URI, provider credentials and the selected provider's capability response. Return to the app while the ten-minute flow is valid. Cancel and restart expired consent. Treat Google and LinkedIn provider identities as distinct unless an explicit migration/linking workflow is implemented.

Sample or draft fails: inspect the saved job stage/error, selected subjects, source availability and AI allowance. Tighten impossible writing preferences, especially word ranges that exceed the final character budget. A no-source outcome is valid. A provider quota failure is not fixed by repeatedly tapping prepare; retries consume the same bounded allowances.

Draft missing after discard: discarded posts are intentionally excluded from the current ready list, while their slot occurrence remains consumed. Check the correct account and date before assuming data loss. If a save timed out, refresh or retry using the same request identity rather than inventing a new one.

No notification: check system permission, the account's saved preference, device registration and Firebase configuration. Inspect the outbox and provider status, then open the app for the authoritative state. An FCM accepted send is weaker evidence than observing the alert on the actual device.

Post not sent: verify global live switch, LinkedIn token expiry, account/slot automatic settings, explicit clearance, hold state, eligible send window, daily allowance and final text length. If the outcome is unknown, inspect the LinkedIn profile and resolve it through the app. Never reset the distribution claim merely to force a retry.

Recovering after data loss: restore a tested backup into an isolated target, restore the matching token-encryption key, validate schema and ownership, and inspect pending jobs/distributions before enabling scheduling. Keep publishing disabled during recovery until uncertain sends have been reconciled. Cloud-to-PostgreSQL and PostgreSQL-to-cloud migrations require an explicit data transformation; copying SQL files does not transfer history.

23. Testing and what the evidence means

Root npm test checks core formatting, escaping, scheduling, judge handling and health behavior. test:catalogue validates subject uniqueness/discovery/relevance and voice persistence behavior. test:byline checks account/session/setup and timezone/DST logic. test:db exercises real SQL against a disposable PostgreSQL database. test:local orchestrates local API/catalogue/native-return integration scripts. build:check compiles the Next.js production build separately from a serving build.

cloud npm test builds the Worker bundle and runs writer, discovery-budget, database and API suites using Miniflare. Tests cover concurrent identities, session revocation, ownership separation, draft and schedule isolation, notification device ownership, deduplication, publish claims, account deletion and provider failure paths. The companion source reference supplies the exact fixtures and assertions. A mocked provider response does not demonstrate a real LinkedIn grant or FCM arrival.

Flutter analysis checks lib and test. Flutter tests cover model/transport contracts, auth return, notifications, catalogue/voice behavior, onboarding, preparation, reconnect recovery, screen rendering and widgets. The final release verification document records fresh results, command exit status and any limitations. Historical reports are separately dated; they are useful regression context but not replacements for this run.

The PDF is checked for readable page rendering, extracted text, file-catalogue coverage and final artifacts. APK verification checks structure and signing and the hash of the copied file. Git verification checks committed content and that the remote branch has the pushed commit. None of those alone proves every user journey on every phone, so the report distinguishes current automated checks, current read-only live checks and earlier device evidence.

24. Security and privacy model

Principal security boundaries are the phone/server boundary, unauthenticated/authenticated API boundary, user/agent ownership boundary, server/provider credential boundary and draft/publication boundary. Bearer-session verification, persisted revocation, owner-scoped SQL, one-use OAuth flows, parameterized queries, encrypted grants and atomic send claims support these boundaries. Request and provider-response byte caps prevent unbounded body reads in the relevant helpers.

Writing samples, draft text, voice preferences and selected source material can be sent to the configured AI provider when generation is requested. LinkedIn receives posts/images when publication is authorized. Firebase receives device tokens and notification payloads. The database contains identities, preferences and writing history. The app's deployment-specific privacy policy must explain actual providers and retention; source code alone is not a complete privacy notice.

The repo excludes populated .env files, local database storage, private signing material, service-account private keys and live backups. Existing Firebase client configuration is a public app identifier/configuration asset; it must not be confused with administrative credentials. A code repository backup is not a customer-data backup. Preserve operational secrets separately and never print them in CI logs or support screenshots.

25. Known boundaries and maintenance guide

This repository contains a usable Android client and two backend implementations, not a claim of unlimited free hosting or a fully certified multi-tenant commercial service. The cloud API and old web service remain separate. There is no checked-in iOS release project. Full background cloud push on Windows is not established. Provider availability, free quotas, callback registration, permission grants and token expiry can interrupt the experience.

The 5 November release report records an in-place phone update, real notification observations and earlier publication evidence, but explicitly notes no second real person's OAuth sign-in and a manually shortened draft after a provider failure. Those limitations remain relevant context. Public customer launch still needs independent monitoring, tested off-provider restoration, a distribution/update policy and deployment-specific privacy/support operations.

When adding a subject, update catalogue definitions and validate discovery/relevance tests. When changing writing behavior, update shared core logic and exercise both adapters. When changing persisted fields, add database migrations for each affected backend and update view models/mobile parsing. When changing an API, update client transport/model tests. When changing publication behavior, preserve idempotency and ambiguous-outcome handling. When updating the mobile app, preserve its signing key and record the version/build hash.

The PDF reference chapters retain every file and its role, npm dependency resolutions, imports and environment uses, API navigation, D1 table definitions, test titles and selected phone previews. The separate docs/generated-reference.md preserves the full project-owned source, Dart lockfile and historical documents. Use that companion when a question needs an exact branch or assertion. This keeps the PDF within 100-120 pages without discarding the exhaustive repository reference.

26. Release metadata and fresh verification

releases/android/release.json


```
{
  "name": "ByLine",
  "versionName": "1.0.3",
  "versionCode": 4,
  "packageId": "com.linkdin.byline",
  "builtAtUtc": "2026-11-07T08:00:56Z",
  "releaseKind": "cloud",
  "apiOrigin": "https://byline-api.byline-b79.workers.dev",
  "minimumAndroidApi": 24,
  "minimumAndroidVersion": "7.0",
  "targetAndroidApi": 36,
  "compileAndroidApi": 36,
  "architectures": [
    "arm64-v8a",
    "armeabi-v7a",
    "x86_64"
  ],
  "bytes": 56892379,
  "sha256": "9ab71a961f1cd3ffbb58a6256d380b0abe34d1696d842fe4c540391b80e3e823",
  "signingCertificateSha256": "fcfc5a0a6d34abe8ada3e525f1f5f758a4560b9fa58261f218a0fca3ac61773c",
  "signatureScheme": "APK Signature Scheme v2",
  "flutter": "3.44.1",
  "dart": "3.12.1",
  "buildCommand": "powershell -NoProfile -ExecutionPolicy Bypass -File scripts/build-cloud-android.ps1",
  "sourceInventory": "../../docs/repository-inventory.json",
  "download":
  "https://github.com/Don-Gabriel/link_agent/raw/refs/heads/main/releases/android/byline-latest.apk",
  "phoneInstalledDuringThisBuild": false,
  "note": "Android browser-only OAuth routing and first-run connection recovery. Version increased; existing
   private release signing key preserved. 177 Flutter, 8 native Android and 30 cloud tests passed. Real
  new-phone consent not performed during this build."
}
```


reports/ByLine-auth-onboarding-fix-2026-11-07.md

ByLine 1.0.3 (4): Android authentication and first-run setup

Date: 7 November 2026. Supersedes the APK portion of the earlier same-day release report; the original backend/database validation remains historical evidence.

Reported failure and change

On a new Android phone, LinkedIn opened before the user reached ByLine's consent screen. The previous `externalApplication` launch left Android free to resolve the provider's HTTPS URL to the LinkedIn app. The shared `openAuthBrowser` helper now routes Android OAuth through `byline/auth_browser` and `AuthBrowser.kt`.

The native bridge discovers general HTTP/HTTPS browser activities using public resolved intent filters, rejects host-restricted app handlers and disabled or unexported activities, and explicitly sets the browser package on the OAuth intent. It prefers the user's eligible default browser; otherwise every chooser entry is explicitly scoped to a browser. The URL, state and HTTPS callback are preserved. No WebView, credential interception or unrestricted resolver fallback is used. The same path serves welcome sign-in, setup connection and settings reconnection. Other platforms retain external-browser authentication.

No enabled browser produces a retryable error and clears an unlaunchable welcome flow. Existing verifier-protected, securely stored pending-flow recovery remains. Disposed/cancelled welcome attempts cannot apply a late response to a newer attempt. Setup refreshes LinkedIn status on foreground return, checks at three-second intervals for up to ten minutes, prevents overlapping connection requests, and updates only account status so delayed responses cannot revert saved setup revisions.

Verification

- `flutter analyze --no-pub lib test`: no issues. - `flutter test --no-pub --reporter expanded`: 177 tests passed. - Cloud `npm run typecheck`: passed; `npm test`: 30 tests passed, including D1 identity/session ownership, OAuth state/verifier/callback and onboarding guards. - `:app:testDebugUnitTest` with the local-preview define: 8 native tests

passed across Android API 24 and 35. Checks cover a provider app claiming web links, explicit browser-only choices, disabled/missing browsers and unsafe URLs. - Signed release build: passed. `aapt` confirms `com.linkdin.byline`, version 1.0.3/build 4, minimum API 24, target/compile API 36 and all three universal ABIs. `apksigner verify --verbose --print-certs` verifies APK v2 signing and the same certificate SHA-256 as the previous release. The merged manifest contains browser visibility queries and the ByLine return link. All three compiled Dart libraries contain the expected cloud API origin.

The first remote mobile CI run passed 176 tests and exposed an existing screenshot test's assumption that the ignored `.byline-local` directory already existed. That test now creates its output directory before writing the image, making it runnable from a fresh checkout. This follow-up changes tests and documentation only; the verified release APK's application code is unchanged. Remote backend build and PostgreSQL integration jobs passed on the application release commit.

New Flutter coverage checks the intact OAuth URL reaching the native bridge, unsafe URL rejection, browser unavailable/platform failure without a provider-app fallback, fresh sign-in exchanging the original verifier and storing its session, and failed launch clearing the pending flow and enabling retry. Existing tests cover secure pending-flow restoration after network/server interruption and completed setup opening the daily screen.

New 360-pixel-wide setup journeys cover subjects and adding a topic, default or custom voice, saving a new revision, sample generation failure and retry, sample acceptance, posting time/timezone payloads, skipping notifications or unavailable Firebase, and opening ByLine. Connection coverage verifies transient GET failures, foreground recovery, no overlapping requests and polling stopping after success. These are automated tests with mocked provider/network boundaries; they do not claim a live LinkedIn account consent or physical FCM delivery was performed.

Reproduction and phone checks

1. Install the repository's 1.0.3 build 4 APK over the previous same-key cloud app. 2. On a fresh installation with LinkedIn installed, tap Continue with LinkedIn. A web browser (or a chooser containing only browsers) must open. 3. Complete LinkedIn login and ByLine consent. On the completion page select Return to ByLine if needed. The app must recover the flow and load the account's setup. 4. For a Google signup, connect LinkedIn from setup and return. Verify the connected profile is shown; repeat reconnection from Me after setup when appropriate. 5. Choose subjects, optional voice, generate/retry and accept the sample, choose time and timezone, and either enable or skip notifications. Open ByLine, close/reopen it and verify setup stays completed. Notification denial must not block entry.

The owner's phone was not installed, reset or changed during this work. A real new-phone login through LinkedIn remains a device validation step. No production backend deployment, account mutation, real publication or paid AI generation was needed for this client-side fix. The release uses the existing cloud origin and private release signing identity; no secret files are included in Git.

Repeat the checks

From `mobile`, run the Flutter analyzer and test commands above. For native tests, prepare the Flutter Android toolchain (`flutter pub get` and a local preview build if Gradle wrapper/local.properties have not yet been generated), then from `mobile/android` run:

```powershell .\gradlew.bat :app:testDebugUnitTest -Pdart-defines=QllMSU5FX0xPQ0FMX1RFU1Q9dHJ1ZQ== ```

The encoded define is `BYLINE_LOCAL_TEST=true`; it prevents Firebase production configuration being required for the isolated native tests. JUnit/Robolectric are test-only dependencies. Native tests use Android API 24 and 35 models. Robolectric's SDK cache is kept in ignored build output to avoid its Windows native-loader issue with spaces in the user-home Maven cache. The first run hit that tooling issue; after relocating the cache, all eight checks passed.

Release instructions and the exact APK SHA-256/certificate are in `releases/android/README.md`, `release.json` and `SHA256SUMS`.

Technical references: LinkedIn authorization code flow, AppAuth Android browser discovery, Robolectric setup.
```

27. Complete file catalogue

Every tracked or non-ignored project file is listed below. Private/generated dependencies and local runtime data are excluded by Git rules. Derived handbook artifacts are listed without recursive content/hashes. Binary assets have metadata instead of source text. The JSON inventory has full SHA-256 values for every non-derived file. Imports are collected in chapter 29 and the companion reference.

.env.example

Blank original-backend environment variable template with operator comments.

2848 bytes; 67 lines

.gitattributes

Preserves PDF/APK binary bytes across Git checkouts and exempts embedded source whitespace in the generated reference.

212 bytes; 6 lines

.github/workflows/backup.yml

Scheduled original PostgreSQL encrypted backup artifact workflow.

3847 bytes; 81 lines

.github/workflows/ci-mobile.yml

Path-filtered GitHub Actions Flutter analysis and tests.

1618 bytes; 49 lines

.github/workflows/ci.yml

GitHub Actions root logic/type/build checks and disposable PostgreSQL integration tests.

2791 bytes; 86 lines

.github/workflows/watchdog.yml

External scheduled original-backend health/reminder watchdog workflow.

4823 bytes; 99 lines

.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

922 bytes; 43 lines

BYLINE-LIVE.md

Original integration/live workstation operating instructions.

7984 bytes; 74 lines

BYLINE-LOCAL.md

Isolated demonstration backend/phone setup, verification and boundaries.

7734 bytes; 86 lines

DEPLOY.md

Original hosted deployment procedure and infrastructure notes.

13828 bytes; 343 lines

DESIGN.md

Design language, typography, layout and interaction rationale.

15901 bytes; 328 lines

README.md

Repository overview, current download/documentation links and original setup reference.

10289 bytes; 214 lines

app/api/account/delete/route.ts

Next.js App Router HTTP handler for /api/account/delete. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3200 bytes; 50 lines

Declared symbols: POST, dynamic

app/api/auth/route.ts

Next.js App Router HTTP handler for /api/auth. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3038 bytes; 81 lines

Declared symbols: POST, DELETE, dynamic

app/api/compose/rewrite/route.ts

Next.js App Router HTTP handler for /api/compose/rewrite. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2864 bytes; 68 lines

Declared symbols: POST, dynamic, maxDuration

app/api/cron/tick/route.ts

Next.js App Router HTTP handler for /api/cron/tick. Validates request/authentication, delegates domain operations and returns the endpoint contract.

7095 bytes; 159 lines

Declared symbols: announce, authorized, GET, dynamic, maxDuration

app/api/cycle/run/route.ts

Next.js App Router HTTP handler for /api/cycle/run. Validates request/authentication, delegates domain operations and returns the endpoint contract.

1682 bytes; 44 lines

Declared symbols: POST, dynamic, maxDuration

app/api/devices/route.ts

Next.js App Router HTTP handler for /api/devices. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2640 bytes; 58 lines

Declared symbols: POST, DELETE, dynamic

app/api/health/route.ts

Next.js App Router HTTP handler for /api/health. Validates request/authentication, delegates domain operations and returns the endpoint contract.

877 bytes; 29 lines

Declared symbols: GET, dynamic

app/api/init/route.ts

Next.js App Router HTTP handler for /api/init. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3383 bytes; 79 lines

Declared symbols: GET, POST, dynamic, maxDuration

app/api/interests/route.ts

Next.js App Router HTTP handler for /api/interests. Validates request/authentication, delegates domain operations and returns the endpoint contract.

1767 bytes; 27 lines

Declared symbols: GET, POST, dynamic

app/api/linkedin/callback/route.ts

Next.js App Router HTTP handler for /api/linkedin/callback. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3220 bytes; 70 lines

Declared symbols: back, GET, dynamic

app/api/linkedin/connect/route.ts

Next.js App Router HTTP handler for /api/linkedin/connect. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2196 bytes; 45 lines

Declared symbols: GET, dynamic

app/api/linkedin/disconnect/route.ts

Next.js App Router HTTP handler for /api/linkedin/disconnect. Validates request/authentication, delegates domain operations and returns the endpoint contract.

829 bytes; 20 lines

Declared symbols: POST, dynamic

app/api/linkedin/redirect-uri.ts

Resolves and validates the original LinkedIn callback URI for OAuth requests.

685 bytes; 14 lines

Declared symbols: redirectUriFor

app/api/media/route.ts

Next.js App Router HTTP handler for /api/media. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3825 bytes; 99 lines

Declared symbols: POST, dynamic, maxDuration

app/api/native-auth/callback/route.ts

Next.js App Router HTTP handler for /api/native-auth/callback. Validates request/authentication, delegates domain operations and returns the endpoint contract.

427 bytes; 8 lines

Declared symbols: GET, dynamic

app/api/native-auth/route.ts

Next.js App Router HTTP handler for /api/native-auth. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3296 bytes; 47 lines

Declared symbols: GET, POST, dynamic

app/api/onboarding/route.ts

Next.js App Router HTTP handler for /api/onboarding. Validates request/authentication, delegates domain operations and returns the endpoint contract.

5031 bytes; 62 lines

Declared symbols: GET, POST, dynamic, maxDuration

app/api/posts/[seq]/route.ts

Next.js App Router HTTP handler for /api/posts/[seq]. Validates request/authentication, delegates domain operations and returns the endpoint contract.

17045 bytes; 390 lines

Declared symbols: Action, PATCH, dynamic, maxDuration

app/api/posts/route.ts

Next.js App Router HTTP handler for /api/posts. Validates request/authentication, delegates domain operations and returns the endpoint contract.

8781 bytes; 197 lines

Declared symbols: GET, POST, dynamic, maxDuration

app/api/review-delivery/route.ts

Next.js App Router HTTP handler for /api/review-delivery. Validates request/authentication, delegates domain operations and returns the endpoint contract.

2627 bytes; 34 lines

Declared symbols: GET, POST, dynamic, maxDuration

app/api/settings/route.ts

Next.js App Router HTTP handler for /api/settings. Validates request/authentication, delegates domain operations and returns the endpoint contract.

6088 bytes; 131 lines

Declared symbols: PATCH, dynamic

app/api/slots/[id]/route.ts

Next.js App Router HTTP handler for /api/slots/[id]. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3524 bytes; 91 lines

Declared symbols: PATCH, DELETE, dynamic

app/api/slots/route.ts

Next.js App Router HTTP handler for /api/slots. Validates request/authentication, delegates domain operations and returns the endpoint contract.

3436 bytes; 96 lines

Declared symbols: GET, POST, dynamic

app/api/status/route.ts

Next.js App Router HTTP handler for /api/status. Validates request/authentication, delegates domain operations and returns the endpoint contract.

9044 bytes; 215 lines

Declared symbols: GET, dynamic

app/api/style/preview/route.ts

Next.js App Router HTTP handler for /api/style/preview. Validates request/authentication, delegates domain operations and returns the endpoint contract.

4502 bytes; 101 lines

Declared symbols: POST, dynamic, maxDuration

app/api/watchdog/route.ts

Next.js App Router HTTP handler for /api/watchdog. Validates request/authentication, delegates domain operations and returns the endpoint contract.

6007 bytes; 139 lines

Declared symbols: authorized, GET, dynamic

app/globals.css

Original web dashboard global styling.

20771 bytes; 899 lines

app/layout.tsx

Root Next.js HTML/layout and metadata wrapper.

709 bytes; 25 lines

Declared symbols: RootLayout, metadata, viewport

app/page.tsx

Original React operator gate, setup and dashboard UI.

49909 bytes; 1396 lines

Declared symbols: Post, Status, CategoryPicker, api, downscale, relative, Page, Gate, submit, Setup, toggle, Dashboard, Alerts, Attachment, Composer, upload, Queue, judgeTotal, PostCard, act, History, Connection, Settings, patch, voiceSummary, toLines, fromLines, PreviewResult, Voice, set, save, runPreview, Schedule, Rejections

cloud/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

54 bytes; 4 lines

cloud/README.md

Dedicated cloud ownership, deployment, free-budget limits and recovery guidance.

6387 bytes; 40 lines

cloud/migrations/0001_initial.sql

D1 schema migration: initial complete SQLite tables, ownership keys and indexes.

12607 bytes; 350 lines

cloud/migrations/0002_cloud_jobs.sql

D1 schema migration: durable jobs, AI reservation triggers and operational indexes.

2334 bytes; 44 lines

cloud/package-lock.json

Exact npm dependency resolution tree, integrity hashes and platform packages for reproducible installation.

51912 bytes; 1646 lines

cloud/package.json

npm package identity, direct dependency version ranges and executable task commands for the cloud backend.

525 bytes; 20 lines

cloud/scripts/live-smoke.ts

Configured integration smoke checks; provider effects depend on the script/environment.

3956 bytes; 42 lines

cloud/scripts/prepare-secrets.mjs

Builds ignored cloud secret configuration from private operator inputs without committing secrets.

2971 bytes; 28 lines

cloud/scripts/remote-smoke.ts

Remote cloud integration smoke exercise using disposable data and configured live AI.

5374 bytes; 70 lines

Declared symbols: sql, request

cloud/scripts/setup-push.mjs

Operator setup helper for dedicated Firebase cloud push service credentials.

1936 bytes; 28 lines

Declared symbols: api

cloud/src/ai.ts

Gemini REST transport, atomic quota reservations, pacing, bounded transient fallback and usage records.

5882 bytes; 90 lines

Declared symbols: reserveAi, withProviderRetry, completion, durableCompletion, singleCompletion, USER_AI_LIMIT, PROVIDER_AI_LIMIT, AI_MODEL, AI_FALLBACK_MODEL, isTransientAiFailure

cloud/src/auth.ts

Cloud OAuth capability/start/poll/callback, session authentication, login limits and LinkedIn connection.

9833 bytes; 136 lines

Declared symbols: AuthEnv, Owner, authenticate, limitLogin, capabilities, authorizationUrl, nativeAuth, Grant, Identity, exchange, accountStatement, authCallback, connectLinkedIn

cloud/src/crypto.ts

Web Crypto session MAC signing/verification, digest helpers and authenticated token encryption.

3077 bytes; 47 lines

Declared symbols: digest, signingKey, signSession, verifySession, unbase64, base64, encryptionKey, encryptToken, decryptToken

cloud/src/delete-account.ts

Atomic author-data deletion with exact confirmation and in-flight-publication guard.

1800 bytes; 17 lines

Declared symbols: deleteAccount

cloud/src/drafts.ts

Idempotent draft save, per-author sequence allocation and settings/slot revision enforcement.

2857 bytes; 49 lines

Declared symbols: DraftInput, saveDraft

cloud/src/env.ts

Types for secret bindings combined with generated Wrangler resource bindings.

406 bytes; 13 lines

Declared symbols: Secrets, AppEnv

cloud/src/generation-errors.ts

Converts internal generation failures into bounded client-safe explanations.

1238 bytes; 17 lines

Declared symbols: generationError

cloud/src/generation.ts

Cloud sample and durable job generation using the shared discover/judge/write pipeline.

8387 bytes; 95 lines

Declared symbols: RunStep, feedResult, generatePreview, generateJob, directly

cloud/src/http.ts

No-store JSON responses, typed HTTP errors and bounded body/provider JSON parsing.

1135 bytes; 23 lines

Declared symbols: HttpError, json, body, text, responseJson

cloud/src/identities.ts

Atomic provider identity provisioning and server-side session-to-author ownership resolution.

2605 bytes; 41 lines

Declared symbols: provisionIdentity, sessionOwner

cloud/src/index.ts

Cloud Worker HTTP method/path router, authenticated-owner boundary and five-minute scheduled dispatch.

4889 bytes; 73 lines

cloud/src/jobs.ts

Persistent manual/slot job enqueue, Workflow dispatch, failure/outbox settlement and stale-job reconciliation.

5981 bytes; 75 lines

Declared symbols: GenerationJob, failJob, enqueueSlot, enqueueManual, dispatchJobs, reconcileJobs

cloud/src/media.ts

Bounded multipart image validation, official LinkedIn upload and owned asset persistence.

2105 bytes; 22 lines

Declared symbols: mediaRoute

cloud/src/models.ts

Cloud database row types and conversions to the mobile settings/account/post contracts.

3169 bytes; 42 lines

Declared symbols: AgentRow, agentView, loadAgent, JsonPostKeys, DatePostKeys, CloudPost, postView, accountStatus

cloud/src/notifications.ts

FCM credentials and send transport, owned device registration and bounded durable outbox dispatch.

6106 bytes; 71 lines

Declared symbols: ServiceAccount, pushCredentials, Notice, notification, notify, devicesRoute, drainNotifications

cloud/src/onboarding.ts

Cloud saved setup revision, preview lease, acceptance and atomic first-slot activation.

6165 bytes; 64 lines

Declared symbols: SetupRow, setupStatus, onboardingRoute

cloud/src/posts.ts

Cloud archive, composer saves, rewrite/preview and guarded post actions.

10689 bytes; 121 lines

Declared symbols: tags, reviewed, future, voiceContext, postsRoute, postAction, rewriteRoute

cloud/src/publish.ts

Cloud publication eligibility, atomic claims, image ownership, result settlement and manual resolution.

7302 bytes; 81 lines

Declared symbols: Reviewed, usableToken, ownedImages, publish, resolveSend

cloud/src/scheduler.ts

Cloud maintenance Workflow, due-slot scanning/publication, cleanup and manual preparation routes.

8149 bytes; 103 lines

Declared symbols: scanSchedule, publishDue, cleanExpired, MaintenanceWorkflow, reviewRoute, cycleRoute

cloud/src/settings.ts

Cloud author settings/interests validation and persistence.

5026 bytes; 45 lines

Declared symbols: settingsRoute, interestsRoute

cloud/src/slots.ts

Cloud slot CRUD, limits, timezone schedule views and discarded-aware daily timetable.

8461 bytes; 91 lines

Declared symbols: SlotRow, slotView, listSlots, fields, slotsRoute, timetable, SLOT_LIMITS

cloud/src/status.ts

Owner-scoped aggregate status document consumed by the mobile client.

5033 bytes; 40 lines

Declared symbols: statusRoute

cloud/src/workflow.ts

Content Workflow entry point, durable step retry configuration and outcome notification dispatch.

1096 bytes; 17 lines

Declared symbols: ContentWorkflow

cloud/test/api.test.ts

Cloud Worker/D1 regression suite: api. Exact test titles and assertions appear below.

16347 bytes; 194 lines

Declared symbols: author, call

cloud/test/database.test.ts

Cloud Worker/D1 regression suite: database. Exact test titles and assertions appear below.

13803 bytes; 193 lines

cloud/test/discovery-budget.test.ts

Cloud Worker/D1 regression suite: discovery-budget. Exact test titles and assertions appear below.

3025 bytes; 52 lines

cloud/test/writer.test.ts

Cloud Worker/D1 regression suite: writer. Exact test titles and assertions appear below.

2763 bytes; 46 lines

cloud/tsconfig.json

TypeScript compiler settings and included/excluded source scope for this package.

340 bytes; 14 lines

cloud/wrangler.jsonc

Dedicated Worker account, D1 and Workflow bindings, timer and observability configuration.

939 bytes; 37 lines

docs/README.md

Documentation entry point and reproducible PDF generation instructions.

2321 bytes; 40 lines

docs/generated-reference.md

Generated searchable complete file/reference/source appendix in Markdown.

generated bytes

docs/handbook-build.json

Generated PDF page/coverage statistics and PDF SHA-256.

generated bytes

docs/handbook.md

Authored architecture, user/developer/operator manual and implementation explanations for the PDF.

56642 bytes; 291 lines

docs/repository-inventory.json

Generated machine-readable file, hash, purpose, symbol and import inventory.

generated bytes

lib/accounts.ts

Loads, encrypts and persists LinkedIn account grants; reports connection and expiry status.

6985 bytes; 185 lines

Declared symbols: AccountRow, AccountStatus, daysUntil, saveAccount, loadRow, getAccountStatus, TokenLookup, getUsableToken, recordAccountOk, recordAccountError, disconnectAccount, REAUTH_WARNING_DAYS

lib/agents.ts

Creates and updates PostgreSQL author workspaces, settings, persona and voice references.

15735 bytes; 363 lines

Declared symbols: canonicalize, InitPersona, AgentSettings, ensureAgent, expandStoredPersona, refreshPersonaIfStale, getPersona, SettingsRow, toSettings, getAgentSettings, getPrimaryAgent, VoiceReferences, voiceReferencesFor, SettingsPatch, updateAgentSettings

lib/ai-usage.ts

Reserves and records original-backend per-author/provider AI usage and pacing.

2302 bytes; 36 lines

Declared symbols: withAgentUsage, usageOwner, reserveUserCall, reserveProviderCall, recordAiUsage

lib/auth.ts

Signs and validates the legacy password-dashboard session cookie.

4135 bytes; 96 lines

Declared symbols: hmacKey, toHex, timingSafeEqual, sign, authConfigured, createSession, verifySession, createUserSession, sessionIdentity, passwordMatches, SESSION_COOKIE

lib/breeth.ts

Optional external Breeth graph-memory transport and fact operations.

6019 bytes; 176 lines

Declared symbols: BreethResult, EpisodeWriteData, SearchEdge, isDegraded, request, writeEpisode, search, healthCheck

lib/categories.ts

Normalizes legacy and specialist subjects; exposes IDs, labels, hashtags and selection validation.

12061 bytes; 196 lines

Declared symbols: CategoryId, LegacyCategoryId, Category, isCategoryId, parseCategories, describeCategories, sameCategorySet, categoryBlock, hashtagsFor, CATEGORIES, ALL_CATEGORY_IDS, MAX_SELECTED_CATEGORIES, LEGACY_CATEGORY_IDS

lib/category-catalogue.ts

Complete specialist subject vocabulary and stable subject-ID construction.

24781 bytes; 65 lines

Declared symbols: subjectId, SUBJECT_GROUPS

lib/critique.ts

Deterministic draft-quality checks, including voice constraints and final character budget.

10975 bytes; 261 lines

Declared symbols: Violation, countWords, firstSentence, critique, severity, repairInstruction, summarize

lib/crypto.ts

Original backend AES-GCM encryption/decryption for provider tokens at rest.

2800 bytes; 73 lines

Declared symbols: key, hasEncryptionKey, encrypt, decrypt

lib/cycle.ts

PostgreSQL-backed discovery/judging/writing orchestration and scheduled cycle coordination.

27258 bytes; 634 lines

Declared symbols: AgentSettings, DueSlot, CycleResult, CycleContext, recordCycleRan, runCycle, runCycleWithLock, runCycleLocked, queueAlreadyCovers, runSlotCycle, runSlotCycleInternal, runDueSlots

lib/db.ts

Shared PostgreSQL pool, query handling, schema hash ledger and migration locking.

6659 bytes; 151 lines

Declared symbols: DbGlobals, getPool, ensureSchema, isConnectionError, query

lib/discovery-core.ts

Feed definitions, fetch budgets, redirect handling, parsing, deduplication and balanced source selection.

20480 bytes; 593 lines

Declared symbols: FeedRecorder, Candidate, DiscoverOptions, FeedFetch, boundedFeedFetch, fetchText, stripHtml, clip, fromHackerNews, parseFeed, arxivUrl, Feed, isFresh, interleaveByCategory, feedsForCategories, balanceFeeds, discover, FEEDS

lib/discovery.ts

PostgreSQL feed-health adapter around shared source discovery.

262 bytes; 4 lines

Declared symbols: discover

lib/distribute.ts

Original backend publication claims, daily limits, idempotency and ambiguous-outcome resolution.

22032 bytes; 499 lines

Declared symbols: PublishSource, ReviewedPost, DistributeResult, PostRow, liveModeEnabled, sendsToday, loadImages, publishPost, DuePostRow, DuePublishResult, publishDuePosts, listAmbiguousSends, resolveAmbiguousSend, MANUAL_DAILY_CAP, LINKEDIN_DAILY_REQUESTS, MAX_AUTO_CAP

lib/entities.ts

HTML/XML entity decoding used when normalizing feed text.

1038 bytes; 40 lines

Declared symbols: fromCode, decodeEntities

lib/feedhealth.ts

Persists feed success/failure history and identifies repeated source failures.

4226 bytes; 110 lines

Declared symbols: recordFeedResult, DeadFeed, deadFeeds, DEAD_AFTER_FAILURES, DEAD_AFTER_DAYS

lib/format.ts

Assembles exact source/hashtag text, computes escaped LinkedIn length and extracts the hook.

3458 bytes; 90 lines

Declared symbols: AssembleArgs, normalizeHashtag, tidy, assemblePost, LengthCheck, checkLength, hookOf, MAX_BODY_CHARS, FOLD_CHARS

lib/http-body.ts

Reads HTTP streams with explicit byte limits, cancelling oversized bodies.

731 bytes; 21 lines

Declared symbols: boundedText

lib/judge-core.ts

Batched candidate scoring, relevance thresholds, validation and coverage-aware selection.

12431 bytes; 277 lines

Declared symbols: relevanceTotal, outputBudgetFor, Scores, ScoredCandidate, RawScore, inRange, isRawScore, isRawScores, coverageBlock, candidateLine, buildUser, JudgeOutcome, judgeCandidates, PUBLISH_THRESHOLD

lib/judge.ts

Original backend completion adapter for the shared editorial judge.

415 bytes; 6 lines

Declared symbols: Tail, judgeCandidates

lib/linkedin.ts

Official LinkedIn OAuth, profile, image and post HTTP client; little-text escaping and permalink rules.

15697 bytes; 450 lines

Declared symbols: LinkedInResult, apiVersion, apiVersionAge, versionedHeaders, withTimeout, toFailure, toNetworkFailure, escapeLittle, toLittleText, authorizeUrl, TokenGrant, tokenRequest, exchangeCode, refreshAccessToken, MemberIdentity, getMemberIdentity, RegisteredImage, initializeImageUpload, uploadImageBytes, PostImage, CreatePostArgs, buildContent, createPost, postPermalink, SCOPES, MAX_COMMENTARY

lib/llm-contract.ts

Shared completion request/result types and structured JSON parsing helpers.

722 bytes; 28 lines

Declared symbols: CompleteArgs, CompleteResult, Completion, parseJson

lib/llm.ts

Original Node/Gemini SDK adapter with configured models, accounting and response handling.

8629 bytes; 211 lines

Declared symbols: cascade, rpdCap, isGemma, paced, pacificToday, todayCount, bumpCount, getTodayCalls, client, is429, callGemini, completeGemini, complete

lib/media-ownership.ts

Validates that referenced original-backend media assets belong to the requesting author.

397 bytes; 7 lines

Declared symbols: ownsMedia

lib/memory.ts

Original editorial memory abstraction with optional Breeth and database fallback.

4248 bytes; 108 lines

Declared symbols: MemoryContext, recordBreethStatus, fingerprintFallback, recall, rememberPublish, rememberRejections, memoryDegraded

lib/native-auth.ts

PostgreSQL native identities, verifier-protected OAuth flows, bearer sessions and revocation.

4571 bytes; 70 lines

Declared symbols: provisionUser, issueSession, completeNativeAuth, localTestMode, digest

lib/native-callback.ts

Browser completion page and Android/desktop return signal without putting credentials in app links.

1902 bytes; 11 lines

Declared symbols: nativeCallbackPage

lib/native-return.ts

Strict validation of random-path loopback desktop OAuth return URLs.

573 bytes; 10 lines

Declared symbols: nativeReturnUri

lib/onboarding.ts

PostgreSQL saved setup, sample generation/acceptance, activation and review-delivery coordination.

4067 bytes; 44 lines

Declared symbols: Sample, generateSetupSample, setupStatus

lib/persona-prompt.ts

Runtime-neutral persona types and prompt text construction.

1171 bytes; 32 lines

Declared symbols: PersonaIdentity, PersonaRecord, personaBlock

lib/persona.ts

Original persona generation/persistence adapter and shared persona exports.

5332 bytes; 114 lines

Declared symbols: isIdentity, expandPersona

lib/post-view.ts

Converts persisted original-backend posts into client-facing display/status fields.

1891 bytes; 57 lines

Declared symbols: PostRow, serializePost, POST_COLUMNS

lib/push.ts

Original Firebase push transport, device registration, reminder eligibility and logging.

16728 bytes; 421 lines

Declared symbols: pushConfigured, CachedToken, pemToBytes, base64url, mintAccessToken, checkCredentials, accessToken, registerDevice, forgetDevice, devicesFor, PushEvent, Rendered, render, withinCooldown, notify

lib/ratelimit.ts

Original dashboard login-failure rate limiting and reset helpers.

4423 bytes; 102 lines

Declared symbols: clientKey, RateVerdict, checkLoginAllowed, recordLoginFailure, clearLoginFailures, MAX_ATTEMPTS, WINDOW_MINUTES

lib/request-agent.ts

Resolves the authenticated request to its authorized agent for original API handlers.

1544 bytes; 33 lines

Declared symbols: credential, requestIdentity, getRequestAgent

lib/retention.ts

Bounded original-backend cleanup policies for operational records.

4632 bytes; 105 lines

Declared symbols: SweepResult, sweepIfDue, RETENTION

lib/review-feedback.ts

Maps preparation/review outcomes to meaningful user-facing feedback.

2963 bytes; 45 lines

Declared symbols: ReviewAttempt, reviewFeedback

lib/review-progress.ts

Preparation stage/progress contracts and UI-facing state helpers.

1320 bytes; 20 lines

Declared symbols: reviewProgress

lib/reviews.ts

PostgreSQL review-delivery generation, retries, leases and notification outbox orchestration.

5544 bytes; 71 lines

Declared symbols: runDueReviews, advance, flushNotifications

lib/schedule.ts

Timezone-aware clock, local date/time validation and next-run calculations.

8501 bytes; 209 lines

Declared symbols: LocalClock, isValidTimeZone, safeTimeZone, localClock, normalizeHhMm, parseHhMm, nextDailyRun, isDayEnabled, parseDaysMask, describeDays, nextSlotRun, formatInZone, MASK_DAILY, MASK_WEEKDAYS, MASK_WEEKENDS

lib/schema.ts

Complete additive PostgreSQL schema SQL, ownership relationships, indexes and migration-compatible changes.

21904 bytes; 439 lines

Declared symbols: SCHEMA_SQL

lib/setup-config.ts

Shared onboarding catalogue, tones, validation and conversion to persona/style/schedule.

6020 bytes; 63 lines

Declared symbols: SetupConfig, parseSetup, setupStyle, setupCategories, setupPersona, firstDelivery, INDUSTRIES, VOICES, defaultSetup

lib/slots.ts

Original recurring posting slots, occurrence claims, scheduler heartbeat and timeline.

26340 bytes; 683 lines

Declared symbols: SlotOutcome, PostSlot, SlotRow, toSlot, clampLead, listSlots, getSlot, syncAutoCap, rescheduleSlot, rescheduleAllSlots, SlotInput, SlotWriteResult, createSlot, updateSlot, deleteSlot, setSlotCount, ensureSlotsMigrated, DueSlot, DueRow, listDueSlots, claimSlotRun, settleSlotRun, withSlotLock, recordTick, recordWatchdog, watchdogHealth, SchedulerHealth, schedulerHealth, TimelineEntry, slotTimeline, MAX_SLOTS, MIN_LEAD_MINUTES, MAX_LEAD_MINUTES, MISSED_AFTER_MINUTES, GENERATION_BUFFER_MINUTES, HOLD_MINUTES, SLOT_COLUMN_NAMES, SLOT_COLUMNS_QUALIFIED, TICK_STALE_MINUTES

lib/style.ts

Writing style types, defaults, presets, normalization and prompt constraints.

17448 bytes; 365 lines

Declared symbols: Structure, EmojiPolicy, HookIntensity, CtaPolicy, Register, SignatureConfig, StyleConfig, oneOf, clamp, stringList, parseSignature, parseStyle, styleBlock, signatureBudget, MAX_HASHTAGS, BULLET_MARK, DEFAULT_STYLE, PRESETS

lib/timetable-home.ts

Derives home preparation/ready state from the unified timetable.

3797 bytes; 53 lines

Declared symbols: timetableDay, manualOccurrences

lib/unified-timetable.ts

Combines slot runs and saved drafts into a single day-oriented timetable model.

3174 bytes; 44 lines

Declared symbols: migrateTimetable

lib/voice-prompt.ts

Shared writing-sample selection and voice-reference prompt construction.

3941 bytes; 103 lines

Declared symbols: VoiceSample, parseCorpus, pickSamples, voiceBlock, SAMPLES_IN_PROMPT, MIN_PAIRS_FOR_NOTES

lib/voice.ts

Original database-backed selection of writing samples and feedback for voice conditioning.

5911 bytes; 143 lines

Declared symbols: EditPair, deriveEditNotes, refreshEditNotes

lib/writer-core.ts

Shared writer prompts, output validation, repair budgets and draft/rewrite/follow-up operations.

24052 bytes; 492 lines

Declared symbols: PriorPost, DraftPost, isDraft, buildSystem, WriteArgs, writerOutputBudget, writePost, repairIfNeeded, VoiceOpt, withVoice, rewriteDraft, writeFollowUp, polishCustomPost

lib/writer.ts

Original completion adapter for shared generation, rewriting, follow-up and polishing.

783 bytes; 9 lines

Declared symbols: Tail, writePost, rewriteDraft, writeFollowUp, polishCustomPost

middleware.ts

Original Next.js request authentication/gating middleware.

1944 bytes; 46 lines

Declared symbols: middleware, config

mobile/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

765 bytes; 46 lines

mobile/.metadata

Flutter project/platform creation metadata used by migration tooling.

998 bytes; 30 lines

mobile/README.md

Directory-specific usage, asset provenance or platform instructions.

653 bytes; 17 lines

mobile/analysis_options.yaml

Dart analyzer and Flutter lint configuration.

1448 bytes; 28 lines

mobile/android/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

278 bytes; 15 lines

mobile/android/app/build.gradle.kts

Android package variants, Dart-define routing, Firebase input, SDK defaults and release signing.

4238 bytes; 102 lines

mobile/android/app/google-services.json

Firebase Android client project/app identifiers; not a service-account private key.

710 bytes; 29 lines

mobile/android/app/src/debug/AndroidManifest.xml

Android debug build manifest overlay and permissions.

854 bytes; 17 lines

mobile/android/app/src/main/AndroidManifest.xml

Android permissions, application/activity identity, OAuth intent and notification metadata.

4160 bytes; 77 lines

mobile/android/app/src/main/kotlin/com/linkdin/linkdin_mobile/AuthBrowser.kt

Finds general HTTP/HTTPS browsers using public intent filters and explicitly targets OAuth to a browser, excluding provider app links.

2612 bytes; 52 lines

mobile/android/app/src/main/kotlin/com/linkdin/linkdin_mobile/MainActivity.kt

Android Flutter host, native browser-only OAuth bridge and notification channel/platform integration.

7064 bytes; 138 lines

Declared symbols: MainActivity

mobile/android/app/src/main/res/drawable-v21/launch_background.xml

Android launch/splash background drawable for this resource variant.

450 bytes; 12 lines

mobile/android/app/src/main/res/drawable/ic_notification.xml

Android monochrome notification status-bar icon vector.

393 bytes; 7 lines

mobile/android/app/src/main/res/drawable/launch_background.xml

Android launch/splash background drawable for this resource variant.

446 bytes; 12 lines

mobile/android/app/src/main/res/mipmap-hdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

544 bytes

mobile/android/app/src/main/res/mipmap-mdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

442 bytes

mobile/android/app/src/main/res/mipmap-xhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

721 bytes

mobile/android/app/src/main/res/mipmap-xxhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

1031 bytes

mobile/android/app/src/main/res/mipmap-xxxhdpi/ic_launcher.png

Android launcher icon at the resource density specified by its parent directory.

1443 bytes

mobile/android/app/src/main/res/values-night/styles.xml

Android startup/normal activity theme for dark mode.

1013 bytes; 18 lines

mobile/android/app/src/main/res/values/styles.xml

Android startup/normal activity theme for default mode.

1014 bytes; 18 lines

mobile/android/app/src/profile/AndroidManifest.xml

Android profile build manifest overlay and permissions.

385 bytes; 7 lines

mobile/android/app/src/test/kotlin/com/linkdin/linkdin_mobile/AuthBrowserTest.kt

Robolectric Android API 24/35 regression tests: provider-app interception, browser choices, missing browsers and invalid links.

3869 bytes; 81 lines

Declared symbols: AuthBrowserTest

mobile/android/build.gradle.kts

Android build/toolchain configuration: build.gradle.kts; controls project build and plugin setup.

561 bytes; 24 lines

mobile/android/gradle.properties

Android build/toolchain configuration: gradle.properties; controls project build and plugin setup.

306 bytes; 6 lines

mobile/android/gradle/wrapper/gradle-wrapper.properties

Android build/toolchain configuration: gradle-wrapper.properties; controls Gradle distribution bootstrap.

207 bytes; 5 lines

mobile/android/settings.gradle.kts

Android build/toolchain configuration: settings.gradle.kts; controls project build and plugin setup.

999 bytes; 29 lines

mobile/assets/fonts/BarlowCondensed-Bold.ttf

Bundled BarlowCondensed-Bold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

109912 bytes

mobile/assets/fonts/BarlowCondensed-Medium.ttf

Bundled BarlowCondensed-Medium font asset used by Flutter typography; see pubspec.yaml and theme.dart.

103360 bytes

mobile/assets/fonts/BarlowCondensed-SemiBold.ttf

Bundled BarlowCondensed-SemiBold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

109428 bytes

mobile/assets/fonts/IBMPlexMono-Bold.ttf

Bundled IBMPlexMono-Bold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

137784 bytes

mobile/assets/fonts/IBMPlexMono-Regular.ttf

Bundled IBMPlexMono-Regular font asset used by Flutter typography; see pubspec.yaml and theme.dart.

135580 bytes

mobile/assets/fonts/IBMPlexMono-SemiBold.ttf

Bundled IBMPlexMono-SemiBold font asset used by Flutter typography; see pubspec.yaml and theme.dart.

140216 bytes

mobile/assets/fonts/IBMPlexSans.ttf

Bundled IBMPlexSans font asset used by Flutter typography; see pubspec.yaml and theme.dart.

537244 bytes

mobile/assets/fonts/OFL.txt

Bundled font license terms.

4456 bytes; 93 lines

mobile/assets/fonts/README.md

Directory-specific usage, asset provenance or platform instructions.

958 bytes; 19 lines

mobile/lib/android_notifications.dart

Android notification platform-channel helpers and payload handling.

2135 bytes; 63 lines

mobile/lib/api/client.dart

Authenticated JSON/multipart transport, secure session/pending flow storage, timeout and reconnect handling.

15857 bytes; 422 lines

Declared symbols: ApiException, ApiClient

mobile/lib/api/models.dart

Dart JSON response models used by app state and screens.

27266 bytes; 848 lines

Declared symbols: StyleConfig, SignatureConfig, CategoryInfo, StylePreset, Agent, Account, Post, PostSlot, TimelineEntry, SchedulerHealth, SlotLimits, Budget, Rejection, LlmUsage, AppStatus

mobile/lib/auth_browser.dart

Shared OAuth launcher: HTTPS validation, browser-only Android bridge and external-browser fallback on other platforms.

926 bytes; 25 lines

mobile/lib/auth_return.dart

Desktop loopback sign-in return listener and cancellation.

3374 bytes; 94 lines

Declared symbols: LoopbackAuthReturn

mobile/lib/desktop_notifications.dart

Desktop notification capability/handling abstraction.

3274 bytes; 101 lines

mobile/lib/main.dart

Flutter startup, Firebase/session bootstrap, provider and authenticated/onboarding root routing.

7141 bytes; 220 lines

Declared symbols: LinkdInApp, _SignedIn, _SignedInState, _Root, _NativeRoot, _NativeRootState

mobile/lib/main_preview.dart

Deterministic mock-data visual-preview entry point for UI scenarios.

14806 bytes; 423 lines

Declared symbols: _Preview, _PreviewState

mobile/lib/push.dart

Firebase token registration, permission, foreground/background and notification-tap integration.

7106 bytes; 194 lines

Declared symbols: PushListener, _PushListenerState

mobile/lib/screens/archive_screen.dart

Published-post history pagination and follow-up entry points.

8296 bytes; 269 lines

Declared symbols: _Shelf, ArchiveScreen, _ArchiveScreenState, _ShelfBar, _PassedOver

mobile/lib/screens/composer_screen.dart

Manual/edit/follow-up composer with tags, images, rewriting, preview and save/send controls.

40598 bytes; 1171 lines

Declared symbols: ComposerScreen, _ComposerScreenState, _CommitBar, _PreviewSheet, _Hashtags, _Variant, _Attachments

mobile/lib/screens/delete_account_screen.dart

Account deletion explanation and explicit confirmation interface.

3884 bytes; 107 lines

Declared symbols: DeleteAccountScreen, _DeleteAccountScreenState

mobile/lib/screens/delivery_settings_screen.dart

Delivery-time and notification-preference interface.

3251 bytes; 93 lines

Declared symbols: DeliverySettingsScreen, _DeliverySettingsScreenState

mobile/lib/screens/desk_screen.dart

Actionable draft workspace, preparation feedback and publication outcome controls.

15829 bytes; 461 lines

Declared symbols: DeskScreen, _Masthead, _Waiting

mobile/lib/screens/draft_commands.dart

Shared UI commands for draft review, editing, scheduling and publication actions.

11770 bytes; 326 lines

mobile/lib/screens/gate_screen.dart

Legacy server/password installation sign-in and connection settings.

5537 bytes; 152 lines

Declared symbols: GateScreen, _GateScreenState

mobile/lib/screens/home_screen.dart

Home/My posts/Me navigation shell, lifecycle reconnect and composition/notification routing.

11108 bytes; 327 lines

Declared symbols: HomeScreen, _HomeScreenState, _PostsWorkspace, _PostsWorkspaceState, _PostsIcon, _SettingsIcon

mobile/lib/screens/onboarding_screen.dart

Resumable first-run subject, voice, sample acceptance and delivery setup.

26520 bytes; 696 lines

Declared symbols: OnboardingScreen, _OnboardingScreenState

mobile/lib/screens/settings_screen.dart

Account/settings navigation, connection health, pause and operational controls.

20233 bytes; 566 lines

Declared symbols: SettingsPage, _SettingsPageState, SettingsScreen, TopicsScreen, LinkedInScreen, _LinkedInScreenState, DiagnosticsScreen

mobile/lib/screens/timetable_screen.dart

Recurring posting-slot editor with days, lead time and automatic-publication controls.

23468 bytes; 671 lines

Declared symbols: TimetableScreen, _SlotCard, _DayPicker, _LeadRow, _Step, _CapStepper, _Budget

mobile/lib/screens/today_screen.dart

Native account daily timetable and preparation progress/ready-post presentation.

10336 bytes; 299 lines

Declared symbols: TodayScreen, _TodayScreenState

mobile/lib/screens/voice_screen.dart

Writing preferences, samples, voice preview and persistence interface.

22732 bytes; 681 lines

Declared symbols: VoiceScreen, _VoiceScreenState, _ActionBar, _WritingSamples, _WritingSamplesState, _Sample, _Stepper, _StepButton, _Preview

mobile/lib/screens/welcome_screen.dart

Social sign-in, provider capabilities, secure pending-flow resume and browser return.

11639 bytes; 321 lines

Declared symbols: WelcomeScreen, _WelcomeScreenState, _WelcomeIntro

mobile/lib/state/app_state.dart

Observable account/status state, refresh, preparation and cross-screen navigation commands.

30195 bytes; 799 lines

Declared symbols: AuthPhase, AppState

mobile/lib/theme.dart

ByLine Flutter colors, typography, layout tokens and system chrome style.

16460 bytes; 498 lines

mobile/lib/widgets/day_rail.dart

Day/timetable visual rail and occurrence selection presentation.

5946 bytes; 178 lines

Declared symbols: RailStop, DayRail, _Stop

mobile/lib/widgets/draft_card.dart

Reusable draft summary, source/status and associated actions.

37473 bytes; 1071 lines

Declared symbols: CountdownTicker, FoldedCopy, _FoldedCopyState, FoldRule, _DashedCut, _DashPainter, ClockStrip, _ClockStripState, HeroClock, _HeroClockState, OfferATime, DraftActions, DraftCard, _SlugLine, _Judgement, _Actions, _MenuRow, _SwipeHint

mobile/lib/widgets/editorial.dart

Brand/editorial artwork and visual components.

10179 bytes; 342 lines

Declared symbols: StudioScene, StudioArt, StudioBanner, WritingPrompt, _StudioPainter

mobile/lib/widgets/experience.dart

Shared page/reading-width and experience layout components.

9276 bytes; 287 lines

Declared symbols: ReadingWidth, PageSurface, ByLineMark, TimeChoice, ZoneField, _ZoneFieldState, SetupFrame

mobile/lib/widgets/form_select.dart

Reusable accessible-to-Flutter selection/form controls.

7233 bytes; 211 lines

Declared symbols: FormSelect, MultiSelectField, _SelectionDialog, _SelectionDialogState

mobile/lib/widgets/personal_topics.dart

Subject catalogue browsing/search and personalized topic selection.

4672 bytes; 161 lines

Declared symbols: PersonalTopics, _PersonalTopicsState

mobile/lib/widgets/preparation_progress.dart

Visible multi-stage draft preparation and failure feedback.

3789 bytes; 105 lines

Declared symbols: PreparationProgress

mobile/lib/widgets/primitives.dart

Basic reusable typography, spacing, status and interaction widgets.

24808 bytes; 798 lines

Declared symbols: Tone, SectionRule, ObjectCard, Field, Slug, Meter, Notice, ConditionStrip, ErrorNote, Empty, Choice, PickChip, SwitchRow, _SwitchRowState, Readout, NavRow, Disclosure, _DisclosureState, WriteButton

mobile/lib/widgets/profile_card.dart

Profile/account summary visual component.

3893 bytes; 126 lines

Declared symbols: ProfileCard, FormSection

mobile/lib/widgets/unsaved_changes_guard.dart

Prevents silently leaving a screen with unsaved edits.

1670 bytes; 54 lines

Declared symbols: UnsavedChangesGuard, _UnsavedChangesGuardState

mobile/lib/widgets/writing_preferences.dart

Shared controls for structure, tone, word range, hashtags and voice constraints.

3326 bytes; 95 lines

Declared symbols: WritingPreferences

mobile/pubspec.lock

Exact resolved Dart/Flutter dependency versions and source checksums.

27257 bytes; 874 lines

mobile/pubspec.yaml

Flutter package metadata, version, Dart constraint, direct plugins, font and asset declarations.

6833 bytes; 150 lines

mobile/test/android_notifications_test.dart

Flutter widget/transport regression suite: android notifications. Exact test titles and assertions appear below.

2877 bytes; 84 lines

mobile/test/api_test.dart

Flutter widget/transport regression suite: api. Exact test titles and assertions appear below.

26684 bytes; 772 lines

Declared symbols: _Call

mobile/test/auth_browser_test.dart

Flutter widget/transport regression suite: auth browser. Exact test titles and assertions appear below.

2276 bytes; 66 lines

mobile/test/auth_return_test.dart

Flutter widget/transport regression suite: auth return. Exact test titles and assertions appear below.

1478 bytes; 45 lines

mobile/test/catalogue_voice_test.dart

Flutter widget/transport regression suite: catalogue voice. Exact test titles and assertions appear below.

8529 bytes; 236 lines

mobile/test/daily_preparation_test.dart

Flutter widget/transport regression suite: daily preparation. Exact test titles and assertions appear below.

9440 bytes; 272 lines

mobile/test/first_run_test.dart

Flutter widget/transport regression suite: first run. Exact test titles and assertions appear below.

10817 bytes; 294 lines

mobile/test/onboarding_test.dart

Flutter widget/transport regression suite: onboarding. Exact test titles and assertions appear below.

11711 bytes; 318 lines

mobile/test/reconnect_test.dart

Flutter widget/transport regression suite: reconnect. Exact test titles and assertions appear below.

3772 bytes; 111 lines

mobile/test/redesign_test.dart

Flutter widget/transport regression suite: redesign. Exact test titles and assertions appear below.

8260 bytes; 238 lines

mobile/test/screens_test.dart

Flutter widget/transport regression suite: screens. Exact test titles and assertions appear below.

39004 bytes; 1050 lines

mobile/test/widget_test.dart

Flutter widget/transport regression suite: widget. Exact test titles and assertions appear below.

13608 bytes; 426 lines

mobile/web/favicon.png

Flutter web scaffold icon/branding asset.

917 bytes

mobile/web/icons/Icon-192.png

Flutter web scaffold icon/branding asset.

5292 bytes

mobile/web/icons/Icon-512.png

Flutter web scaffold icon/branding asset.

8252 bytes

mobile/web/icons/Icon-maskable-192.png

Flutter web scaffold icon/branding asset.

5594 bytes

mobile/web/icons/Icon-maskable-512.png

Flutter web scaffold icon/branding asset.

20998 bytes

mobile/web/index.html

Flutter web scaffold bootstrap document and application metadata.

1579 bytes; 46 lines

mobile/web/manifest.json

Flutter web scaffold bootstrap document and application metadata.

959 bytes; 35 lines

mobile/windows/.gitignore

Git exclusion rules for generated, private or local-only files in this directory scope.

308 bytes; 17 lines

mobile/windows/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

4572 bytes; 112 lines

mobile/windows/flutter/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

3851 bytes; 109 lines

mobile/windows/flutter/generated_plugin_registrant.cc

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

1051 bytes; 26 lines

mobile/windows/flutter/generated_plugin_registrant.h

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

302 bytes; 15 lines

mobile/windows/flutter/generated_plugins.cmake

Flutter-generated Windows native plugin registration/build linkage; regenerated from plugin dependencies.

902 bytes; 30 lines

mobile/windows/runner/CMakeLists.txt

Windows Flutter host CMake build definition for CMakeLists.

1836 bytes; 40 lines

mobile/windows/runner/Runner.rc

Windows Flutter host resource definition for Runner.

3174 bytes; 121 lines

mobile/windows/runner/flutter_window.cpp

Windows Flutter host implementation for flutter window.

3444 bytes; 99 lines

mobile/windows/runner/flutter_window.h

Windows Flutter host header for flutter window.

1121 bytes; 36 lines

Declared symbols: FlutterWindow

mobile/windows/runner/main.cpp

Windows Flutter host implementation for main.

1302 bytes; 43 lines

mobile/windows/runner/resource.h

Windows Flutter host header for resource.

448 bytes; 16 lines

mobile/windows/runner/resources/app_icon.ico

Windows Flutter host application icon for app icon.

33772 bytes

mobile/windows/runner/runner.exe.manifest

Windows Flutter host executable compatibility manifest for runner.exe.

616 bytes; 14 lines

mobile/windows/runner/utils.cpp

Windows Flutter host implementation for utils.

2237 bytes; 69 lines

mobile/windows/runner/utils.h

Windows Flutter host header for utils.

691 bytes; 19 lines

mobile/windows/runner/win32_window.cpp

Windows Flutter host implementation for win32 window.

8822 bytes; 288 lines

Declared symbols: WindowClassRegistrar

mobile/windows/runner/win32_window.h

Windows Flutter host header for win32 window.

3624 bytes; 102 lines

Declared symbols: Win32Window

next-env.d.ts

Next.js generated TypeScript framework declarations reference.

275 bytes; 6 lines

next.config.ts

Next.js build/runtime configuration and output directory settings.

2686 bytes; 54 lines

output/pdf/ByLine-Complete-Project-Handbook.pdf

Condensed human-readable handbook with every-file catalogue and linked exhaustive source reference.

generated bytes

package-lock.json

Exact npm dependency resolution tree, integrity hashes and platform packages for reproducible installation.

73773 bytes; 2190 lines

package.json

npm package identity, direct dependency version ranges and executable task commands for the original backend.

1819 bytes; 46 lines

releases/android/README.md

Phone download/install/update instructions and release provenance.

3501 bytes; 62 lines

releases/android/SHA256SUMS

SHA-256 verification line for the exact downloadable APK.

85 bytes; 1 lines

releases/android/byline-latest.apk

Signed universal Android cloud release ready for phone download and installation.

56892379 bytes

releases/android/release.json

Verified downloadable APK version, identity, SDK, ABI, signing and checksum metadata.

1325 bytes; 29 lines

reports/ByLine-UX-redesign-plan.md

Dated project evidence, plan or verification record: UX redesign plan. Historical claims retain their original date.

10728 bytes; 72 lines

reports/ByLine-UX-v2-plan.md

Dated project evidence, plan or verification record: UX v2 plan. Historical claims retain their original date.

4749 bytes; 31 lines

reports/ByLine-auth-onboarding-fix-2026-11-07.md

Dated project evidence, plan or verification record: auth onboarding fix 2026 11 07. Historical claims retain their original date.

6748 bytes; 109 lines

reports/ByLine-build-status-2026-09-06.md

Dated project evidence, plan or verification record: build status 2026 09 06. Historical claims retain their original date.

6927 bytes; 48 lines

reports/ByLine-finance-preparation-fix-2026-09-06.md

Dated project evidence, plan or verification record: finance preparation fix 2026 09 06. Historical claims retain their original date.

2578 bytes; 47 lines

reports/ByLine-functional-gap-audit-2026-09-06.md

Dated project evidence, plan or verification record: functional gap audit 2026 09 06. Historical claims retain their original date.

11385 bytes; 77 lines

reports/ByLine-illustrated-design-plan.md

Dated project evidence, plan or verification record: illustrated design plan. Historical claims retain their original date.

2049 bytes; 17 lines

reports/ByLine-layout-and-workflow-review.md

Dated project evidence, plan or verification record: layout and workflow review. Historical claims retain their original date.

2413 bytes; 18 lines

reports/ByLine-phone-verification-2026-10-27.md

Dated project evidence, plan or verification record: phone verification 2026 10 27. Historical claims retain their original date.

2964 bytes; 37 lines

reports/ByLine-preparation-progress-2026-09-06.md

Dated project evidence, plan or verification record: preparation progress 2026 09 06. Historical claims retain their original date.

1564 bytes; 25 lines

reports/ByLine-product-readiness-and-client-onboarding.md

Dated project evidence, plan or verification record: product readiness and client onboarding. Historical claims retain their original date.

52967 bytes; 418 lines

reports/ByLine-professional-polish-2026-09-07.md

Dated project evidence, plan or verification record: professional polish 2026 09 07. Historical claims retain their original date.

3763 bytes; 28 lines

reports/ByLine-project-state-2026-10-27.md

Dated project evidence, plan or verification record: project state 2026 10 27. Historical claims retain their original date.

6109 bytes; 49 lines

reports/ByLine-release-verification-2026-11-05.md

Dated project evidence, plan or verification record: release verification 2026 11 05. Historical claims retain their original date.

5756 bytes; 46 lines

reports/ByLine-release-verification-2026-11-07.md

Dated project evidence, plan or verification record: release verification 2026 11 07. Historical claims retain their original date.

5282 bytes; 88 lines

reports/ByLine-unified-timetable-plan.md

Dated project evidence, plan or verification record: unified timetable plan. Historical claims retain their original date.

3652 bytes; 56 lines

reports/ByLine-zero-cost-cloud-plan.md

Dated project evidence, plan or verification record: zero cost cloud plan. Historical claims retain their original date.

5233 bytes; 35 lines

reports/ui-preview/daily-1280.png

Historical UI preview of daily at viewport width 1280 pixels.

112476 bytes

reports/ui-preview/daily-390.png

Historical UI preview of daily at viewport width 390 pixels.

53001 bytes

reports/ui-preview/daily-900.png

Historical UI preview of daily at viewport width 900 pixels.

91684 bytes

reports/ui-preview/delivery-1280.png

Historical UI preview of delivery at viewport width 1280 pixels.

32795 bytes

reports/ui-preview/delivery-390.png

Historical UI preview of delivery at viewport width 390 pixels.

27819 bytes

reports/ui-preview/delivery-900.png

Historical UI preview of delivery at viewport width 900 pixels.

30916 bytes

reports/ui-preview/interests-onboarding-1280.png

Historical UI preview of interests-onboarding at viewport width 1280 pixels.

56870 bytes

reports/ui-preview/interests-onboarding-390.png

Historical UI preview of interests-onboarding at viewport width 390 pixels.

29136 bytes

reports/ui-preview/interests-onboarding-900.png

Historical UI preview of interests-onboarding at viewport width 900 pixels.

54483 bytes

reports/ui-preview/sample-1280.png

Historical UI preview of sample at viewport width 1280 pixels.

52012 bytes

reports/ui-preview/sample-390.png

Historical UI preview of sample at viewport width 390 pixels.

25557 bytes

reports/ui-preview/sample-900.png

Historical UI preview of sample at viewport width 900 pixels.

50397 bytes

reports/ui-preview/timetable-1280.png

Historical UI preview of timetable at viewport width 1280 pixels.

76089 bytes

reports/ui-preview/timetable-390.png

Historical UI preview of timetable at viewport width 390 pixels.

60049 bytes

reports/ui-preview/timetable-900.png

Historical UI preview of timetable at viewport width 900 pixels.

73234 bytes

reports/ui-preview/topics-1280.png

Historical UI preview of topics at viewport width 1280 pixels.

42243 bytes

reports/ui-preview/topics-390.png

Historical UI preview of topics at viewport width 390 pixels.

37565 bytes

reports/ui-preview/topics-900.png

Historical UI preview of topics at viewport width 900 pixels.

40064 bytes

reports/ui-preview/voice-1280.png

Historical UI preview of voice at viewport width 1280 pixels.

54725 bytes

reports/ui-preview/voice-390.png

Historical UI preview of voice at viewport width 390 pixels.

45424 bytes

reports/ui-preview/voice-900.png

Historical UI preview of voice at viewport width 900 pixels.

52394 bytes

reports/ui-preview/welcome-1280.png

Historical UI preview of welcome at viewport width 1280 pixels.

56272 bytes

reports/ui-preview/welcome-390.png

Historical UI preview of welcome at viewport width 390 pixels.

35794 bytes

reports/ui-preview/welcome-900.png

Historical UI preview of welcome at viewport width 900 pixels.

54506 bytes

scripts/backup-live.mjs

Creates a backup of the configured live PostgreSQL installation.

1029 bytes; 14 lines

scripts/bench-api.mjs

Measures API response timings for diagnostic comparison.

2640 bytes; 79 lines

Declared symbols: envValue, sample

scripts/bench-db.mjs

Measures database/query latency for original-backend diagnostics.

3772 bytes; 98 lines

Declared symbols: databaseUrl, run

scripts/build-check.mjs

Runs a production Next.js verification build in .next-verify.

1166 bytes; 27 lines

scripts/build-cloud-android.ps1

Builds the privately signed cloud APK from prepared Dart defines; installs nothing.

1083 bytes; 14 lines

scripts/build-handbook.py

Rebuilds PDF, exhaustive file/source/dependency reference and hash inventory from publishable Git files.

47763 bytes; 572 lines

Declared symbols: Handbook

scripts/build-live-android.ps1

Builds the integration/live Android variant from local configuration.

869 bytes; 12 lines

scripts/build-local-android.ps1

Builds the isolated demonstration Android preview variant.

1025 bytes; 22 lines

scripts/byline-logic-test.ts

Pure native-session, setup validation, first-delivery and DST assertions.

2707 bytes; 35 lines

Declared symbols: main

scripts/byline-test.mjs

Local API integration coverage for account, setup, timetable and author-owned data.

10486 bytes; 107 lines

Declared symbols: check, api, today, waitForDraft, signup

scripts/catalogue-api-test.mjs

Local API subject catalogue and settings persistence integration checks.

3627 bytes; 41 lines

Declared symbols: request

scripts/catalogue-test.ts

Subject uniqueness, source routing, relevance and voice consistency assertions.

4363 bytes; 52 lines

Declared symbols: main

scripts/check-feeds.mjs

Probes configured source feeds and reports reachability.

3197 bytes; 78 lines

scripts/check-live-services.mjs

Checks configured live provider/service readiness.

1366 bytes; 12 lines

Declared symbols: get

scripts/dbtest.ts

Integration assertions against a disposable real PostgreSQL database.

22420 bytes; 481 lines

Declared symbols: check, runs, main

scripts/google-operator.mjs

Operator helper for Google/Firebase configuration tasks; inspect its flags before use.

1226 bytes; 20 lines

Declared symbols: googleOperatorToken, googleOperatorCredentials, googleOperatorFetch

scripts/health-test.ts

Health endpoint tests for readiness, missing configuration and safe error responses.

1378 bytes; 31 lines

Declared symbols: main

scripts/install-live-android.ps1

Installs/launches the live integration APK on a connected Android device.

791 bytes; 14 lines

scripts/install-local-android.ps1

Installs/launches the preview APK and configures USB port reversal.

1102 bytes; 18 lines

scripts/live-cycle-smoke.ts

Integration smoke exercise of a configured live content cycle.

1484 bytes; 21 lines

Declared symbols: main

scripts/live-dev.mjs

Starts the original integration backend with its dedicated live environment.

2255 bytes; 24 lines

Declared symbols: save, refreshCredentials

scripts/live-env.mjs

Loads/validates the dedicated live integration environment.

843 bytes; 10 lines

Declared symbols: readEnvFile, liveEnv

scripts/live-setup.mjs

Prepares the original live integration environment and database configuration.

3126 bytes; 29 lines

scripts/live-smoke.ts

Configured integration smoke checks; provider effects depend on the script/environment.

703 bytes; 12 lines

Declared symbols: main

scripts/local-dev.mjs

Starts isolated Next.js preview and its local scheduler tick.

764 bytes; 11 lines

scripts/local-env.mjs

Loads validated loopback-only PostgreSQL fixture configuration and clears external credentials.

904 bytes; 11 lines

Declared symbols: localEnv

scripts/local-phone.ps1

Coordinates isolated server, preview build, USB installation and app launch.

1892 bytes; 38 lines

Declared symbols: Get

scripts/local-setup.mjs

Creates the isolated local PostgreSQL data directory and preview environment.

2078 bytes; 23 lines

Declared symbols: run

scripts/migrate.ts

Applies the additive PostgreSQL schema to the explicitly configured database.

456 bytes; 10 lines

Declared symbols: main

scripts/native-return-test.mjs

Local API and browser-return contract checks for native sign-in.

3692 bytes; 41 lines

Declared symbols: check, post

scripts/prepare-cloud-android.mjs

Validates the cloud origin/Firebase app and prepares preserved private signing and Dart defines.

2056 bytes; 21 lines

scripts/selftest.ts

Core deterministic formatting, escaping, style, source, judge and scheduling regression checks.

45628 bytes; 872 lines

Declared symbols: check

scripts/zero-budget-test.ts

Verifies zero-budget/local behavior and provider-call safeguards.

1127 bytes; 22 lines

Declared symbols: main

tsconfig.json

TypeScript compiler settings and included/excluded source scope for this package.

886 bytes; 46 lines

vercel.json

Original Vercel deployment/runtime configuration.

578 bytes; 14 lines

28. Direct packages and exact resolved dependencies

package.json

```
{
  "name": "linkedin-creator",
  "version": "0.1.0",
  "private": true,
  "scripts": {
    "dev": "next dev",
    "build": "next build",
    "build:check": "node scripts/build-check.mjs",
    "start": "next start",
    "test": "tsx scripts/selftest.ts && tsx scripts/health-test.ts",
    "test:db": "tsx scripts/dbtest.ts",
    "test:catalogue": "tsx scripts/catalogue-test.ts",
    "test:catalogue:api": "node scripts/catalogue-api-test.mjs",
    "test:local": "node scripts/byline-test.mjs && node scripts/catalogue-api-test.mjs && node
  scripts/native-return-test.mjs",
    "test:byline": "tsx scripts/byline-logic-test.ts",
    "check:feeds": "node scripts/check-feeds.mjs",
    "keygen": "node -e \"console.log('TOKEN_ENCRYPTION_KEY=' +
  require('crypto').randomBytes(32).toString('base64')); console.log('APP_SECRET=' +
  require('crypto').randomBytes(32).toString('hex')); console.log('CRON_SECRET=' +
  require('crypto').randomBytes(24).toString('hex'))\"",
    "local:setup": "node scripts/local-setup.mjs",
    "local:dev": "node scripts/local-dev.mjs",
    "local:phone": "powershell -NoProfile -ExecutionPolicy Bypass -File scripts/local-phone.ps1",
    "migrate": "tsx scripts/migrate.ts",
    "live:setup": "node scripts/live-setup.mjs",
    "live:dev": "node scripts/live-dev.mjs",
    "live:backup": "node scripts/backup-live.mjs"
  },
  "dependencies": {
    "@google/genai": "^2.16.0",
    "next": "^15.5.28",
    "pg": "^8.13.1",
    "react": "^19.1.0",
    "react-dom": "^19.1.0"
  },
  "overrides": {
    "next": {
      "postcss": "8.5.32"
    }
  },
  "devDependencies": {
    "@types/node": "^22.10.0",
    "@types/pg": "^8.11.10",
    "@types/react": "^19.1.0",
    "@types/react-dom": "^19.1.0",
    "tsx": "^4.23.12",
    "typescript": "^5.7.0"
  }
}
```

cloud/package.json

```
{
  "name": "byline-cloud",
  "version": "0.1.0",
  "private": true,
  "type": "module",
  "scripts": {
    "pretest": "wrangler deploy --dry-run --outdir .wrangler/test-build",
    "test": "tsx --test test/*.test.ts",
    "typecheck": "tsc --noEmit",
    "types": "wrangler types",
    "db:local": "wrangler d1 migrations apply byline --local"
  },
  "devDependencies": {
    "@types/node": "^22.10.0",
    "miniflare": "5.20261023.0-beta",
    "tsx": "^4.23.12",
    "typescript": "^5.7.0",
    "wrangler": "4.153.0"
  }
}
```

mobile/pubspec.yaml

```
name: linkdin_mobile
description: "ByLine: your LinkedIn writing workspace."
# The following line prevents the package from being accidentally published to
# pub.dev using `flutter pub publish`. This is preferred for private packages.
publish_to: 'none' # Remove this line if you wish to publish to pub.dev

# The following defines the version and build number for your application.
# A version number is three numbers separated by dots, like 1.2.43
# followed by an optional build number separated by a +.
# Both the version and the builder number may be overridden in flutter
# build by specifying --build-name and --build-number, respectively.
# In Android, build-name is used as versionName while build-number used as versionCode.
# Read more about Android versioning at https://developer.android.com/studio/publish/versioning
# In iOS, build-name is used as CFBundleShortVersionString while build-number is used as CFBundleVersion.
# Read more about iOS versioning at
# https://developer.apple.com/library/archive/documentation/General/Reference/InfoPlistKeyReference/Articles
  /CoreFoundationKeys.html
# In Windows, build-name is used as the major, minor, and patch parts
# of the product and file versions while build-number is used as the build suffix.
version: 1.0.3+4

environment:
  sdk: ^3.12.1

# Dependencies specify other packages that your package needs in order to work.
# To automatically upgrade your package dependencies to the latest versions
# consider running `flutter pub upgrade --major-versions`. Alternatively,
# dependencies can be manually updated by changing the version numbers below to
# the latest version available on pub.dev. To see which dependencies have newer
# versions available, run `flutter pub outdated`.
dependencies:
  flutter:
    sdk: flutter

  # The following adds the Cupertino Icons font to your application.
  # Use with the CupertinoIcons class for iOS style icons.
  cupertino_icons: ^1.0.8

  # Kept small on purpose. Every package here is a thing that can break a build
  # months from now, and this app's whole job is rendering one JSON document and
  # PATCHing bits of it back  -  so each one below earns its place by doing
  # something the app genuinely cannot do without.
  http: ^1.2.2 # API calls
  provider: ^6.1.2 # app-wide state
  shared_preferences: ^2.3.2 # session cookie + server address
  image_picker: ^1.1.2 # attach photos; also does the downscale (see media upload)
  http_parser: ^4.0.2 # MediaType for multipart uploads  -  see _imageSubtype
  # Opens LinkedIn's consent page in the SYSTEM browser. OAuth cannot happen
  # inside the app's own HTTP client: the consent screen needs a real browser,
  # and a token minted anywhere else would not be the one the session carries.
  url_launcher: ^6.3.0
  # Push notifications. Comfortably the largest thing in this file, and taken
  # deliberately: there is no way to reach an Android app that is not currently
  # running without FCM, and the whole point of the alerts is hearing that the
  # agent has stopped on a day you never opened it. The alternative was routing
  # them through a second app, which trades this weight for a notification that
  # is not ours and cannot open the right tab.
  firebase_core: ^3.8.0
  firebase_messaging: ^15.1.5
  flutter_secure_storage: 10.0.0
  flutter_timezone: ^5.1.0
  flutter_local_notifications_windows: ^3.1.1

dev_dependencies:
  flutter_test:
    sdk: flutter

  # The "flutter_lints" package below contains a set of recommended lints to
  # encourage good coding practices. The lint set provided by the package is
  # activated in the `analysis_options.yaml` file located at the root of your
  # package. See that file for information about deactivating specific lint
  # rules and activating additional ones.
  flutter_lints: ^6.0.0

# For information on the generic Dart part of this file, see the
# following page: https://dart.dev/tools/pub/pubspec

# The following section is specific to Flutter packages.
flutter:
  # The following line ensures that the Material Icons font is
```

```
  # included with your application, so that you can use the icons in
  # the material Icons class.
  uses-material-design: true

  assets:
    - assets/fonts/OFL.txt

  # Three faces, three jobs  -  see DESIGN.md \xa73. All bundled rather than
  # fetched: a CDN font is a silent single point of failure, and a family that
  # does not resolve falls back without an error.
  #
  # Plex Sans is the VARIABLE cut  -  google/fonts no longer publishes static
  # instances of it. Flutter does not map TextStyle.fontWeight onto a variable
  # axis, so weight comes from fontVariations in theme.dart rather than from
  # extra `weight:` entries here, which would silently do nothing.
  #
  # Barlow Condensed is deliberately the STATIC cut for the opposite reason: a
  # fontVariations list makes a TextStyle non-const, and these styles sit in
  # const widget trees across every screen.
  fonts:
    - family: BarlowCondensed
      fonts:
        - asset: assets/fonts/BarlowCondensed-Medium.ttf
          weight: 500
        - asset: assets/fonts/BarlowCondensed-SemiBold.ttf
          weight: 600
        - asset: assets/fonts/BarlowCondensed-Bold.ttf
          weight: 700
    - family: PlexSans
      fonts:
        - asset: assets/fonts/IBMPlexSans.ttf
    - family: PlexMono
      fonts:
        - asset: assets/fonts/IBMPlexMono-Regular.ttf
          weight: 400
        - asset: assets/fonts/IBMPlexMono-SemiBold.ttf
          weight: 600
        - asset: assets/fonts/IBMPlexMono-Bold.ttf
          weight: 700

  # To add assets to your application, add an assets section, like this:
  # assets:
  #   - images/a_dot_burr.jpeg
  #   - images/a_dot_ham.jpeg

  # An image asset can refer to one or more resolution-specific "variants", see
  # https://flutter.dev/to/resolution-aware-images

  # For details regarding adding assets from package dependencies, see
  # https://flutter.dev/to/asset-from-package

  # To add custom fonts to your application, add a fonts section here,
  # in this "flutter" section. Each entry in this list should have a
  # "family" key with the font family name, and a "fonts" key with a
  # list giving the asset and other descriptors for the font. For
  # example:
  # fonts:
  #   - family: Schyler
  #     fonts:
  #       - asset: fonts/Schyler-Regular.ttf
  #       - asset: fonts/Schyler-Italic.ttf
  #         style: italic
  #   - family: Trajan Pro
  #     fonts:
  #       - asset: fonts/TrajanPro.ttf
  #       - asset: fonts/TrajanPro_Bold.ttf
  #         weight: 700
  #
  # For details regarding fonts from package dependencies,
  # see https://flutter.dev/to/font-from-package
```

The following npm inventories preserve every resolved package path (including nested/platform variants), version, flags, dependencies, peers, engine/platform restrictions, source URL and integrity. They are complete package-entry inventories, not third-party implementation source. Flutter exact resolutions are in mobile/pubspec.lock and the companion repository source reference.

package-lock.json

```
node_modules/@emnapi/runtime | version=1.11.3 | dev=False | optional=True | license=MIT
  requires: tslib ^2.4.0
  integrity: sha512-Xz4Tpyki7XyrpbUK1jR1AhdAdaXyhhY4lZ3neLodmhpuWfy2PAQN5B46sAiU4liOXGLkHypn/qU+jvfWSCYYLA==
  resolved: https://registry.npmjs.org/@emnapi/runtime/-/runtime-1.11.3.tgz
node_modules/@esbuild/aix-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["aix"], "cpu": ["ppc64"]}
  integrity: sha512-XExcO+dvLKvVtNTibSTBej1NCAbaGhWn9Ww1ZPx80qsahhPFe/8jgWP0IchNe0F3HwkU7n8ejhH8bjonqht8mQ==
  resolved: https://registry.npmjs.org/@esbuild/aix-ppc64/-/aix-ppc64-0.28.2.tgz
node_modules/@esbuild/android-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm"]}
  integrity: sha512-kXXoiPVVGQcnIYGOeaovwOURpniDBpSq4A03qkQ+BMQqtGG6HYap3xne9C1O1yo4TR3qxlCX5IqqmX6fFo2Lqg==
  resolved: https://registry.npmjs.org/@esbuild/android-arm/-/android-arm-0.28.2.tgz
node_modules/@esbuild/android-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm64"]}
  integrity: sha512-5YfKeeI8qWfBZIX+u2xZC3Zlb3Os/gLS2sbEKM+I4ZOcsWmHS2WLysCcQZDAFRslDUU5Oiq44gf6PYN1vGwG5A==
  resolved: https://registry.npmjs.org/@esbuild/android-arm64/-/android-arm64-0.28.2.tgz
node_modules/@esbuild/android-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["x64"]}
  integrity: sha512-O387ite7SzUyCcy3JQX4P4bLtEA7bLLkx+esve5JHnyYfNTxcVpXZo9jhdB0lTKN44gztELTdU7nS8Nr16Fs1Q==
  resolved: https://registry.npmjs.org/@esbuild/android-x64/-/android-x64-0.28.2.tgz
node_modules/@esbuild/darwin-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-n4KqkOQrraxHJcgjM1RvwbigfQKIKJVpM7xp+KsxiyUSrRdIXnt73VhrPAx0fV44hgfmIVKjxMN9J1t5jySVkw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-arm64/-/darwin-arm64-0.28.2.tgz
node_modules/@esbuild/darwin-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-uq6suIWYP37qzGddBKPw5QEQPi6HiLGsO7UmkpfyaYNQ3D+rN6w6WfwH+nuqcGXWvawGwxOEroO4YGnFh95azw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-x64/-/darwin-x64-0.28.2.tgz
node_modules/@esbuild/freebsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["arm64"]}
  integrity: sha512-n+I0BTSRIoy+d6RPKnEVwql5UwBJolytvY4mAOIEJorKlqgPII8ix6slVVrfZ5Tnj7glIZvloylbB/EJPMWEXw==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-arm64/-/freebsd-arm64-0.28.2.tgz
node_modules/@esbuild/freebsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["x64"]}
  integrity: sha512-78XJTJkvPs0kz2w61301PJjXl4g7q3JqiYMZ/M/yVI73EHBrCRTgkhu9oqG7vPqq+a/yadEW8aD+agKlk5xrmg==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-x64/-/freebsd-x64-0.28.2.tgz
node_modules/@esbuild/linux-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-XlDnu2q5yoqems+xay6wSAcg9DDD7K9RLKZEBOMZm3ckNpJBvOX20tSfby8KfrrhINDyv9V2YVZKY/SpoGJI8w==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm/-/linux-arm-0.28.2.tgz
node_modules/@esbuild/linux-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-pW4AC0P3it8c7do9MVM4p51FzHzdM/TZrerurgRcHJ2WTa1VQ1CIq18xncfpBJw4ojkiZZrKW2yIBWBP92j6Ug==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm64/-/linux-arm64-0.28.2.tgz
node_modules/@esbuild/linux-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ia32"]}
  integrity: sha512-CYbnj78HsIeA+DhgUKgFCfvNsTHFhMMrinUrMZpDXJXKN8T3XViTZ/+wtHeVxEWY8ewSzTFN+nRmSwO2tZaLUQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ia32/-/linux-ia32-0.28.2.tgz
node_modules/@esbuild/linux-loong64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["loong64"]}
  integrity: sha512-buwkd8nsph4R+ajRvw0qM5Hja/TXQow3ptzWO2EbG/cqcIkHloRrdlBtQlshyYGTNFvfkfJ5tpPLVkY4DtsPfQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-loong64/-/linux-loong64-0.28.2.tgz
node_modules/@esbuild/linux-mips64el | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["mips64el"]}
  integrity: sha512-ZVykbDyk7519VwiNb9Lcj9m8XM6v5V9uKPvrEMkkEedVewf+0itkhahp4HDpgERXhwLRpWFypsGbG/J8s0QjJA==
  resolved: https://registry.npmjs.org/@esbuild/linux-mips64el/-/linux-mips64el-0.28.2.tgz
node_modules/@esbuild/linux-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-CAXl+Dtd9UUuJd8pKKdwh6MLm3MUMiqMPmhZ3tTSXPqfyQ3vDl6R5hZdZ/kYojK4ofXtdfSv1tFq8XzWx3heNQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ppc64/-/linux-ppc64-0.28.2.tgz
node_modules/@esbuild/linux-riscv64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-GeXCej4IQtU1B+QlDV8W/RRvbzI3O/Stss+/bCXv4lZls5WGRtu2a+3JkA3i4qIUlMXpcHebWpF8AkJhATowuA==
  resolved: https://registry.npmjs.org/@esbuild/linux-riscv64/-/linux-riscv64-0.28.2.tgz
node_modules/@esbuild/linux-s390x | version=0.28.2 | dev=True | optional=True | license=MIT
```

```
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-3H1weTYZPxt/WOhByszQZybS9w5lKzUn1FDMsgEChbHWQwHYQQRfBxgCcZvPhjHfKyJjIievvMmEUawJrdY9Dg==
  resolved: https://registry.npmjs.org/@esbuild/linux-s390x/-/linux-s390x-0.28.2.tgz
node_modules/@esbuild/linux-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4xTZr1FUmSoQW4XIWmit3tzQrUTZM+N3P0XV8xROKYF50XfI7xeO90+1bZvNwxIufQ9hDQVRJH5YhgPVF8A/HQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-x64/-/linux-x64-0.28.2.tgz
node_modules/@esbuild/netbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["arm64"]}
  integrity: sha512-sSATRjPeDBg3pdgHoQfoYBob11Kk1FGa9lui5RIHZCoCkJa9QKlvl3/vKz2usCmYYjs7ymJR/2Nnsqe+Hjt5nw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-arm64/-/netbsd-arm64-0.28.2.tgz
node_modules/@esbuild/netbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["x64"]}
  integrity: sha512-lqnzCV+mM0gIADaKihiCg6ifgfU2L3h5E33rNQBN1Y4MaVGnzryzmvvf7UHxprpQdE8hpqLolJ9Rl+SkIRDpyw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-x64/-/netbsd-x64-0.28.2.tgz
node_modules/@esbuild/openbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["arm64"]}
  integrity: sha512-AL2qJILH7lNjrDmCQDvdxMfAUIv8KMNZOvrwAQ8i8//ntL9FflhOyMJ8OZSMBb8/AWXe3/5v5S20y3zCoZWKoQ==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-arm64/-/openbsd-arm64-0.28.2.tgz
node_modules/@esbuild/openbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["x64"]}
  integrity: sha512-QtiuPytchRyC4rwUKhexJdQKvDuZ6hWloi3igqPQNUJCS1/v9EiO3UTOXR6A3FoMo4fnAKbWJdqaIwhOzh8qEw==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-x64/-/openbsd-x64-0.28.2.tgz
node_modules/@esbuild/openharmony-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openharmony"], "cpu": ["arm64"]}
  integrity: sha512-WkhYDmpTjLvGlScA1rwjRUmhl4k8oXR3cIbtqWmELgU/dFeHHlEllxDvdWcNJV9rbzCexB5vz8gtNewWLgCT7Q==
  resolved: https://registry.npmjs.org/@esbuild/openharmony-arm64/-/openharmony-arm64-0.28.2.tgz
node_modules/@esbuild/sunos-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["sunos"], "cpu": ["x64"]}
  integrity: sha512-GPMSkTOtMnv2U2F8gxe4Io6qmVs+YKyp832EtqqxrhFngmXQ3rzwytelm3GIn7T4VviRUlf3sOgBOiTdvaf7g==
  resolved: https://registry.npmjs.org/@esbuild/sunos-x64/-/sunos-x64-0.28.2.tgz
node_modules/@esbuild/win32-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-PIhhEkE9uPBleRBrQEJpUn7MBnibZzbGzYWPmY3x+YoVg/95zbjB4CxPPOQ8l5tYYM4mMaCthF8/1DIfBQQyWQ==
  resolved: https://registry.npmjs.org/@esbuild/win32-arm64/-/win32-arm64-0.28.2.tgz
node_modules/@esbuild/win32-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-YmJbfTlvU7Sdn9BB+4PRES4oB6pxgS37MAONj+hBr/cpXS1aBPKXxNnDbu+QCWPj0o9dgyxeq79g6c5P8KeuYA==
  resolved: https://registry.npmjs.org/@esbuild/win32-ia32/-/win32-ia32-0.28.2.tgz
node_modules/@esbuild/win32-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-5ebpxr3nWMzrL/rnUI755Jkuee0bHL/Gq0WTF9lvcpv73wAp5eu8MfBUgWK9bhWvZjj7yX8etf/8tI8Ney695g==
  resolved: https://registry.npmjs.org/@esbuild/win32-x64/-/win32-x64-0.28.2.tgz
node_modules/@google/genai | version=2.16.0 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=20.0.0"}
  requires: google-auth-library ^10.3.0, p-retry ^4.6.2, protobufjs ^7.5.4, ws ^8.18.0
  peers: {"@modelcontextprotocol/sdk": "^1.25.2"}
  integrity: sha512-K+1C1sqR0u7NJ5xpKJCQBws0QXpfuklo3WTNuUIMvtbQfNW2O5OohX0BYT2V+PXzsUzQEwGCXPWQxttLyGQ6xw==
  resolved: https://registry.npmjs.org/@google/genai/-/genai-2.16.0.tgz
node_modules/@img/colour | version=1.1.0 | dev=False | optional=True | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-Td76q7j57o/tLVdgS746cYARfSyxk8iEfRxewL9h4OMzYhbW4TAcppl0mT4eyqXddh6L/jwoM75mo7ixa/pCeQ==
  resolved: https://registry.npmjs.org/@img/colour/-/colour-1.1.0.tgz
node_modules/@img/sharp-darwin-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-QRUlFQ0WxvdWyqqG/WtI3iupfD5rBzmCHXSdPsY91sAtVtTo7Q4cb6zOccZ3gqEqkr0f1As1ehLqmEpDsRf+lg==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-arm64/-/sharp-darwin-arm64-0.35.5.tgz
node_modules/@img/sharp-darwin-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-+BR255RhDlpygUpOc/Jdt1nT6DQ3XG/ERo5wbcdOf5Q320dKtPCKPLR1LJs9VGXRaMa8l1uUa0tkCNOXiAxZUw==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-x64/-/sharp-darwin-x64-0.35.5.tgz
node_modules/@img/sharp-freebsd-wasm32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["freebsd"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-Y/z91nEZ4uIBX5X3nfTovjU9lHNKFYbL2lpHCLVNmXQK03VIZvXBBt0KxbPGp2SdGSF+2mQU4e+hQaWOt86iAw==
  resolved: https://registry.npmjs.org/@img/sharp-freebsd-wasm32/-/sharp-freebsd-wasm32-0.35.5.tgz
node_modules/@img/sharp-libvips-darwin-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
```

```
  integrity: sha512-5R89nBYiRdUlSWJxPhO+GVtaXzXSxKnRu/xqMn3KTA3L9EB9Oy/P+Nn2f2vlhPuUdy/Zusb2DarbyTpGCfEDuw==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-darwin-arm64/-/sharp-libvips-darwin-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-darwin-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-iR2OKH80yi0U+dUplyh3/xdpFvps6YkCwsXenIJxqxR1v9o+xtKTGbS9H7cps+2Vxjc8B1j96p75NmTGjIhtpQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-darwin-x64/-/sharp-libvips-darwin-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LmRtTsOHuvM2+wlO2Db37dx5MiZhB0FvSunciw48YjdOkZz9KAiRbm8ujeMOA1INqmei5NapFxYEK1D1ZSidmw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm/-/sharp-libvips-linux-arm-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-Y3dgX/6lE2QhQb+Gxy0WZxfg9MEm/JBjamZpS2IklP7xIQoKN4hzAm7KcMVGtaVDt3neE9OKBC7vAfonA/Lr1A==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm64/-/sharp-libvips-linux-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-ppc64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-Le6boB8Tai0Nis+gIxIpKx68UDVVIqdR8Tin5Yf1z2LJJQLDJvCDRqRu+jC2qCoD+eIomonmOwB4smBRxfVpYQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-ppc64/-/sharp-libvips-linux-ppc64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-riscv64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-aHkkIEHPRdQEegJN20MLmGtxYD9R2wQr3Cwpddnu5+YKMt6Uzax7S9h5gpZTo8wyrGuZSlfQ63OevL5mTyOC7Q==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linux-riscv64/-/sharp-libvips-linux-riscv64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-s390x | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-ra/mB6MikESDUO7Yg+Mi95bFBb9GsObURuhnOv3OqknjGe9sZrG8tCe9q0xSIGrtLgvgw0gKnFWcK4blSgQOuQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-s390x/-/sharp-libvips-linux-s390x-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-GJ//SSXbnwSDes02umB3nDJLFcQzw8a18V8fyhqr6tV515tOEMdImjjxj1AoafMRz56F3PHgftnj1QEKSU1zkw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-x64/-/sharp-libvips-linux-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-arm64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-hvulFwtjUcagsis6BBxHwGFwWoNZjgYmULGVrZcyfNbjA8hKILbRxGg15/7w5HDyXHXUos/j6baAWqnCyQ2DWA==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-arm64/-/sharp-libvips-linuxmusl-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-x64 | version=1.3.4 | dev=False | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-6zXKeE/p39I1AmA3cJG35eyBGNqNddLnUXjhwBnsGjFPWqf5VKkDBEqaEkPDoTEtkxwi2vv8Tcr2mDyP4So7Fg==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-x64/-/sharp-libvips-linuxmusl-x64-1.3.4.tgz
node_modules/@img/sharp-linux-arm | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LEaXK2WdXVK5ykcw0buWyPMsmLLL2vpHLD6yrNSW+JGEL3BZPA4tpKN6iaMc4AxTTAoaX/sU1rOL51lcIz48ZQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm/-/sharp-linux-arm-0.35.5.tgz
node_modules/@img/sharp-linux-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-LYVx5JTsOM2CBzmxreh+nl64/3H6Xb09iSLknqH47z2T2DFFxDeFLP5y4dJwe6H7uGQlHPyEEtIqyo3DYsRwdQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm64/-/sharp-linux-arm64-0.35.5.tgz
node_modules/@img/sharp-linux-ppc64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-QVxAAq8evVRI9ia2vqgwrmWucn5Dfv+JdWzj75pD8omHLPSP7f8p20O8jxzjCcuCEQEOtYOZUmX1hkiZ0kdevA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-ppc64/-/sharp-linux-ppc64-0.35.5.tgz
node_modules/@img/sharp-linux-riscv64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-LtdreXguaavKODPIfzJ4kffx7UNt1omwtK0rch4EBbbSTXPnxWmYSayXdLJw0fJzQ97kHt1gL/yh4tvU+nCyRQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-riscv64/-/sharp-linux-riscv64-0.35.5.tgz
node_modules/@img/sharp-linux-s390x | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-UZasTOFiYzotTsGOCu42BfUzP6Tu6Do/947iRm1RsLKvlllxwGcn4RN27LibGWceix4Y+Pmw3jsnTcCQIgWjqA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-s390x/-/sharp-linux-s390x-0.35.5.tgz
node_modules/@img/sharp-linux-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-SxFtLTeJInhAA9Q836kux2vZNeOBQEx658qvbboZScr0wIARym3IcGmW7KpVD5sbVg0Ojy+udFQdayYIZyoNog==
  resolved: https://registry.npmjs.org/@img/sharp-linux-x64/-/sharp-linux-x64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
```

```
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-9HbMclmI1zlNkFRs3z9/eBtDjfD0sGlrX1z6b1qwmiFY5ElDLh4BC0LPBdVp7z1DXFiKlIcznf+ZlsuZzLxQqg==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-arm64/-/sharp-linuxmusl-arm64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4KOphqB035HrVdqLZfCgMzzERrQkkzOwRhl4OAkRO1YCldbaFjySXMaK534Mo0V+LndnlJk+sbUyLeU0ULyD1A==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-x64/-/sharp-linuxmusl-x64-0.35.5.tgz
node_modules/@img/sharp-wasm32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later AND MIT
  engines: {"node": ">=20.9.0"}
  requires: @emnapi/runtime ^1.11.3
  integrity: sha512-Ptsga1su4tQx+LLF1ECS9U6nz5kmrXKo6XVbtR48Ke3ZRxxgaWBu7IDtEe1quo8hiupwm6WFqxVlXaSf7IINGQ==
  resolved: https://registry.npmjs.org/@img/sharp-wasm32/-/sharp-wasm32-0.35.5.tgz
node_modules/@img/sharp-webcontainers-wasm32 | version=0.35.5 | dev=False | optional=True |
  license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"cpu": ["wasm32"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-hfhF/FmoQyTUkA0bIKFOtw536BQSeBMe6BF6QyWlrPxT754+TFLaZ7sKKTfvvM0yJgKgaYTwnFCIZ/GuDw5SUA==
  resolved:
  https://registry.npmjs.org/@img/sharp-webcontainers-wasm32/-/sharp-webcontainers-wasm32-0.35.5.tgz
node_modules/@img/sharp-win32-arm64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-X4t7g+7ZA5DKblCBEXGjUqqemj4vczING/5viFwAL8h4N3qYeyjwdCvRLHi4EdOUI+2Z7UFlp1VM+p/AuEtm6Q==
  resolved: https://registry.npmjs.org/@img/sharp-win32-arm64/-/sharp-win32-arm64-0.35.5.tgz
node_modules/@img/sharp-win32-ia32 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": "^20.9.0"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-5Zm82LoBc43nhwNybZlG7Y1KO//Zhsn306fQl29ZOuStHLGTo3BWL83q3cznX0poxSAMuYL1On/BHBxkBeKr6A==
  resolved: https://registry.npmjs.org/@img/sharp-win32-ia32/-/sharp-win32-ia32-0.35.5.tgz
node_modules/@img/sharp-win32-x64 | version=0.35.5 | dev=False | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-x76eH0vEiHlcMQu8Y8IenntaACtddpT6W0wmXtWrnKcnKI7ME5DdgqhAD6SEWOEl1v2zDvkZDhFA9KnURwpfqg==
  resolved: https://registry.npmjs.org/@img/sharp-win32-x64/-/sharp-win32-x64-0.35.5.tgz
node_modules/@next/env | version=15.5.28 | dev=False | optional=False | license=MIT
  integrity: sha512-xxW5EBI8fMPuVTPBW7LL980IRbuDXlbkUAwp9DDhtb4Lnich3nJ13uYpvrX4VE74hWPf6AvHHAMmGCidcHjbfg==
  resolved: https://registry.npmjs.org/@next/env/-/env-15.5.28.tgz
node_modules/@next/swc-darwin-arm64 | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-dPoQYXcfSIqx5o+TOXVXO7kONK5qbtNRDeiTfII0bT3puGIT6VF5e0QwmxNZfEZ5Zety5f3m9P/p4xqwfiLlPg==
  resolved: https://registry.npmjs.org/@next/swc-darwin-arm64/-/swc-darwin-arm64-15.5.28.tgz
node_modules/@next/swc-darwin-x64 | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-RgCJ7buBivTH+6sddqaVm+/v8kwMHlFkobvdt3DfETutws5HrxnToMIWSN9X3MZ3aAi7BbKrGZZWUDQLEycXqw==
  resolved: https://registry.npmjs.org/@next/swc-darwin-x64/-/swc-darwin-x64-15.5.28.tgz
node_modules/@next/swc-linux-arm64-gnu | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-OHXQe13olE59aKe++zHavGcJPh5SLHXi6Anret3BBeq1+qhSuOJDNAli/EDDfxs6UTqA4Qddo4uyYry2slyjiQ==
  resolved: https://registry.npmjs.org/@next/swc-linux-arm64-gnu/-/swc-linux-arm64-gnu-15.5.28.tgz
node_modules/@next/swc-linux-arm64-musl | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-nTB7bB6vfn4ezCJNYP43ukt2o8L3+WxKF/sTcTxepdXsJh3SM9RhlU7wrZYbH7L4HO5M87dqDTwm8587vAkCiw==
  resolved: https://registry.npmjs.org/@next/swc-linux-arm64-musl/-/swc-linux-arm64-musl-15.5.28.tgz
node_modules/@next/swc-linux-x64-gnu | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-WXCfVI32rW3xCusoUX1RpZKtyChWU2Zwe27JUDmM3KrXwcDNc9vV4zEq0GKFAURnuQ/Ouo/XqPvB0yh445XZCg==
  resolved: https://registry.npmjs.org/@next/swc-linux-x64-gnu/-/swc-linux-x64-gnu-15.5.28.tgz
node_modules/@next/swc-linux-x64-musl | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-Miq+NDb/HWsXuxseYxMM6fuEOQXgTziarkKIRpVKCn8W69cEfhQaQr+90pO+u4q2CbJR2wzXmUuCFyZaJs/Nng==
  resolved: https://registry.npmjs.org/@next/swc-linux-x64-musl/-/swc-linux-x64-musl-15.5.28.tgz
node_modules/@next/swc-win32-arm64-msvc | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-5LR79lemgDlgxvG7MQJ+zHCkVcrUoQuO7CiIvq3I58vNW4goSOE2b+19Z6FujRWMouvni4gvudYFuFuNxolGWA==
  resolved: https://registry.npmjs.org/@next/swc-win32-arm64-msvc/-/swc-win32-arm64-msvc-15.5.28.tgz
node_modules/@next/swc-win32-x64-msvc | version=15.5.28 | dev=False | optional=True | license=MIT
  engines: {"node": ">= 10"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-GNipvXUYROSTf4PXEyH95FrWImIB5zdaK6uEOg0RP1/X2drnvoMwiBkJ0VWdzX7w3iiBm3y5g2TxkKDGVTOQcg==
  resolved: https://registry.npmjs.org/@next/swc-win32-x64-msvc/-/swc-win32-x64-msvc-15.5.28.tgz
```

```
node_modules/@protobufjs/aspromise | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-j+gKExEuLmKwvz3OgROXtrJ2UG2x8Ch2YZUxahh+s1F2HZ+wAceUNLkvy6zKCPVRkU++ZWQrdxsUeQXmcg4uoQ==
  resolved: https://registry.npmjs.org/@protobufjs/aspromise/-/aspromise-1.1.2.tgz
node_modules/@protobufjs/base64 | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-AZkcAA5vnN/v4PDqKyMR5lx7hZttPDgClv83E//FMNhR2TMcLUhfRUBHCmSl0oi9zMgDDqRUJkSxO3wm85+XLg==
  resolved: https://registry.npmjs.org/@protobufjs/base64/-/base64-1.1.2.tgz
node_modules/@protobufjs/codegen | version=2.0.5 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-zgXFLzW3Ap33e6d0Wlj4MGIm6Ce8O89n/apUaGNB/jx+hw+ruWEp7EwGUshdLKVRCxZW12fp9r40E1mQrf/34g==
  resolved: https://registry.npmjs.org/@protobufjs/codegen/-/codegen-2.0.5.tgz
node_modules/@protobufjs/eventemitter | version=1.1.1 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-vW1GmwMZNnL+gMRaovlh9yZX74kc+TTU3FObkkurpMaRtBfLP3ldjS9KQWlwZgraRE0+dheEEoAxdzcJQ8eXZg==
  resolved: https://registry.npmjs.org/@protobufjs/eventemitter/-/eventemitter-1.1.1.tgz
node_modules/@protobufjs/fetch | version=1.1.1 | dev=False | optional=False | license=BSD-3-Clause
  requires: @protobufjs/aspromise ^1.1.1
  integrity: sha512-GpptLrs57adMSuHi3VNj0mAF8dwh36LMaYF6XyJ6JMWlVsc+t42tm1HSEDmOs3A8fC9yyeisgLhsTVQokOZ0zw==
  resolved: https://registry.npmjs.org/@protobufjs/fetch/-/fetch-1.1.1.tgz
node_modules/@protobufjs/float | version=1.0.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-Ddb+kVXlXst9d+R9PfTIxh1EdNkgoRe5tOX6t01f1lYWOvJnSPDBlG241QLzcyPdoNTsblLUdujGSE4RzrTZGQ==
  resolved: https://registry.npmjs.org/@protobufjs/float/-/float-1.0.2.tgz
node_modules/@protobufjs/path | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-6JOcJ5Tm08dOHAbdR3GrvP+yUUfkjG5ePsHYczMFLq3ZmMkAD98cDgcT2iA1lJ9NVwFd4tH/iSSoe44YWkltEA==
  resolved: https://registry.npmjs.org/@protobufjs/path/-/path-1.1.2.tgz
node_modules/@protobufjs/pool | version=1.1.0 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-0kELaGSIDBKvcgS4zkjz1PeddatrjYcmMWOlAuAPwAeccUrPHdUqo/J6LiymHHEiJT5NrF1UVwxY14f+fy4WQw==
  resolved: https://registry.npmjs.org/@protobufjs/pool/-/pool-1.1.0.tgz
node_modules/@protobufjs/utf8 | version=1.1.2 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-b1UQwcEZ4yCnMCD8DAL1VlbvBJE9/IX4FTIp7BG1xYpf29SLazLSrqUkj4w7Y5y7cCVP6E5tcqqcI0xemPkHug==
  resolved: https://registry.npmjs.org/@protobufjs/utf8/-/utf8-1.1.2.tgz
node_modules/@swc/helpers | version=0.5.15 | dev=False | optional=False | license=Apache-2.0
  requires: tslib ^2.8.0
  integrity: sha512-JQ5TuMi45Owi4/BIMAJBoSQoOJu12oOk/gADqlcUL9JEdHB8vyjUSsxqeNXnmXHjYKMi2WcYtezGEEhqUI/E2g==
  resolved: https://registry.npmjs.org/@swc/helpers/-/helpers-0.5.15.tgz
node_modules/@types/node | version=22.20.1 | dev=False | optional=False | license=MIT
  requires: undici-types ~6.21.0
  integrity: sha512-EANqOCF9QFyra+4pfxUcX9STKJpCLjMbObVzljIJomAWSnuSIEAvyzEU53GaajbXJEgdh0iEcPL+DGvpUd4k1Q==
  resolved: https://registry.npmjs.org/@types/node/-/node-22.20.1.tgz
node_modules/@types/pg | version=8.21.0 | dev=True | optional=False | license=MIT
  requires: @types/node *, pg-protocol *, pg-types ^2.2.0
  integrity: sha512-AYdtudzabjLZgVgRZmAnU8bAnVUXzuJX2IYHeSIiIHm68olD+LgQYCGWdtcNYnP0uq9c4S4NibVG3Ni7VbKW7Q==
  resolved: https://registry.npmjs.org/@types/pg/-/pg-8.21.0.tgz
node_modules/@types/react | version=19.2.18 | dev=True | optional=False | license=MIT
  requires: csstype ^3.2.2
  integrity: sha512-AnzbBERsrLKtk2XSfTbYRLjQPdy116Sty4q+T+Bp3IC4l6jNBvreVPAHmpq9qhXQM7CXZPjLVmGMw9sy+hxQ3w==
  resolved: https://registry.npmjs.org/@types/react/-/react-19.2.18.tgz
node_modules/@types/react-dom | version=19.2.4 | dev=True | optional=False | license=MIT
  peers: {"@types/react": "^19.2.0"}
  integrity: sha512-Bsc+QHgp+P/F02XDzNCY9jnZNCUuLki36KT7VKrTXXLdHf+vHMNZnW1rVu5DNW/rCK+fya3DATySbLM4yhtKUw==
  resolved: https://registry.npmjs.org/@types/react-dom/-/react-dom-19.2.4.tgz
node_modules/@types/retry | version=0.12.0 | dev=False | optional=False | license=MIT
  integrity: sha512-wWKOClTTiizcZhXnPY4wikVAwmdYHp8q6DmC+EJUzAMsycb7HB32Kh9RN4+0gExjmPmZSAQjgURXIGATPegAvA==
  resolved: https://registry.npmjs.org/@types/retry/-/retry-0.12.0.tgz
node_modules/agent-base | version=7.1.4 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 14"}
  integrity: sha512-MnA+YT8fwfJPgBx3m60MNqakm30XOkyIoH1y6huTQvC0PwZG7ki8NacLBcrPbNoo8vEZy7Jpuk7+jMO+CUovTQ==
  resolved: https://registry.npmjs.org/agent-base/-/agent-base-7.1.4.tgz
node_modules/base64-js | version=1.5.1 | dev=False | optional=False | license=MIT
  integrity: sha512-AKpaYlHn8t4SVbOHCy+b5+KKgvR4vrsD8vbvrbiQJps7fKDTkjkDry6ji0rUJjC0kzbNePLwzxq8iypo41qeWA==
  resolved: https://registry.npmjs.org/base64-js/-/base64-js-1.5.1.tgz
node_modules/bignumber.js | version=9.3.1 | dev=False | optional=False | license=MIT
  engines: {"node": "*"}
  integrity: sha512-Ko0uX15oIUS7wJ3Rb30Fs6SkVbLmPBAKdlm7q9+ak9bbIeFf0MwuBsQV6z7+X768/cHsfg+WlysDWJcmthjsjQ==
  resolved: https://registry.npmjs.org/bignumber.js/-/bignumber.js-9.3.1.tgz
node_modules/buffer-equal-constant-time | version=1.0.1 | dev=False | optional=False | license=BSD-3-Clause
  integrity: sha512-zRpUiDwd/xk6ADqPMATG8vc9VPrkck7T07OIx0gnjmJAnHnTVXNQG3vfvWNuiZIkwu9KrKdA1iJKfsfTVxE6NA==
  resolved: https://registry.npmjs.org/buffer-equal-constant-time/-/buffer-equal-constant-time-1.0.1.tgz
node_modules/caniuse-lite | version=1.0.30001809 | dev=False | optional=False | license=CC-BY-4.0
  integrity: sha512-xxWVywk6a6Arlk+hymeycyn/VgqEfLDxupvhH/xiY5SJ/18kmi9o6MiO320DCUzypORHLtvh0I4i04tUhCNHNQ==
  resolved: https://registry.npmjs.org/caniuse-lite/-/caniuse-lite-1.0.30001809.tgz
node_modules/client-only | version=0.0.1 | dev=False | optional=False | license=MIT
  integrity: sha512-IV3Ou0jSMzZrd3pZ48nLkT9DA7Ag1pnPzaiQhpW7c3Rbcqqzvzzvu+L8gfqMp/8IM2MQtSiqaCxrrcfu8I8rMA==
  resolved: https://registry.npmjs.org/client-only/-/client-only-0.0.1.tgz
node_modules/csstype | version=3.2.3 | dev=True | optional=False | license=MIT
  integrity: sha512-z1HGKcYy2xA8AGQfwrn0PAy+PB7X/GSj3UVJW9qKyn43xWa+gl5nXmU4qqLMRzWVLFC8KusUX8T/0kCiOYpAIQ==
  resolved: https://registry.npmjs.org/csstype/-/csstype-3.2.3.tgz
node_modules/data-uri-to-buffer | version=4.0.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 12"}
  integrity: sha512-0R9ikRb668HB7QDxT1vkpuUBtqc53YyAwMwGeUFKRojY/NWKvdZ+9UYtRfGmhqNbRkTSVpMbmyhXipFFv2cb/A==
  resolved: https://registry.npmjs.org/data-uri-to-buffer/-/data-uri-to-buffer-4.0.1.tgz
node_modules/debug | version=4.4.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">=6.0"}
  requires: ms ^2.1.3
  integrity: sha512-RGwwWnwQvkVfavKVt22FGLw+xYSdzARwm0ru6DhTVA3umU5hZc28V3kO4stgYryrTlLpuvgI9GiijltAjNbcqA==
  resolved: https://registry.npmjs.org/debug/-/debug-4.4.3.tgz
```

```
node_modules/detect-libc | version=2.1.2 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=8"}
  integrity: sha512-Btj2BOOO83o3WyH59e8MgXsxEQVcarkUOpEYrubB0urwnN10yQ364rsiByU11nZlqWYZm05i/of7io4mzihBtQ==
  resolved: https://registry.npmjs.org/detect-libc/-/detect-libc-2.1.2.tgz
node_modules/ecdsa-sig-formatter | version=1.0.11 | dev=False | optional=False | license=Apache-2.0
  requires: safe-buffer ^5.0.1
  integrity: sha512-nagl3RYrbNv6kQkeJIpt6NJZy8twLB/2vtz6yN9Z4vRKHN4/QZJIEbqohALSgwKdnksuY3k5Addp5lg8sVoVcQ==
  resolved: https://registry.npmjs.org/ecdsa-sig-formatter/-/ecdsa-sig-formatter-1.0.11.tgz
node_modules/esbuild | version=0.28.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-HKVLS8dvII+xoKW9kmqxbRKrnWEXfJJr/FZhhJmiqIB0e053QNYFqOBouTMO/k5sID4MvCiUCvv8b9M4h32wIA==
  resolved: https://registry.npmjs.org/esbuild/-/esbuild-0.28.2.tgz
node_modules/extend | version=3.0.2 | dev=False | optional=False | license=MIT
  integrity: sha512-fjquC59cD7CyW6urNXK0FBufkZcoiGG80wTuPujX590cB5Ttln20E2UB4S/WARVqhXffZl2LNgS+gQdPIIim/g==
  resolved: https://registry.npmjs.org/extend/-/extend-3.0.2.tgz
node_modules/fetch-blob | version=3.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": "^12.20 || >= 14.13"}
  requires: node-domexception ^1.0.0, web-streams-polyfill ^3.0.3
  integrity: sha512-7yAQpD2UMJzLi1Dqv7qFYnPbaPx7ZfFK6PiIxQ4PfkGPyNyl2Ugx+a/umUonmKqjhM4DnfbMvdX6otXq83soQQ==
  resolved: https://registry.npmjs.org/fetch-blob/-/fetch-blob-3.2.0.tgz
node_modules/formdata-polyfill | version=4.0.10 | dev=False | optional=False | license=MIT
  engines: {"node": ">=12.20.0"}
  requires: fetch-blob ^3.1.2
  integrity: sha512-buewHzMvYL29jdeQTVILecSaZKnt/RJWjoZCF5OW60Z67/GmSLBkOFM7qh1PI3zFNtJbaZL5eQu1vLfazOwj4g==
  resolved: https://registry.npmjs.org/formdata-polyfill/-/formdata-polyfill-4.0.10.tgz
node_modules/fsevents | version=2.3.3 | dev=True | optional=True | license=MIT
  engines: {"node": "^8.16.0 || ^10.6.0 || >=11.0.0"}
  platform: {"os": ["darwin"]}
  integrity: sha512-5xoDfX+fL7faATnagmWPpbFtwh/R77WmMMqqHGS65C3vvB0YHrgF+B1YmZ3441tMj5n63k0212XNoJwzlhffQw==
  resolved: https://registry.npmjs.org/fsevents/-/fsevents-2.3.3.tgz
node_modules/gaxios | version=7.3.0 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: extend ^3.0.2, https-proxy-agent ^7.0.1, node-fetch ^3.3.2
  integrity: sha512-RB5vLV+vvQeoFPCX4QMK6/hjVkbIamPp1QSUD0CiZcnj12qbpiL+pLbYtgD+oZkWl0tl9z+o2Utp+MpM3QRhBA==
  resolved: https://registry.npmjs.org/gaxios/-/gaxios-7.3.0.tgz
node_modules/gcp-metadata | version=8.1.2 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: gaxios ^7.0.0, google-logging-utils ^1.0.0, json-bigint ^1.0.0
  integrity: sha512-zV/5HKTfCeKWnxG0Dmrw51hEWFGfcF2xiXqcA3+J90WDuP0SvoiSO5ORvcBsifmx/FoIjgQN3oNOGaQ5PhLFkg==
  resolved: https://registry.npmjs.org/gcp-metadata/-/gcp-metadata-8.1.2.tgz
node_modules/google-auth-library | version=10.9.1 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=18"}
  requires: base64-js ^1.3.0, ecdsa-sig-formatter ^1.0.11, gaxios ^7.1.4, gcp-metadata 8.1.2,
  google-logging-utils 1.1.3, jws ^4.0.0
  integrity: sha512-i1ydyHrqcIxXkWh/uBmVkzCvIuq5yiK2ATndIe5XxKholrG/MTYP9xGYka4sQhrbIAgGjL2B6NOE7rFaiF3fXw==
  resolved: https://registry.npmjs.org/google-auth-library/-/google-auth-library-10.9.1.tgz
node_modules/google-logging-utils | version=1.1.3 | dev=False | optional=False | license=Apache-2.0
  engines: {"node": ">=14"}
  integrity: sha512-eAmLkjDjAFCVXg7A1unxHsLf961m6y17QFqXqAXGj/gVkKFrEICfStRfwUlGNfeCEjNRa32JEWOUTlYXPyyKvA==
  resolved: https://registry.npmjs.org/google-logging-utils/-/google-logging-utils-1.1.3.tgz
node_modules/https-proxy-agent | version=7.0.6 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 14"}
  requires: agent-base ^7.1.2, debug 4
  integrity: sha512-vK9P5/iUfdl95AI+JVyUuIcVtd4ofvtrOr3HNtM2yxC9bnMbEdp3x01OhQNnjb8IJYi38VlTE3mBXwcfvywuSw==
  resolved: https://registry.npmjs.org/https-proxy-agent/-/https-proxy-agent-7.0.6.tgz
node_modules/json-bigint | version=1.0.0 | dev=False | optional=False | license=MIT
  requires: bignumber.js ^9.0.0
  integrity: sha512-SiPv/8VpZuWbvLSMtTDU8hEfrZWg/mH/nV/b4o0CYbSxu1UIQPLdwKOCIyLQX+VIPO5vrLX3i8qtqFyhdPSUSQ==
  resolved: https://registry.npmjs.org/json-bigint/-/json-bigint-1.0.0.tgz
node_modules/jwa | version=2.0.1 | dev=False | optional=False | license=MIT
  requires: buffer-equal-constant-time ^1.0.1, ecdsa-sig-formatter 1.0.11, safe-buffer ^5.0.1
  integrity: sha512-hRF04fqJIP8Abbkq5NKGN0Bbr3JxlQ+qhZufXVr0DvujKy93ZCbXZMHDL4EOtodSbCWxOqR8MS1tXA5hwqCXDg==
  resolved: https://registry.npmjs.org/jwa/-/jwa-2.0.1.tgz
node_modules/jws | version=4.0.1 | dev=False | optional=False | license=MIT
  requires: jwa ^2.0.1, safe-buffer ^5.0.1
  integrity: sha512-EKI/M/yqPncGUUh44xz0PxSidXFr/+r0pA70+gIYhjv+et7yxM+s29Y+VGDkovRofQem0fs7Uvf4+YmAdyRduA==
  resolved: https://registry.npmjs.org/jws/-/jws-4.0.1.tgz
node_modules/long | version=5.3.2 | dev=False | optional=False | license=Apache-2.0
  integrity: sha512-mNAgZ1GmyNhD7AuqnTG3/VQ26o760+ZYBPKjPvugO8+nLbYfX6TVpJPseBvopbdY+qpZ/lKUnmEc1LeZYS3QAA==
  resolved: https://registry.npmjs.org/long/-/long-5.3.2.tgz
node_modules/ms | version=2.1.3 | dev=False | optional=False | license=MIT
  integrity: sha512-6FlzubTLZG3J2a/NVCAleEhjzq5oxgHyaCU9yYXvcLsvoVaHJq/s5xXI6/XXP6tz7R9xAOtHnSO/tXtF3WRTlA==
  resolved: https://registry.npmjs.org/ms/-/ms-2.1.3.tgz
node_modules/nanoid | version=3.3.20 | dev=False | optional=False | license=MIT
  engines: {"node": "^10 || ^12 || ^13.7 || ^14 || >=15.0.1"}
  integrity: sha512-uKdg2G3GNCKQn9byYOpxbGqrT2fGO5KRt5J/8b3pok8rT6qxGWF6hxMyJiEYtAf+FVyYuD9hRaDqX5uPFYJ4ZQ==
  resolved: https://registry.npmjs.org/nanoid/-/nanoid-3.3.20.tgz
node_modules/next | version=15.5.28 | dev=False | optional=False | license=MIT
  engines: {"node": "^18.18.0 || ^19.8.0 || >= 20.0.0"}
  requires: @next/env 15.5.28, @swc/helpers 0.5.15, caniuse-lite ^1.0.30001579, postcss 8.4.31, styled-jsx
  5.1.6
  peers: {"@opentelemetry/api": "^1.1.0", "@playwright/test": "^1.51.1", "babel-plugin-react-compiler": "*",
   "react": "^18.2.0 || 19.0.0-rc-de68d2f4-20241204 || ^19.0.0", "react-dom": "^18.2.0 ||
```

```
  19.0.0-rc-de68d2f4-20241204 || ^19.0.0", "sass": "^1.3.0"}
  integrity: sha512-JjhLBBY1PNnuwPtcZ7t8yxVeJVYvD2Jyp633J+gRCNbzSt7N0E+xqCf6uQiff3+3qmUkwcF/ksfSsK1xsZ76Tw==
  resolved: https://registry.npmjs.org/next/-/next-15.5.28.tgz
node_modules/node-domexception | version=1.0.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=10.5.0"}
  integrity: sha512-/jKZoMpw0F8GRwl4/eLROPA3cfcXtLApP0QzLmUT/HuPCZWyB7IY9ZrMeKw2O/nFIqPQB3PVM9aYm0F312AXDQ==
  resolved: https://registry.npmjs.org/node-domexception/-/node-domexception-1.0.0.tgz
node_modules/node-fetch | version=3.3.2 | dev=False | optional=False | license=MIT
  engines: {"node": "^12.20.0 || ^14.13.1 || >=16.0.0"}
  requires: data-uri-to-buffer ^4.0.0, fetch-blob ^3.1.4, formdata-polyfill ^4.0.10
  integrity: sha512-dRB78srN/l6gqWulah9SrxeYnxeddIG30+GOqK/9OlLVyLg3HPnr6SqOWTWOXKRwC2eGYCkZ59NNuSgvSrpgOA==
  resolved: https://registry.npmjs.org/node-fetch/-/node-fetch-3.3.2.tgz
node_modules/p-retry | version=4.6.2 | dev=False | optional=False | license=MIT
  engines: {"node": ">=8"}
  requires: @types/retry 0.12.0, retry ^0.13.1
  integrity: sha512-312Id396EbJdvRONlngUx0NydfrIQ5lsYu0znKVUzVvArzEIt08V1qhtyESbGVd1FGX7UKtiFp5uwKZdM8wIuQ==
  resolved: https://registry.npmjs.org/p-retry/-/p-retry-4.6.2.tgz
node_modules/pg | version=8.23.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 16.0.0"}
  requires: pg-connection-string ^2.14.0, pg-pool ^3.14.0, pg-protocol ^1.16.0, pg-types 2.2.0, pgpass 1.0.5
  peers: {"pg-native": ">=3.0.1"}
  integrity: sha512-Ip2EQCngowJLGOfCwkFhPXU7/ljlhn6Rxlmy4XYfL2Y+vyRM59+8uR2xqRWKdYmbXmxCFOAmKxBuSUCdF34qLg==
  resolved: https://registry.npmjs.org/pg/-/pg-8.23.0.tgz
node_modules/pg-cloudflare | version=1.4.0 | dev=False | optional=True | license=MIT
  integrity: sha512-Vo7z/6rrQYxpNRylp4Tlob2elzbh+N/MOQbxFVWCxS7oEx6jF53GTJFxK2WWpKuBRkmiin4Mt+xofFDjx09R0A==
  resolved: https://registry.npmjs.org/pg-cloudflare/-/pg-cloudflare-1.4.0.tgz
node_modules/pg-connection-string | version=2.14.0 | dev=False | optional=False | license=MIT
  integrity: sha512-XwWDGcLRGCXAR8F/AM5bG7Q+A3Wm2s6QeEjlOKZLlH3UYcguiqCWKyWXVag5TLTIjR7oOJUY8kcADaZgWPyLeg==
  resolved: https://registry.npmjs.org/pg-connection-string/-/pg-connection-string-2.14.0.tgz
node_modules/pg-int8 | version=1.0.1 | dev=False | optional=False | license=ISC
  engines: {"node": ">=4.0.0"}
  integrity: sha512-WCtabS6t3c8SkpDBUlb1kjOs7l66xsGdKpIPZsg4wR+B3+u9UAum2odSsF9tnvxg80h4ZxLWMy4pRjOsFIqQpw==
  resolved: https://registry.npmjs.org/pg-int8/-/pg-int8-1.0.1.tgz
node_modules/pg-pool | version=3.14.0 | dev=False | optional=False | license=MIT
  peers: {"pg": ">=8.0"}
  integrity: sha512-gKtPkFdQPU3DksooVLi9LsjZxrsBUZIpa+7aVx+LV5pNh0KzP4Zleud2po+ConrxbuXGBJ6Hfer6hdgpIBpBaw==
  resolved: https://registry.npmjs.org/pg-pool/-/pg-pool-3.14.0.tgz
node_modules/pg-protocol | version=1.16.0 | dev=False | optional=False | license=MIT
  integrity: sha512-sILXutLVjCLjcDuOmvhX5e2Z4cS5qG/6Bu3VkpFwdf/633ElGLpEh9bgmuI5I4sqKqkifQiGyiCcx1HdtrK7tg==
  resolved: https://registry.npmjs.org/pg-protocol/-/pg-protocol-1.16.0.tgz
node_modules/pg-types | version=2.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=4"}
  requires: pg-int8 1.0.1, postgres-array ~2.0.0, postgres-bytea ~1.0.0, postgres-date ~1.0.4,
  postgres-interval ^1.1.0
  integrity: sha512-qTAAlrEsl8s4OiEQY69wDvcMIdQN6wdz5ojQiOy6YRMuynxenON0O5oCpJI6lshc6scgAY8qvJ2On/p+CXY0GA==
  resolved: https://registry.npmjs.org/pg-types/-/pg-types-2.2.0.tgz
node_modules/pgpass | version=1.0.5 | dev=False | optional=False | license=MIT
  requires: split2 ^4.1.0
  integrity: sha512-FdW9r/jQZhSeohs1Z3sI1yxFQNFvMcnmfuj4WBMUTxOrAyLMaTcE1aAMBiTlbMNaXvBCQuVi0R7hd8udDSP7ug==
  resolved: https://registry.npmjs.org/pgpass/-/pgpass-1.0.5.tgz
node_modules/picocolors | version=1.1.1 | dev=False | optional=False | license=ISC
  integrity: sha512-xceH2snhtb5M9liqDsmEw56le376mTZkEX/jEb/RxNFyegNul7eNslCXP9FDj/Lcu0X8KEyMceP2ntpaHrDEVA==
  resolved: https://registry.npmjs.org/picocolors/-/picocolors-1.1.1.tgz
node_modules/postcss | version=8.5.32 | dev=False | optional=False | license=MIT
  engines: {"node": "^10 || ^12 || >=14"}
  requires: nanoid ^3.3.20, picocolors ^1.1.1, source-map-js ^1.2.2
  integrity: sha512-LJlKCCAUFKOuZxipUdYw1NzIITEsPcgyOG9LkvRJvuKj/bRzbuRY0ARXvL0pWGpsZvn8jku+LMep2eU0seHp8g==
  resolved: https://registry.npmjs.org/postcss/-/postcss-8.5.32.tgz
node_modules/postgres-array | version=2.0.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=4"}
  integrity: sha512-VpZrUqU5A69eQyW2c5CA1jtLecCsN2U/bD6VilrFDWq5+5UIEVO7nazS3TEcHf1zuPYO/sqGvUvW62g86RXZuA==
  resolved: https://registry.npmjs.org/postgres-array/-/postgres-array-2.0.0.tgz
node_modules/postgres-bytea | version=1.0.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  integrity: sha512-5+5HqXnsZPE65IJZSMkZtURARZelel2oXUEO8rH83VS/hxH5vv1uHquPg5wZs8yMAfdv971IU+kcPUczi7NVBQ==
  resolved: https://registry.npmjs.org/postgres-bytea/-/postgres-bytea-1.0.1.tgz
node_modules/postgres-date | version=1.0.7 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  integrity: sha512-suDmjLVQg78nMK2UZ454hAG+OAW+HQPZ6n++TNDUX+L0+uUlLywnoxJKDou51Zm+zTCjrCl0Nq6J9C5hP9vK/Q==
  resolved: https://registry.npmjs.org/postgres-date/-/postgres-date-1.0.7.tgz
node_modules/postgres-interval | version=1.2.0 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.10.0"}
  requires: xtend ^4.0.0
  integrity: sha512-9ZhXKM/rw350N1ovuWHbGxnGh/SNJ4cnxHiM0rxE4VN41wsg8P8zWn9hv/buK00RP4WvlOyr/RBDiptyxVbkZQ==
  resolved: https://registry.npmjs.org/postgres-interval/-/postgres-interval-1.2.0.tgz
node_modules/protobufjs | version=7.6.5 | dev=False | optional=False | license=BSD-3-Clause
  engines: {"node": ">=12.0.0"}
  requires: @protobufjs/aspromise ^1.1.2, @protobufjs/base64 ^1.1.2, @protobufjs/codegen ^2.0.5,
  @protobufjs/eventemitter ^1.1.1, @protobufjs/fetch ^1.1.1, @protobufjs/float ^1.0.2, @protobufjs/path
  ^1.1.2, @protobufjs/pool ^1.1.0, @protobufjs/utf8 ^1.1.1, @types/node >=13.7.0, long ^5.3.2
  integrity: sha512-/FPD0nUc9jH6rfFjji9IBqOz4pcSE3CsT1m7Ep6Mdb0LxSUMj8hgl6GomOvZzpNpAqqGaXA0P3VSrZLFzIhQrw==
  resolved: https://registry.npmjs.org/protobufjs/-/protobufjs-7.6.5.tgz
node_modules/react | version=19.2.8 | dev=False | optional=False | license=MIT
```

```
  engines: {"node": ">=0.10.0"}
  integrity: sha512-PWaYA1L/q9u2u7xYQi+Y3L3Yfnie7XyLeaJICV1MGD6LprsBxcAqGjYyr0eY3p+QdsA+x/Irkt4Qif8D63+Sbw==
  resolved: https://registry.npmjs.org/react/-/react-19.2.8.tgz
node_modules/react-dom | version=19.2.8 | dev=False | optional=False | license=MIT
  requires: scheduler ^0.27.0
  peers: {"react": "^19.2.8"}
  integrity: sha512-rVprimfGBG3DR+Tq0IQG2DT5PxKth1WIGDmj5yPmlzr4YBe7uyE+Du4oVqTDXZSHGGGXRtTJEGSSePyQCMBglQ==
  resolved: https://registry.npmjs.org/react-dom/-/react-dom-19.2.8.tgz
node_modules/retry | version=0.13.1 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 4"}
  integrity: sha512-XQBQ3I8W1Cge0Seh+6gjj03LbmRFWuoszgK9ooCpwYIrhhoO80pfq4cUkU5DkknwfOfFteRwlZ56PYOGYyFWdg==
  resolved: https://registry.npmjs.org/retry/-/retry-0.13.1.tgz
node_modules/safe-buffer | version=5.2.1 | dev=False | optional=False | license=MIT
  integrity: sha512-rp3So07KcdmmKbGvgaNxQSJr7bGVSVk5S9Eq1F+ppbRo70+YeaDxkw5Dd8NPN+GD6bjnYm2VuPuCXmpuYvmCXQ==
  resolved: https://registry.npmjs.org/safe-buffer/-/safe-buffer-5.2.1.tgz
node_modules/scheduler | version=0.27.0 | dev=False | optional=False | license=MIT
  integrity: sha512-eNv+WrVbKu1f3vbYJT/xtiF5syA5HPIMtf9IgY/nKg0sWqzAUEvqY/xm7OcZc/qafLx/iO9FgOmeSAp4v5ti/Q==
  resolved: https://registry.npmjs.org/scheduler/-/scheduler-0.27.0.tgz
node_modules/semver | version=7.8.5 | dev=False | optional=True | license=ISC
  engines: {"node": ">=10"}
  integrity: sha512-Y7/KDsb8LjooZpwaqGyulO6DQlksgCnccchHGk+sZIY4SBvUocMBEFH5Ur1fI4dV+Jvl0w6cjvucaIi40puRioA==
  resolved: https://registry.npmjs.org/semver/-/semver-7.8.5.tgz
node_modules/sharp | version=0.35.5 | dev=False | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  requires: @img/colour ^1.1.0, detect-libc ^2.1.2, semver ^7.8.5
  integrity: sha512-Ywn4OnzGukp7CDMrp08RQ50YKmuwG47brZgIVPTvBaaAfQlRlygrRqSrxdCiL9M+LlzLBiJ68IR1QqvzHyjC7g==
  resolved: https://registry.npmjs.org/sharp/-/sharp-0.35.5.tgz
node_modules/source-map-js | version=1.2.2 | dev=False | optional=False | license=BSD-3-Clause
  engines: {"node": ">=0.10.0"}
  integrity: sha512-KGj/8Y43x35aZVDtt+J4mK1hoLGHULMYfSkODJNQjNDC3oW1PqPoxMwo0pLUsWM/UEGzON/NxeHywEfNXNP3Vw==
  resolved: https://registry.npmjs.org/source-map-js/-/source-map-js-1.2.2.tgz
node_modules/split2 | version=4.2.0 | dev=False | optional=False | license=ISC
  engines: {"node": ">= 10.x"}
  integrity: sha512-UcjcJOWknrNkF6PLX83qcHM6KHgVKNkV62Y8a5uYDVv9ydGQVwAHMKqHdJje1VTWpljG0WYpCDhrCdAOYH4TWg==
  resolved: https://registry.npmjs.org/split2/-/split2-4.2.0.tgz
node_modules/styled-jsx | version=5.1.6 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 12.0.0"}
  requires: client-only 0.0.1
  peers: {"react": ">= 16.8.0 || 17.x.x || ^18.0.0-0 || ^19.0.0-0"}
  integrity: sha512-qSVyDTeMotdvQYoHWLNGwRFJHC+i+ZvdBRYosOFgC+Wg1vx4frN2/RG/NA7SYqqvKNLf39P2LSRA2pu6n0XYZA==
  resolved: https://registry.npmjs.org/styled-jsx/-/styled-jsx-5.1.6.tgz
node_modules/tslib | version=2.8.1 | dev=False | optional=False | license=0BSD
  integrity: sha512-oJFu94HQb+KVduSUQL7wnpmqnfmLsOA/nAh6b6EH0wCEoK0/mPeXU6c3wKDV83MkOuHPRHtSXKKU99IBazS/2w==
  resolved: https://registry.npmjs.org/tslib/-/tslib-2.8.1.tgz
node_modules/tsx | version=4.23.12 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18.0.0"}
  requires: esbuild ~0.28.0
  integrity: sha512-FDf4L4sYzKtzWYhU/Xm0AQFdTjdIxNo9ElTf2mxXM6k8YMHXzYUe4yODVaXP4V9uMFbVg8c0qyBccK2OOxb45Q==
  resolved: https://registry.npmjs.org/tsx/-/tsx-4.23.12.tgz
node_modules/typescript | version=5.9.3 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=14.17"}
  integrity: sha512-jl1vZzPDinLr9eUt3J/t7V6FgNEw9QjvBPdysz9KfQDD41fQrC2Y4vKQdiaUpFT4bXlb1RHhLpp8wtm6M5TgSw==
  resolved: https://registry.npmjs.org/typescript/-/typescript-5.9.3.tgz
node_modules/undici-types | version=6.21.0 | dev=False | optional=False | license=MIT
  integrity: sha512-iwDZqg0QAGrg9Rav5H4n0M64c3mkR59cJ6wQp+7C4nI0gsmExaedaYLNO44eT4AtBBwjbTiGPMlt2Md0T9H9JQ==
  resolved: https://registry.npmjs.org/undici-types/-/undici-types-6.21.0.tgz
node_modules/web-streams-polyfill | version=3.3.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">= 8"}
  integrity: sha512-d2JWLCivmZYTSIoge9MsgFCZrt571BikcWGYkjC1khllbTeDlGqZ2D8vD8E/lJa8WGWbb7Plm8/XJYV7IJHZZw==
  resolved: https://registry.npmjs.org/web-streams-polyfill/-/web-streams-polyfill-3.3.3.tgz
node_modules/ws | version=8.21.3 | dev=False | optional=False | license=MIT
  engines: {"node": ">=10.0.0"}
  peers: {"bufferutil": "^4.0.1", "utf-8-validate": ">=5.0.2"}
  integrity: sha512-201TZ/kPWxoPr/OKWjquZR1SWKXcvxdH+e1xrx89b3YbmzLMFCLfnaG1HFIgWzJOEWZ7MvpK++odZufgYR50Rw==
  resolved: https://registry.npmjs.org/ws/-/ws-8.21.3.tgz
node_modules/xtend | version=4.0.2 | dev=False | optional=False | license=MIT
  engines: {"node": ">=0.4"}
  integrity: sha512-LKYU1iAXJXUgAXn9URjiu+MWhyUXHsvfp7mcuYm9dSUKK0/CjtrUwFAxD82/mCWbtLsGjFIad0wIsod4zrTAEQ==
  resolved: https://registry.npmjs.org/xtend/-/xtend-4.0.2.tgz
```

cloud/package-lock.json

```
node_modules/@cloudflare/kv-asset-handler | version=0.5.0 | dev=True | optional=False | license=MIT OR
  Apache-2.0
  engines: {"node": ">=22.0.0"}
  integrity: sha512-jxQYkj8dSIzc0cD6cMMNdOc1UVjqSqu8BZdor5s8cGjW2I8BjODt/kWPVdY+u9zj3ms75Q5qaZgnxUad83+eAg==
  resolved: https://registry.npmjs.org/@cloudflare/kv-asset-handler/-/kv-asset-handler-0.5.0.tgz
node_modules/@cloudflare/unenv-preset | version=2.16.2 | dev=True | optional=False | license=MIT OR
  Apache-2.0
  peers: {"unenv": "2.0.0-rc.24", "workerd": ">1.20260305.0 <2.0.0-0"}
  integrity: sha512-JBP1+Z7ZSNG/d4mRP+y8VC5dka3tZVMLEZRvS+rzQ4DGV1EoxRFQckcJTTkXbHSQiTj0DtNI01Zwb/V2fX0mvQ==
  resolved: https://registry.npmjs.org/@cloudflare/unenv-preset/-/unenv-preset-2.16.2.tgz
node_modules/@cloudflare/workerd-darwin-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-lsEx0i7nR0PNG/erUFFHmQmiidEhLfDE5uQmAL9421/y4/ycuxDDOSaxu3VGGYFFPK5sduyUeMmjIlX4CwOBFg==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-darwin-64/-/workerd-darwin-64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-darwin-arm64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-5e79fHgabdDD8EgmjOhJ1S+xMsf6DbC7fL7IgTBizMnzOp0P2isDn7pYmUxI9AJZE9FVQ4RUilH/I36YNg+GQQ==
  resolved:
  https://registry.npmjs.org/@cloudflare/workerd-darwin-arm64/-/workerd-darwin-arm64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-linux-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-VHQ6jKFSihjR2+x1buby8XTdBLLJztVnYiB7OLOTYO8aDXB+c1Rd2410PdgFuFYc4AgFEk6PCJLyCLL5L1KBnw==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-linux-64/-/workerd-linux-64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-linux-arm64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-ilpRHzfDN8YFRM5CLRKuFw40x/LJBS89yVdhdQmxehlVDuBqjKpJB++zPFbTgKRRFaNupgnXc8RHktXAIhgCmQ==
  resolved:
  https://registry.npmjs.org/@cloudflare/workerd-linux-arm64/-/workerd-linux-arm64-1.20261023.1.tgz
node_modules/@cloudflare/workerd-windows-64 | version=1.20261023.1 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=16"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-279WLVjNsMycAwr0EZNiNEf0l2SY6NUtsN80NwZzbTHzakmiN+WSx4w38muxPm+PAU0oSPPAPXKVD+H6Hya8xw==
  resolved: https://registry.npmjs.org/@cloudflare/workerd-windows-64/-/workerd-windows-64-1.20261023.1.tgz
node_modules/@cspotcode/source-map-support | version=0.8.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=12"}
  requires: @jridgewell/trace-mapping 0.3.9
  integrity: sha512-IchNf6dN4tHoMFIn/7OE8LWZ19Y6q/67Bmf6vnGREv8RSbBVb9LPJxEcnwrcwX6ixSvaiGoomAUvu4YSxXrVgw==
  resolved: https://registry.npmjs.org/@cspotcode/source-map-support/-/source-map-support-0.8.1.tgz
node_modules/@emnapi/runtime | version=1.11.3 | dev=True | optional=True | license=MIT
  requires: tslib ^2.4.0
  integrity: sha512-Xz4Tpyki7XyrpbUK1jR1AhdAdaXyhhY4lZ3neLodmhpuWfy2PAQN5B46sAiU4liOXGLkHypn/qU+jvfWSCYYLA==
  resolved: https://registry.npmjs.org/@emnapi/runtime/-/runtime-1.11.3.tgz
node_modules/@esbuild/aix-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["aix"], "cpu": ["ppc64"]}
  integrity: sha512-XExcO+dvLKvVtNTibSTBej1NCAbaGhWn9Ww1ZPx80qsahhPFe/8jgWP0IchNe0F3HwkU7n8ejhH8bjonqht8mQ==
  resolved: https://registry.npmjs.org/@esbuild/aix-ppc64/-/aix-ppc64-0.28.2.tgz
node_modules/@esbuild/android-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm"]}
  integrity: sha512-kXXoiPVVGQcnIYGOeaovwOURpniDBpSq4A03qkQ+BMQqtGG6HYap3xne9C1O1yo4TR3qxlCX5IqqmX6fFo2Lqg==
  resolved: https://registry.npmjs.org/@esbuild/android-arm/-/android-arm-0.28.2.tgz
node_modules/@esbuild/android-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["arm64"]}
  integrity: sha512-5YfKeeI8qWfBZIX+u2xZC3Zlb3Os/gLS2sbEKM+I4ZOcsWmHS2WLysCcQZDAFRslDUU5Oiq44gf6PYN1vGwG5A==
  resolved: https://registry.npmjs.org/@esbuild/android-arm64/-/android-arm64-0.28.2.tgz
node_modules/@esbuild/android-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["android"], "cpu": ["x64"]}
  integrity: sha512-O387ite7SzUyCcy3JQX4P4bLtEA7bLLkx+esve5JHnyYfNTxcVpXZo9jhdB0lTKN44gztELTdU7nS8Nr16Fs1Q==
  resolved: https://registry.npmjs.org/@esbuild/android-x64/-/android-x64-0.28.2.tgz
node_modules/@esbuild/darwin-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-n4KqkOQrraxHJcgjM1RvwbigfQKIKJVpM7xp+KsxiyUSrRdIXnt73VhrPAx0fV44hgfmIVKjxMN9J1t5jySVkw==
  resolved: https://registry.npmjs.org/@esbuild/darwin-arm64/-/darwin-arm64-0.28.2.tgz
node_modules/@esbuild/darwin-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-uq6suIWYP37qzGddBKPw5QEQPi6HiLGsO7UmkpfyaYNQ3D+rN6w6WfwH+nuqcGXWvawGwxOEroO4YGnFh95azw==
```

```
  resolved: https://registry.npmjs.org/@esbuild/darwin-x64/-/darwin-x64-0.28.2.tgz
node_modules/@esbuild/freebsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["arm64"]}
  integrity: sha512-n+I0BTSRIoy+d6RPKnEVwql5UwBJolytvY4mAOIEJorKlqgPII8ix6slVVrfZ5Tnj7glIZvloylbB/EJPMWEXw==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-arm64/-/freebsd-arm64-0.28.2.tgz
node_modules/@esbuild/freebsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["freebsd"], "cpu": ["x64"]}
  integrity: sha512-78XJTJkvPs0kz2w61301PJjXl4g7q3JqiYMZ/M/yVI73EHBrCRTgkhu9oqG7vPqq+a/yadEW8aD+agKlk5xrmg==
  resolved: https://registry.npmjs.org/@esbuild/freebsd-x64/-/freebsd-x64-0.28.2.tgz
node_modules/@esbuild/linux-arm | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-XlDnu2q5yoqems+xay6wSAcg9DDD7K9RLKZEBOMZm3ckNpJBvOX20tSfby8KfrrhINDyv9V2YVZKY/SpoGJI8w==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm/-/linux-arm-0.28.2.tgz
node_modules/@esbuild/linux-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-pW4AC0P3it8c7do9MVM4p51FzHzdM/TZrerurgRcHJ2WTa1VQ1CIq18xncfpBJw4ojkiZZrKW2yIBWBP92j6Ug==
  resolved: https://registry.npmjs.org/@esbuild/linux-arm64/-/linux-arm64-0.28.2.tgz
node_modules/@esbuild/linux-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ia32"]}
  integrity: sha512-CYbnj78HsIeA+DhgUKgFCfvNsTHFhMMrinUrMZpDXJXKN8T3XViTZ/+wtHeVxEWY8ewSzTFN+nRmSwO2tZaLUQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ia32/-/linux-ia32-0.28.2.tgz
node_modules/@esbuild/linux-loong64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["loong64"]}
  integrity: sha512-buwkd8nsph4R+ajRvw0qM5Hja/TXQow3ptzWO2EbG/cqcIkHloRrdlBtQlshyYGTNFvfkfJ5tpPLVkY4DtsPfQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-loong64/-/linux-loong64-0.28.2.tgz
node_modules/@esbuild/linux-mips64el | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["mips64el"]}
  integrity: sha512-ZVykbDyk7519VwiNb9Lcj9m8XM6v5V9uKPvrEMkkEedVewf+0itkhahp4HDpgERXhwLRpWFypsGbG/J8s0QjJA==
  resolved: https://registry.npmjs.org/@esbuild/linux-mips64el/-/linux-mips64el-0.28.2.tgz
node_modules/@esbuild/linux-ppc64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-CAXl+Dtd9UUuJd8pKKdwh6MLm3MUMiqMPmhZ3tTSXPqfyQ3vDl6R5hZdZ/kYojK4ofXtdfSv1tFq8XzWx3heNQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-ppc64/-/linux-ppc64-0.28.2.tgz
node_modules/@esbuild/linux-riscv64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-GeXCej4IQtU1B+QlDV8W/RRvbzI3O/Stss+/bCXv4lZls5WGRtu2a+3JkA3i4qIUlMXpcHebWpF8AkJhATowuA==
  resolved: https://registry.npmjs.org/@esbuild/linux-riscv64/-/linux-riscv64-0.28.2.tgz
node_modules/@esbuild/linux-s390x | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-3H1weTYZPxt/WOhByszQZybS9w5lKzUn1FDMsgEChbHWQwHYQQRfBxgCcZvPhjHfKyJjIievvMmEUawJrdY9Dg==
  resolved: https://registry.npmjs.org/@esbuild/linux-s390x/-/linux-s390x-0.28.2.tgz
node_modules/@esbuild/linux-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4xTZr1FUmSoQW4XIWmit3tzQrUTZM+N3P0XV8xROKYF50XfI7xeO90+1bZvNwxIufQ9hDQVRJH5YhgPVF8A/HQ==
  resolved: https://registry.npmjs.org/@esbuild/linux-x64/-/linux-x64-0.28.2.tgz
node_modules/@esbuild/netbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["arm64"]}
  integrity: sha512-sSATRjPeDBg3pdgHoQfoYBob11Kk1FGa9lui5RIHZCoCkJa9QKlvl3/vKz2usCmYYjs7ymJR/2Nnsqe+Hjt5nw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-arm64/-/netbsd-arm64-0.28.2.tgz
node_modules/@esbuild/netbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["netbsd"], "cpu": ["x64"]}
  integrity: sha512-lqnzCV+mM0gIADaKihiCg6ifgfU2L3h5E33rNQBN1Y4MaVGnzryzmvvf7UHxprpQdE8hpqLolJ9Rl+SkIRDpyw==
  resolved: https://registry.npmjs.org/@esbuild/netbsd-x64/-/netbsd-x64-0.28.2.tgz
node_modules/@esbuild/openbsd-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["arm64"]}
  integrity: sha512-AL2qJILH7lNjrDmCQDvdxMfAUIv8KMNZOvrwAQ8i8//ntL9FflhOyMJ8OZSMBb8/AWXe3/5v5S20y3zCoZWKoQ==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-arm64/-/openbsd-arm64-0.28.2.tgz
node_modules/@esbuild/openbsd-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openbsd"], "cpu": ["x64"]}
  integrity: sha512-QtiuPytchRyC4rwUKhexJdQKvDuZ6hWloi3igqPQNUJCS1/v9EiO3UTOXR6A3FoMo4fnAKbWJdqaIwhOzh8qEw==
  resolved: https://registry.npmjs.org/@esbuild/openbsd-x64/-/openbsd-x64-0.28.2.tgz
node_modules/@esbuild/openharmony-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["openharmony"], "cpu": ["arm64"]}
  integrity: sha512-WkhYDmpTjLvGlScA1rwjRUmhl4k8oXR3cIbtqWmELgU/dFeHHlEllxDvdWcNJV9rbzCexB5vz8gtNewWLgCT7Q==
  resolved: https://registry.npmjs.org/@esbuild/openharmony-arm64/-/openharmony-arm64-0.28.2.tgz
node_modules/@esbuild/sunos-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
```

```
  platform: {"os": ["sunos"], "cpu": ["x64"]}
  integrity: sha512-GPMSkTOtMnv2U2F8gxe4Io6qmVs+YKyp832EtqqxrhFngmXQ3rzwytelm3GIn7T4VviRUlf3sOgBOiTdvaf7g==
  resolved: https://registry.npmjs.org/@esbuild/sunos-x64/-/sunos-x64-0.28.2.tgz
node_modules/@esbuild/win32-arm64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-PIhhEkE9uPBleRBrQEJpUn7MBnibZzbGzYWPmY3x+YoVg/95zbjB4CxPPOQ8l5tYYM4mMaCthF8/1DIfBQQyWQ==
  resolved: https://registry.npmjs.org/@esbuild/win32-arm64/-/win32-arm64-0.28.2.tgz
node_modules/@esbuild/win32-ia32 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-YmJbfTlvU7Sdn9BB+4PRES4oB6pxgS37MAONj+hBr/cpXS1aBPKXxNnDbu+QCWPj0o9dgyxeq79g6c5P8KeuYA==
  resolved: https://registry.npmjs.org/@esbuild/win32-ia32/-/win32-ia32-0.28.2.tgz
node_modules/@esbuild/win32-x64 | version=0.28.2 | dev=True | optional=True | license=MIT
  engines: {"node": ">=18"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-5ebpxr3nWMzrL/rnUI755Jkuee0bHL/Gq0WTF9lvcpv73wAp5eu8MfBUgWK9bhWvZjj7yX8etf/8tI8Ney695g==
  resolved: https://registry.npmjs.org/@esbuild/win32-x64/-/win32-x64-0.28.2.tgz
node_modules/@img/colour | version=1.1.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-Td76q7j57o/tLVdgS746cYARfSyxk8iEfRxewL9h4OMzYhbW4TAcppl0mT4eyqXddh6L/jwoM75mo7ixa/pCeQ==
  resolved: https://registry.npmjs.org/@img/colour/-/colour-1.1.0.tgz
node_modules/@img/sharp-darwin-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-QRUlFQ0WxvdWyqqG/WtI3iupfD5rBzmCHXSdPsY91sAtVtTo7Q4cb6zOccZ3gqEqkr0f1As1ehLqmEpDsRf+lg==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-arm64/-/sharp-darwin-arm64-0.35.5.tgz
node_modules/@img/sharp-darwin-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-+BR255RhDlpygUpOc/Jdt1nT6DQ3XG/ERo5wbcdOf5Q320dKtPCKPLR1LJs9VGXRaMa8l1uUa0tkCNOXiAxZUw==
  resolved: https://registry.npmjs.org/@img/sharp-darwin-x64/-/sharp-darwin-x64-0.35.5.tgz
node_modules/@img/sharp-freebsd-wasm32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["freebsd"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-Y/z91nEZ4uIBX5X3nfTovjU9lHNKFYbL2lpHCLVNmXQK03VIZvXBBt0KxbPGp2SdGSF+2mQU4e+hQaWOt86iAw==
  resolved: https://registry.npmjs.org/@img/sharp-freebsd-wasm32/-/sharp-freebsd-wasm32-0.35.5.tgz
node_modules/@img/sharp-libvips-darwin-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["arm64"]}
  integrity: sha512-5R89nBYiRdUlSWJxPhO+GVtaXzXSxKnRu/xqMn3KTA3L9EB9Oy/P+Nn2f2vlhPuUdy/Zusb2DarbyTpGCfEDuw==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-darwin-arm64/-/sharp-libvips-darwin-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-darwin-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["darwin"], "cpu": ["x64"]}
  integrity: sha512-iR2OKH80yi0U+dUplyh3/xdpFvps6YkCwsXenIJxqxR1v9o+xtKTGbS9H7cps+2Vxjc8B1j96p75NmTGjIhtpQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-darwin-x64/-/sharp-libvips-darwin-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LmRtTsOHuvM2+wlO2Db37dx5MiZhB0FvSunciw48YjdOkZz9KAiRbm8ujeMOA1INqmei5NapFxYEK1D1ZSidmw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm/-/sharp-libvips-linux-arm-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-Y3dgX/6lE2QhQb+Gxy0WZxfg9MEm/JBjamZpS2IklP7xIQoKN4hzAm7KcMVGtaVDt3neE9OKBC7vAfonA/Lr1A==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-arm64/-/sharp-libvips-linux-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-ppc64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-Le6boB8Tai0Nis+gIxIpKx68UDVVIqdR8Tin5Yf1z2LJJQLDJvCDRqRu+jC2qCoD+eIomonmOwB4smBRxfVpYQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-ppc64/-/sharp-libvips-linux-ppc64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-riscv64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-aHkkIEHPRdQEegJN20MLmGtxYD9R2wQr3Cwpddnu5+YKMt6Uzax7S9h5gpZTo8wyrGuZSlfQ63OevL5mTyOC7Q==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linux-riscv64/-/sharp-libvips-linux-riscv64-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-s390x | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-ra/mB6MikESDUO7Yg+Mi95bFBb9GsObURuhnOv3OqknjGe9sZrG8tCe9q0xSIGrtLgvgw0gKnFWcK4blSgQOuQ==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-s390x/-/sharp-libvips-linux-s390x-1.3.4.tgz
node_modules/@img/sharp-libvips-linux-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-GJ//SSXbnwSDes02umB3nDJLFcQzw8a18V8fyhqr6tV515tOEMdImjjxj1AoafMRz56F3PHgftnj1QEKSU1zkw==
  resolved: https://registry.npmjs.org/@img/sharp-libvips-linux-x64/-/sharp-libvips-linux-x64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-arm64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["arm64"]}
```

```
  integrity: sha512-hvulFwtjUcagsis6BBxHwGFwWoNZjgYmULGVrZcyfNbjA8hKILbRxGg15/7w5HDyXHXUos/j6baAWqnCyQ2DWA==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-arm64/-/sharp-libvips-linuxmusl-arm64-1.3.4.tgz
node_modules/@img/sharp-libvips-linuxmusl-x64 | version=1.3.4 | dev=True | optional=True |
  license=LGPL-3.0-or-later
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-6zXKeE/p39I1AmA3cJG35eyBGNqNddLnUXjhwBnsGjFPWqf5VKkDBEqaEkPDoTEtkxwi2vv8Tcr2mDyP4So7Fg==
  resolved:
  https://registry.npmjs.org/@img/sharp-libvips-linuxmusl-x64/-/sharp-libvips-linuxmusl-x64-1.3.4.tgz
node_modules/@img/sharp-linux-arm | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm"]}
  integrity: sha512-LEaXK2WdXVK5ykcw0buWyPMsmLLL2vpHLD6yrNSW+JGEL3BZPA4tpKN6iaMc4AxTTAoaX/sU1rOL51lcIz48ZQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm/-/sharp-linux-arm-0.35.5.tgz
node_modules/@img/sharp-linux-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-LYVx5JTsOM2CBzmxreh+nl64/3H6Xb09iSLknqH47z2T2DFFxDeFLP5y4dJwe6H7uGQlHPyEEtIqyo3DYsRwdQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-arm64/-/sharp-linux-arm64-0.35.5.tgz
node_modules/@img/sharp-linux-ppc64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["ppc64"]}
  integrity: sha512-QVxAAq8evVRI9ia2vqgwrmWucn5Dfv+JdWzj75pD8omHLPSP7f8p20O8jxzjCcuCEQEOtYOZUmX1hkiZ0kdevA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-ppc64/-/sharp-linux-ppc64-0.35.5.tgz
node_modules/@img/sharp-linux-riscv64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["riscv64"]}
  integrity: sha512-LtdreXguaavKODPIfzJ4kffx7UNt1omwtK0rch4EBbbSTXPnxWmYSayXdLJw0fJzQ97kHt1gL/yh4tvU+nCyRQ==
  resolved: https://registry.npmjs.org/@img/sharp-linux-riscv64/-/sharp-linux-riscv64-0.35.5.tgz
node_modules/@img/sharp-linux-s390x | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["s390x"]}
  integrity: sha512-UZasTOFiYzotTsGOCu42BfUzP6Tu6Do/947iRm1RsLKvlllxwGcn4RN27LibGWceix4Y+Pmw3jsnTcCQIgWjqA==
  resolved: https://registry.npmjs.org/@img/sharp-linux-s390x/-/sharp-linux-s390x-0.35.5.tgz
node_modules/@img/sharp-linux-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-SxFtLTeJInhAA9Q836kux2vZNeOBQEx658qvbboZScr0wIARym3IcGmW7KpVD5sbVg0Ojy+udFQdayYIZyoNog==
  resolved: https://registry.npmjs.org/@img/sharp-linux-x64/-/sharp-linux-x64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["arm64"]}
  integrity: sha512-9HbMclmI1zlNkFRs3z9/eBtDjfD0sGlrX1z6b1qwmiFY5ElDLh4BC0LPBdVp7z1DXFiKlIcznf+ZlsuZzLxQqg==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-arm64/-/sharp-linuxmusl-arm64-0.35.5.tgz
node_modules/@img/sharp-linuxmusl-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["linux"], "cpu": ["x64"]}
  integrity: sha512-4KOphqB035HrVdqLZfCgMzzERrQkkzOwRhl4OAkRO1YCldbaFjySXMaK534Mo0V+LndnlJk+sbUyLeU0ULyD1A==
  resolved: https://registry.npmjs.org/@img/sharp-linuxmusl-x64/-/sharp-linuxmusl-x64-0.35.5.tgz
node_modules/@img/sharp-wasm32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later AND MIT
  engines: {"node": ">=20.9.0"}
  requires: @emnapi/runtime ^1.11.3
  integrity: sha512-Ptsga1su4tQx+LLF1ECS9U6nz5kmrXKo6XVbtR48Ke3ZRxxgaWBu7IDtEe1quo8hiupwm6WFqxVlXaSf7IINGQ==
  resolved: https://registry.npmjs.org/@img/sharp-wasm32/-/sharp-wasm32-0.35.5.tgz
node_modules/@img/sharp-webcontainers-wasm32 | version=0.35.5 | dev=True | optional=True |
  license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  platform: {"cpu": ["wasm32"]}
  requires: @img/sharp-wasm32 0.35.5
  integrity: sha512-hfhF/FmoQyTUkA0bIKFOtw536BQSeBMe6BF6QyWlrPxT754+TFLaZ7sKKTfvvM0yJgKgaYTwnFCIZ/GuDw5SUA==
  resolved:
  https://registry.npmjs.org/@img/sharp-webcontainers-wasm32/-/sharp-webcontainers-wasm32-0.35.5.tgz
node_modules/@img/sharp-win32-arm64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["arm64"]}
  integrity: sha512-X4t7g+7ZA5DKblCBEXGjUqqemj4vczING/5viFwAL8h4N3qYeyjwdCvRLHi4EdOUI+2Z7UFlp1VM+p/AuEtm6Q==
  resolved: https://registry.npmjs.org/@img/sharp-win32-arm64/-/sharp-win32-arm64-0.35.5.tgz
node_modules/@img/sharp-win32-ia32 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": "^20.9.0"}
  platform: {"os": ["win32"], "cpu": ["ia32"]}
  integrity: sha512-5Zm82LoBc43nhwNybZlG7Y1KO//Zhsn306fQl29ZOuStHLGTo3BWL83q3cznX0poxSAMuYL1On/BHBxkBeKr6A==
  resolved: https://registry.npmjs.org/@img/sharp-win32-ia32/-/sharp-win32-ia32-0.35.5.tgz
node_modules/@img/sharp-win32-x64 | version=0.35.5 | dev=True | optional=True | license=Apache-2.0 AND
  LGPL-3.0-or-later
  engines: {"node": ">=20.9.0"}
  platform: {"os": ["win32"], "cpu": ["x64"]}
  integrity: sha512-x76eH0vEiHlcMQu8Y8IenntaACtddpT6W0wmXtWrnKcnKI7ME5DdgqhAD6SEWOEl1v2zDvkZDhFA9KnURwpfqg==
  resolved: https://registry.npmjs.org/@img/sharp-win32-x64/-/sharp-win32-x64-0.35.5.tgz
node_modules/@jridgewell/resolve-uri | version=3.1.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=6.0.0"}
```

```
  integrity: sha512-bRISgCIjP20/tbWSPWMEi54QVPRZExkuD9lJL+UIxUKtwVJA8wW1Trb1jMs1RFXo1CBTNZ/5hpC9QvmKWdopKw==
  resolved: https://registry.npmjs.org/@jridgewell/resolve-uri/-/resolve-uri-3.1.2.tgz
node_modules/@jridgewell/sourcemap-codec | version=1.6.0 | dev=True | optional=False | license=MIT
  integrity: sha512-T7jf+5zgsZHwNJ4lvQ7/aezbyk0nNX+zJVWpmHA7VYsEx7a7qr5Rg5IbtJFqkgze5Y2sruq1RUY8Q837Od7iFw==
  resolved: https://registry.npmjs.org/@jridgewell/sourcemap-codec/-/sourcemap-codec-1.6.0.tgz
node_modules/@jridgewell/trace-mapping | version=0.3.9 | dev=True | optional=False | license=MIT
  requires: @jridgewell/resolve-uri ^3.0.3, @jridgewell/sourcemap-codec ^1.4.10
  integrity: sha512-3Belt6tdc8bPgAtbcmdtNJlirVoTmEb5e2gC94PnkwEW9jI6CAHUeoG85tjWP5WquqfavoMtMwiG4P926ZKKuQ==
  resolved: https://registry.npmjs.org/@jridgewell/trace-mapping/-/trace-mapping-0.3.9.tgz
node_modules/@poppinss/colors | version=4.1.6 | dev=True | optional=False | license=MIT
  requires: kleur ^4.1.5
  integrity: sha512-H9xkIdFswbS8n1d6vmRd8+c10t2Qe+rZITbbDHHkQixH5+2x1FDGmi/0K+WgWiqQFKPSlIYB7jlH6Kpfn6Fleg==
  resolved: https://registry.npmjs.org/@poppinss/colors/-/colors-4.1.6.tgz
node_modules/@poppinss/dumper | version=0.6.5 | dev=True | optional=False | license=MIT
  requires: @poppinss/colors ^4.1.5, @sindresorhus/is ^7.0.2, supports-color ^10.0.0
  integrity: sha512-NBdYIb90J7LfOI32dOewKI1r7wnkiH6m920puQ3qHUeZkxNkQiFnXVWoE6YtFSv6QOiPPf7ys6i+HWWecDz7sw==
  resolved: https://registry.npmjs.org/@poppinss/dumper/-/dumper-0.6.5.tgz
node_modules/@poppinss/exception | version=1.2.3 | dev=True | optional=False | license=MIT
  integrity: sha512-dCED+QRChTVatE9ibtoaxc+WkdzOSjYTKi/+uacHWIsfodVfpsueo3+DKpgU5Px8qXjgmXkSvhXvSCz3fnP9lw==
  resolved: https://registry.npmjs.org/@poppinss/exception/-/exception-1.2.3.tgz
node_modules/@sindresorhus/is | version=7.2.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-P1Cz1dWaFfR4IR+U13mqqiGsLFf1KbayybWwdd2vfctdV6hDpUkgCY0nKOLLTMSoRd/jJNjtbqzf13K8DCCXQw==
  resolved: https://registry.npmjs.org/@sindresorhus/is/-/is-7.2.0.tgz
node_modules/@speed-highlight/core | version=1.2.24 | dev=True | optional=False | license=CC0-1.0
  integrity: sha512-qeW2e1l78afw8VhRPfPQ1Gjj+KU5XFQ/OFV5ti6eTa9bruO7mJyZtA4vw0ofqmA3tKCkROE9xLk3VZoeRc98nw==
  resolved: https://registry.npmjs.org/@speed-highlight/core/-/core-1.2.24.tgz
node_modules/@types/node | version=22.20.5 | dev=True | optional=False | license=MIT
  requires: undici-types ~6.21.0
  integrity: sha512-U2+DNr+wSjpsTS/wZGYHq7GcwfuSmKiKvoPvK22zwTlRhU91yOniN4qRR5KhIjvif7ysw/dz/hKmfDH0Ris4aA==
  resolved: https://registry.npmjs.org/@types/node/-/node-22.20.5.tgz
node_modules/blake3-wasm | version=2.1.5 | dev=True | optional=False | license=MIT
  integrity: sha512-F1+K8EbfOZE49dtoPtmxUQrpXaBIl3ICvasLh+nJta0xkz+9kF/7uet9fLnwKqhDrmj6g+6K3Tw9yQPUg2ka5g==
  resolved: https://registry.npmjs.org/blake3-wasm/-/blake3-wasm-2.1.5.tgz
node_modules/cookie | version=1.1.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-ei8Aos7ja0weRpFzJnEA9UHJ/7XQmqglbRwnf2ATjcB9Wq874VKH9kfjjirM6UhU2/E5fFYadylyhFldcqSidQ==
  resolved: https://registry.npmjs.org/cookie/-/cookie-1.1.1.tgz
node_modules/detect-libc | version=2.1.2 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=8"}
  integrity: sha512-Btj2BOOO83o3WyH59e8MgXsxEQVcarkUOpEYrubB0urwnN10yQ364rsiByU11nZlqWYZm05i/of7io4mzihBtQ==
  resolved: https://registry.npmjs.org/detect-libc/-/detect-libc-2.1.2.tgz
node_modules/error-stack-parser-es | version=1.0.5 | dev=True | optional=False | license=MIT
  integrity: sha512-5qucVt2XcuGMcEGgWI7i+yZpmpByQ8J1lHhcL7PwqCwu9FPP3VUXzT4ltHe5i2z9dePwEHcDVOAfSnHsOlCXRA==
  resolved: https://registry.npmjs.org/error-stack-parser-es/-/error-stack-parser-es-1.0.5.tgz
node_modules/esbuild | version=0.28.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-HKVLS8dvII+xoKW9kmqxbRKrnWEXfJJr/FZhhJmiqIB0e053QNYFqOBouTMO/k5sID4MvCiUCvv8b9M4h32wIA==
  resolved: https://registry.npmjs.org/esbuild/-/esbuild-0.28.2.tgz
node_modules/fsevents | version=2.3.3 | dev=True | optional=True | license=MIT
  engines: {"node": "^8.16.0 || ^10.6.0 || >=11.0.0"}
  platform: {"os": ["darwin"]}
  integrity: sha512-5xoDfX+fL7faATnagmWPpbFtwh/R77WmMMqqHGS65C3vvB0YHrgF+B1YmZ3441tMj5n63k0212XNoJwzlhffQw==
  resolved: https://registry.npmjs.org/fsevents/-/fsevents-2.3.3.tgz
node_modules/kleur | version=4.1.5 | dev=True | optional=False | license=MIT
  engines: {"node": ">=6"}
  integrity: sha512-o+NO+8WrRiQEE4/7nwRJhN1HWpVmJm511pBHUxPLtp0BUISzlBplORYSmTclCnJvQq2tKu/sgl3xVpkc7ZWuQQ==
  resolved: https://registry.npmjs.org/kleur/-/kleur-4.1.5.tgz
node_modules/miniflare | version=5.20261023.0-beta | dev=True | optional=False | license=MIT
  engines: {"node": ">=22.0.0"}
  requires: @cspotcode/source-map-support 0.8.1, sharp 0.35.5, undici 7.30.1, workerd 1.20261023.1, ws
  8.21.0, youch 4.1.0-beta.10
  integrity: sha512-SHY8A98gCvmrnBLqABHRTSh3duAL1z+tHPRZu/tqxHFqVARrZ4oQis/ALYwp3XvzHvs6B/ff/CdcCafqP+cOFA==
  resolved: https://registry.npmjs.org/miniflare/-/miniflare-5.20261023.0-beta.tgz
node_modules/path-to-regexp | version=6.3.0 | dev=True | optional=False | license=MIT
  integrity: sha512-Yhpw4T9C6hPpgPeA28us07OJeqZ5EzQTkbfwuhsUg0c237RomFoETJgmp2sa3F/41gfLE6G5cqcYwznmeEeOlQ==
  resolved: https://registry.npmjs.org/path-to-regexp/-/path-to-regexp-6.3.0.tgz
node_modules/pathe | version=2.0.3 | dev=True | optional=False | license=MIT
  integrity: sha512-WUjGcAqP1gQacoQe+OBJsFA7Ld4DyXuUIjZ5cc75cLHvJ7dtNsTugphxIADwspS+AraAUePCKrSVtPLFj/F88w==
  resolved: https://registry.npmjs.org/pathe/-/pathe-2.0.3.tgz
node_modules/semver | version=7.8.5 | dev=True | optional=False | license=ISC
  engines: {"node": ">=10"}
  integrity: sha512-Y7/KDsb8LjooZpwaqGyulO6DQlksgCncchHGk+sZIY4SBvUocMBEFH5Ur1fI4dV+Jvl0w6cjvucaIi40puRioA==
  resolved: https://registry.npmjs.org/semver/-/semver-7.8.5.tgz
node_modules/sharp | version=0.35.5 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=20.9.0"}
  requires: @img/colour ^1.1.0, detect-libc ^2.1.2, semver ^7.8.5
  integrity: sha512-Ywn4OnzGukp7CDMrp08RQ50YKmuwG47brZgIVPTvBaaAfQlRlygrRqSrxdCiL9M+LlzLBiJ68IR1QqvzHyjC7g==
  resolved: https://registry.npmjs.org/sharp/-/sharp-0.35.5.tgz
node_modules/supports-color | version=10.2.2 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18"}
  integrity: sha512-SS+jx45GF1QjgEXQx4NJZV9ImqmO2NPz5FNsIHrsDjh2YsHnawpan7SNQ1o8NuhrbHZy9AZhIoCUiCeaW/C80g==
  resolved: https://registry.npmjs.org/supports-color/-/supports-color-10.2.2.tgz
```

```
node_modules/tslib | version=2.8.1 | dev=True | optional=True | license=0BSD
  integrity: sha512-oJFu94HQb+KVduSUQL7wnpmqnfmLsOA/nAh6b6EH0wCEoK0/mPeXU6c3wKDV83MkOuHPRHtSXKKU99IBazS/2w==
  resolved: https://registry.npmjs.org/tslib/-/tslib-2.8.1.tgz
node_modules/tsx | version=4.23.15 | dev=True | optional=False | license=MIT
  engines: {"node": ">=18.0.0"}
  requires: esbuild ~0.28.0
  integrity: sha512-Yiex1Ovn8z2xPpOWckIiysV1SSyRMY9BkLF++q0yKiDxCqRhosKfMg3janKkiLBwZ5c/YryloKwGZcrEmtwxKw==
  resolved: https://registry.npmjs.org/tsx/-/tsx-4.23.15.tgz
node_modules/typescript | version=5.9.3 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=14.17"}
  integrity: sha512-jl1vZzPDinLr9eUt3J/t7V6FgNEw9QjvBPdysz9KfQDD41fQrC2Y4vKQdiaUpFT4bXlb1RHhLpp8wtm6M5TgSw==
  resolved: https://registry.npmjs.org/typescript/-/typescript-5.9.3.tgz
node_modules/undici | version=7.30.1 | dev=True | optional=False | license=MIT
  engines: {"node": ">=20.18.1"}
  integrity: sha512-03KrMbjIFDWQR5RNPrSw3bd1r12JpyFQl9/yxjUbJtqkjmllqC5lFjZh6ujeuJCKr8EOQvRW872Oy/az+nLYxg==
  resolved: https://registry.npmjs.org/undici/-/undici-7.30.1.tgz
node_modules/undici-types | version=6.21.0 | dev=True | optional=False | license=MIT
  integrity: sha512-iwDZqg0QAGrg9Rav5H4n0M64c3mkR59cJ6wQp+7C4nI0gsmExaedaYLNO44eT4AtBBwjbTiGPMlt2Md0T9H9JQ==
  resolved: https://registry.npmjs.org/undici-types/-/undici-types-6.21.0.tgz
node_modules/unenv | version=2.0.0-rc.24 | dev=True | optional=False | license=MIT
  requires: pathe ^2.0.3
  integrity: sha512-i7qRCmY42zmCwnYlh9H2SvLEypEFGye5iRmEMKjcGi7zk9UquigRjFtTLz0TYqr0ZGLZhaMHl/foy1bZR+Cwlw==
  resolved: https://registry.npmjs.org/unenv/-/unenv-2.0.0-rc.24.tgz
node_modules/workerd | version=1.20261023.1 | dev=True | optional=False | license=Apache-2.0
  engines: {"node": ">=16"}
  integrity: sha512-NeofJFyaYNpqKpFRJW3ApuonaerPd6/JWlfTtLDYf2A6ygqrDEFnYgEXmc0hhOxqnJsSM+kXJN6VebPojzRrsg==
  resolved: https://registry.npmjs.org/workerd/-/workerd-1.20261023.1.tgz
node_modules/wrangler | version=4.153.0 | dev=True | optional=False | license=MIT OR Apache-2.0
  engines: {"node": ">=22.0.0"}
  requires: @cloudflare/kv-asset-handler 0.5.0, @cloudflare/unenv-preset 2.16.2, blake3-wasm 2.1.5, esbuild
  0.28.2, miniflare 5.20261023.0-beta, path-to-regexp 6.3.0, unenv 2.0.0-rc.24, workerd 1.20261023.1
  peers: {"@cloudflare/workers-types": "^5.20261023.1"}
  integrity: sha512-Hn1AowKzZao/729rMpdpxBZt/RaKQNJ4GtKtHQcOrwT+J/GIq0iwl680+dhJyO00iSsXaCkxoNcLg3yVIwIvyw==
  resolved: https://registry.npmjs.org/wrangler/-/wrangler-4.153.0.tgz
node_modules/ws | version=8.21.0 | dev=True | optional=False | license=MIT
  engines: {"node": ">=10.0.0"}
  peers: {"bufferutil": "^4.0.1", "utf-8-validate": ">=5.0.2"}
  integrity: sha512-Vsp28b7DRcimFQvrqu2Wek3z1iYxDCWqHYB8Qsnk/S4RfaCQzPGPyBNuVjJV3cd6UiKtUtp6sNM77gWvzcCH+g==
  resolved: https://registry.npmjs.org/ws/-/ws-8.21.0.tgz
node_modules/youch | version=4.1.0-beta.10 | dev=True | optional=False | license=MIT
  requires: @poppinss/colors ^4.1.5, @poppinss/dumper ^0.6.4, @speed-highlight/core ^1.2.7, cookie ^1.0.2,
  youch-core ^0.3.3
  integrity: sha512-rLfVLB4FgQneDr0dv1oddCVZmKjcJ6yX6mS4pU82Mq/Dt9a3cLZQ62pDBL4AUO+uVrCvtWz3ZFUL2HFAFJ/BXQ==
  resolved: https://registry.npmjs.org/youch/-/youch-4.1.0-beta.10.tgz
node_modules/youch-core | version=0.3.3 | dev=True | optional=False | license=MIT
  requires: @poppinss/exception ^1.2.2, error-stack-parser-es ^1.0.5
  integrity: sha512-ho7XuGjLaJ2hWHoK8yFnsUGy2Y5uDpqSTq1FkHLK4/oqKtyUU1AFbOOxY4IpC9f0fTLjwYbslUz0Po5BpD1wrA==
  resolved: https://registry.npmjs.org/youch-core/-/youch-core-0.3.3.tgz
```

29. Import and configuration-use index

This syntactic index covers static imports and literal environment accesses. Dynamically computed names, CLI flags and generated platform bindings are additionally documented by their source/config files. Values are never read from private environment files.

APPDATA - scripts/google-operator.mjs:10

APP_PASSWORD - lib/auth.ts:48; lib/auth.ts:90

APP_SECRET - cloud/src/auth.ts:18; cloud/src/auth.ts:24; cloud/src/auth.ts:58; lib/auth.ts:48; lib/auth.ts:52; lib/auth.ts:60; lib/auth.ts:72; lib/auth.ts:80; lib/auth.ts:85; lib/auth.ts:93; scripts/byline-logic-test.ts:8

BREETH_API_KEY - lib/breeth.ts:67

BYLINE_AI_CALLS_PER_USER_DAY - lib/ai-usage.ts:19

BYLINE_API_URL - mobile/lib/api/client.dart

BYLINE_CLOUD_ORIGIN - cloud/scripts/remote-smoke.ts:8

BYLINE_LOCAL_ONLY - lib/distribute.ts:169; lib/native-auth.ts:7

BYLINE_PUBLIC_URL - app/api/native-auth/route.ts:35

BYLINE_REQUIRE_MIGRATIONS - lib/db.ts:83; lib/db.ts:91; scripts/migrate.ts:3

BYLINE_TEST_MODE - app/api/status/route.ts:130; lib/cycle.ts:557; lib/distribute.ts:169; lib/distribute.ts:86; lib/llm.ts:184; lib/native-auth.ts:7; scripts/zero-budget-test.ts:8

BYLINE_ZERO_BUDGET_STATE_FILE - lib/llm.ts:185; lib/llm.ts:187; scripts/live-dev.mjs:15; scripts/zero-budget-test.ts:17; scripts/zero-budget-test.ts:9

CONTENT - cloud/src/jobs.ts:47; cloud/src/jobs.ts:48; cloud/src/jobs.ts:60

CRON_SECRET - app/api/cron/tick/route.ts:68; app/api/watchdog/route.ts:34; scripts/live-dev.mjs:20; scripts/local-dev.mjs:7

DATABASE_URL - lib/db.ts:41; lib/db.ts:44; scripts/backup-live.mjs:9; scripts/bench-db.mjs:18; scripts/byline-test.mjs:103; scripts/dbtest.ts:86; scripts/health-test.ts:10; scripts/health-test.ts:25; scripts/native-return-test.mjs:7

DB - cloud/src/ai.ts:52; cloud/src/ai.ts:87; cloud/src/auth.ts:102; cloud/src/auth.ts:108; cloud/src/auth.ts:111; cloud/src/auth.ts:112; cloud/src/auth.ts:115; cloud/src/auth.ts:119; cloud/src/auth.ts:134; cloud/src/auth.ts:20; cloud/src/auth.ts:25; cloud/src/auth.ts:50; cloud/src/auth.ts:51; cloud/src/auth.ts:54; cloud/src/auth.ts:70; cloud/src/auth.ts:91; cloud/src/generation.ts:27; cloud/src/generation.ts:42; cloud/src/generation.ts:44; cloud/src/generation.ts:46; cloud/src/generation.ts:50; cloud/src/generation.ts:51; cloud/src/generation.ts:52; cloud/src/generation.ts:58; cloud/src/generation.ts:76; cloud/src/generation.ts:82; cloud/src/generation.ts:83; cloud/src/generation.ts:84; cloud/src/generation.ts:85; cloud/src/generation.ts:86; cloud/src/generation.ts:87; cloud/src/generation.ts:92; cloud/src/index.ts:22; cloud/src/index.ts:24; cloud/src/index.ts:37; cloud/src/index.ts:42; cloud/src/index.ts:43; cloud/src/index.ts:53; cloud/src/index.ts:56; cloud/src/index.ts:59; cloud/src/index.ts:61; cloud/src/jobs.ts:43; cloud/src/jobs.ts:49; cloud/src/jobs.ts:56; cloud/src/jobs.ts:62; cloud/src/jobs.ts:64; cloud/src/jobs.ts:65; cloud/src/jobs.ts:66; cloud/src/jobs.ts:67; cloud/src/jobs.ts:72; cloud/src/media.ts:17; cloud/src/media.ts:19; cloud/src/notifications.ts:28; cloud/src/notifications.ts:40; cloud/src/notifications.ts:51; cloud/src/notifications.ts:60; cloud/src/notifications.ts:67; cloud/src/notifications.ts:70; cloud/src/onboarding.ts:21; cloud/src/onboarding.ts:22; cloud/src/onboarding.ts:27; cloud/src/onboarding.ts:32; cloud/src/onboarding.ts:39; cloud/src/onboarding.ts:42; cloud/src/onboarding.ts:44; cloud/src/onboarding.ts:51; cloud/src/onboarding.ts:52; cloud/src/onboarding.ts:56; cloud/src/onboarding.ts:58; cloud/src/onboarding.ts:63; cloud/src/posts.ts:106; cloud/src/posts.ts:110; cloud/src/posts.ts:111; cloud/src/posts.ts:38; cloud/src/posts.ts:51; cloud/src/posts.ts:54; cloud/src/posts.ts:57; cloud/src/posts.ts:58; cloud/src/posts.ts:64; cloud/src/posts.ts:69; cloud/src/posts.ts:73; cloud/src/posts.ts:74; cloud/src/posts.ts:84; cloud/src/posts.ts:99; cloud/src/publish.ts:10; cloud/src/publish.ts:23; cloud/src/publish.ts:24; cloud/src/publish.ts:28; cloud/src/publish.ts:35; cloud/src/publish.ts:47; cloud/src/publish.ts:52; cloud/src/publish.ts:53; cloud/src/publish.ts:54; cloud/src/publish.ts:55; cloud/src/publish.ts:56; cloud/src/publish.ts:62; cloud/src/publish.ts:63; cloud/src/publish.ts:64; cloud/src/publish.ts:65; cloud/src/scheduler.ts:101; cloud/src/scheduler.ts:14; cloud/src/scheduler.ts:20; cloud/src/scheduler.ts:22; cloud/src/scheduler.ts:23; cloud/src/scheduler.ts:24; cloud/src/scheduler.ts:26; cloud/src/scheduler.ts:28; cloud/src/scheduler.ts:33; cloud/src/scheduler.ts:35; cloud/src/scheduler.ts:43; cloud/src/scheduler.ts:76; cloud/src/scheduler.ts:80; cloud/src/scheduler.ts:83; cloud/src/scheduler.ts:86; cloud/src/scheduler.ts:87; cloud/src/scheduler.ts:90; cloud/src/scheduler.ts:92; cloud/src/scheduler.ts:98; cloud/src/scheduler.ts:99; cloud/src/status.ts:11; cloud/src/status.ts:13; cloud/src/status.ts:14; cloud/src/status.ts:16; cloud/src/status.ts:17; cloud/src/status.ts:18; cloud/src/status.ts:19; cloud/src/status.ts:20; cloud/src/status.ts:21; cloud/src/status.ts:22; cloud/src/status.ts:23; cloud/src/status.ts:24; cloud/test/api.test.ts:177

FCM_ACCESS_TOKEN_FILE - lib/push.ts:147; lib/push.ts:25; lib/push.ts:68; lib/push.ts:69; scripts/live-dev.mjs:14

FCM_CLIENT_EMAIL - lib/push.ts:25; lib/push.ts:72

FCM_PRIVATE_KEY - lib/push.ts:25; lib/push.ts:76

FCM_PROJECT_ID - lib/push.ts:25; lib/push.ts:367

FCM_SERVICE_ACCOUNT_JSON - cloud/src/notifications.ts:62; cloud/src/notifications.ts:65; cloud/src/notifications.ts:8; cloud/src/notifications.ts:9

FIREBASE_API_KEY - mobile/lib/main.dart; mobile/lib/main.dart:37

FIREBASE_APP_ID - mobile/lib/main.dart; mobile/lib/main.dart:32

FIREBASE_PROJECT_ID - mobile/lib/main.dart; mobile/lib/main.dart:40

FIREBASE_SENDER_ID - mobile/lib/main.dart; mobile/lib/main.dart:39

GEMINI_API_KEY - cloud/scripts/live-smoke.ts:12; cloud/scripts/live-smoke.ts:13; cloud/scripts/live-smoke.ts:22; cloud/src/ai.ts:50; cloud/src/ai.ts:59; cloud/src/ai.ts:69; cloud/src/ai.ts:82; lib/llm.ts:106; lib/llm.ts:188; lib/llm.ts:197; scripts/live-dev.mjs:10; scripts/live-dev.mjs:15; scripts/zero-budget-test.ts:10; scripts/zero-budget-test.ts:7

GEMINI_FALLBACK_MODEL - lib/llm.ts:38

GEMINI_LAST_RESORT_MODEL - lib/llm.ts:39

GEMINI_MODEL - lib/llm.ts:37; lib/llm.ts:44

GEMINI_RPD_LIMIT - lib/llm.ts:45

GOOGLE_CLIENT_ID - app/api/native-auth/route.ts:11; app/api/native-auth/route.ts:40; app/api/native-auth/route.ts:41; cloud/src/auth.ts:31; cloud/src/auth.ts:36; cloud/src/auth.ts:79; lib/native-auth.ts:55

GOOGLE_CLIENT_SECRET - app/api/native-auth/route.ts:11; app/api/native-auth/route.ts:40; cloud/src/auth.ts:31; cloud/src/auth.ts:79; lib/native-auth.ts:55

GOOGLE_REDIRECT_URI - app/api/native-auth/route.ts:36

JAVA_TOOL_OPTIONS - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:11; scripts/build-local-android.ps1:21; scripts/build-local-android.ps1:8

LINKEDIN_API_VERSION - lib/linkedin.ts:40; scripts/selftest.ts:408; scripts/selftest.ts:409; scripts/selftest.ts:413; scripts/selftest.ts:414

LINKEDIN_CLIENT_ID - app/api/native-auth/route.ts:12; cloud/src/auth.ts:31; cloud/src/auth.ts:36; cloud/src/auth.ts:79; lib/linkedin.ts:167; lib/linkedin.ts:187

LINKEDIN_CLIENT_SECRET - app/api/native-auth/route.ts:12; cloud/src/auth.ts:31; cloud/src/auth.ts:79; lib/linkedin.ts:188

LINKEDIN_LIVE - cloud/src/publish.ts:22; cloud/src/scheduler.ts:31; cloud/src/status.ts:29; cloud/test/api.test.ts:177; lib/distribute.ts:86

LINKEDIN_REDIRECT_URI - app/api/linkedin/redirect-uri.ts:11; app/api/native-auth/route.ts:36

LLM_PROVIDER - lib/llm.ts:191

MAINTENANCE - cloud/src/index.ts:71

MANUAL_DAILY_CAP - lib/distribute.ts:49

NEXT_DIST_DIR - next.config.ts:18

NODE_ENV - app/api/auth/route.ts:67

PG_BIN - scripts/backup-live.mjs:6; scripts/local-setup.mjs:5

PORT - scripts/byline-test.mjs:5; scripts/catalogue-api-test.mjs:5; scripts/live-dev.mjs:18; scripts/live-dev.mjs:20; scripts/local-dev.mjs:4; scripts/local-dev.mjs:7; scripts/native-return-test.mjs:5

STAMP - .github/workflows/backup.yml:76; .github/workflows/backup.yml:77

TEMP - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:19; scripts/build-local-android.ps1:6; scripts/build-local-android.ps1:9

TMP - scripts/build-cloud-android.ps1:14; scripts/build-cloud-android.ps1:6; scripts/build-cloud-android.ps1:7; scripts/build-live-android.ps1:12; scripts/build-live-android.ps1:5; scripts/build-live-android.ps1:6; scripts/build-local-android.ps1:10; scripts/build-local-android.ps1:20; scripts/build-local-android.ps1:7

TOKEN_ENCRYPTION_KEY - cloud/src/auth.ts:89; cloud/src/auth.ts:90; cloud/src/publish.ts:12; cloud/src/status.ts:29; cloud/test/api.test.ts:178; cloud/test/database.test.ts:192; lib/crypto.ts:25

VERCEL_GIT_COMMIT_SHA - app/api/health/route.ts:26

Module/package imports and users

../../../../lib/accounts - app/api/linkedin/callback/route.ts; app/api/linkedin/disconnect/route.ts

../../../../lib/agents - app/api/compose/rewrite/route.ts; app/api/linkedin/disconnect/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/categories - app/api/slots/[id]/route.ts

../../../../lib/cycle - app/api/cron/tick/route.ts; app/api/cycle/run/route.ts

../../../../lib/db - app/api/account/delete/route.ts; app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts; app/api/style/preview/route.ts

../../../../lib/distribute - app/api/cron/tick/route.ts; app/api/posts/[seq]/route.ts

../../../../lib/format - app/api/compose/rewrite/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/linkedin - app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts

../../../../lib/media-ownership - app/api/posts/[seq]/route.ts

../../../../lib/native-auth - app/api/linkedin/callback/route.ts; app/api/native-auth/callback/route.ts

../../../../lib/native-callback - app/api/linkedin/callback/route.ts; app/api/native-auth/callback/route.ts

../../../../lib/native-return - app/api/linkedin/connect/route.ts

../../../../lib/push - app/api/cron/tick/route.ts

../../../../lib/request-agent - app/api/account/delete/route.ts; app/api/compose/rewrite/route.ts; app/api/cycle/run/route.ts; app/api/linkedin/connect/route.ts; app/api/linkedin/disconnect/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts; app/api/style/preview/route.ts

../../../../lib/retention - app/api/cron/tick/route.ts

../../../../lib/reviews - app/api/cron/tick/route.ts

../../../../lib/slots - app/api/cron/tick/route.ts; app/api/posts/[seq]/route.ts; app/api/slots/[id]/route.ts

../../../../lib/style - app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../../lib/unified-timetable - app/api/cron/tick/route.ts

../../../../lib/writer - app/api/compose/rewrite/route.ts; app/api/posts/[seq]/route.ts; app/api/style/preview/route.ts

../../../lib/accounts - app/api/media/route.ts; app/api/settings/route.ts; app/api/status/route.ts; app/api/watchdog/route.ts

../../../lib/agents - app/api/init/route.ts; app/api/posts/route.ts; app/api/settings/route.ts; app/api/watchdog/route.ts

../../../lib/auth - app/api/auth/route.ts

../../../lib/categories - app/api/init/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts

../../../lib/crypto - app/api/status/route.ts

../../../lib/cycle - app/api/init/route.ts; app/api/review-delivery/route.ts

../../../lib/db - app/api/auth/route.ts; app/api/devices/route.ts; app/api/health/route.ts; app/api/interests/route.ts; app/api/media/route.ts; app/api/native-auth/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/status/route.ts

../../../lib/distribute - app/api/posts/route.ts; app/api/status/route.ts

../../../lib/feedhealth - app/api/watchdog/route.ts

../../../lib/format - app/api/posts/route.ts

../../../lib/linkedin - app/api/media/route.ts; app/api/native-auth/route.ts; app/api/watchdog/route.ts

../../../lib/llm - app/api/status/route.ts

../../../lib/media-ownership - app/api/posts/route.ts

../../../lib/memory - app/api/status/route.ts

../../../lib/native-auth - app/api/native-auth/route.ts; app/api/onboarding/route.ts

../../../lib/native-return - app/api/native-auth/route.ts

../../../lib/onboarding - app/api/onboarding/route.ts

../../../lib/post-view - app/api/posts/route.ts; app/api/status/route.ts

../../../lib/push - app/api/devices/route.ts; app/api/watchdog/route.ts

../../../lib/ratelimit - app/api/auth/route.ts; app/api/native-auth/route.ts

../../../lib/request-agent - app/api/auth/route.ts; app/api/devices/route.ts; app/api/init/route.ts; app/api/interests/route.ts; app/api/media/route.ts; app/api/onboarding/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts

../../../lib/schedule - app/api/settings/route.ts; app/api/status/route.ts

../../../lib/slots - app/api/settings/route.ts; app/api/slots/route.ts; app/api/status/route.ts; app/api/watchdog/route.ts

../../../lib/style - app/api/posts/route.ts; app/api/settings/route.ts; app/api/status/route.ts

../../../lib/timetable-home - app/api/review-delivery/route.ts

../../../lib/writer - app/api/posts/route.ts

../../lib/categories - cloud/src/models.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

../../lib/critique - cloud/src/generation.ts; cloud/src/posts.ts; cloud/test/writer.test.ts

../../lib/discovery-core - cloud/src/generation.ts; cloud/test/discovery-budget.test.ts

../../lib/format - cloud/src/posts.ts; cloud/src/publish.ts

../../lib/http-body - cloud/src/ai.ts; cloud/src/http.ts; cloud/src/notifications.ts

../../lib/judge-core - cloud/src/generation.ts

../../lib/linkedin - cloud/src/auth.ts; cloud/src/media.ts; cloud/src/publish.ts

../../lib/llm-contract - cloud/src/ai.ts

../../lib/native-callback - cloud/src/auth.ts

../../lib/native-return - cloud/src/auth.ts

../../lib/persona-prompt - cloud/src/models.ts

../../lib/post-view - cloud/src/models.ts

../../lib/schedule - cloud/src/ai.ts; cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

../../lib/setup-config - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/test/api.test.ts; cloud/test/writer.test.ts

../../lib/style - cloud/src/models.ts; cloud/src/posts.ts; cloud/src/settings.ts; cloud/src/status.ts; cloud/test/writer.test.ts

../../lib/voice-prompt - cloud/src/generation.ts; cloud/src/models.ts; cloud/src/posts.ts

../../lib/writer-core - cloud/src/generation.ts; cloud/src/posts.ts; cloud/test/writer.test.ts

../../scripts/google-operator.mjs - cloud/scripts/live-smoke.ts; cloud/scripts/setup-push.mjs

../api/client.dart - mobile/lib/screens/composer_screen.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart

../api/models.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/writing_preferences.dart

../app/api/health/route - scripts/health-test.ts

../auth_browser.dart - mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/welcome_screen.dart

../auth_return.dart - mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart

../desktop_notifications.dart - mobile/lib/screens/delivery_settings_screen.dart

../lib/accounts - scripts/dbtest.ts

../lib/agents - scripts/dbtest.ts

../lib/auth - scripts/byline-logic-test.ts

../lib/categories - app/page.tsx; scripts/catalogue-test.ts; scripts/selftest.ts

../lib/category-catalogue - scripts/catalogue-test.ts

../lib/critique - scripts/selftest.ts

../lib/cycle - scripts/live-cycle-smoke.ts

../lib/db - scripts/dbtest.ts; scripts/live-cycle-smoke.ts; scripts/live-smoke.ts; scripts/migrate.ts

../lib/discovery - scripts/catalogue-test.ts; scripts/selftest.ts

../lib/distribute - scripts/dbtest.ts; scripts/selftest.ts

../lib/feedhealth - scripts/dbtest.ts

../lib/format - scripts/selftest.ts

../lib/judge - scripts/catalogue-test.ts; scripts/selftest.ts

../lib/linkedin - scripts/selftest.ts

../lib/llm - scripts/dbtest.ts; scripts/zero-budget-test.ts

../lib/memory - scripts/dbtest.ts

../lib/native-auth - scripts/live-cycle-smoke.ts

../lib/native-callback - scripts/byline-logic-test.ts

../lib/native-return - scripts/byline-logic-test.ts

../lib/onboarding - scripts/byline-logic-test.ts; scripts/catalogue-test.ts; scripts/live-cycle-smoke.ts; scripts/live-smoke.ts

../lib/push - scripts/dbtest.ts; scripts/live-smoke.ts; scripts/selftest.ts

../lib/ratelimit - scripts/dbtest.ts

../lib/retention - scripts/dbtest.ts

../lib/schedule - scripts/byline-logic-test.ts; scripts/selftest.ts

../lib/slots - scripts/dbtest.ts; scripts/selftest.ts

../lib/style - app/page.tsx; scripts/catalogue-test.ts; scripts/selftest.ts

../lib/voice - scripts/selftest.ts

../push.dart - mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/state/app_state.dart

../redirect-uri - app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts

../src/ai - cloud/test/discovery-budget.test.ts

../src/ai.ts - cloud/test/database.test.ts

../src/auth.ts - cloud/test/database.test.ts

../src/crypto - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/test/api.test.ts

../src/crypto.ts - cloud/test/database.test.ts

../src/drafts - cloud/test/api.test.ts

../src/drafts.ts - cloud/test/database.test.ts

../src/env - cloud/test/api.test.ts

../src/env.ts - cloud/test/database.test.ts

../src/generation-errors.ts - cloud/test/database.test.ts

../src/identities - cloud/scripts/live-smoke.ts; cloud/test/api.test.ts

../src/identities.ts - cloud/test/database.test.ts

../src/jobs.ts - cloud/test/database.test.ts

../src/notifications.ts - cloud/test/database.test.ts

../src/publish - cloud/test/api.test.ts

../state/app_state.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/profile_card.dart

../theme.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/editorial.dart; mobile/lib/widgets/experience.dart; mobile/lib/widgets/form_select.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/preparation_progress.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart

../widgets/day_rail.dart - mobile/lib/screens/desk_screen.dart

../widgets/draft_card.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/today_screen.dart

../widgets/editorial.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart

../widgets/experience.dart - mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart

../widgets/form_select.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/voice_screen.dart

../widgets/personal_topics.dart - mobile/lib/screens/settings_screen.dart

../widgets/preparation_progress.dart - mobile/lib/screens/desk_screen.dart; mobile/lib/screens/today_screen.dart

../widgets/primitives.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/voice_screen.dart

../widgets/profile_card.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart

../widgets/unsaved_changes_guard.dart - mobile/lib/screens/voice_screen.dart

../widgets/writing_preferences.dart - mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/voice_screen.dart

./accounts - lib/distribute.ts; lib/native-auth.ts; lib/onboarding.ts

./agents - lib/cycle.ts; lib/request-agent.ts

./ai - cloud/src/generation.ts; cloud/src/posts.ts; cloud/src/status.ts

./ai-usage - lib/cycle.ts; lib/llm.ts

./auth - cloud/src/delete-account.ts; cloud/src/index.ts; cloud/src/media.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts; lib/ai-usage.ts; lib/native-auth.ts; lib/request-agent.ts

./breeth - lib/memory.ts

./categories - lib/agents.ts; lib/cycle.ts; lib/discovery-core.ts; lib/judge-core.ts; lib/onboarding.ts; lib/persona-prompt.ts; lib/persona.ts; lib/setup-config.ts; lib/slots.ts; lib/writer-core.ts

./category-catalogue - lib/categories.ts; lib/onboarding.ts; lib/setup-config.ts

./critique - lib/onboarding.ts; lib/writer-core.ts

./crypto - cloud/src/auth.ts; cloud/src/publish.ts; lib/accounts.ts

./cycle - lib/reviews.ts

./db - lib/accounts.ts; lib/agents.ts; lib/ai-usage.ts; lib/cycle.ts; lib/distribute.ts; lib/feedhealth.ts; lib/llm.ts; lib/media-ownership.ts; lib/memory.ts; lib/native-auth.ts; lib/onboarding.ts; lib/push.ts; lib/ratelimit.ts; lib/request-agent.ts; lib/retention.ts; lib/review-progress.ts; lib/reviews.ts; lib/slots.ts; lib/timetable-home.ts; lib/unified-timetable.ts; lib/voice.ts

./delete-account - cloud/src/index.ts

./discovery - lib/cycle.ts; lib/judge-core.ts; lib/onboarding.ts

./discovery-core - lib/discovery.ts

./distribute - lib/agents.ts

./drafts - cloud/src/generation.ts; cloud/src/posts.ts

./entities - lib/discovery-core.ts

./env - cloud/src/ai.ts; cloud/src/auth.ts; cloud/src/generation.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/media.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/status.ts; cloud/src/workflow.ts

./feedhealth - lib/discovery.ts

./format - lib/critique.ts; lib/cycle.ts; lib/distribute.ts; lib/post-view.ts

./generation - cloud/src/onboarding.ts; cloud/src/workflow.ts

./generation-errors - cloud/src/generation.ts; cloud/src/onboarding.ts

./globals.css - app/layout.tsx

./google-operator.mjs - scripts/check-live-services.mjs; scripts/live-dev.mjs; scripts/live-setup.mjs

./http - cloud/src/auth.ts; cloud/src/delete-account.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/media.ts; cloud/src/models.ts; cloud/src/notifications.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

./http-body - lib/discovery-core.ts

./identities - cloud/src/auth.ts

./jobs - cloud/src/generation.ts; cloud/src/scheduler.ts; cloud/src/workflow.ts

./judge - lib/cycle.ts; lib/onboarding.ts; lib/writer-core.ts

./judge-core - lib/judge.ts

./lib/auth - middleware.ts

./linkedin - lib/accounts.ts; lib/distribute.ts; lib/format.ts; lib/native-auth.ts

./live-env.mjs - scripts/backup-live.mjs; scripts/live-dev.mjs; scripts/live-setup.mjs

./llm - lib/judge.ts; lib/persona.ts; lib/voice.ts; lib/writer.ts

./llm-contract - lib/judge-core.ts; lib/llm.ts; lib/writer-core.ts

./local-env.mjs - scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/local-dev.mjs; scripts/native-return-test.mjs

./media - cloud/src/index.ts

./memory - lib/cycle.ts; lib/judge-core.ts; lib/writer-core.ts

./models - cloud/src/generation.ts; cloud/src/onboarding.ts; cloud/src/posts.ts; cloud/src/publish.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/slots.ts; cloud/src/status.ts

./native-auth - lib/onboarding.ts; lib/reviews.ts

./native-return - lib/native-callback.ts

./notifications - cloud/src/index.ts; cloud/src/scheduler.ts; cloud/src/workflow.ts

./onboarding - cloud/src/index.ts; lib/cycle.ts; lib/reviews.ts

./persona - lib/agents.ts; lib/onboarding.ts

./persona-prompt - lib/judge-core.ts; lib/persona.ts; lib/setup-config.ts; lib/writer-core.ts

./post-view - lib/timetable-home.ts

./posts - cloud/src/index.ts

./publish - cloud/src/media.ts; cloud/src/posts.ts; cloud/src/scheduler.ts

./push - lib/cycle.ts; lib/reviews.ts

./review-feedback - lib/review-progress.ts; lib/timetable-home.ts

./schedule - lib/agents.ts; lib/cycle.ts; lib/distribute.ts; lib/onboarding.ts; lib/reviews.ts; lib/setup-config.ts; lib/slots.ts; lib/timetable-home.ts; lib/unified-timetable.ts

./scheduler - cloud/src/index.ts

./schema - lib/db.ts

./settings - cloud/src/index.ts

./setup-config - lib/onboarding.ts

./slots - cloud/src/generation.ts; cloud/src/index.ts; cloud/src/jobs.ts; cloud/src/scheduler.ts; cloud/src/settings.ts; cloud/src/status.ts; lib/cycle.ts; lib/distribute.ts; lib/timetable-home.ts

./status - cloud/src/index.ts

./style - lib/agents.ts; lib/critique.ts; lib/distribute.ts; lib/format.ts; lib/onboarding.ts; lib/setup-config.ts; lib/writer-core.ts

./unified-timetable - lib/slots.ts; lib/timetable-home.ts

./voice - lib/agents.ts; lib/distribute.ts

./voice-prompt - lib/voice.ts; lib/writer-core.ts

./workflow - cloud/src/index.ts

./writer - lib/cycle.ts; lib/onboarding.ts

./writer-core - lib/writer.ts

@google/genai - lib/llm.ts

@next/env - scripts/migrate.ts

android_notifications.dart - mobile/lib/push.dart

api/client.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

api/models.dart - mobile/lib/main_preview.dart

archive_screen.dart - mobile/lib/screens/home_screen.dart

asked once - mobile/lib/state/app_state.dart

cleared - app/api/slots/[id]/route.ts

cloudflare:workers - cloud/src/scheduler.ts; cloud/src/workflow.ts

composer_screen.dart - mobile/lib/screens/draft_commands.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/today_screen.dart

crypto - lib/crypto.ts; package.json

dart:async - mobile/lib/api/client.dart; mobile/lib/auth_return.dart; mobile/lib/desktop_notifications.dart; mobile/lib/push.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/widgets/draft_card.dart; mobile/test/first_run_test.dart

dart:convert - mobile/lib/api/client.dart; mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart;

mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

dart:io - mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/test/api_test.dart; mobile/test/auth_return_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

dart:math - mobile/lib/auth_return.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/editorial.dart

dart:ui - mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

delete_account_screen.dart - mobile/lib/screens/settings_screen.dart

delivery_settings_screen.dart - mobile/lib/screens/settings_screen.dart

desk_screen.dart - mobile/lib/screens/home_screen.dart

desktop_notifications.dart - mobile/lib/push.dart

draft - lib/schema.ts

draft_commands.dart - mobile/lib/screens/archive_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/today_screen.dart

editorial.dart - mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart

form_select.dart - mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/writing_preferences.dart

gate_screen.dart - mobile/lib/screens/welcome_screen.dart

miniflare - cloud/scripts/live-smoke.ts; cloud/test/api.test.ts; cloud/test/database.test.ts

next - app/layout.tsx; next.config.ts

next/headers - lib/ai-usage.ts; lib/request-agent.ts

next/server - app/api/account/delete/route.ts; app/api/auth/route.ts; app/api/compose/rewrite/route.ts; app/api/cron/tick/route.ts; app/api/cycle/run/route.ts; app/api/devices/route.ts; app/api/health/route.ts; app/api/init/route.ts; app/api/interests/route.ts; app/api/linkedin/callback/route.ts; app/api/linkedin/connect/route.ts; app/api/linkedin/disconnect/route.ts; app/api/media/route.ts; app/api/native-auth/route.ts; app/api/onboarding/route.ts; app/api/posts/[seq]/route.ts; app/api/posts/route.ts; app/api/review-delivery/route.ts; app/api/settings/route.ts; app/api/slots/[id]/route.ts; app/api/slots/route.ts; app/api/status/route.ts; app/api/style/preview/route.ts; app/api/watchdog/route.ts; middleware.ts

node:assert/strict - cloud/test/api.test.ts; cloud/test/database.test.ts; cloud/test/discovery-budget.test.ts; cloud/test/writer.test.ts; scripts/byline-logic-test.ts; scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/catalogue-test.ts; scripts/health-test.ts; scripts/native-return-test.mjs; scripts/zero-budget-test.ts

node:async_hooks - lib/ai-usage.ts

node:child_process - cloud/scripts/remote-smoke.ts; scripts/backup-live.mjs; scripts/build-check.mjs; scripts/google-operator.mjs; scripts/live-dev.mjs; scripts/local-dev.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs

node:crypto - app/api/linkedin/connect/route.ts; app/api/native-auth/route.ts; cloud/scripts/prepare-secrets.mjs; lib/agents.ts; lib/crypto.ts; lib/db.ts; lib/llm.ts; lib/native-auth.ts; scripts/byline-test.mjs; scripts/catalogue-api-test.mjs; scripts/dbtest.ts; scripts/live-cycle-smoke.ts; scripts/live-dev.mjs; scripts/live-setup.mjs; scripts/local-setup.mjs; scripts/native-return-test.mjs; scripts/prepare-cloud-android.mjs; scripts/selftest.ts; scripts/zero-budget-test.ts

node:fs - cloud/scripts/live-smoke.ts; cloud/scripts/prepare-secrets.mjs; cloud/scripts/remote-smoke.ts; cloud/scripts/setup-push.mjs; cloud/test/api.test.ts; cloud/test/database.test.ts; scripts/backup-live.mjs; scripts/bench-api.mjs; scripts/bench-db.mjs; scripts/check-live-services.mjs; scripts/live-cycle-smoke.ts; scripts/live-dev.mjs; scripts/live-env.mjs; scripts/live-setup.mjs; scripts/live-smoke.ts; scripts/local-env.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs; scripts/selftest.ts; scripts/zero-budget-test.ts

node:fs/promises - lib/llm.ts; lib/push.ts; scripts/check-feeds.mjs

node:module - scripts/google-operator.mjs

node:path - scripts/backup-live.mjs; scripts/check-feeds.mjs; scripts/google-operator.mjs; scripts/live-setup.mjs; scripts/local-setup.mjs; scripts/prepare-cloud-android.mjs

node:test - cloud/test/api.test.ts; cloud/test/database.test.ts; cloud/test/discovery-budget.test.ts; cloud/test/writer.test.ts

node:url - cloud/scripts/live-smoke.ts; cloud/scripts/remote-smoke.ts; cloud/test/api.test.ts; scripts/check-feeds.mjs

node:util - cloud/scripts/live-smoke.ts; cloud/scripts/prepare-secrets.mjs

nothing has been running since Tuesday - mobile/lib/api/models.dart

nothing was sent because no device has ever registered - app/api/watchdog/route.ts

onboarding_test.dart - mobile/test/catalogue_voice_test.dart; mobile/test/first_run_test.dart; mobile/test/redesign_test.dart

package:firebase_core/firebase_core.dart - mobile/lib/main.dart

package:firebase_messaging/firebase_messaging.dart - mobile/lib/android_notifications.dart; mobile/lib/push.dart; mobile/test/android_notifications_test.dart

package:flutter/foundation.dart - mobile/lib/android_notifications.dart; mobile/lib/auth_browser.dart; mobile/lib/auth_return.dart; mobile/lib/push.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/state/app_state.dart; mobile/lib/theme.dart; mobile/test/android_notifications_test.dart; mobile/test/auth_browser_test.dart

package:flutter/material.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart; mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/theme.dart; mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart; mobile/lib/widgets/editorial.dart; mobile/lib/widgets/experience.dart; mobile/lib/widgets/form_select.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/preparation_progress.dart; mobile/lib/widgets/primitives.dart; mobile/lib/widgets/profile_card.dart; mobile/lib/widgets/unsaved_changes_guard.dart; mobile/lib/widgets/writing_preferences.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:flutter/rendering.dart - mobile/test/catalogue_voice_test.dart; mobile/test/redesign_test.dart

package:flutter/services.dart - mobile/lib/android_notifications.dart; mobile/lib/auth_browser.dart; mobile/lib/auth_return.dart; mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/theme.dart; mobile/test/android_notifications_test.dart; mobile/test/auth_browser_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart

package:flutter_local_notifications_windows/flutter_local_notifications_windows.dart - mobile/lib/desktop_notifications.dart

package:flutter_secure_storage/flutter_secure_storage.dart - mobile/lib/api/client.dart

package:flutter_test/flutter_test.dart - mobile/test/android_notifications_test.dart; mobile/test/api_test.dart; mobile/test/auth_browser_test.dart; mobile/test/auth_return_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:flutter_timezone/flutter_timezone.dart - mobile/lib/screens/onboarding_screen.dart

package:http/http.dart - mobile/lib/api/client.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:http/testing.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:http_parser/http_parser.dart - mobile/lib/api/client.dart

package:image_picker/image_picker.dart - mobile/lib/screens/composer_screen.dart

package:linkdin_mobile/android_notifications.dart - mobile/test/android_notifications_test.dart

package:linkdin_mobile/api/client.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/api/models.dart - mobile/test/api_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:linkdin_mobile/auth_browser.dart - mobile/test/auth_browser_test.dart

package:linkdin_mobile/auth_return.dart - mobile/test/auth_return_test.dart

package:linkdin_mobile/main.dart - mobile/test/onboarding_test.dart

package:linkdin_mobile/screens/archive_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/composer_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/delivery_settings_screen.dart - mobile/test/redesign_test.dart

package:linkdin_mobile/screens/desk_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/gate_screen.dart - mobile/test/screens_test.dart

package:linkdin_mobile/screens/home_screen.dart - mobile/test/daily_preparation_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart

package:linkdin_mobile/screens/onboarding_screen.dart - mobile/test/catalogue_voice_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/redesign_test.dart

package:linkdin_mobile/screens/settings_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/timetable_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/today_screen.dart - mobile/test/daily_preparation_test.dart; mobile/test/onboarding_test.dart

package:linkdin_mobile/screens/voice_screen.dart - mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/screens/welcome_screen.dart - mobile/test/first_run_test.dart; mobile/test/redesign_test.dart

package:linkdin_mobile/state/app_state.dart - mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/theme.dart - mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart; mobile/test/widget_test.dart

package:linkdin_mobile/widgets/day_rail.dart - mobile/test/screens_test.dart

package:linkdin_mobile/widgets/draft_card.dart - mobile/test/widget_test.dart

package:linkdin_mobile/widgets/experience.dart - mobile/test/redesign_test.dart

package:linkdin_mobile/widgets/form_select.dart - mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/screens_test.dart

package:linkdin_mobile/widgets/writing_preferences.dart - mobile/test/catalogue_voice_test.dart

package:provider/provider.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart; mobile/lib/screens/archive_screen.dart; mobile/lib/screens/composer_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/delivery_settings_screen.dart; mobile/lib/screens/desk_screen.dart; mobile/lib/screens/draft_commands.dart; mobile/lib/screens/gate_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/timetable_screen.dart; mobile/lib/screens/today_screen.dart; mobile/lib/screens/voice_screen.dart; mobile/lib/screens/welcome_screen.dart; mobile/lib/widgets/personal_topics.dart; mobile/lib/widgets/profile_card.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:shared_preferences/shared_preferences.dart - mobile/lib/api/client.dart; mobile/lib/desktop_notifications.dart; mobile/test/api_test.dart; mobile/test/catalogue_voice_test.dart; mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart; mobile/test/screens_test.dart

package:url_launcher/url_launcher.dart - mobile/lib/auth_browser.dart; mobile/lib/screens/archive_screen.dart; mobile/lib/screens/delete_account_screen.dart; mobile/lib/screens/onboarding_screen.dart; mobile/lib/widgets/draft_card.dart

pg - lib/db.ts; scripts/bench-db.mjs; scripts/byline-test.mjs; scripts/live-setup.mjs; scripts/native-return-test.mjs

primitives.dart - mobile/lib/widgets/day_rail.dart; mobile/lib/widgets/draft_card.dart

push.dart - mobile/lib/main.dart

react - app/layout.tsx; app/page.tsx

screens/composer_screen.dart - mobile/lib/main_preview.dart

screens/home_screen.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

screens/onboarding_screen.dart - mobile/lib/main.dart

screens/settings_screen.dart - mobile/lib/main_preview.dart

screens/timetable_screen.dart - mobile/lib/main_preview.dart

screens/voice_screen.dart - mobile/lib/main_preview.dart

screens/welcome_screen.dart - mobile/lib/main.dart

screens_test.dart - mobile/test/daily_preparation_test.dart; mobile/test/first_run_test.dart; mobile/test/onboarding_test.dart; mobile/test/reconnect_test.dart; mobile/test/redesign_test.dart

settings_screen.dart - mobile/lib/screens/desk_screen.dart; mobile/lib/screens/home_screen.dart; mobile/lib/screens/timetable_screen.dart

state/app_state.dart - mobile/lib/desktop_notifications.dart; mobile/lib/main.dart; mobile/lib/main_preview.dart; mobile/lib/push.dart

theme.dart - mobile/lib/main.dart; mobile/lib/main_preview.dart

timetable_screen.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart; mobile/lib/screens/today_screen.dart

today_screen.dart - mobile/lib/screens/home_screen.dart

unsaved_changes_guard.dart - mobile/lib/widgets/personal_topics.dart

voice_screen.dart - mobile/lib/screens/home_screen.dart; mobile/lib/screens/settings_screen.dart

widgets/experience.dart - mobile/lib/main.dart

30. API and schema navigation index

/api/account/delete - POST - app/api/account/delete/route.ts

/api/auth - POST, DELETE - app/api/auth/route.ts

/api/compose/rewrite - POST - app/api/compose/rewrite/route.ts

/api/cron/tick - GET - app/api/cron/tick/route.ts

/api/cycle/run - POST - app/api/cycle/run/route.ts

/api/devices - POST, DELETE - app/api/devices/route.ts

/api/health - GET - app/api/health/route.ts

/api/init - GET, POST - app/api/init/route.ts

/api/interests - GET, POST - app/api/interests/route.ts

/api/linkedin/callback - GET - app/api/linkedin/callback/route.ts

/api/linkedin/connect - GET - app/api/linkedin/connect/route.ts

/api/linkedin/disconnect - POST - app/api/linkedin/disconnect/route.ts

/api/media - POST - app/api/media/route.ts

/api/native-auth/callback - GET - app/api/native-auth/callback/route.ts

/api/native-auth - GET, POST - app/api/native-auth/route.ts

/api/onboarding - GET, POST - app/api/onboarding/route.ts

/api/posts/[seq] - PATCH - app/api/posts/[seq]/route.ts

/api/posts - GET, POST - app/api/posts/route.ts

/api/review-delivery - GET, POST - app/api/review-delivery/route.ts

/api/settings - PATCH - app/api/settings/route.ts

/api/slots/[id] - PATCH, DELETE - app/api/slots/[id]/route.ts

/api/slots - GET, POST - app/api/slots/route.ts

/api/status - GET - app/api/status/route.ts

/api/style/preview - POST - app/api/style/preview/route.ts

/api/watchdog - GET - app/api/watchdog/route.ts

Cloud method dispatch, including its public/authenticated boundary, is reproduced verbatim below. Dynamic post and slot paths are validated by regular expressions.

```
 1 | import { authenticate,authCallback,nativeAuth,connectLinkedIn } from './auth';
 2 | import { json,HttpError } from './http';
 3 | import { onboardingRoute } from './onboarding';
 4 | import { slotsRoute } from './slots';
 5 | import { statusRoute } from './status';
 6 | import { settingsRoute,interestsRoute } from './settings';
 7 | import { postsRoute,postAction,rewriteRoute } from './posts';
 8 | import { devicesRoute } from './notifications';
 9 | import { mediaRoute } from './media';
10 | import { deleteAccount } from './delete-account';
11 | import { reviewRoute,cycleRoute } from './scheduler';
12 | import type { AppEnv } from './env';
13 | export { ContentWorkflow } from './workflow';
14 | export { MaintenanceWorkflow } from './scheduler';
15 |
16 | export default {
17 |   async fetch(request:Request,env:AppEnv):Promise<Response> {
18 |     try {
19 |       const path=new URL(request.url).pathname,method=request.method;
20 |       if(path==='/api/health'&&method==='GET') {
21 |         try {
22 |           await env.DB.prepare('SELECT 1').first();
23 |           if(new URL(request.url).searchParams.get('check')==='scheduler') {
24 |             const heartbeat=await env.DB.prepare("SELECT updated_at FROM system_status WHERE
   > key='cloud_scheduler'").first<{updated_at:string}>();
25 |             const healthy=!!heartbeat&&Date.now()-Date.parse(heartbeat.updated_at)<16*60000;
26 |             return json({ok:healthy,db:'ok',scheduler:{healthy,lastTickAt:heartbeat?.updated_at??nul
   > l}},healthy?200:503);
27 |           }
28 |           return json({ok:true,db:'ok',service:'byline-cloud'});
```

```
29 |         }
30 |         catch{return json({ok:false,db:'unavailable'},503);}
31 |       }
32 |       if(path==='/api/native-auth'&&['GET','POST'].includes(method))return await
   > nativeAuth(request,env);
33 |
   > if(['/api/linkedin/callback','/api/native-auth/callback'].includes(path)&&method==='GET')return
   > await authCallback(request,env);
34 |       const owner=await authenticate(request,env);
35 |       if(!owner)return json({error:'unauthorized'},401);
36 |       if(path==='/api/auth'&&method==='DELETE') {
37 |         await env.DB.prepare('UPDATE byline_sessions SET revoked_at=? WHERE id=? AND
   > user_id=?').bind(new Date().toISOString(),owner.sessionId,owner.userId).run();
38 |         return json({ok:true});
39 |       }
40 |       if(path==='/api/onboarding'&&['GET','POST'].includes(method))return await
   > onboardingRoute(request,env,owner);
41 |       if(path==='/api/status'&&method==='GET')return await statusRoute(env,owner);
42 |       if(path==='/api/settings'&&method==='PATCH')return await settingsRoute(request,env.DB,owner);
43 |       if(path==='/api/interests'&&['GET','POST'].includes(method))return await
   > interestsRoute(request,env.DB,owner);
44 |       if(path==='/api/posts'&&['GET','POST'].includes(method))return await
   > postsRoute(request,env,owner);
45 |       const post=/^\/api\/posts\/([1-9][0-9]{0,8})$/.exec(path);
46 |       if(post&&method==='PATCH')return await postAction(request,env,owner,Number(post[1]));
47 |       if(path==='/api/compose/rewrite'&&method==='POST')return await
   > rewriteRoute(request,env,owner);
48 |       if(path==='/api/style/preview'&&method==='POST')return await
   > rewriteRoute(request,env,owner,true);
49 |       if(path==='/api/review-delivery'&&['GET','POST'].includes(method))return await
   > reviewRoute(request,env,owner);
50 |       if(path==='/api/cycle/run'&&method==='POST')return await cycleRoute(env,owner);
51 |       if(path==='/api/devices'&&['POST','DELETE'].includes(method))return await
   > devicesRoute(request,env,owner);
52 |       if(path==='/api/media'&&method==='POST')return await mediaRoute(request,env,owner);
53 |       if(path==='/api/account/delete'&&method==='POST')return await
   > deleteAccount(request,env.DB,owner);
54 |       if(path==='/api/linkedin/connect'&&method==='GET')return await
   > connectLinkedIn(request,env,owner);
55 |       if(path==='/api/linkedin/disconnect'&&method==='POST') {
56 |         await env.DB.batch([env.DB.prepare('DELETE FROM linkedin_accounts WHERE
   > agent_id=?').bind(owner.agentId),env.DB.prepare('UPDATE agents SET
   > auto_publish=0,revision=revision+1 WHERE id=?').bind(owner.agentId)]);
57 |         return json({ok:true});
58 |       }
59 |       if(path==='/api/slots'&&['GET','POST'].includes(method))return await
   > slotsRoute(request,env.DB,owner);
60 |       const slot=/^\/api\/slots\/([a-f0-9-]{36})$/.exec(path);
61 |       if(slot&&['PATCH','DELETE'].includes(method))return await
   > slotsRoute(request,env.DB,owner,slot[1]);
62 |       return json({error:'not_found'},404);
63 |     } catch(error) {
64 |       if(error instanceof HttpError)return json({error:error.message},error.status);
65 |       console.error(JSON.stringify({event:'request_failed',path:new URL(request.url).pathname}));
66 |       return json({error:'The request could not be completed. Please try again.'},500);
67 |     }
68 |   },
69 |   async scheduled(event:ScheduledController,env:AppEnv) {
70 |     const id=`tick-${Math.floor(event.scheduledTime/300000)}`;
71 |     await env.MAINTENANCE.createBatch([{id,params:{cleanup:new
   > Date(event.scheduledTime).getUTCMinutes()===0}}]);
72 |   },
73 | } satisfies ExportedHandler<AppEnv>;
```

Database table responsibilities

agents - Author workspace, persona, preferences, active/paused state and configuration revision.

ai_provider_days - Per-model shared daily attempts and next permitted request time.

ai_reservations - Cloud atomic AI-attempt reservations that trigger quota accounting.

ai_usage - Attempt success and reported input/output token usage.

ai_user_days - Per-owner daily AI request counts.

byline_schema_versions - Original PostgreSQL applied additive-schema hash ledger.

byline_sessions - Expiring, revocable native sessions owned by users.

byline_users - Verified social-provider identities, keyed by provider and subject.

device_tokens - Current device-to-author FCM ownership.

distributions - Atomic publication claims, idempotency, provider outcome and manual resolution.

feed_health - Source reachability, recent success/failure and failure streak.

generation_jobs - Cloud durable job payload, revision snapshot, queue/working/completed/failed state.

linkedin_accounts - Encrypted provider grants, member identity and connection expiry.

llm_calls - Original model call quota bookkeeping.

login_attempts - Time-windowed sign-in throttling records.

media_assets - Owned LinkedIn image upload metadata and upload status.

native_auth - Short-lived verifier-protected native OAuth handoff state.

notification_outbox - Durable, deduplicated notification work and delivery retry state.

oauth_states - One-use LinkedIn connection consent state and safe return destination.

onboarding - Saved setup, optimistic revisions, preview/acceptance leases and activation state.

post_counters - Atomic per-author post-sequence allocation.

post_slots - Recurring timezone-local posting times, selected days, lead interval and automation flags.

posts - Owned draft/publication content, sources, score metadata, schedule, clearance and status.

push_log - Original push-send/reminder bookkeeping.

rejections - Editorially rejected candidate evidence.

review_deliveries - Original review-delivery occurrence, generation and retry state.

scheduler_state - Per-author cycle count and last-run timestamp.

slot_runs - One slot/date occurrence, preparation attempt/progress and associated post.

system_status - Operational heartbeat and named system status values.

cloud/migrations/0001_initial.sql

```
-- Initial D1 schema. Dates are UTC ISO strings; JSON is validated TEXT.

-- Extracted from the verified local PostgreSQL schema; no user data is included.

-- Subsequent changes must be separate numbered migrations.

CREATE TABLE "agents" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "name" TEXT NOT NULL,
  "domain" TEXT NOT NULL,
  "persona_json" TEXT NOT NULL CHECK ("persona_json" IS NULL OR json_valid("persona_json")),
  "persona_hash" TEXT NOT NULL,
  "is_demo" INTEGER NOT NULL DEFAULT 0 CHECK ("is_demo" IN (0,1)),
  "active" INTEGER NOT NULL DEFAULT 1 CHECK ("active" IN (0,1)),
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  "categories_json" TEXT NOT NULL DEFAULT '[]' CHECK ("categories_json" IS NULL OR
> json_valid("categories_json")),
  "timezone" TEXT NOT NULL DEFAULT 'Asia/Kolkata',
  "post_time_local" TEXT NOT NULL DEFAULT '09:30',
  "auto_publish" INTEGER NOT NULL DEFAULT 0 CHECK ("auto_publish" IN (0,1)),
  "paused" INTEGER NOT NULL DEFAULT 0 CHECK ("paused" IN (0,1)),
  "auto_publish_cap" INTEGER NOT NULL DEFAULT 1,
  "style_json" TEXT NOT NULL DEFAULT '{}' CHECK ("style_json" IS NULL OR json_valid("style_json")),
  "corpus_json" TEXT NOT NULL DEFAULT '[]' CHECK ("corpus_json" IS NULL OR
> json_valid("corpus_json")),
  "edit_notes" TEXT,
  "edit_notes_from" INTEGER NOT NULL DEFAULT 0,
  "owner_id" TEXT,
  FOREIGN KEY (owner_id) REFERENCES byline_users(id),
  PRIMARY KEY (id),
  UNIQUE (persona_hash)
);

CREATE UNIQUE INDEX agents_owner_unique ON agents (owner_id) WHERE (owner_id IS NOT NULL);

CREATE TABLE "ai_provider_days" (
  "model" TEXT NOT NULL,
  "day" TEXT NOT NULL,
  "attempts" INTEGER NOT NULL,
  "next_at" TEXT NOT NULL,
  PRIMARY KEY (model, day)
);

CREATE TABLE "ai_usage" (
  "id" INTEGER PRIMARY KEY AUTOINCREMENT,
  "owner" TEXT NOT NULL,
  "model" TEXT NOT NULL,
  "success" INTEGER NOT NULL CHECK ("success" IN (0,1)),
  "input_tokens" INTEGER,
  "output_tokens" INTEGER,
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
);

CREATE TABLE "ai_user_days" (
  "owner" TEXT NOT NULL,
  "day" TEXT NOT NULL,
  "requests" INTEGER NOT NULL,
  PRIMARY KEY (owner, day)
);

CREATE TABLE "byline_sessions" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "user_id" TEXT NOT NULL,
  "expires_at" TEXT NOT NULL,
  "revoked_at" TEXT,
  FOREIGN KEY (user_id) REFERENCES byline_users(id),
  PRIMARY KEY (id)
);

CREATE TABLE "byline_users" (
  "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
> substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
  "provider" TEXT NOT NULL,
  "subject" TEXT NOT NULL,
  "name" TEXT NOT NULL,
  "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
  PRIMARY KEY (id),
  UNIQUE (provider, subject)
```

```
 76 | );
 77 |
 78 | CREATE TABLE "device_tokens" (
 79 |   "token" TEXT NOT NULL,
 80 |   "agent_id" TEXT NOT NULL,
 81 |   "platform" TEXT NOT NULL DEFAULT 'android',
 82 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
 83 |   "last_seen_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
 84 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
 85 |   PRIMARY KEY (token)
 86 | );
 87 |
 88 | CREATE INDEX device_tokens_agent ON device_tokens (agent_id);
 89 |
 90 | CREATE TABLE "distributions" (
 91 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
 92 |   "agent_id" TEXT NOT NULL,
 93 |   "seq" INTEGER,
 94 |   "idempotency_key" TEXT NOT NULL,
 95 |   "target" TEXT NOT NULL DEFAULT 'linkedin_member',
 96 |   "status" TEXT NOT NULL DEFAULT 'in_flight',
 97 |   "external_urn" TEXT,
 98 |   "attempts" INTEGER NOT NULL DEFAULT 0,
 99 |   "last_error" TEXT,
100 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
101 |   "settled_at" TEXT,
102 |   "source" TEXT NOT NULL DEFAULT 'manual',
103 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
104 |   UNIQUE (idempotency_key)
105 | );
106 |
107 | CREATE INDEX distributions_agent_idx ON distributions (agent_id, created_at DESC);
108 |
109 | CREATE TABLE "feed_health" (
110 |   "name" TEXT NOT NULL,
111 |   "last_ok_at" TEXT,
112 |   "last_failed_at" TEXT,
113 |   "fails_in_a_row" INTEGER NOT NULL DEFAULT 0,
114 |   "last_error" TEXT,
115 |   "updated_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
116 |   PRIMARY KEY (name)
117 | );
118 |
119 | CREATE TABLE "linkedin_accounts" (
120 |   "agent_id" TEXT NOT NULL,
121 |   "member_urn" TEXT NOT NULL,
122 |   "member_name" TEXT,
123 |   "member_picture" TEXT,
124 |   "access_token_enc" TEXT NOT NULL,
125 |   "refresh_token_enc" TEXT,
126 |   "scopes" TEXT,
127 |   "expires_at" TEXT NOT NULL,
128 |   "connected_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
129 |   "last_ok_at" TEXT,
130 |   "last_error" TEXT,
131 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
132 |   PRIMARY KEY (agent_id)
133 | );
134 |
135 | CREATE TABLE "llm_calls" (
136 |   "day" TEXT NOT NULL,
137 |   "model" TEXT NOT NULL,
138 |   "call_count" INTEGER NOT NULL DEFAULT 0,
139 |   PRIMARY KEY (day, model)
140 | );
141 |
142 | CREATE TABLE "login_attempts" (
143 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
144 |   "client" TEXT NOT NULL,
145 |   "at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
146 | );
147 |
148 | CREATE INDEX login_attempts_client_at ON login_attempts (client, at DESC);
149 |
150 | CREATE TABLE "media_assets" (
151 |   "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
    > substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
152 |   "agent_id" TEXT NOT NULL,
153 |   "kind" TEXT NOT NULL DEFAULT 'image',
154 |   "linkedin_urn" TEXT NOT NULL,
155 |   "upload_url" TEXT NOT NULL,
156 |   "alt_text" TEXT,
157 |   "filename" TEXT,
```

```
158 |   "status" TEXT NOT NULL DEFAULT 'initialized',
159 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
160 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
161 |   PRIMARY KEY (id)
162 | );
163 |
164 | CREATE TABLE "native_auth" (
165 |   "id" TEXT NOT NULL,
166 |   "provider" TEXT NOT NULL,
167 |   "verifier_hash" TEXT NOT NULL,
168 |   "redirect_uri" TEXT NOT NULL,
169 |   "user_id" TEXT,
170 |   "error" TEXT,
171 |   "claimed_at" TEXT,
172 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
173 |   "return_uri" TEXT,
174 |   FOREIGN KEY (user_id) REFERENCES byline_users(id),
175 |   PRIMARY KEY (id)
176 | );
177 |
178 | CREATE TABLE "notification_outbox" (
179 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
180 |   "agent_id" TEXT NOT NULL,
181 |   "payload" TEXT NOT NULL CHECK ("payload" IS NULL OR json_valid("payload")),
182 |   "dedupe_key" TEXT NOT NULL,
183 |   "attempts" INTEGER NOT NULL DEFAULT 0,
184 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
185 |   "delivered_at" TEXT,
186 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
187 |   UNIQUE (dedupe_key)
188 | );
189 |
190 | CREATE TABLE "oauth_states" (
191 |   "state" TEXT NOT NULL,
192 |   "agent_id" TEXT NOT NULL,
193 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
194 |   "native" INTEGER NOT NULL DEFAULT 0 CHECK ("native" IN (0,1)),
195 |   "return_uri" TEXT,
196 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
197 |   PRIMARY KEY (state)
198 | );
199 |
200 | CREATE TABLE "onboarding" (
201 |   "user_id" TEXT NOT NULL,
202 |   "config" TEXT NOT NULL DEFAULT '{}' CHECK ("config" IS NULL OR json_valid("config")),
203 |   "revision" INTEGER NOT NULL DEFAULT 0,
204 |   "preview" TEXT CHECK ("preview" IS NULL OR json_valid("preview")),
205 |   "preview_revision" INTEGER,
206 |   "accepted_revision" INTEGER,
207 |   "completed_at" TEXT,
208 |   "next_delivery_at" TEXT,
209 |   "preview_attempts" INTEGER NOT NULL DEFAULT 0,
210 |   "attempts_day" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%d','now')),
211 |   "generating_until" TEXT,
212 |   "timetable_migrated" INTEGER NOT NULL DEFAULT 0 CHECK ("timetable_migrated" IN (0,1)),
213 |   FOREIGN KEY (user_id) REFERENCES byline_users(id),
214 |   PRIMARY KEY (user_id)
215 | );
216 |
217 | CREATE TABLE "post_counters" (
218 |   "agent_id" TEXT NOT NULL,
219 |   "value" INTEGER NOT NULL,
220 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
221 |   PRIMARY KEY (agent_id)
222 | );
223 |
224 | CREATE TABLE "post_slots" (
225 |   "id" TEXT NOT NULL DEFAULT (lower(hex(randomblob(4)) || '-' || hex(randomblob(2)) || '-4' ||
    > substr(hex(randomblob(2)),2) || '-a' || substr(hex(randomblob(2)),2) || '-' || hex(randomblob(6)))),
226 |   "agent_id" TEXT NOT NULL,
227 |   "local_time" TEXT NOT NULL,
228 |   "days_mask" INTEGER NOT NULL DEFAULT 62,
229 |   "lead_minutes" INTEGER NOT NULL DEFAULT 15,
230 |   "auto_publish" INTEGER NOT NULL DEFAULT 0 CHECK ("auto_publish" IN (0,1)),
231 |   "categories_json" TEXT NOT NULL DEFAULT '[]' CHECK ("categories_json" IS NULL OR
    > json_valid("categories_json")),
232 |   "enabled" INTEGER NOT NULL DEFAULT 1 CHECK ("enabled" IN (0,1)),
233 |   "position" INTEGER NOT NULL DEFAULT 0,
234 |   "next_run_at" TEXT,
235 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
236 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
237 |   PRIMARY KEY (id)
238 | );
```

```
239 |
240 | CREATE INDEX post_slots_due_idx ON post_slots (agent_id, enabled, next_run_at);
241 |
242 | CREATE TABLE "posts" (
243 |   "agent_id" TEXT NOT NULL,
244 |   "seq" INTEGER NOT NULL,
245 |   "id" TEXT GENERATED ALWAYS AS ('p' || seq) STORED,
246 |   "text" TEXT NOT NULL,
247 |   "rationale" TEXT NOT NULL,
248 |   "sources_json" TEXT NOT NULL DEFAULT '[]' CHECK ("sources_json" IS NULL OR
    > json_valid("sources_json")),
249 |   "fingerprint" TEXT NOT NULL,
250 |   "scores_json" TEXT CHECK ("scores_json" IS NULL OR json_valid("scores_json")),
251 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
252 |   "continuity" TEXT,
253 |   "cycle_id" INTEGER,
254 |   "status" TEXT NOT NULL DEFAULT 'published',
255 |   "kind" TEXT NOT NULL DEFAULT 'auto',
256 |   "category" TEXT,
257 |   "client_request_id" TEXT,
258 |   "media_json" TEXT NOT NULL DEFAULT '[]' CHECK ("media_json" IS NULL OR json_valid("media_json")),
259 |   "scheduled_for" TEXT,
260 |   "published_at" TEXT,
261 |   "slot_id" TEXT,
262 |   "cleared_at" TEXT,
263 |   "hold_until" TEXT,
264 |   "hashtags_json" TEXT NOT NULL DEFAULT '[]' CHECK ("hashtags_json" IS NULL OR
    > json_valid("hashtags_json")),
265 |   "used_quote" INTEGER NOT NULL DEFAULT 0 CHECK ("used_quote" IN (0,1)),
266 |   "linkedin_text" TEXT,
267 |   "original_text" TEXT,
268 |   "slot_date" TEXT,
269 |   "review_date" TEXT,
270 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
271 |   PRIMARY KEY (agent_id, seq)
272 | );
273 |
274 | CREATE UNIQUE INDEX posts_client_request_idx ON posts (agent_id, client_request_id) WHERE
    > (client_request_id IS NOT NULL);
275 |
276 | CREATE INDEX posts_due_idx ON posts (agent_id, status, scheduled_for);
277 |
278 | CREATE INDEX posts_status_idx ON posts (agent_id, status, created_at DESC);
279 |
280 | CREATE UNIQUE INDEX posts_slot_day ON posts (agent_id, slot_id, slot_date) WHERE (slot_date IS NOT
    > NULL);
281 |
282 | CREATE UNIQUE INDEX posts_review_day ON posts (agent_id, review_date) WHERE (review_date IS NOT
    > NULL);
283 |
284 | CREATE TABLE "push_log" (
285 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
286 |   "agent_id" TEXT NOT NULL,
287 |   "kind" TEXT NOT NULL,
288 |   "sent_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
289 |   FOREIGN KEY (agent_id) REFERENCES agents(id)
290 | );
291 |
292 | CREATE INDEX push_log_agent_kind_at ON push_log (agent_id, kind, sent_at DESC);
293 |
294 | CREATE TABLE "rejections" (
295 |   "id" INTEGER PRIMARY KEY AUTOINCREMENT,
296 |   "agent_id" TEXT NOT NULL,
297 |   "cycle_id" INTEGER NOT NULL,
298 |   "title" TEXT NOT NULL,
299 |   "url" TEXT NOT NULL,
300 |   "scores_json" TEXT NOT NULL CHECK ("scores_json" IS NULL OR json_valid("scores_json")),
301 |   "reason" TEXT NOT NULL,
302 |   "created_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
303 |   FOREIGN KEY (agent_id) REFERENCES agents(id)
304 | );
305 |
306 | CREATE TABLE "review_deliveries" (
307 |   "agent_id" TEXT NOT NULL,
308 |   "delivery_date" TEXT NOT NULL,
309 |   "seq" INTEGER,
310 |   "attempts" INTEGER NOT NULL DEFAULT 0,
311 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
312 |   "lease_until" TEXT,
313 |   "last_error" TEXT,
314 |   "stage" TEXT,
315 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
316 |   PRIMARY KEY (agent_id, delivery_date)
```

```
317 | );
318 |
319 | CREATE TABLE "scheduler_state" (
320 |   "agent_id" TEXT NOT NULL,
321 |   "last_run_at" TEXT,
322 |   "next_run_at" TEXT,
323 |   "cycle_count" INTEGER NOT NULL DEFAULT 0,
324 |   FOREIGN KEY (agent_id) REFERENCES agents(id),
325 |   PRIMARY KEY (agent_id)
326 | );
327 |
328 | CREATE TABLE "slot_runs" (
329 |   "slot_id" TEXT NOT NULL,
330 |   "run_date" TEXT NOT NULL,
331 |   "scheduled_for" TEXT NOT NULL,
332 |   "generated_at" TEXT,
333 |   "post_seq" INTEGER,
334 |   "outcome" TEXT NOT NULL DEFAULT 'pending',
335 |   "detail" TEXT,
336 |   "stage" TEXT,
337 |   "attempts" INTEGER NOT NULL DEFAULT 1,
338 |   "retry_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
339 |   FOREIGN KEY (slot_id) REFERENCES post_slots(id) ON DELETE CASCADE,
340 |   PRIMARY KEY (slot_id, run_date)
341 | );
342 |
343 | CREATE INDEX slot_runs_date_idx ON slot_runs (run_date DESC);
344 |
345 | CREATE TABLE "system_status" (
346 |   "key" TEXT NOT NULL,
347 |   "value" TEXT NOT NULL CHECK ("value" IS NULL OR json_valid("value")),
348 |   "updated_at" TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
349 |   PRIMARY KEY (key)
350 | );
```

cloud/migrations/0002_cloud_jobs.sql

```
  1 | -- Durable dispatch outbox: creating a Workflow is retried without losing the request.
  2 | CREATE TABLE generation_jobs (
  3 |   id TEXT PRIMARY KEY,
  4 |   agent_id TEXT NOT NULL REFERENCES agents(id),
  5 |   payload TEXT NOT NULL CHECK(json_valid(payload)),
  6 |   state TEXT NOT NULL DEFAULT 'queued' CHECK(state IN ('queued','working','completed','failed')),
  7 |   stage TEXT,
  8 |   error TEXT,
  9 |   created_at TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now')),
 10 |   updated_at TEXT NOT NULL DEFAULT (strftime('%Y-%m-%dT%H:%M:%fZ','now'))
 11 | );
 12 | CREATE INDEX generation_jobs_dispatch ON generation_jobs(state,created_at);
 13 | CREATE INDEX generation_jobs_agent ON generation_jobs(agent_id,state);
 14 |
 15 | -- A single insert reserves both budgets under the same D1 transaction.
 16 | CREATE TABLE ai_reservations (
 17 |   id TEXT PRIMARY KEY,
 18 |   owner TEXT NOT NULL,
 19 |   model TEXT NOT NULL,
 20 |   day TEXT NOT NULL,
 21 |   created_at TEXT NOT NULL
 22 | );
 23 | CREATE INDEX ai_reservations_day ON ai_reservations(day);
 24 | CREATE TRIGGER ai_reservation_counters AFTER INSERT ON ai_reservations BEGIN
 25 |   INSERT INTO ai_user_days(owner,day,requests) VALUES(NEW.owner,NEW.day,1)
 26 |     ON CONFLICT(owner,day) DO UPDATE SET requests=requests+1;
 27 |   INSERT INTO ai_provider_days(model,day,attempts,next_at)
    > VALUES(NEW.model,NEW.day,1,strftime('%Y-%m-%dT%H:%M:%fZ',NEW.created_at,'+4 seconds'))
 28 |     ON CONFLICT(model,day) DO UPDATE SET attempts=attempts+1,
 29 |       next_at=strftime('%Y-%m-%dT%H:%M:%fZ',MAX(NEW.created_at,next_at),'+4 seconds');
 30 | END;
 31 | CREATE INDEX native_auth_created ON native_auth(created_at);
 32 | CREATE INDEX oauth_states_created ON oauth_states(created_at);
 33 | CREATE INDEX byline_sessions_expiry ON byline_sessions(expires_at);
 34 | CREATE INDEX notification_outbox_pending ON notification_outbox(delivered_at,retry_at);
 35 | CREATE INDEX post_slots_next ON post_slots(enabled,next_run_at);
 36 | ALTER TABLE agents ADD COLUMN revision INTEGER NOT NULL DEFAULT 0;
 37 | ALTER TABLE post_slots ADD COLUMN revision INTEGER NOT NULL DEFAULT 0;
 38 | ALTER TABLE slot_runs ADD COLUMN job_id TEXT;
 39 | ALTER TABLE onboarding ADD COLUMN finish_token TEXT;
 40 | ALTER TABLE onboarding ADD COLUMN preview_lease TEXT;
 41 | ALTER TABLE distributions ADD COLUMN send_day TEXT;
 42 | CREATE INDEX distributions_daily ON distributions(agent_id,source,send_day);
 43 | ALTER TABLE distributions ADD COLUMN resolution_token TEXT;
 44 | ALTER TABLE agents ADD COLUMN edit_token TEXT;
```

31. Test case index

cloud/test/api.test.ts

status exposes only the owner's latest job and saved notification preference

the compiled Worker responds to health and rejects protected routes without a session

scheduler monitoring reports missing and stale heartbeats as unavailable

mobile setup, status and timetable contracts work in the Workers runtime

concurrent composer saves stay idempotent; another account cannot read or edit the draft

discard removes manual and timetable drafts from every feed without affecting another author

timetable bounds and schedule updates are enforced by the database

two authors keep drafts, schedules, settings and notification devices isolated

onboarding finish is atomic and duplicate requests cannot create two first slots

deleting an idle account removes only that account and revokes its session

parallel publishers make one provider request and unknown outcomes cannot be retried

cloud/test/database.test.ts

notification batches stay bounded and each author receives only their own draft notice

all application tables migrate with foreign keys and JSON validation

failed workflow reconciliation releases stuck jobs and preserves already saved drafts

simultaneous sign-ins provision exactly one user, agent and onboarding record

sessions cannot cross accounts and revoked or expired sessions are rejected

a database batch rolls back every write when a later write fails

concurrent saves allocate unique sequence numbers and retries preserve text

a repeated timetable occurrence cannot create another draft with a new request ID

AI reservations enforce user and provider limits under concurrency

session MACs reject tampering and token encryption authenticates ciphertext

native OAuth preserves the mobile contract, claims callback once, and issues one session

cloud/test/discovery-budget.test.ts

redirect loops and concurrent sources cannot spend the writing request budget

source selection covers every selected category before adding more feeds

temporary AI failures retry once; quota and runtime budgets do not retry

durable steps retry outages but do not retry exhausted quota

an unavailable primary uses the selected free fallback, while quota failures do not

cloud/test/writer.test.ts

the repair gate checks the complete post length including its source and tags

long drafts receive enough output budget and a second bounded repair can finish them

unsuccessful repairs stay bounded and preserve the better draft

mobile/test/android_notifications_test.dart

received foreground push keeps its channel, grouping and destination

data-only and non-Android messages do not create duplicate notifications

blocked or unavailable platform notifications allow the banner fallback

cold notification tap is consumed when listener starts

mobile/test/api_test.dart

sign-out unregisters the device with an authenticated JSON body
post actions use the verb the route actually exports
clear sends PATCH /api/posts/<seq> with action clear
sendNow sends PATCH with action publish
unclear withdraws the clearance
holdForEditing takes the edit lock
reschedule sends an ISO instant in UTC
reschedule with null lifts a post off the timetable
discard sends PATCH with action discard
editPost sends PATCH with the text
editPost omits mediaIds entirely when not given
editPost sends mediaIds when given, including an explicit empty list
compose sends POST /api/posts - the collection route IS a POST
rewrite sends PATCH with the variant index and returns the text
rewrite rejects an empty result rather than blanking the draft
rewriting UNSAVED text posts the body, since there is no seq yet
an unsaved rewrite also refuses an empty result
image upload
declares a real image content type, not octet-stream
png keeps its own type rather than being called a jpeg
settings
style save sends PATCH /api/settings with the whole config
preset save sends the preset id, not a style blob
session handling
the session cookie is attached to authenticated calls
a 401 clears the session and drops back to the gate
a server error surfaces its detail instead of a generic message
editing target
startEditing sets the target and raises a compose request
editing the same post twice still raises a fresh request
stopEditing clears the target
scheduling state on a post
an unscheduled draft is not scheduled and never overdue
a scheduled draft reports the time remaining
past its time and not cleared is overdue
a published post is never overdue
a missed post is never overdue either
clearedAt and heldUntil are read back
a slot parses its display fields
nextDue picks the soonest pending post, not the newest
settings changes cost one round trip, not two
a style change does not refetch the whole dashboard
the updated agent is taken from the PATCH response
a response without an agent still falls back to a full refresh
the schedule fields still take the full refresh

a category tap shows immediately, before the server answers

a rejected category change is rolled back

calls that wait on a model get a longer ceiling

the writer ceiling outlasts the server, so the server error wins

a follow-up survives longer than a status refresh would

the voice fingerprint notices every part of the voice

a register change moves it

adding a writing sample moves it

edit notes move it

an unchanged voice keeps the same fingerprint

mobile/test/auth_browser_test.dart

Android sends the complete OAuth URL to the browser-only bridge

rejects non-HTTPS, credentials and hostless links without launching

missing browser or platform failure cannot fall back to provider app

mobile/test/auth_return_test.dart

loopback return rejects unrelated requests and signals only once

mobile/test/catalogue_voice_test.dart

errors explain recovery without exposing service internals

large catalogue search retains choices and cancels safely

mobile/test/daily_preparation_test.dart

preparation handles $outcome through the timetable API

multi-select searches, cancels safely and applies checked choices

desktop dropdown works with keyboard arrows and Enter

draft badge belongs to My posts on phone and desktop

selected navigation survives desktop-to-phone resize

mobile/test/first_run_test.dart

fresh LinkedIn sign-in with browser available=$canOpen

fresh setup completes with ${defaultVoice ?

LinkedIn connection survives a network interruption and refreshes on resume without overlapping requests

mobile/test/onboarding_test.dart

sign-in resumes after $interruption without opening consent again

completed setup opens the daily screen without restarting

sample acceptance persists before the time step, at phone width

failed acceptance keeps the reviewed sample visible

daily publishing confirms and uses the existing publish route

mobile/test/reconnect_test.dart

a suspended connection retries reads but never repeats a mutation

an unauthorized read is not retried

returning to My posts clears stale connection errors and shows job failure

mobile/test/redesign_test.dart

light palette maintains readable text and control boundaries

${page.key} adapts at ${size.width.toInt()}

${page.key} supports larger text on a small phone

delivery allows a time outside quarter-hour presets

voice instructions are directly editable and enable Save

mobile/test/screens_test.dart

GateScreen renders without overflow

DeskScreen renders a populated desk without overflow

DeskScreen states dry run and a dead token without burying the desk

DeskScreen leads with the next post due, wearing its countdown

a cleared post cools to the send clock

DeskScreen shows the day rail, silence included

DeskScreen makes a stranded approved post actionable again

DeskScreen leaves an ambiguous send inert

DeskScreen invites action rather than showing a blank page

DeskScreen shouts when the scheduler has stopped

DeskScreen distinguishes never-started from stopped

DeskScreen says nothing when the scheduler is healthy

Archive reaches published history and what was passed over

Archive shelves have their own empty states

a draft is never offered a follow-up

ComposerScreen renders without overflow

the composer picks up a follow-up and consumes it

a follow-up is a NEW post, not an edit of the original

ComposerScreen offers rewrite on a NEW post, gated on enough text

ComposerScreen disables sending an empty draft

ComposerScreen in edit mode pre-fills the draft and its tags

ComposerScreen warns when the voice changed under an existing draft

ComposerScreen shows the assembled post before anything is saved

the preview can be backed out of without saving

ComposerScreen asks before dropping typed text

ComposerScreen protects hashtag-only edits when closing

VoiceScreen renders every control without overflow

VoiceScreen keeps Save in reach and stages changes locally

VoiceScreen invites writing samples when there are none

VoiceScreen will not add a sample too short to carry a voice

VoiceScreen lists stored samples and what it learned

TimetableScreen renders the timetable without overflow

TimetableScreen distinguishes a slot switch from the master one

TimetableScreen refuses auto-publish without a usable connection

TimetableScreen shows both publishing budgets separately

TimetableScreen refuses to clear the last enabled day

SettingsScreen answers most questions without being opened

SettingsScreen says so when the scheduler has stopped

LinkedInScreen offers a reconnect rather than a dead end

TopicsScreen will not let the last topic be removed

mobile/test/widget_test.dart

StyleConfig

a null payload is the house style

missing fields fall back rather than throwing

wrong-typed fields fall back

a round trip through JSON preserves every field

clearSignature removes the signature, and a plain copyWith keeps it

the summary reflects the settings a user just changed

AppStatus

an uninitialised backend decodes without an agent

a full payload decodes agent, queue and presets

needsReauth makes an otherwise connected account unusable

a garbage queue entry list does not crash decoding

DraftCard

a short post shows no fold marker

a long post shows the fold where LinkedIn cuts it

see more actually expands and collapses

a short post gets no toggle at all

draft actions appear only when handlers are given

an unscheduled post offers Publish, never Clear

a scheduled post leads with Clear, not Publish

an unscheduled draft is offered a send time

a scheduled draft shows the countdown, not the offer

a cleared post says so and stops offering Clear

The index extracts literal test/group titles. Assertion labels, dynamically generated cases and complete test bodies are preserved in the companion source reference.

32. Finding the exact implementation

This reading edition retains the explanations, every-file catalogue, dependency inventories, configuration/import index, API navigation, D1 schema and test-case index. The thousands of lines of raw application code are available as a separate searchable repository reference, rather than repeated in this PDF.

Open the complete source reference on GitHub

Repository path: docs/generated-reference.md. Download the raw Markdown if GitHub truncates its preview. It contains the full project-owned text listings, historical reports and lockfile resolution details. Individual files remain available at their paths in the repository.

A screen or interaction

Find its mobile/lib/screens or mobile/lib/widgets path in chapter 27, then follow its imports to AppState and ApiClient.

An endpoint or validation rule

Use chapter 30 for method/path routing; inspect the named cloud/src handler or app/api route in the companion reference.

A database field or concurrency rule

Use the D1 schema in chapter 30; inspect lib/schema.ts for PostgreSQL and the relevant adapter for transaction behavior.

An AI prompt or editorial edge case

Inspect lib/writer-core.ts, lib/judge-core.ts, lib/critique.ts and the deployment-specific AI adapter.

A package, configuration key or helper

Use chapters 28-29 for versions and usage locations, then the complete source file for the exact branch.

A historical decision or test assertion


Use reports/ for dated evidence, chapter 31 for test titles and the source reference for complete assertions.

The inventory records source hashes, including LF-normalized text hashes for cross-platform comparison. Source snippets printed in this PDF use line numbers and wrap long lines; the repository contains the original bytes. Historical comments and reports may describe an earlier implementation.


33. Mobile UI preview gallery

One historical phone-width preview per screen is shown. These are design previews already in the repository, not fresh APK captures. Desktop/tablet variants remain in reports/ui-preview and in the file catalogue.


reports/ui-preview/daily-390.png

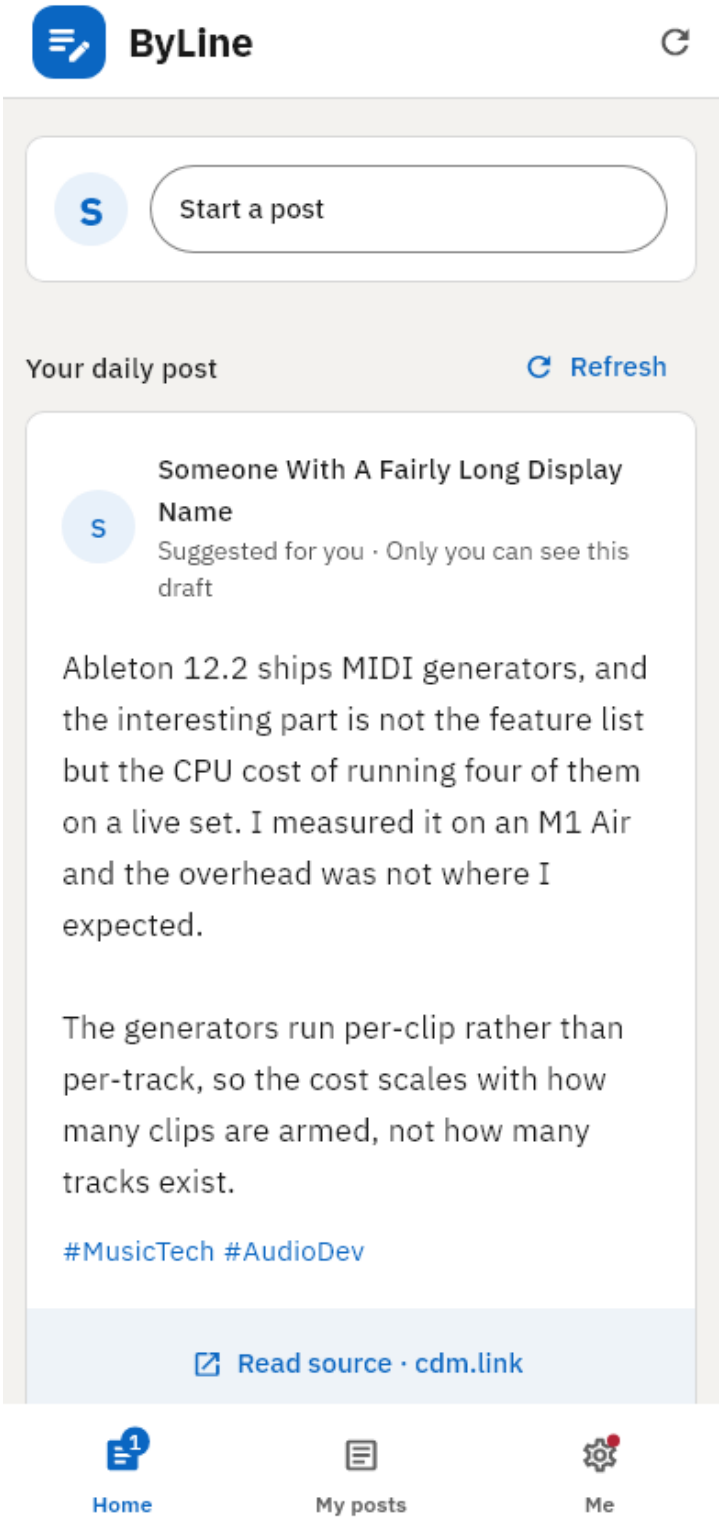


reports/ui-preview/delivery-390.png

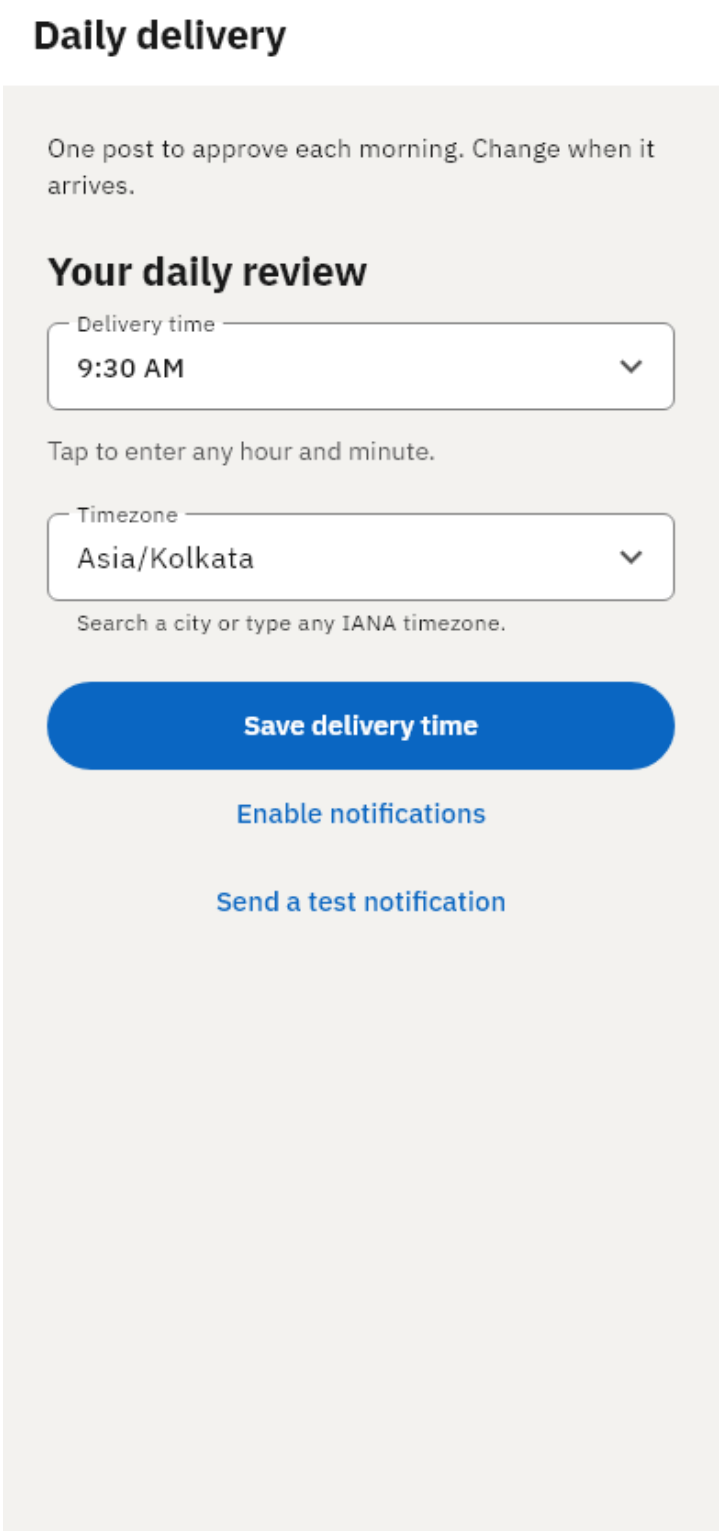


reports/ui-preview/interests-onboarding-390.png

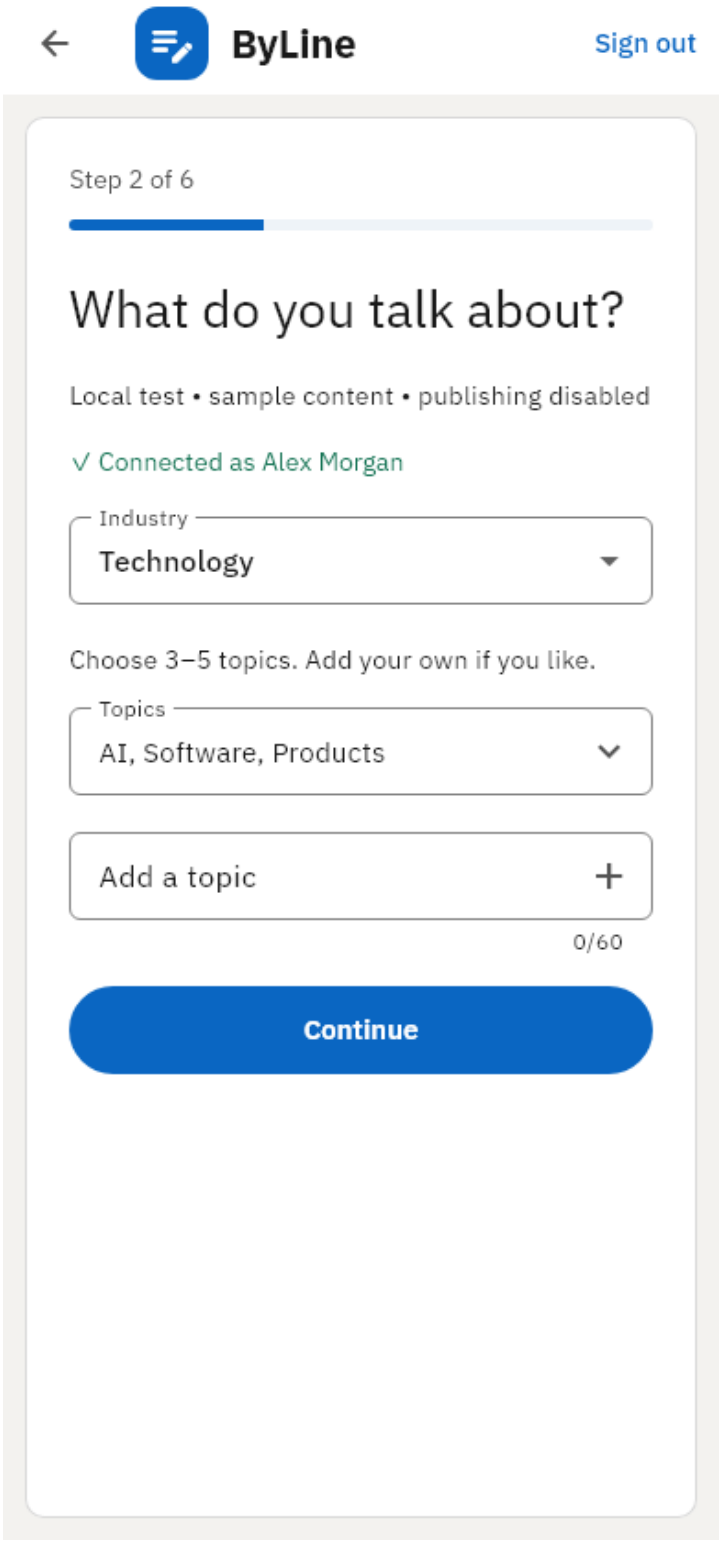


reports/ui-preview/sample-390.png

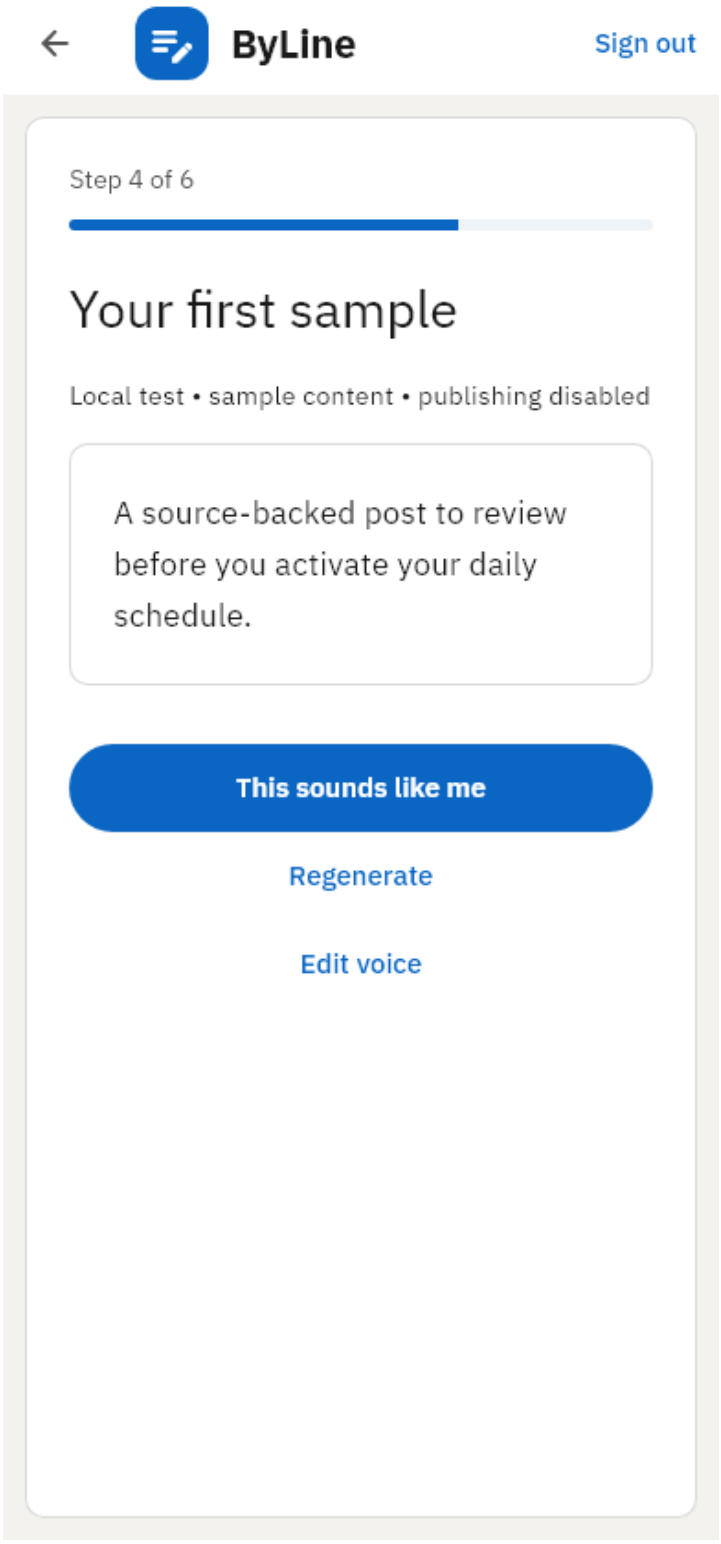


reports/ui-preview/timetable-390.png

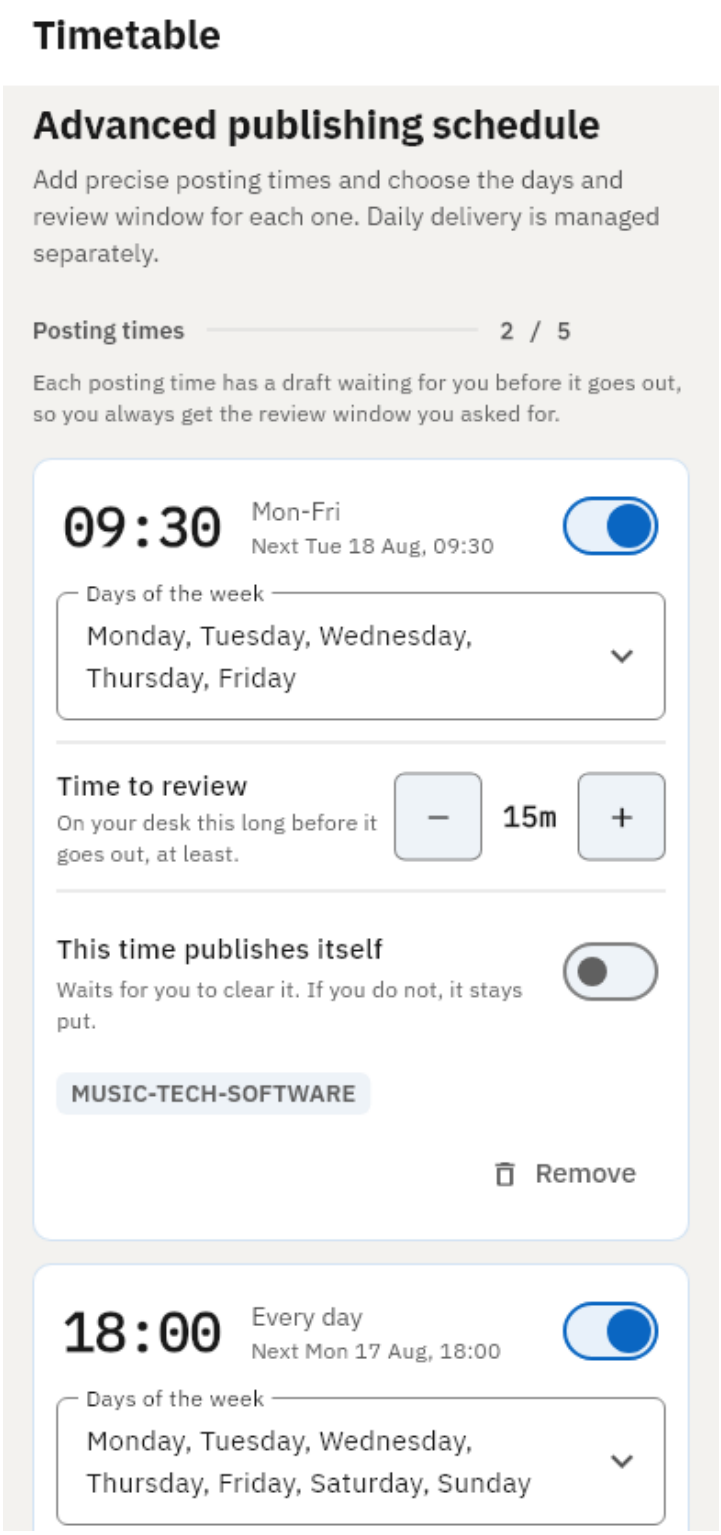


reports/ui-preview/topics-390.png

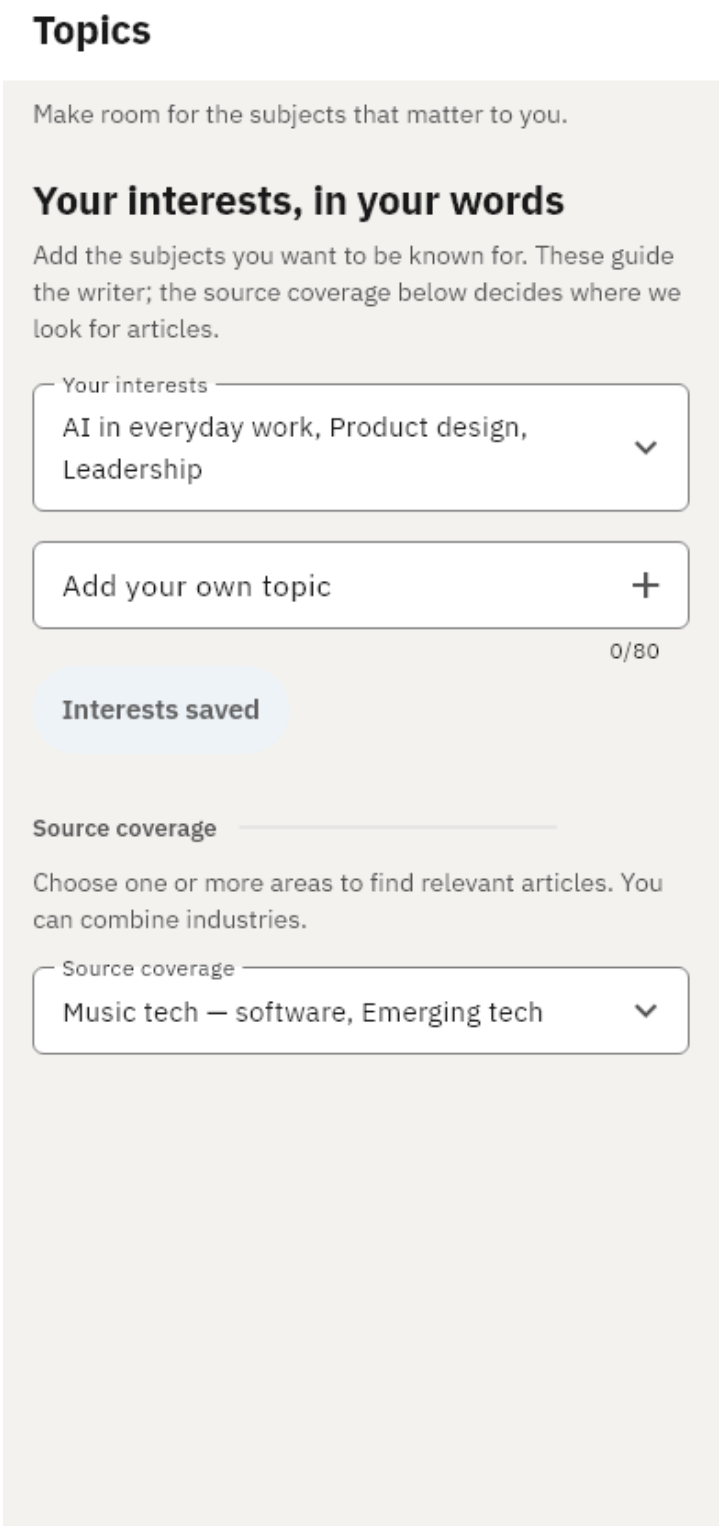

reports/ui-preview/voice-390.png

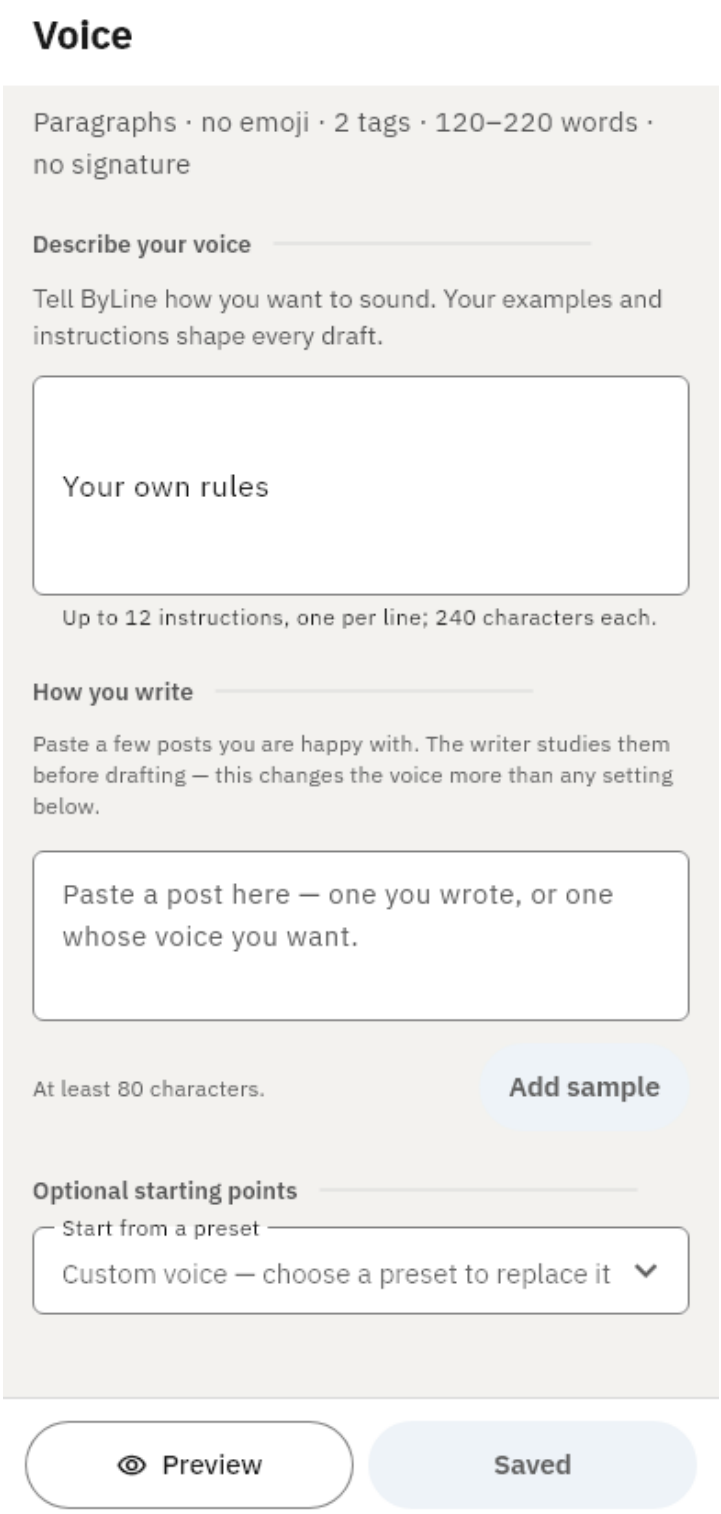

reports/ui-preview/welcome-390.png

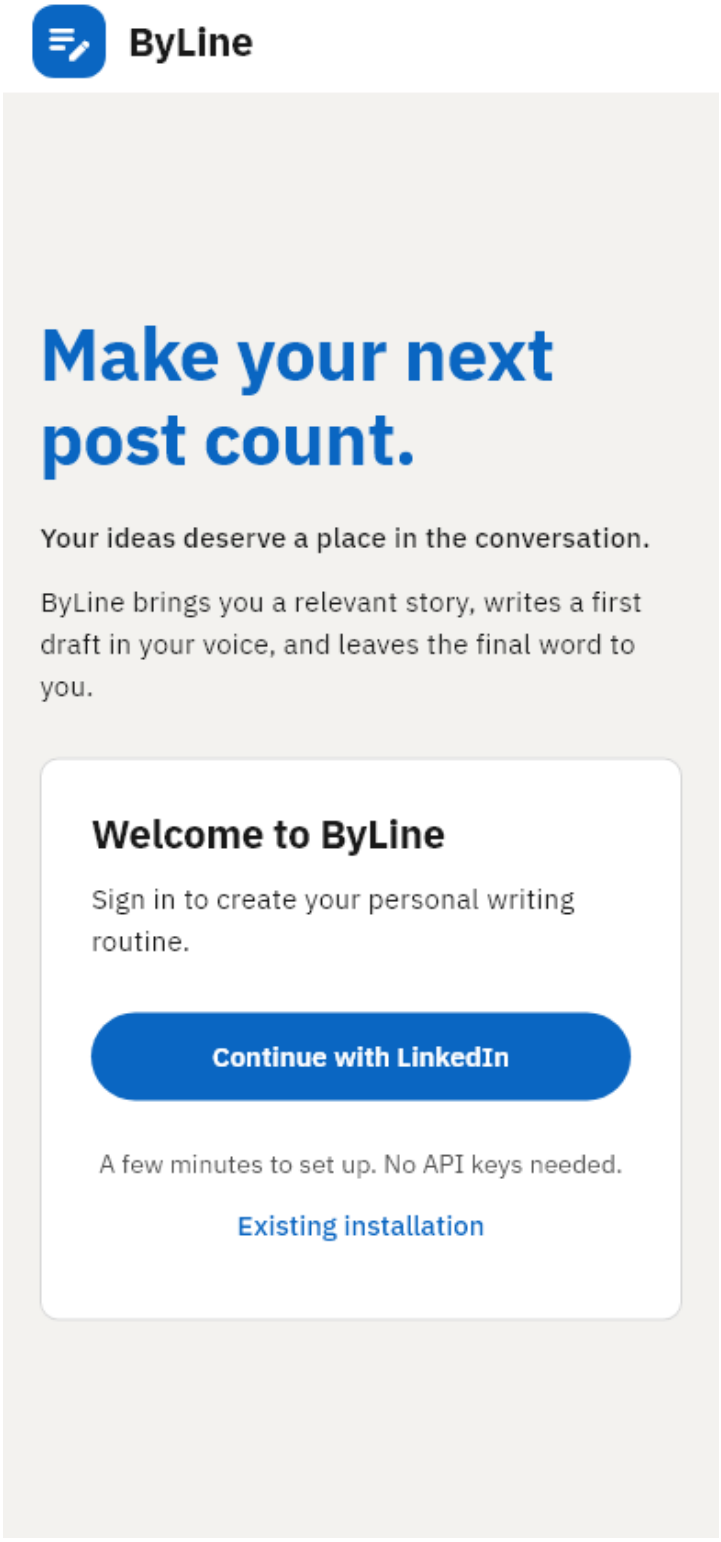

34. Scope and source integrity

PDF catalogue: 332 files. Companion source reference: 282 full text listings and 41,830 original lines. Both npm lockfiles are fully indexed in the PDF. Binary assets are accounted for by path, role, byte size and SHA-256; selected phone previews are rendered in the gallery.

Excluded from publication: Git internals, populated .env files, node_modules, Flutter/Android/Next build caches, local databases, private signing keys, service-account credentials and generated local Worker binding types. These are dependencies, secrets or runtime data, not omitted project source. Recreate generated dependencies with the documented setup commands and restore secrets from authorized secure storage.

This is a source snapshot rather than a warranty about changing third-party services. For any exact condition, use the file catalogue and companion source reference; for subsequent changes use Git history. The generated Markdown reference retains the exhaustive source material outside this condensed PDF.