


IBM Bob 2.0 Hackathon • Sept 2026

Standup Sync

Your standup, written from the code.

Reads the actual code changes in a git repo and writes Slack, Email and Standup updates for developers and for clients.

standup-sync.onrender.com

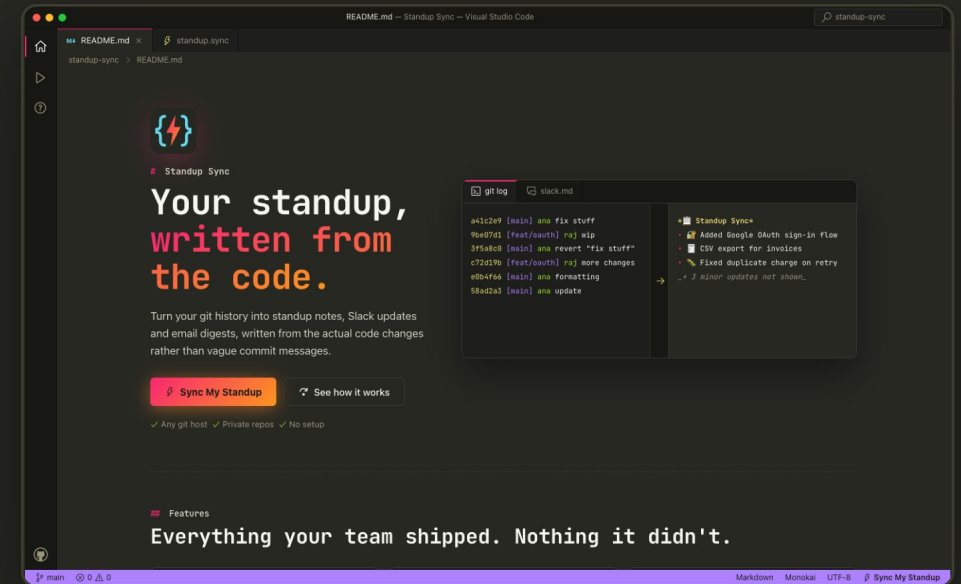

The problem

Every update starts with git log

```
$ git log --oneline  
a41c2e9 fix stuff  
9be07d1 wip  
3f5a8c0 revert "fix stuff"  
c72d19b more changes  
e0b4f66 formatting  
58ad2a3 update
```

Commit messages don't say what got done.

So developers open diffs, jump between branches and piece the week together by hand, before every standup, Slack post and client email.

Why it hurts

Slow, error-prone, repeated



Slow

Reading diffs across every branch just to recall what changed.



Error-prone

Unmerged branch work gets forgotten. Reverts and formatting get reported as progress.



Repeated

The same week rewritten for the team, the Slack channel and the client.

The solution

One click, six ready-to-post updates


- 1 Paste a repo URL.** GitHub, GitLab, Bitbucket, Azure DevOps. Private repos with a token.
- 2 Pick a range.** Last 24 hours to 30 days, or custom dates.
- 3 Press ⚡ Sync My Standup.** Watch each step run live.

Format	Kept to
Slack	3–6 short bullets
Email	300 words, 2–4 sections
Standup	3 lines per person

Each one twice: for **developers** (files, functions) and for **clients** (plain English).

The app

Feels like your editor

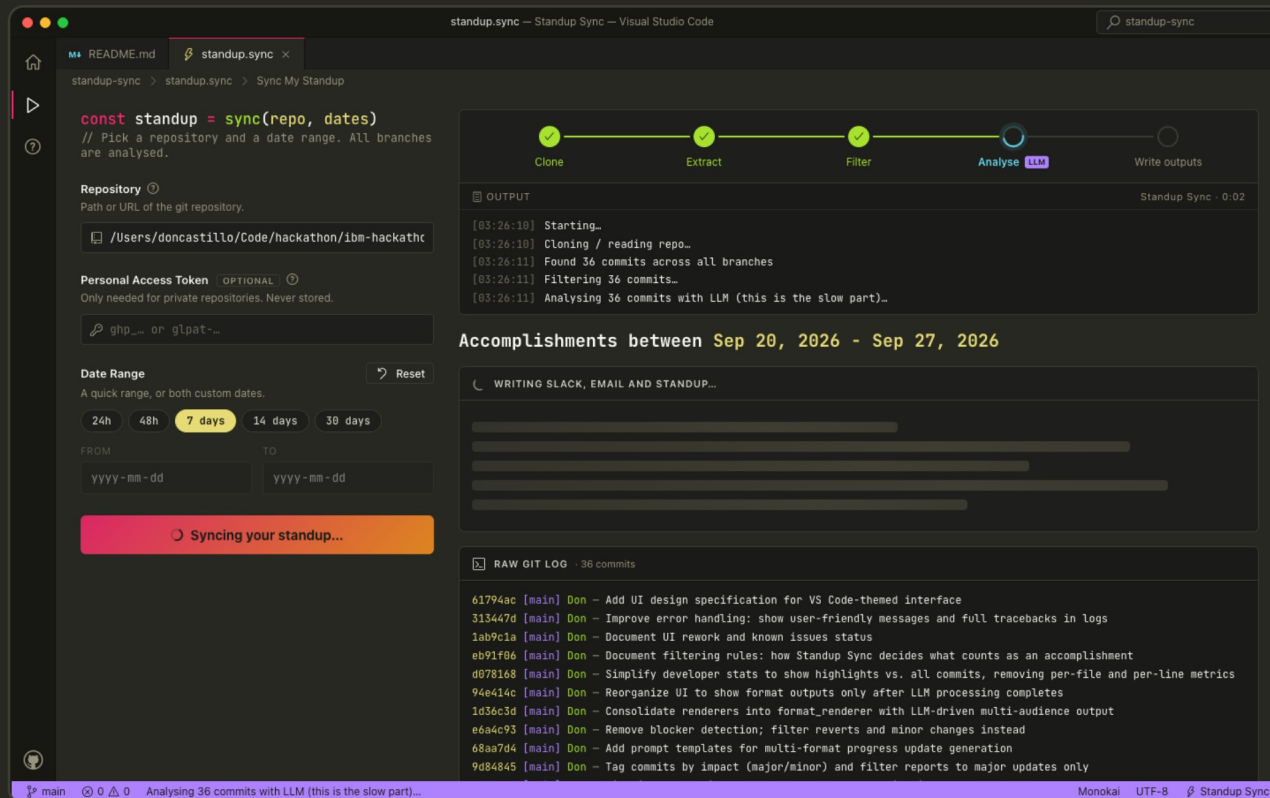


Live progress. Five steps and an OUTPUT log, as the work happens.

Raw log first. Every commit, tagged with its branch, within seconds.

Then the updates. Toggle developers and clients, copy in one click.

How it works

Five steps, only two use AI

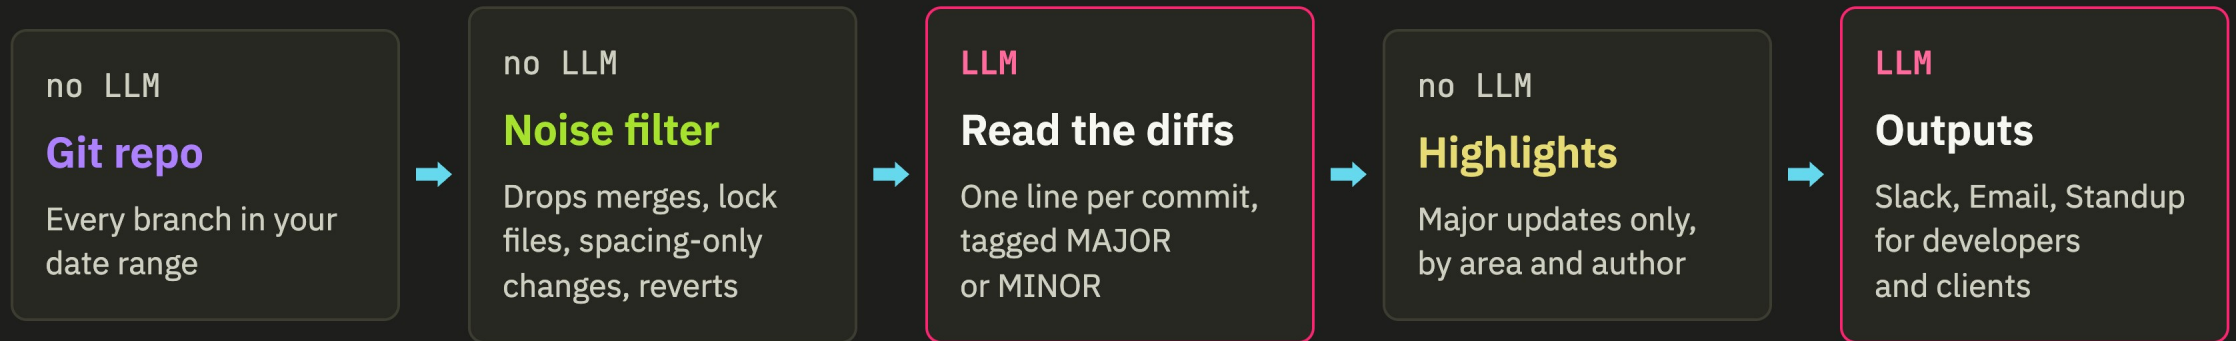

The model only sees commits that survive the filter: noise is dropped before any AI runs, and a typical run costs cents.

Why it's different

Not another changelog bot

	- Changelog bots	+ Standup Sync
Reads	Commit messages as written	The actual diffs
Reports	Every commit, reverts included	Major accomplishments only
Branches	Usually the default branch	Every branch, unmerged work too
Writes for	One technical format	Developers or clients, 3 formats

Built with IBM Bob

Three Bob sessions, one working app

1 • Build the pipeline

Planned from our AGENTS.md and plan/docs, set up watsonx.ai using IBM docs search, scaffolded the full pipeline and streaming UI.

2 • Cost and speed

Explained LLM calls and cost, switched to blobless clones, and sent whole diffs to the model.

3 • Features and UI

Explore subagent and planning skill, then Agent mode: developer stats, client tone, private repos, date presets.

Document understanding

IBM docs search

Planning skill

Explore subagent

Agent mode

Sept 26 • session exports in bob_sessions/ • from Sept 27, testing, filtering and the UI redesign continued with Claude Code

Built to hold up

Tested on real repositories

102

automated tests, offline and
against real public repos

8

bugs found and fixed, from
date ranges to truncated
summaries

5.6×

faster on microsoft/vscode:
807 s down to 143 s

Tokens are never stored. Local paths are blocked on the public server. Dates follow the visitor's time zone.

```
$ standup-sync --since "7 days ago"
```

Stop rebuilding your week from git log.

`standup-sync.onrender.com`

Code, tests and Bob session exports: github.com/DonCastillo/ibm-hackathon