Why R-DGG reads the AUDIO channel, net of motion: motion coupling is strong but does not discriminate

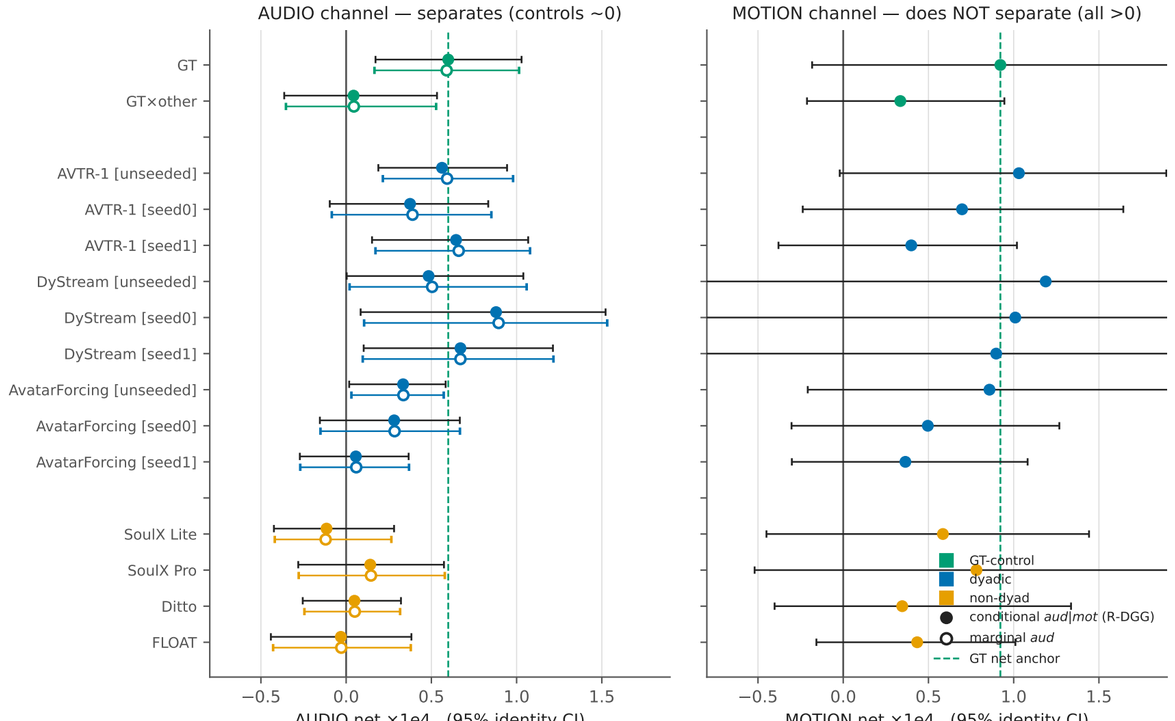

All columns on ONE shared mask (identical frames): GT-reactive & every model-seed column's face_ok. n≈177, 13 identities. Main point: the AUDIO channel separates dyadic/GT (>0) from the controls (~0); the MOTION channel is positive for EVERY column, controls included— so reactivity must be read off audio, net of motion. Conditioning on motion (filled vs hollow, left) barely moves the audio net (|Δ|≤0.03): audio ⊥ motion here.