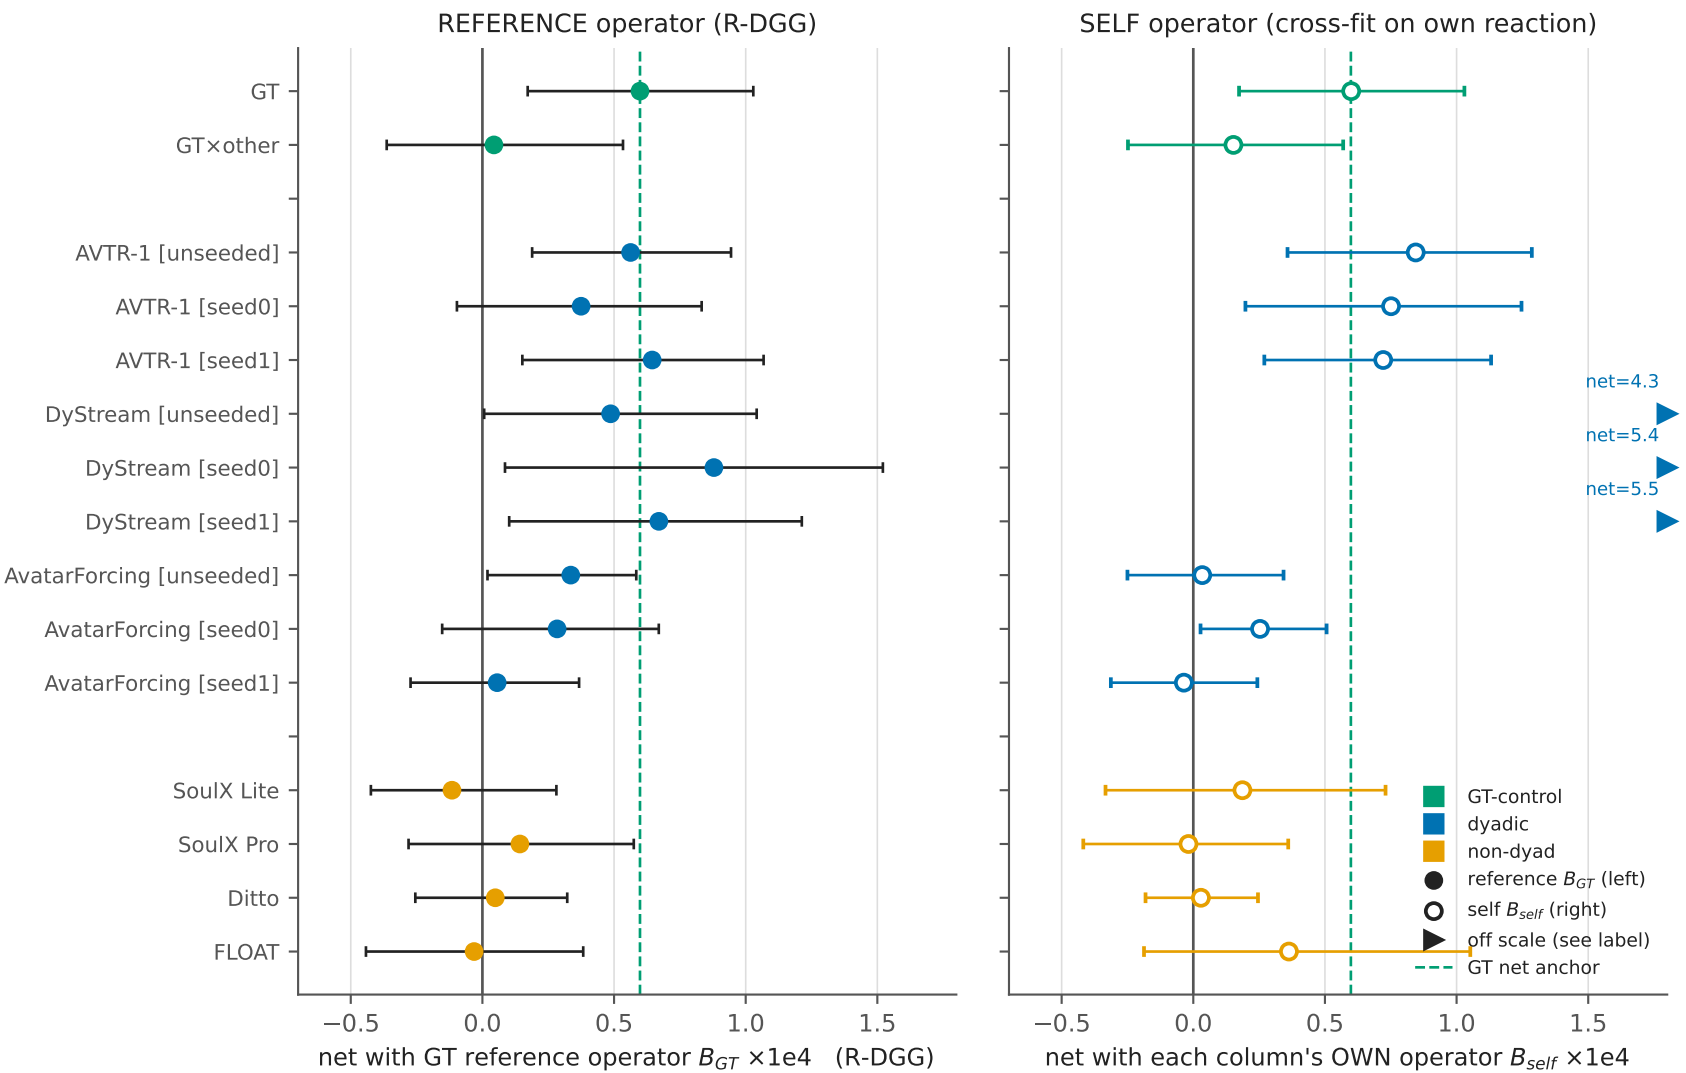
Reference vs self operator: does R-DGG need the GT reference projection?
REFERENCE operator (R-DGG)
SELF operator (cross-fit on own reaction)
GT
GT×other
AVTR-1 [unseeded]
AVTR-1 [seed0]
AVTR-1 [seed1]
DyStream [unseeded]
DyStream [seed0]
DyStream [seed1]
AvatarForcing [unseeded]
AvatarForcing [seed0]
AvatarForcing [seed1]
SoulX Lite
SoulX Pro
Ditto
FLOAT
net=4.3
net=5.4
net=5.5
GT-control
dyadic
non-dyad
reference B_{GT} (left)
self B_{self} (right)
off scale (see label)
GT net anchor
−0.5
0.0
0.5
1.0
1.5
net with GT reference operator B_{GT} ×1e4 (R-DGG)
net with each column's OWN operator B_{self} ×1e4
All columns on ONE shared mask (identical frames): GT-reactive & every model-seed column's face_ok. n≈177, 13 identities. B_self is a leave-one-identity-fold cross-fit on each column's own reaction.