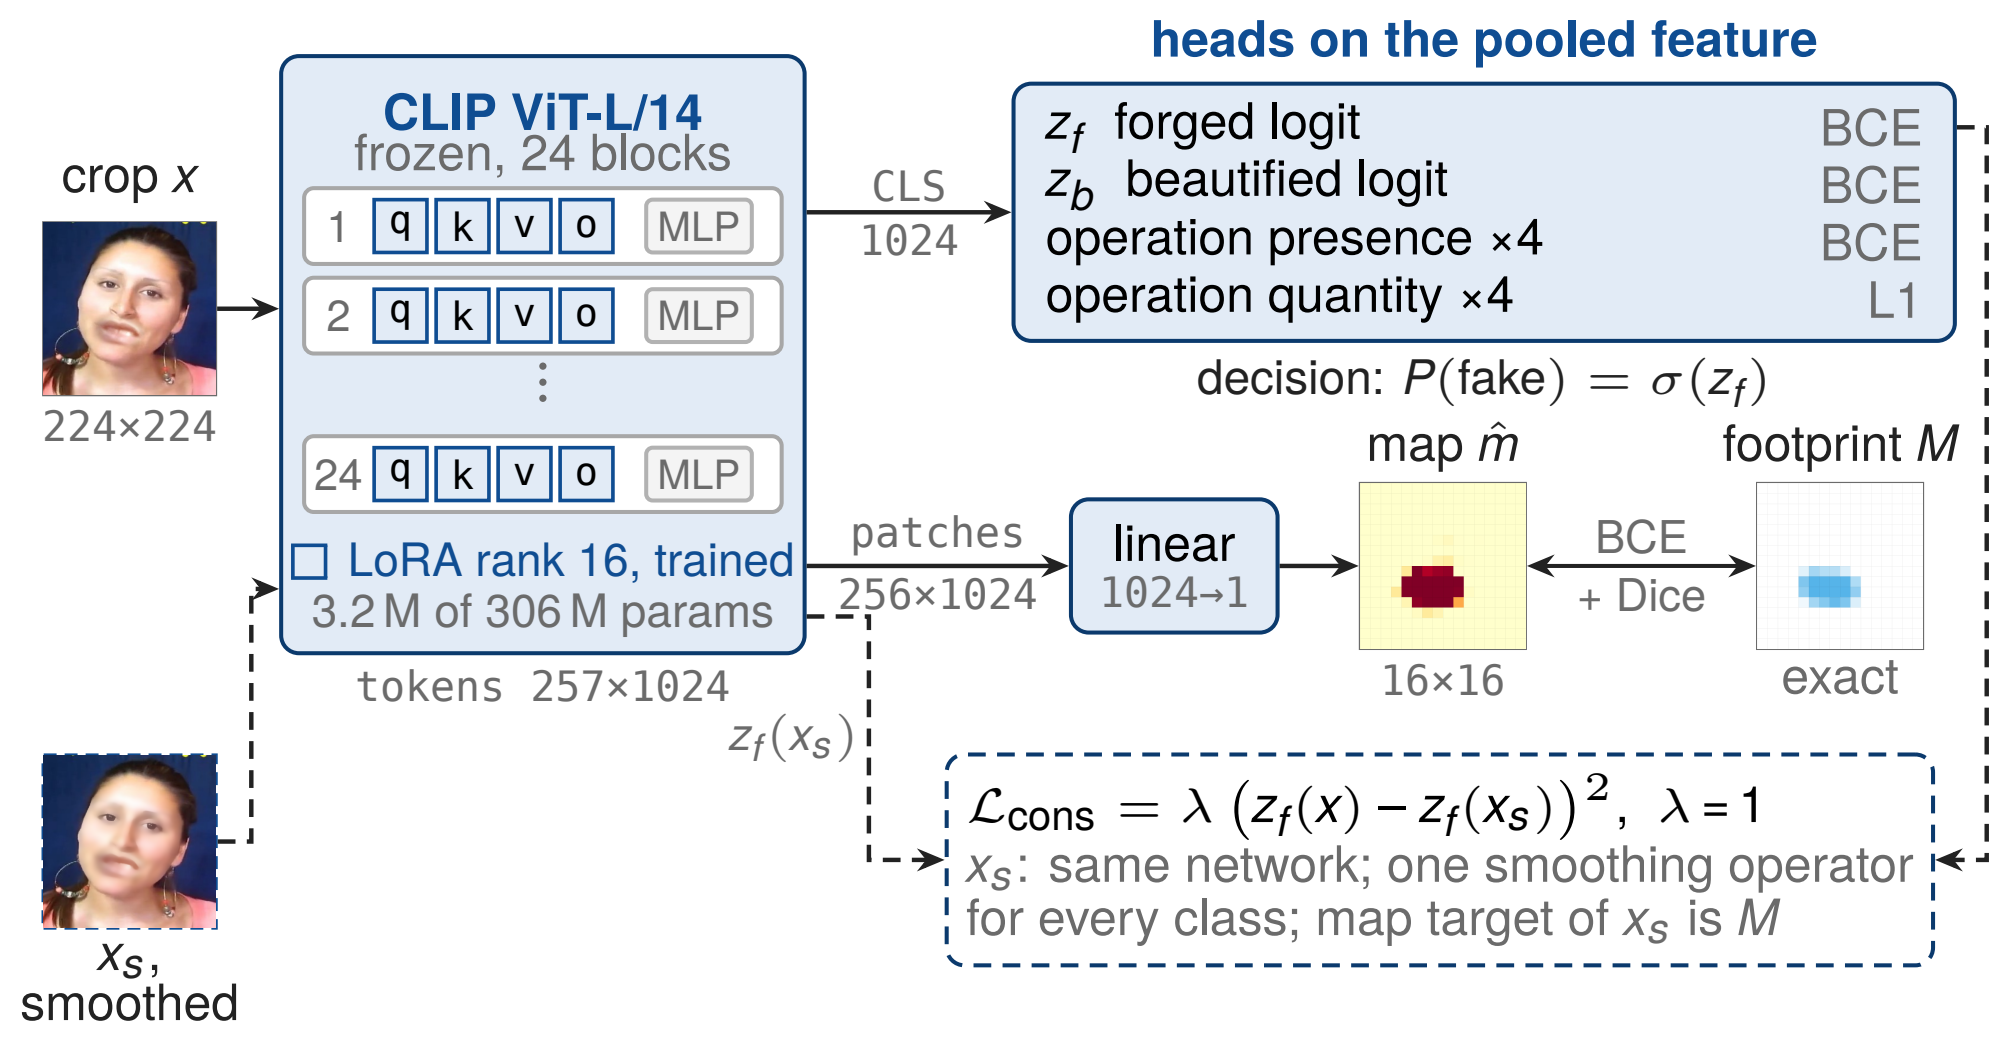

heads on the pooled feature
crop x
224×224
CLIP ViT-L/14
frozen, 24 blocks
1 q k v o MLP
2 q k v o MLP
24 q k v o MLP
LoRA rank 16, trained
3.2 M of 306 M params
tokens 257×1024
CLS
1024
z_f forged logit BCE
z_b beautified logit BCE
operation presence ×4 BCE
operation quantity ×4 L1
decision: $P(\text{fake}) = \sigma(z_f)$
patches
256×1024
linear
1024→1
map $\hat{m}$
16×16
BCE
+ Dice
footprint M
exact
$z_f(x_s)$
x_s,
smoothed
$\mathcal{L}_{\text{cons}} = \lambda \left(z_f(x) - z_f(x_s)\right)^2, \ \lambda = 1$
x_s: same network; one smoothing operator
for every class; map target of x_s is M