UNIVERSITY OF GREENWICH

Alliance with FPT Education

Full Name: Phạm Thái Nam

MSSV: GCS220749

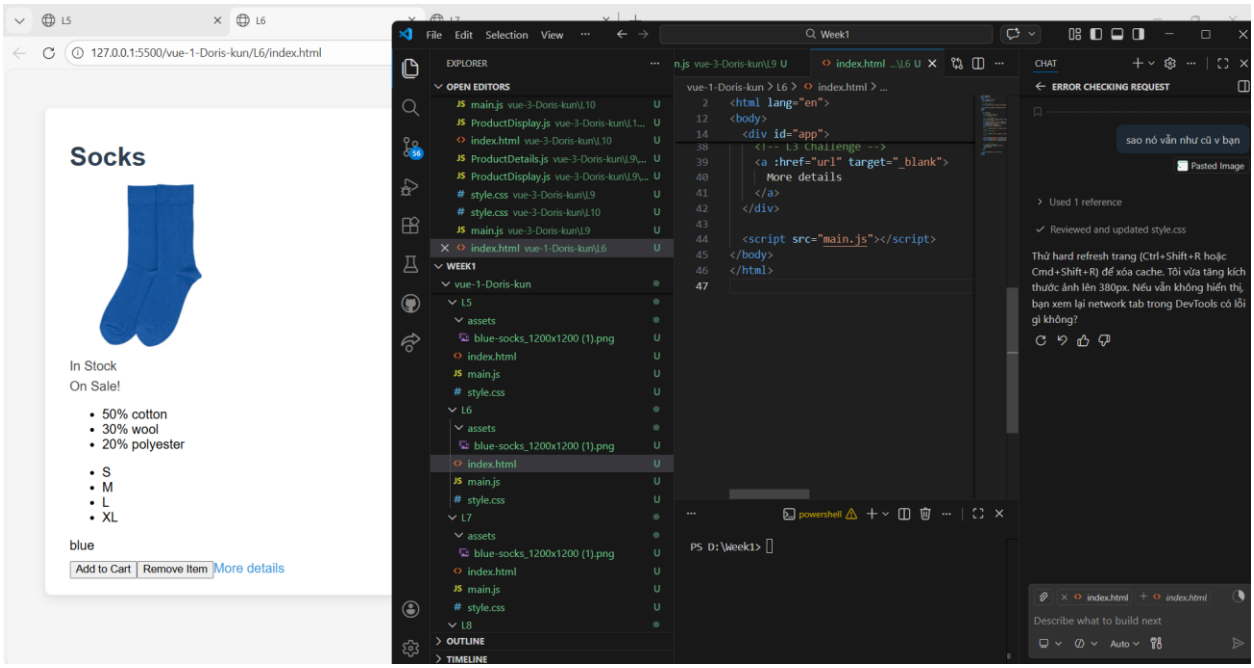
127.0.0.1:5500/vue-1-Doris-kun/L6/index.html
Socks
In Stock
On Sale!
50% cotton
30% wool
20% polyester
S
M
L
XL
blue
Add to Cart
Remove Item
More details
File Edit Selection View
Week1
EXPLORER
OPEN EDITORS
WEEK1
vue-1-Doris-kun
L5
L6
L7
L8
OUTLINE
TIMELINE
<html lang="en">
<body>

<!-- L3 Challenge -->
<a :href="url" target="_blank">
More details
</a>

<script src="main.js"></script>
</body>
</html>
PS D:\Week1>
CHAT
ERROR CHECKING REQUEST
sao nó vẫn như cũ v bạn
Pasted Image
Used 1 reference
Reviewed and updated style.css
Describe what to build next

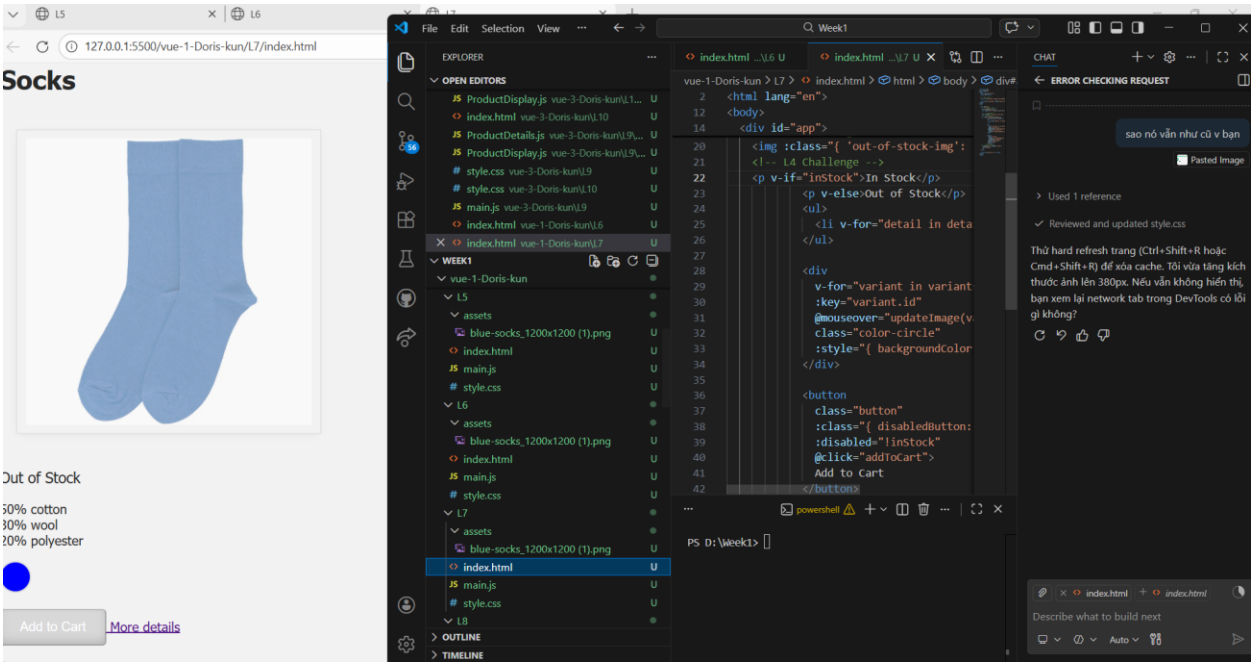
127.0.0.1:5500/vue-1-Doris-kun/L7/index.html
Socks
Out of Stock
50% cotton
30% wool
20% polyester
Add to Cart
More details
File Edit Selection View
Week1
EXPLORER
OPEN EDITORS
WEEK1
vue-1-Doris-kun
L5
L6
L7
L8
OUTLINE
TIMELINE
<html lang="en">
<body>

<img :class="{ 'out-of-stock-img':
<!-- L4 Challenge -->
In Stock
<p v-else>Out of Stock
<ul>
<li v-for="detail in deta
</ul>
<div
v-for="variant in variant
:key="variant.id"
@mouseover="updateImage(v
class="color-circle"
:style="{ backgroundColor

<button
class="button"
:class="{ disabledButton:
:disabled="!inStock"
@click="addToCart">
Add to Cart
</button>
PS D:\Week1>
CHAT
ERROR CHECKING REQUEST
sao nó vẫn như cũ v bạn
Pasted Image
Used 1 reference
Reviewed and updated style.css
Describe what to build next

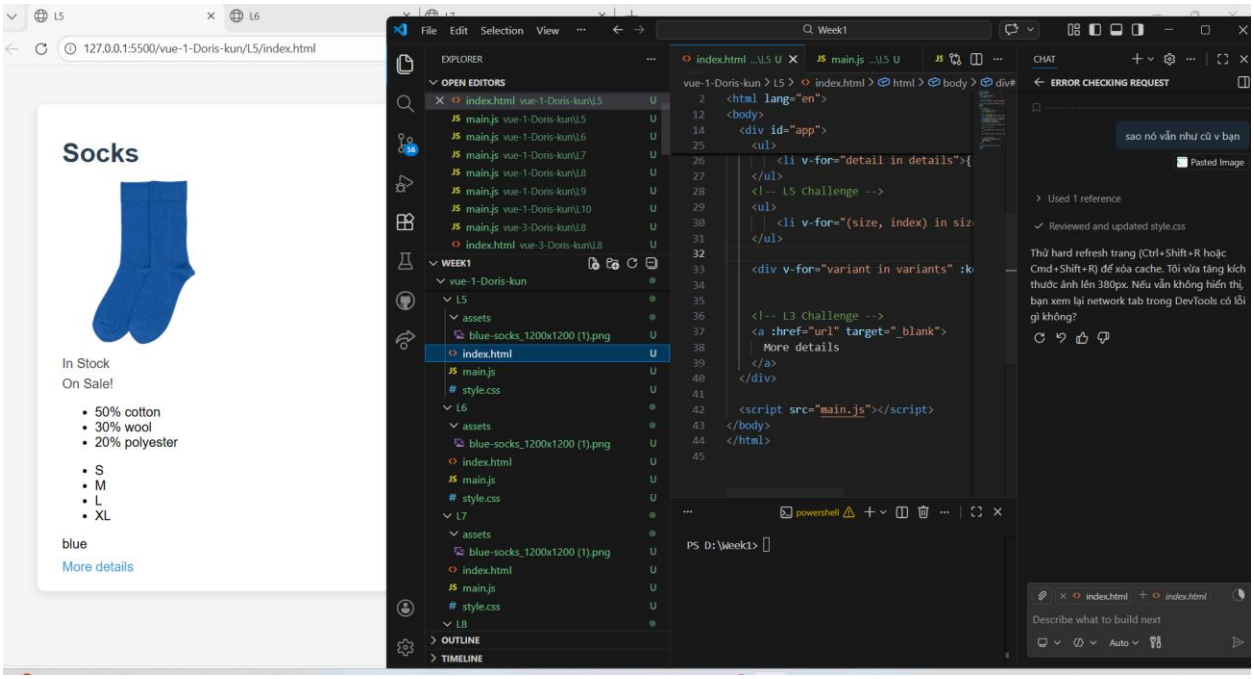

In Lessons 5 to 7 of the Vue course, I built a clearer understanding of how Vue binds data to the interface and reacts to user interaction. In Lesson 5, the focus was mainly on rendering lists and handling events. I practiced using **v-for** to loop through arrays such as product details and sizes, which allowed multiple items to be displayed dynamically instead of writing static HTML. I also learned how to attach event listeners with **v-on** and connect buttons like “Add to Cart” and “Remove Item” to methods. This showed how Vue connects user actions to JavaScript logic in a clean and maintainable way.

In Lesson 6, the lesson expanded into computed properties and conditional rendering. I used **v-if, v-else-if, and v-else** to display stock status and sale messages depending on product quantity and conditions. Computed properties helped combine brand and product names into a dynamic title and determine whether the product is on sale. Compared to methods, computed properties felt more efficient and organized for derived values that update automatically when dependencies change.

In Lesson 7, I learned dynamic class and style binding. I applied **v-bind:class** to change button styles when items are out of stock and bind an “out-of-stock” image class when inventory is false. This made the UI visually respond to data state. Overall, these lessons helped me understand how Vue connects data, logic, and presentation into a reactive system.