



1. Running the bash script from the desktop, while the makefile is in another folder.

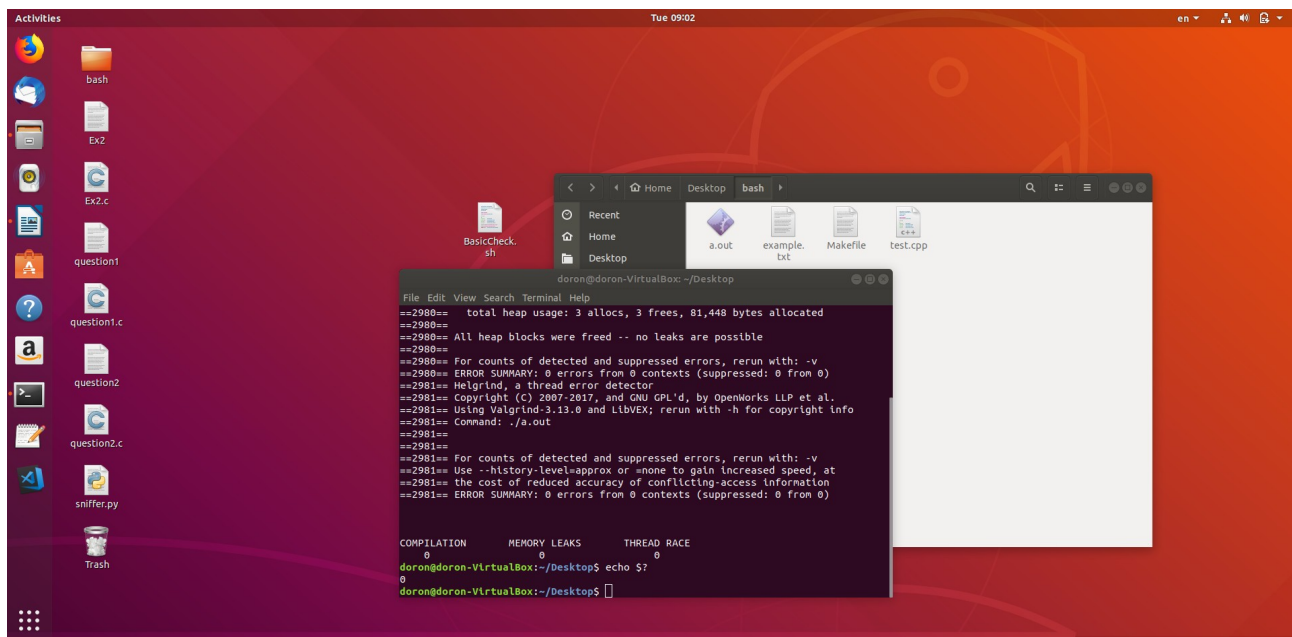

2. running the script when there is no makefile

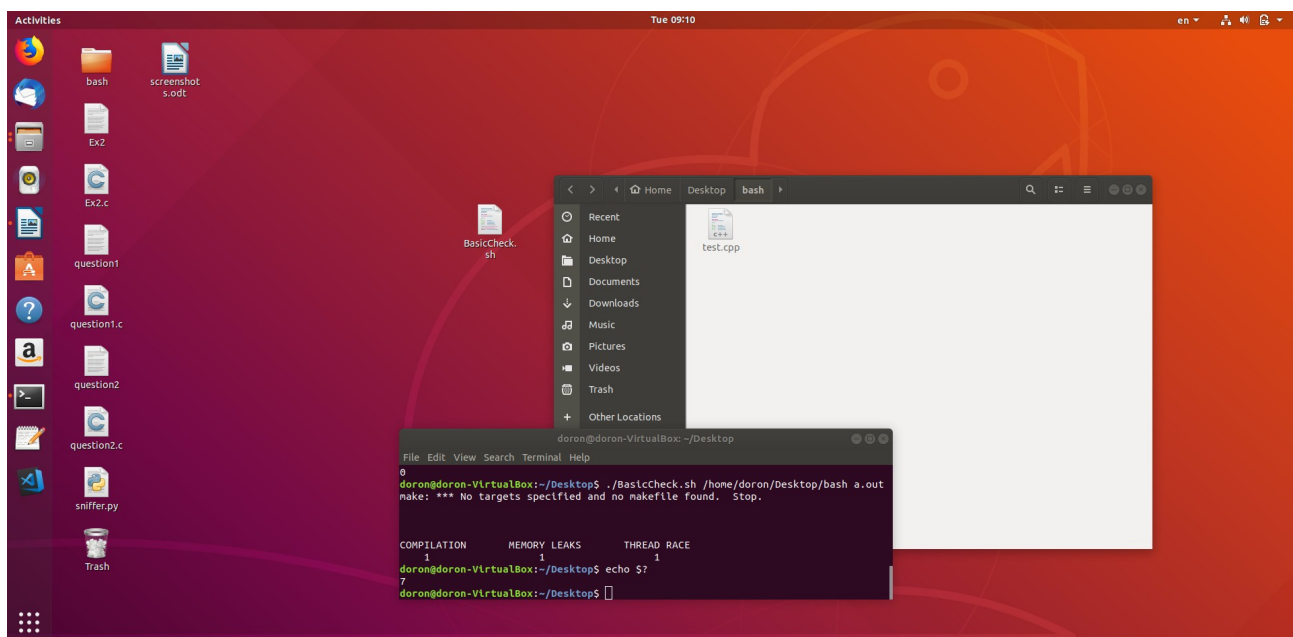

3. running the script while there is a memory leaks in the code.

