
Návod na spustenie

Na naprogramovanie zadania som využila vývojové prostredie Webstorm od InteliJ. Po spustení súboru index.js sa spustí server, ktorý beží lokálne na porte 3000. Ak server beží v konzole je možné vidieť nasledujúci výpis:




Na testovanie požiadaviek na server a odpovedí servera používam službu Postman. Požiadavky sú posielané na lokálne bežiaci server:

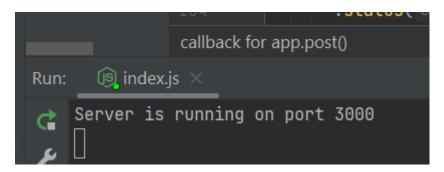



Ukážka požiadaviek na server s odpoveďou servera:

- GET request /gallery
 - o response 200

- POST request /gallery
 - o response 201

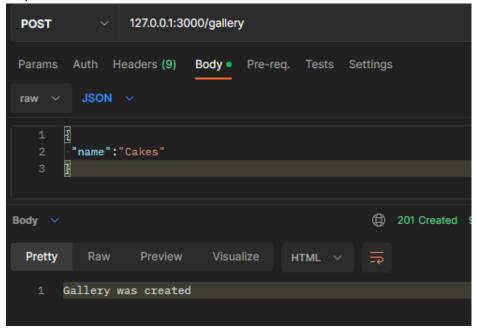


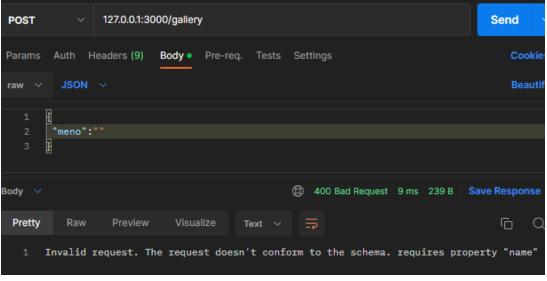


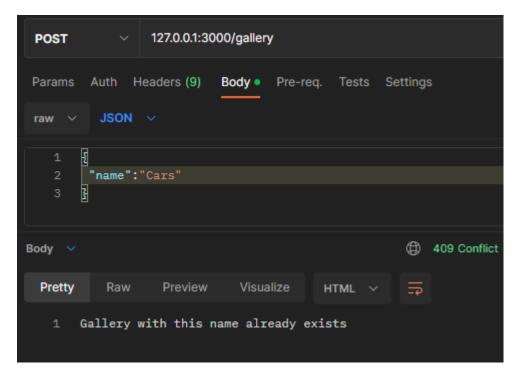


GET request /gallery/{path}


o response 200

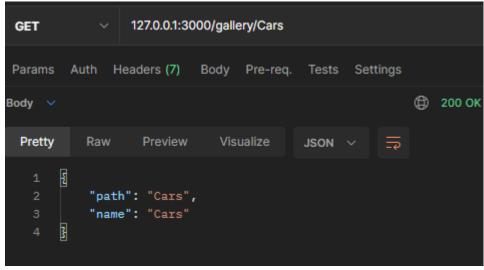

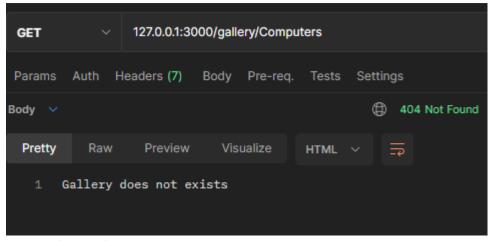


- DELETE request /gallery/{path}
 - o response 200

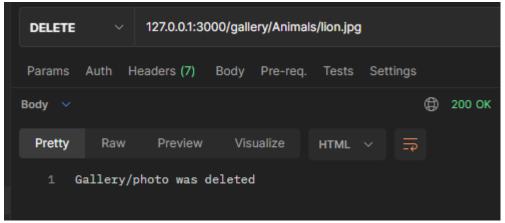


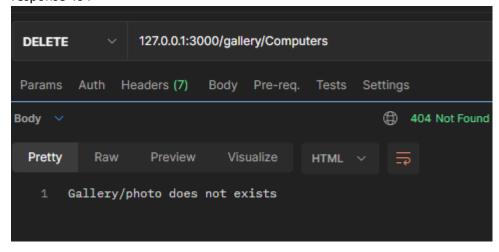

- POST request /gallery/{path}
 - o response 201

```
POST
             127.0.0.1:3000/gallery/Animals/bee.jpg
                           Body • Pre-req. Tests Settings
Params Auth Headers (9)
raw 🗸
            "path":"bee.jpg",
           "name":"Dorka",
            "fullpath":"Animals/bee.jpg"
                                                      (f) 201 Created
Body V
 Pretty
                                          JSON V
                "path": "bee.jpg",
                "fullpath": "Animals/bee.jpg",
                "name": "Dorka",
                "modified": "2023/02/22 23:29:25"
```

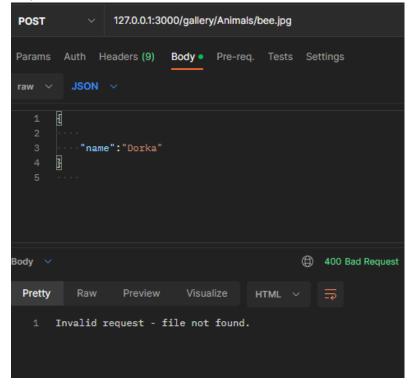

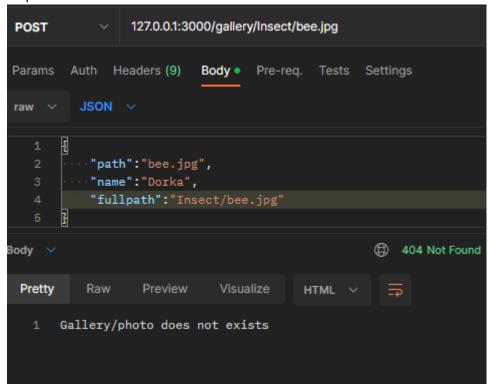

- GET request /images/{w}x{h}/{path}
 - o response 200

