

Here is the step-by-step documentation of all the actions taken so far:

Oracle Grid & Database 19c Pre-installation Steps (Oracle Linux 7.8)

1. VMware Infrastructure Setup

- Created a Virtual Machine running **Oracle Linux 7.8 64-bit**.
- Allocated System Resources:
 - **OS Disk:** 100 GB (SCSI)
 - **ASM Disks:** 20 GB
 - **ISO Image:** Attached `OracleLinux-R7-U8-Server-x86_64-dvd-2`.

2. Local Yum Repository Configuration

To bypass Oracle download/network restrictions (HTTP 403) and install prerequisite packages offline:

1. Mounted the Oracle Linux Installation DVD:

Here if you couldn't mount your iso you should restart the machine.

Bash

```
mkdir -p /media/cdrom
mount /dev/cdrom /media/cdrom
```

2. Backed up existing repository configurations:

Bash

```
cd /etc/yum.repos.d/
mkdir repo_backup
mv *.repo repo_backup/
```

3. Created a Local DVD Repository file (`/etc/yum.repos.d/local.repo`):

Bash

```
cat << 'EOF' > /etc/yum.repos.d/local.repo
[local-media]
name=Oracle Linux Local DVD
baseurl=file:///media/cdrom
gpgcheck=0
```

```
enabled=1
EOF
```

4. Cleared Cache and Verified Local Repository:

Bash

```
yum clean all && yum repolist
```

Verified: 5,211 packages available locally.

3. Installing Oracle 19c Pre-installation Package

Automated kernel parameter tuning and prerequisite package installation using the local media:

Bash

```
yum install -y oracle-database-preinstall-19c
```

To verify the installation step was successful, check that `Complete!` appears at the end of the `yum` command output.

4. Production User & Group Creation (Separation of Duties)

Created dedicated ASM administration groups and created/configured the `grid` and `oracle` OS accounts:

Bash

```
# Create dedicated ASM groups
groupadd -g 54327 asmadmin
groupadd -g 54328 asmdba
groupadd -g 54329 asmoper

# Modify existing oracle user primary & secondary groups
usermod -g oinstall -G dba,asmdba,oper oracle

# Create dedicated grid user
useradd -u 54331 -g oinstall -G asmadmin,asmdba,asmoper,dba grid

# Set passwords
passwd oracle
passwd grid
```

5. OFA Directory Structure Setup

Created directory trees for Grid Infrastructure and Oracle Database Homes, applying strict ownership rules:

Bash

```
# Create directories
mkdir -p /u01/app/19.3.0/grid
mkdir -p /u01/app/oracle/product/19.3.0/dbhome_1
mkdir -p /u01/app/grid
mkdir -p /u01/app/oracle

# Set permissions and ownership
chown -R grid:oinstall /u01/app/19.3.0/grid
chown -R grid:oinstall /u01/app/grid
chown -R oracle:oinstall /u01/app/oracle
chown -R oracle:oinstall /u01/app/oracle/product/19.3.0/dbhome_1

chmod -R 775 /u01
```

6. ASM Partitioning Configuration

Partitioned the dedicated 20 GB SCSI disk for ASM storage using `fdisk` :

Bash

```
fdisk /dev/sdb
# Command sequence: n -> p -> 1 -> Enter -> Enter -> w
```

Verified output using `lsblk /dev/sdb` : `/dev/sdb1` (20 GB partition created)

7. Persistent Device Naming using Udev Rules

Configured Udev rules to ensure proper ownership (`grid:asmadmin`) and persistence across system reboots for the ASM storage partition:

Bash

```
# Create Udev rule file
cat << 'EOF' > /etc/udev/rules.d/99-oracle-asmdevices.rules
KERNEL=="sdb1", OWNER="grid", GROUP="asmadmin", MODE="0660"
EOF

# Reload and apply rules
```

```
udevadm control --reload-rules
udevadm trigger
```

Verification: Executed `ls -l /dev/sdb1` to confirm permissions `brw-rw---- grid asmadmin`

8. Grid Infrastructure Media Transfer & Unzip Preparation

Transferred the Oracle Grid Infrastructure 19c image zip file
(`LINUX.X64_193000_grid_home.zip`) directly into the target `GRID_HOME` directory
(`/home/grid/`) via SCP

```
scp "C:\Users\mohaymen\Desktop\Books\Documents\Arbeit\Installation
files\LINUX.X64_193000_grid_home.zip" root@192.168.76.132:/home/grid/
```

8. Grid Infrastructure Image Extraction

Extracted the Grid Infrastructure 19c image zip directly into the `GRID_HOME` directory using the
`grid` operating system user:

Bash

```
# Set ownership and navigate to GRID_HOME
chown grid:oinstall /u01/app/19.3.0/grid/LINUX.X64_193000_grid_home.zip
su - grid
cd /u01/app/19.3.0/grid/

# Perform silent extraction
unzip -q LINUX.X64_193000_grid_home.zip
```

9. Environment Variables Configuration (`grid` user)

Configured the Grid Infrastructure environment variables within `~/.bash_profile` for the `grid` user:

Bash

```
vi ~/.bash_profile

# Oracle Grid Infrastructure Environment
export ORACLE_SID=+ASM
export ORACLE_BASE=/u01/app/grid
export ORACLE_HOME=/u01/app/19.3.0/grid
export PATH=$ORACLE_HOME/bin:$PATH
EOF
```

```
source ~/.bash_profile
```

10.Installaion window for Grid steps

Select Configuration Option

Configuration Option**Create ASM Disk Group**

- ASM Password
- Operating System Groups
- Installation Location
- Root script execution
- Prerequisite Checks
- Summary
- Install Product
- Finish

Select an option to configure the software. The wizard will register the home in the central inventory and then perform the selected configuration.

- ☐ Configure Oracle Grid Infrastructure for a New Cluster
- ☒ Configure Oracle Grid Infrastructure for a Standalone Server (Oracle Restart)
- ☐ Uppgrade Oracle Grid Infrastructure
- ☐ Set Up Software Only

Help

< Back

Next >

Install

Cancel

Create ASM Disk Group

[Configuration Option](#)**Create ASM Disk Group**[ASM Password](#)[Operating System Groups](#)[Installation Location](#)[Root script execution](#)[Prerequisite Checks](#)[Summary](#)[Install Product](#)[Finish](#)

Select Disk Group characteristics and select disks

Disk group name Redundancy ☐ Flex ☐ High ☐ Normal ☒ ExternalAllocation Unit Size MB

Select Disks

 ▾

☐	Disk Path	Size (in MB)	Status
☒	/dev/sdb1	20479	Candidate

Disk Discovery Path: '/dev/sd*'

☐ Configure Oracle ASM Filter Driver

Select this option to configure ASM Filter Driver(AFD) to simplify configuration and management of disk devices by Oracle ASM.

Specify ASM Password

19^c ORACLE[®]
Grid Infrastructure

- Configuration Option
- Create ASM Disk Group
- ASM Password**
- Management Options

- Operating System Groups
- Installation Location
- Root script execution
- Prerequisite Checks
- Summary
- Install Product
- Finish

The new Oracle Automatic Storage Management (Oracle ASM) instance requires its own SYS user with SYSASM privileges for administration. Oracle recommends that you create a less privileged ASMSNMP user with SYSDBA privileges to monitor the ASM instance.

Specify the password for these user accounts.

☐ Use different passwords for these accounts

	Password	Confirm Password
SYS		
ASMSNMP		

☒ Use same passwords for these accounts

Specify Password: Confirm Password:

[Help](#)

< Back

Next >

Install

Cancel

Specify Management Options

19c ORACLE®
Grid Infrastructure

- Configuration Option
- Create ASM Disk Group
- ASM Password
- Management Options**
- Operating System Groups
- Installation Location
- Root script execution
- Prerequisite Checks
- Summary
- Install Product
- Finish

You can configure to have this instance of Oracle Grid Infrastructure and Oracle Automatic Storage Management to be managed by Enterprise Manager Cloud Control. Specify the details of the Cloud Control configuration to perform the registration.

☐ Register with Enterprise Manager (EM) Cloud Control

OMS host:

OMS port:

EM Admin User Name:

EM Admin Password:

Help

< Back

Next >

Install

Cancel

Privileged Operating System Groups

[Configuration Option](#)[Create ASM Disk Group](#)[ASM Password](#)[Management Options](#)**[Operating System Groups](#)**[Installation Location](#)[Root script execution](#)[Prerequisite Checks](#)[Summary](#)[Install Product](#)[Finish](#)

Select the name of the operating system group, that you want to use for operating system authentication to Oracle Automatic Storage Management.

Oracle ASM Administrator (OSASM) Group

asmadmin ▾

Oracle ASM DBA (OSDBA for ASM) Group

asmdba ▾

Oracle ASM Operator (OSOPER for ASM) Group (Optional)

asmoper ▾

Help

< Back

Next >

Install

Cancel

Root script execution configuration

- Configuration Option
- Create ASM Disk Group
- ASM Password
- Management Options
- Operating System Groups
- Installation Location
- Create Inventory
- Root script execution**
- Prerequisite Checks
- Summary
- Install Product
- Finish

During the software configuration, certain operations have to be performed as "root" user. You can choose to have the installer perform these operations automatically by specifying inputs for one of the options below. The input specified will also be used by the installer to perform additional prerequisite checks.

☒ Automatically run configuration scripts

☒ Use "root" user credential

Password :

...

☐ Use sudo

Program path: /usr/bin/sudo

Browse...

User name:

grid

Password:


Help

< Back

Next >

Install

Cancel

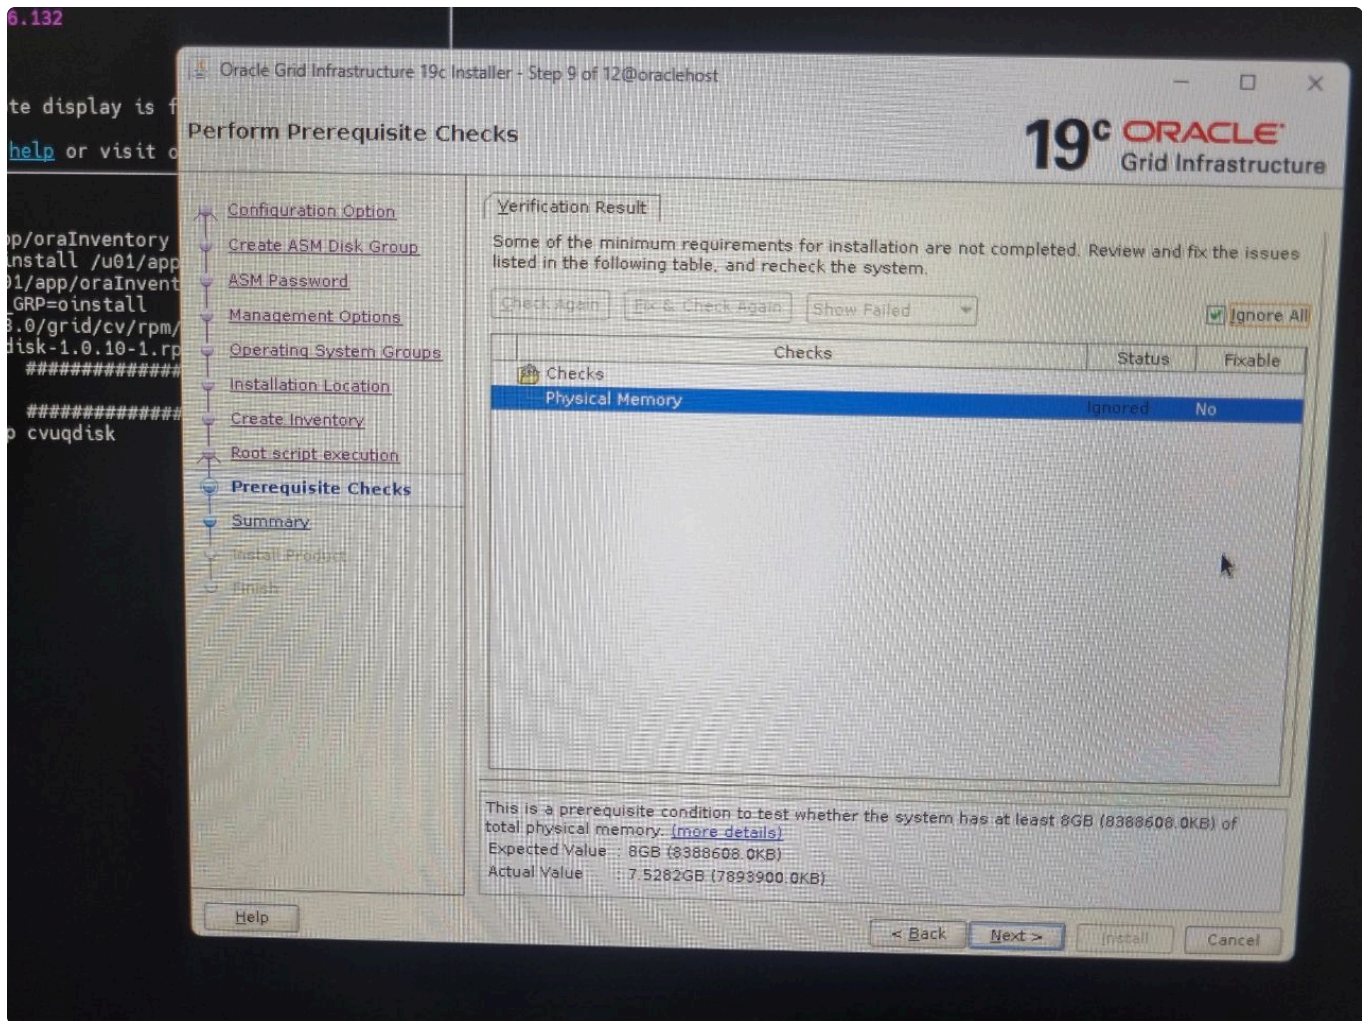

here maybe you have the package warning solve it base on the following code

```
log in with root

export CVUQDISK_GRP=oinstall

cd /u01/app/19.3.0/grid/cv/rpm/
rpm -ivh cvuqdisk-1.0.10-1.rpm

check :
rpm -qa | grep cvuqdisk
```

also maybe listener issue

the error :

```
CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN00009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
```

```

CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed'
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: PRCR-1079 : Failed to start resource ora.LISTENER.lsnr
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-
2026 15:14:30
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: Copyright (c) 1991, 2019, Oracle. All rights reserved.
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: Starting /u01/app/19.3.0/grid/bin/tnslsnr: please wait...
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN00009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
[main] [ 2026-09-08 15:20:03.071 IRDT ] [CRSResourceImpl.start:1042] Process
error message: CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed
[main] [ 2026-09-08 15:20:03.071 IRDT ]
[ConfigureListener.startOrStopListener:1416] PRCR-1079 : Failed to start
resource ora.LISTENER.lsnr
LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:14:30
Copyright (c) 1991, 2019, Oracle. All rights reserved.
Starting /u01/app/19.3.0/grid/bin/tnslsnr: please wait...
CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN00009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed
PRCR-1079 : Failed to start resource ora.LISTENER.lsnr
LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:14:30
Copyright (c) 1991, 2019, Oracle. All rights reserved.
Starting /u01/app/19.3.0/grid/bin/tnslsnr: please wait...
CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN00009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed
    at
oracle.cluster.impl.common.SoftwareModuleImpl.start(SoftwareModuleImpl.java:59
8)
    at
oracle.sysman.assistants.util.hasi.HAListenerUtils.startListener(HAListenerUti
ls.java:293)
    at
oracle.net.ca.ConfigureListener.startListener(ConfigureListener.java:1796)
    at

```

```

oracle.net.ca.ConfigureListener.startOrStopListener(ConfigureListener.java:141
0)
    at
oracle.net.ca.ConfigureListener.typicalConfigure(ConfigureListener.java:369)
    at
oracle.net.ca.SilentConfigure.performSilentConfigure(SilentConfigure.java:212)
    at oracle.net.ca.InitialSetup.<init>(NetCA.java:4325)
    at oracle.net.ca.NetCA.main(NetCA.java:460)
Caused by: PRCR-1079 : Failed to start resource ora.LISTENER.lsnr
LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:14:30
Copyright (c) 1991, 2019, Oracle. All rights reserved.
Starting /u01/app/19.3.0/grid/bin/tnslsnr: please wait...
CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN000009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed
    at
oracle.cluster.impl.crs.cops.CRSNative.genericStartResource(CRSNative.java:581
)
    at
oracle.cluster.impl.crs.cops.EntityOperations.startResource(EntityOperations.j
ava:751)
    at
oracle.cluster.impl.crs.CRSResourceImpl.start(CRSResourceImpl.java:1012)
    at
oracle.cluster.impl.crs.CRSResourceImpl.start(CRSResourceImpl.java:987)
    at
oracle.cluster.impl.crs.CRSResourceImpl.start(CRSResourceImpl.java:975)
    at
oracle.cluster.impl.common.SoftwareModuleImpl.start(SoftwareModuleImpl.java:58
9)
    ... 7 more
Caused by: LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026
15:14:30
Copyright (c) 1991, 2019, Oracle. All rights reserved.
Starting /u01/app/19.3.0/grid/bin/tnslsnr: please wait...
CRS-5014: Agent "ORAAGENT" timed out starting process
"/u01/app/19.3.0/grid/bin/lsnrctl" for action "start": details at "
(:CLSN000009:)" in
"/u01/app/grid/diag/crs/oraclehost/crs/trace/ohasd_oraagent_grid.trc"
CRS-2674: Start of 'ora.LISTENER.lsnr' on 'oraclehost' failed
    at
oracle.cluster.impl.crs.cops.CRSNativeResult.createException(CRSNativeResult.j
ava:641)
    at oracle.cluster.impl.crs.cops.CRSNative.doStartResource(Native

```

```
Method)
    at
oracle.cluster.impl.crs.cops.CRSNative.genericStartResource(CRSNative.java:575
)
```

```
with root :
cat /etc/hosts

127.0.0.1    localhost localhost.localdomain localhost4 localhost4.localdomain4
::1         localhost localhost.localdomain localhost6 localhost6.localdomain6

your.ip.add.ress  oraclehost.localdomain oraclehost

sith grid:

lsnrctl start

with root:
/u01/app/19.3.0/grid/root.sh
```

11.oracle app Infrastructure Media Transfer & Unzip Preparation

```
scp "C:\Users\mohaymen\Desktop\Books\Documents\Arbeit\Installation
files\LINUX.X64_193000_db_home.zip" root@192.168.76.132:/home/oracle/

unzip LINUX.X64_193000_db_home.zip -d
/u01/app/oracle/product/19.3.0/dbhome_1/
```

**12.Set bash_profile for oracle user

```
vi ~/.bash_profile

# .bash_profile for oracle user

# Get the aliases and functions
if [ -f ~/.bashrc ]; then
    . ~/.bashrc
fi
```


```
# User specific environment and startup programs
export ORACLE_BASE=/u01/app/oracle
export ORACLE_HOME=$ORACLE_BASE/product/19.3.0/dbhome_1
export ORACLE_SID=orcl
export PATH=$PATH:$HOME/bin:$ORACLE_HOME/bin


export LD_LIBRARY_PATH=$ORACLE_HOME/lib:/lib:/usr/lib
export CLASSPATH=$ORACLE_HOME/JRE:$ORACLE_HOME/jlib:$ORACLE_HOME/rdbms/jlib
```

13.Start installation(Interactive mode)

```
cd $ORACLE_HOME
```

```
./runInstaller
```

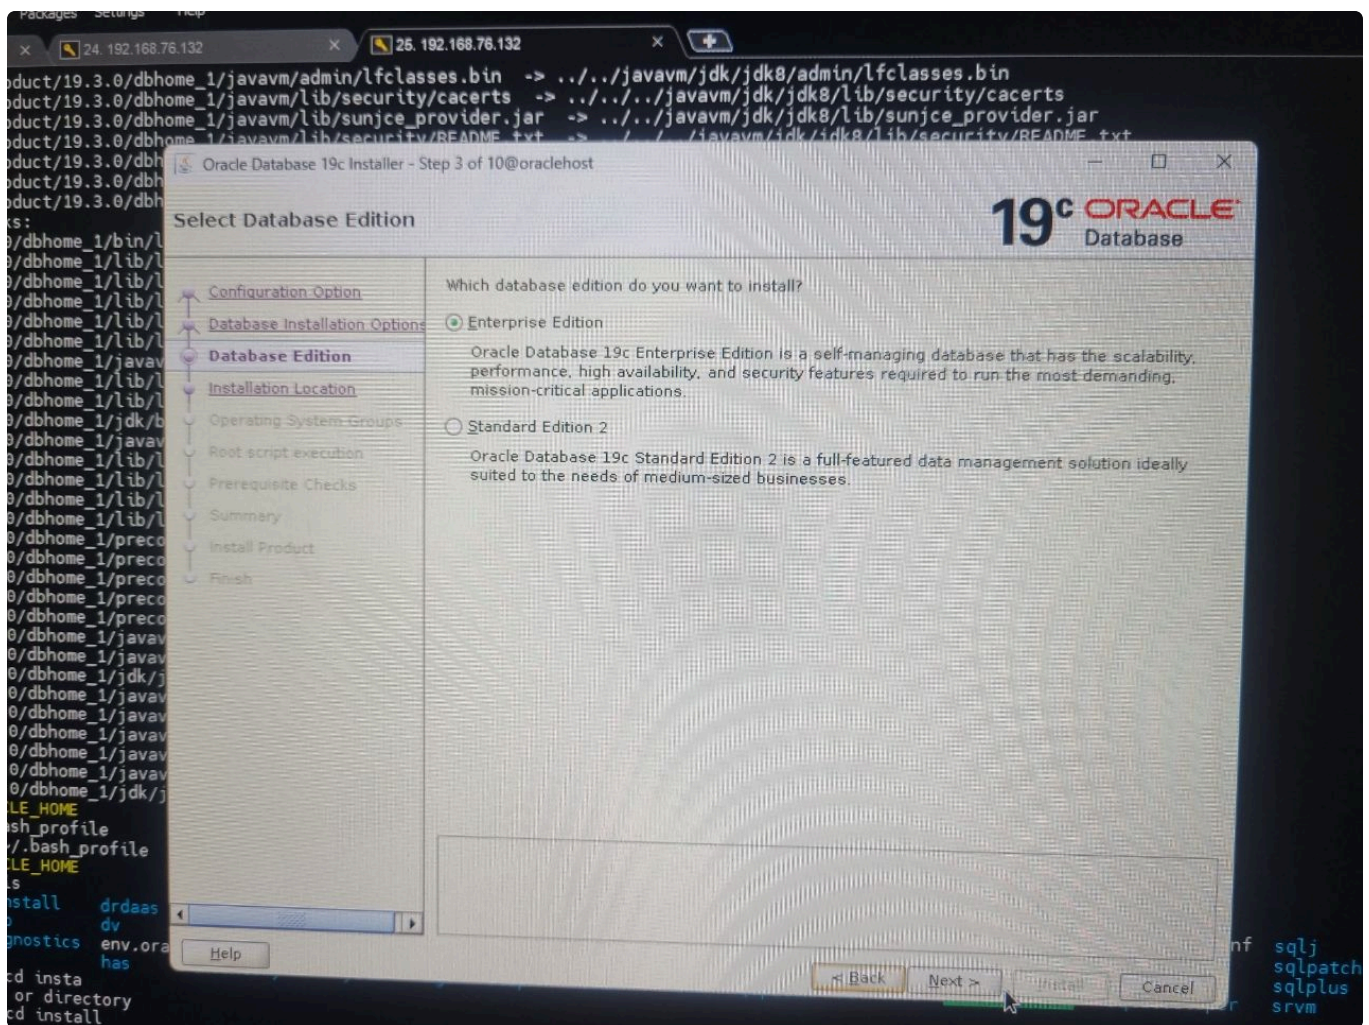

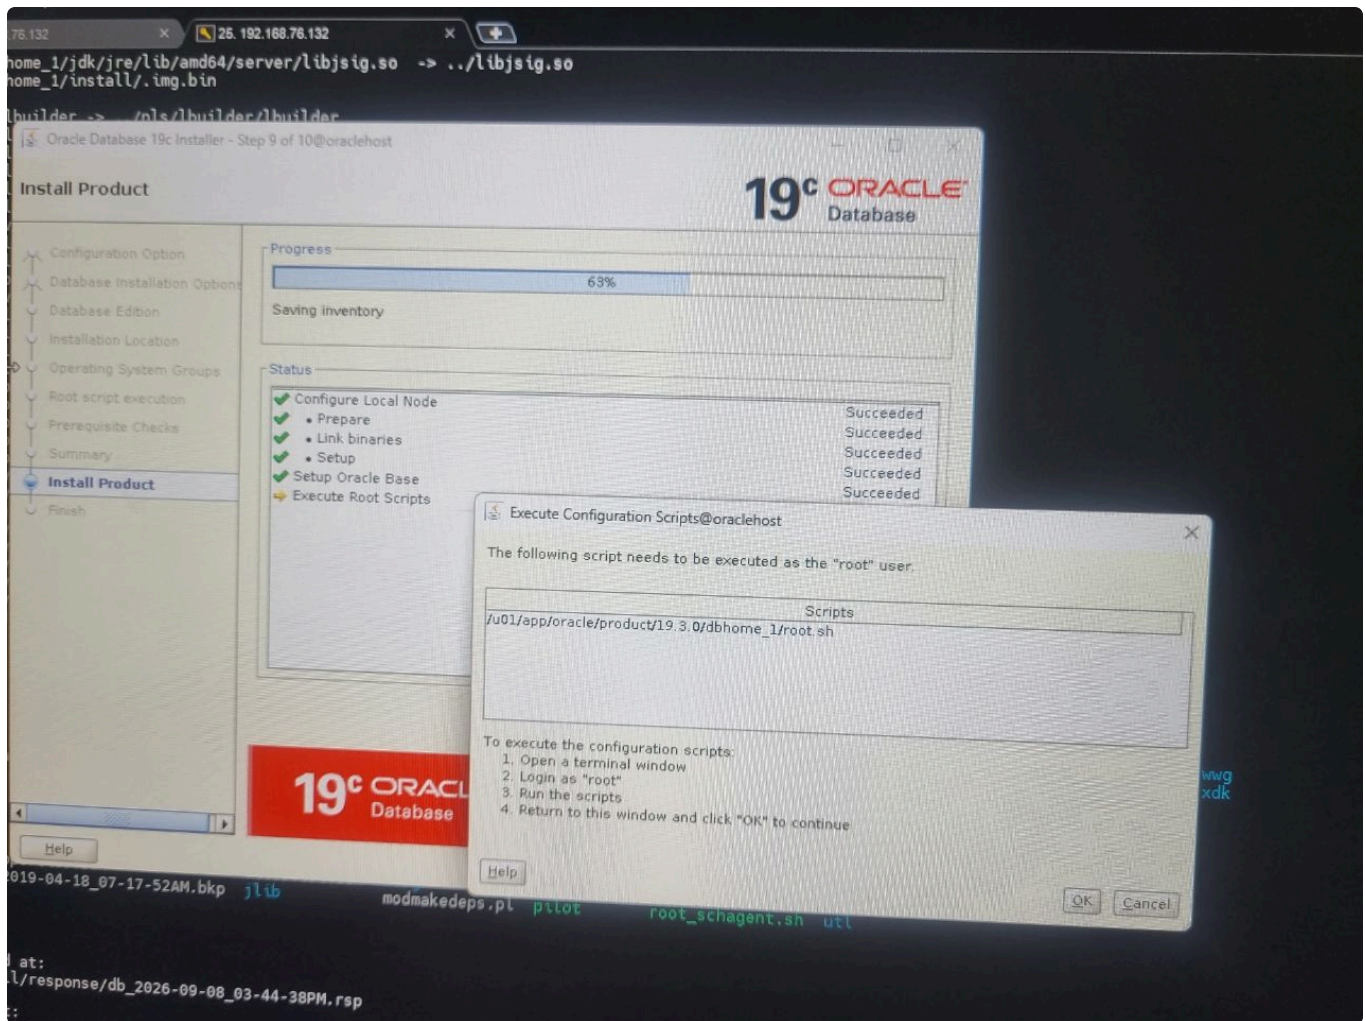**12.Database installtion(Interactivemode)

dbca


```
oracle/product/19.3.0/dbhome_1/lib/libjavavm19.a -> ../javavm/jdk/jdk8/lib/libjavavm19.a
oracle/product/19.3.0/dbhome_1/lib/libjce.jar -> ../javavm/jdk/jdk8/lib/libjce.jar
oracle/product/19.3.0/dbhome_1/lib/libocci.so.18.1 -> libocci.so
oracle/product/19.3.0/dbhome_1/lib/libclntshcore.so -> libclntshcore.so.19.1
```

Database Configuration Assistant - Create a database - Step 2 of 14@oraclehost

Select Database Creation Mode

19c ORACLE Database

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

☐ Typical configuration

Global database name

orc1.localdomain

Storage type

Automatic Storage Management (ASM)

Database files location

+DATA/[DB_UNIQUE_NAME]

Browse

Fast Recovery Area (FRA)

+FRA

Browse

Database character set

AL32UTF8 - Unicode UTF-8 Universal character set

Administrative password

Confirm password

☒ Create as container database

Pluggable database name

☒ Advanced configuration

schagent.conf

1

sdks

slax

sqldeveloper

utl

sqlj

sqlpatch

sqlplus

svrm

Help

< Back

Next >

Finish

Cancel

find the log of this install session at:

op/orainventory/logs/InstallActions2026-09-08_03-44-38PM/InstallActions2026-09-08_03-44-38PM.log

for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:50:01

© (c) 1991, 2019, Oracle. All rights reserved.

DB: Listener using listener name LISTENER has already been started

oraclehost dbhome_1\$ dbca

Subscribing to the professional edition here: <https://mobaxterm.mobatek.net>

Host: 1% 2.91 GB / 7.53 GB 0.03 MB/s 0.00 MB/s 240 min root (x2) grid (x3) oracle /: 43% /home: 8% /boot: 23% /media/cdrom: 100%


```
/app/oracle/product/19.3.0/dbhome_1/javavm/lib/jce.jar -> ../../javavm/jdk/jdk8/lib/jce.jar
/app/oracle/product/19.3.0/dbhome_1/lib/libocci.so.18.1 -> libocci.so
/app/oracle/product/19.3.0/dbhome_1/lib/libclntshcore.so -> libclntshcore.so.19.1
```

Database Configuration Assistant - Create 'orcl' database - Step 4 of 14@oraclehost

Specify Database Identification Details

19c ORACLE Database

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Provide a unique database identifier information. An Oracle database is uniquely identified by a Global database name, typically of the form "name.domain".

Global database name: orcl.localdomain

SID: orcl

Service name:

☒ Create as Container database

A Container database can be used for consolidating multiple databases into a single database, and it enables database virtualization. A Container database (CDB) can have zero or more pluggable databases (PDB).

☒ Use Local Undo tablespace for PDBs

☐ Create an empty Container database

☒ Create a Container database with one or more PDBs

Number of PDBs: 1

PDB name: orclpdb

Help

< Back

Next >


Finish

Cancel

```
le@oraclehost ~]$ cd $ORACLE
le@oraclehost ~]$ vi ~/.bash
le@oraclehost ~]$ source ~/.
le@oraclehost ~]$ cd $ORACLE
le@oraclehost dbhome_1]$ ls
de clone cv deinst
crs data demo
tants css dbjava diagno
ctx dbs dmu
le@oraclehost dbhome_1]$ cd
n: cd: insta: No such file or
le@oraclehost dbhome_1]$ cd
le@oraclehost install]$ ls
config
ledInstall envVars.propertie
le@oraclehost install]$ cd .
le@oraclehost dbhome_1]$ ./r
ching Oracle Database Setup W
response file for this session
1/app/oracle/product/19.3.0/d
```

```
can find the log of this install session at:
1/app/oraInventory/logs/InstallActions2026-09-08_03-44-38PM/installActions2026-09-08_03-44-38PM.log
le@oraclehost dbhome_1]$ lsnrctl start
```

```
CTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:50:01
Copyright (c) 1991, 2019, Oracle. All rights reserved.
01106: Listener using listener name LISTENER has already been started
le@oraclehost dbhome_1]$ dbca
```

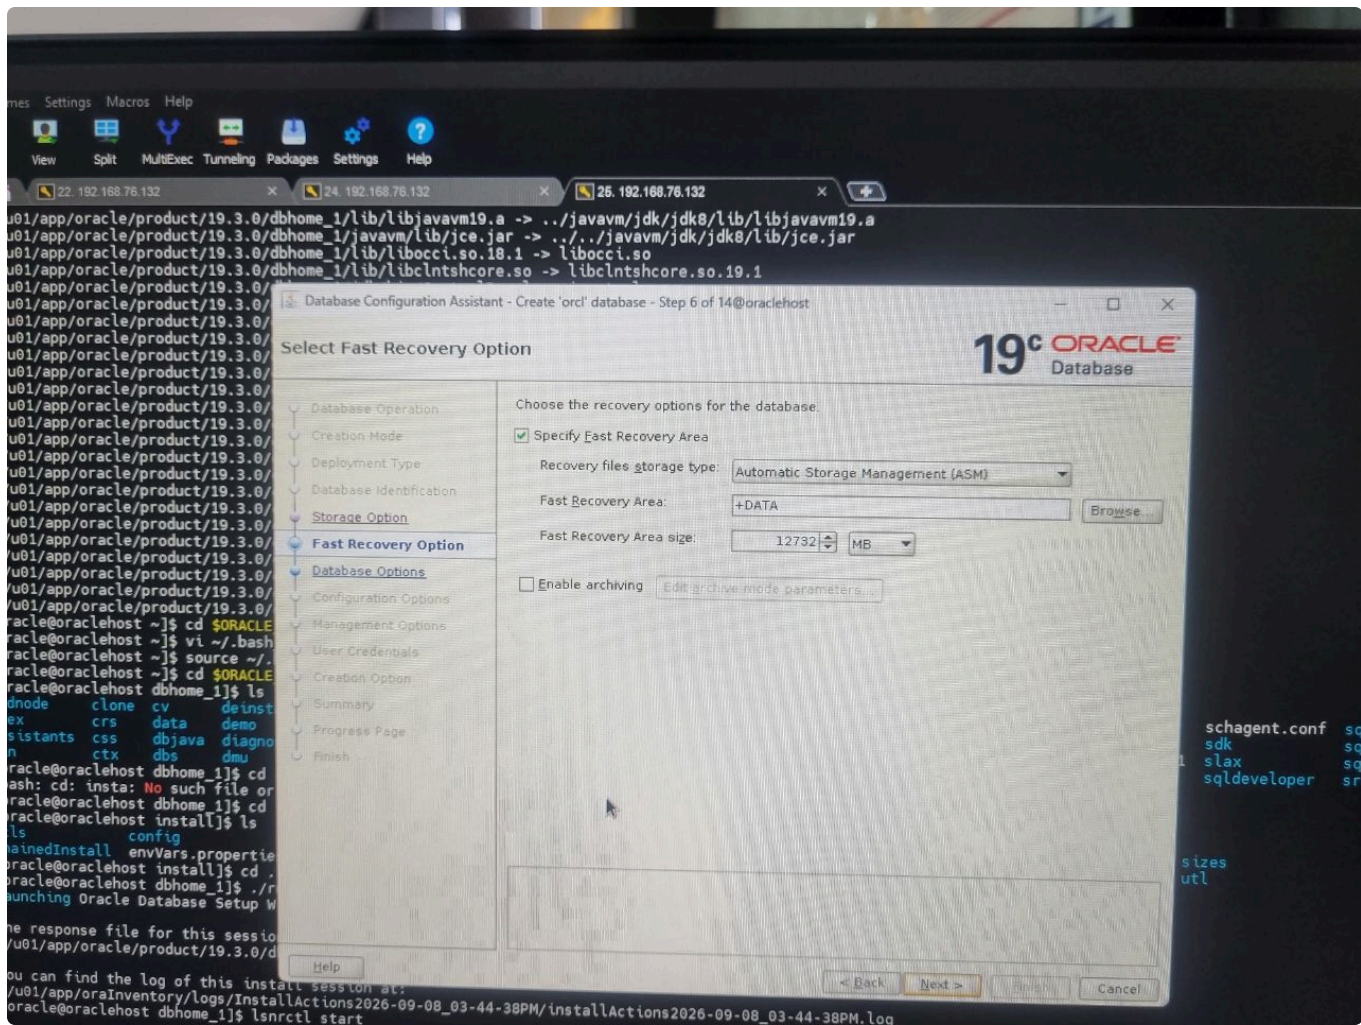

Split MultExec Tunneling Packages Settings

22. 192.168.76.132 x 24. 192.168.76.132 x 25. 192.168.76.132 x +

```
app/oracle/product/19.3.0/dbhome_1/lib/libjavavm19.a -> ../javavm/jdk/jdk8/lib/libjavavm19.a
app/oracle/product/19.3.0/dbhome_1/javavm/lib/jce.jar -> ../../javavm/jdk/jdk8/lib/jce.jar
app/oracle/product/19.3.0/dbhome_1/lib/libocci.so.18.1 -> libocci.so
app/oracle/product/19.3.0/dbhome_1/lib/libclntshcore.so -> libclntshcore.so.19.1
```

Database Configuration Assistant - Create 'ord' database - Step 6 of 14@oraclehost

Select Fast Recovery Option

19c ORACLE Database

Choose the recovery options for the database.

☒ Specify Fast Recovery Area

Recovery files storage type: Automatic Storage Management (ASM)

Fast Recovery Area: +DATA

Fast Recovery Area size: 12732 MB

☒ Enable archiving

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Help

< Back Next > Finish Cancel

schagen
sdk
slax
sqldev

sizes
utl

u01/app/oracle/product/19.3.0/dbhome_1\$ cd
sh: cd: insta: No such file or directory
acle@oraclehost dbhome_1\$ cd
acle@oraclehost install\$ ls
config
binInstall envVars.properties
acle@oraclehost install\$ cd .
acle@oraclehost dbhome_1\$./runInstaller
Launching Oracle Database Setup Wizard...
The response file for this session is
u01/app/oracle/product/19.3.0/dbhome_1/install/resp/resp.rsp
You can find the log of this install session at:
u01/app/oraInventory/logs/InstallActions2026-09-08_03-44-38PM/installActions2026-09-08_03-44-38PM.log
acle@oraclehost dbhome_1\$ lsnrctl start
LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:50:01
Copyright (c) 1991, 2019, Oracle. All rights reserved.

Database Configuration Assistant - Create 'orcl' database - Step 7 of 15@oraclehost

Specify Network Configuration Details

19c ORACLE Database

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Network Configuration

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Help

Back Next > Finish Cancel

Listeners from Grid Infrastructure home and Database Oracle home are listed below. Specify the listener name and port to create a new listener in database Oracle home.

Name	Port	Oracle home	Status
☒ LISTENER	1521	/u01/app/19.3.0/grid	Up

☐ Create a new listener

Listener name:

Listener port:

Oracle home:

The response file for this session is located at:
/u01/app/oracle/product/19.3.0/dbhome_1/response/orcl_install.rsp

You can find the log of this install session at:
/u01/app/oracle/product/19.3.0/dbhome_1/log/installActions2026-09-08_03-44-38PM/installActions2026-09-08_03-44-38PM.log

LSNRCTL for Linux: Version 19.0.0.0.0 - Production on 08-SEP-2026 15:50:01

Copyright (c) 1991, 2019, Oracle. All rights reserved.

TNS-01106: Listener using listener name LISTENER has already been started

```
[oracle@oraclehost ~]$ cd $ORACLE_HOME
[oracle@oraclehost ~]$ vi ~/.bashrc
[oracle@oraclehost ~]$ source ~/.bashrc
[oracle@oraclehost ~]$ cd $ORACLE_HOME
[oracle@oraclehost dbhome_1]$ ls
addnode  clone  cv  detinst
apex     crs   data  demo
assistants  css  dbjava  diagno
bin      ctx   dbs   dmu
[oracle@oraclehost dbhome_1]$ cd
-bash: cd: insta: No such file or directory
[oracle@oraclehost dbhome_1]$ cd
[oracle@oraclehost install]$ ls
acfs      config
chainedInstall  envVars.properties
[oracle@oraclehost install]$ cd .
[oracle@oraclehost dbhome_1]$ ./runInstaller
Launching Oracle Database Setup Wizard...
```

