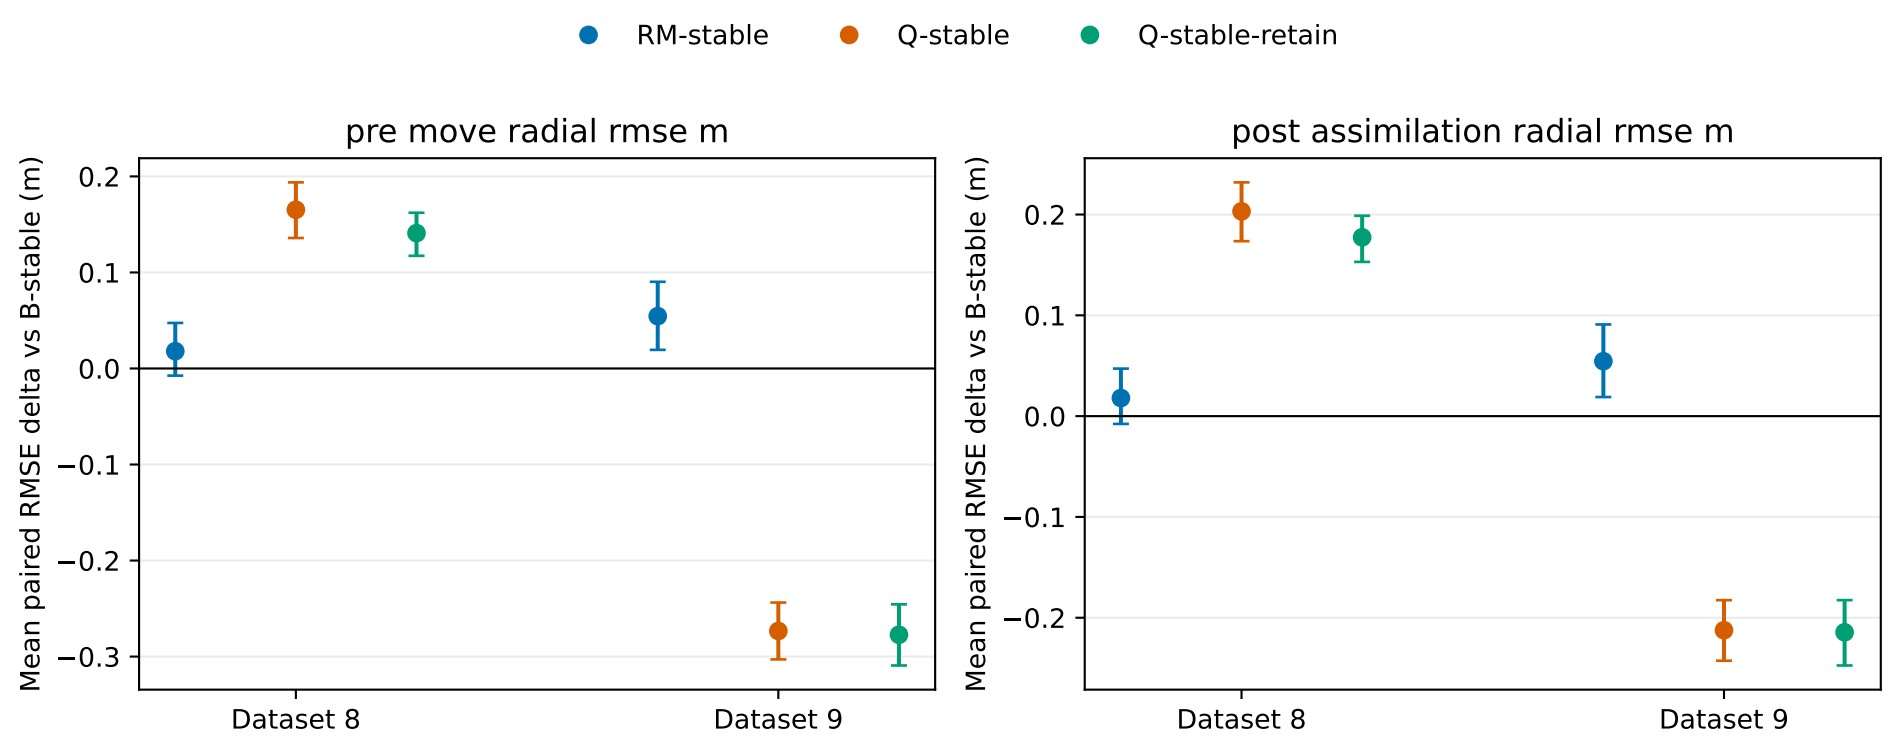

Points and 95% bootstrap intervals are conditional on paired seeds within each dataset; seeds are not independent trajectories.