


# Classical Request Path

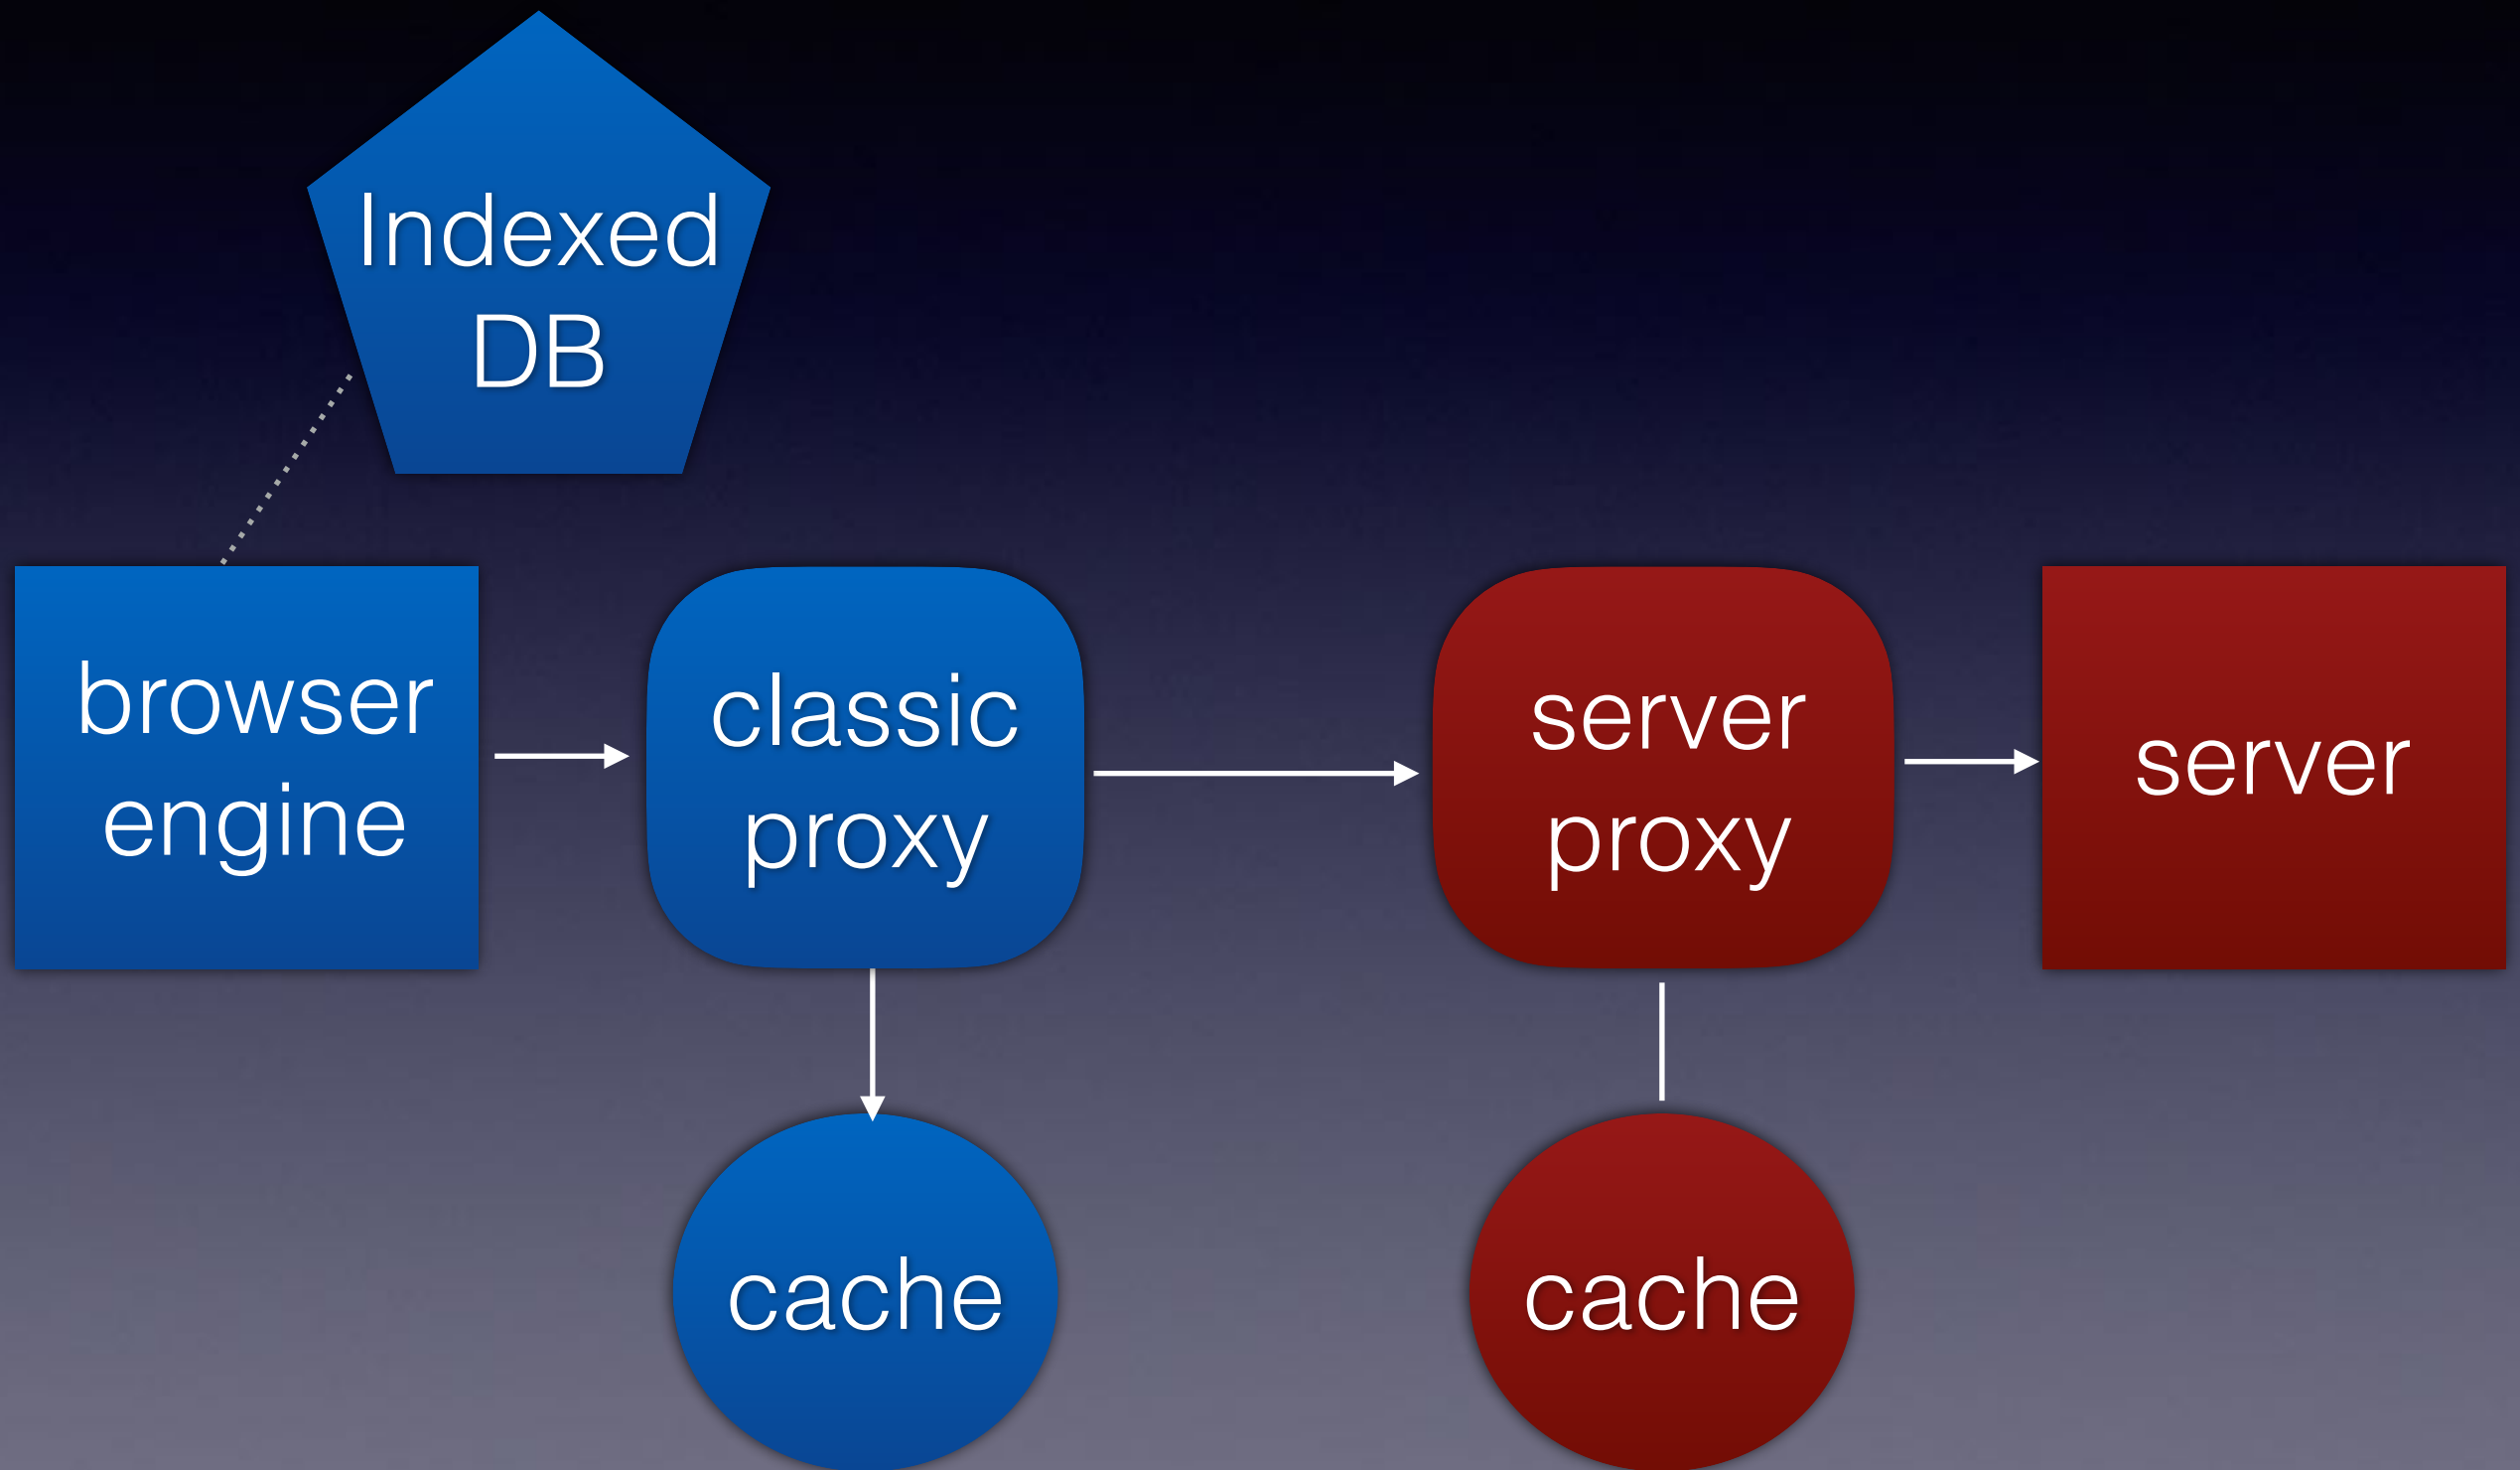

# What they are

- Programmable network proxy
- A separate thread, with separate context (like Web Workers)
- Killed between events (don't use globals)
- Each **origin** may have multiple **scopes**
- All tabs for pages in a scope share a **single s.w.**
- Each s.w. may control **multiple caches**