
Major Concern => Corners are fine as features

but they are unable to solve issues related to scale


new feature
- Scale invariant
- Rotation invariant
- Lightning invariant

Blobs => A specific region with a character color or intensity variations.

feature or keypoint.





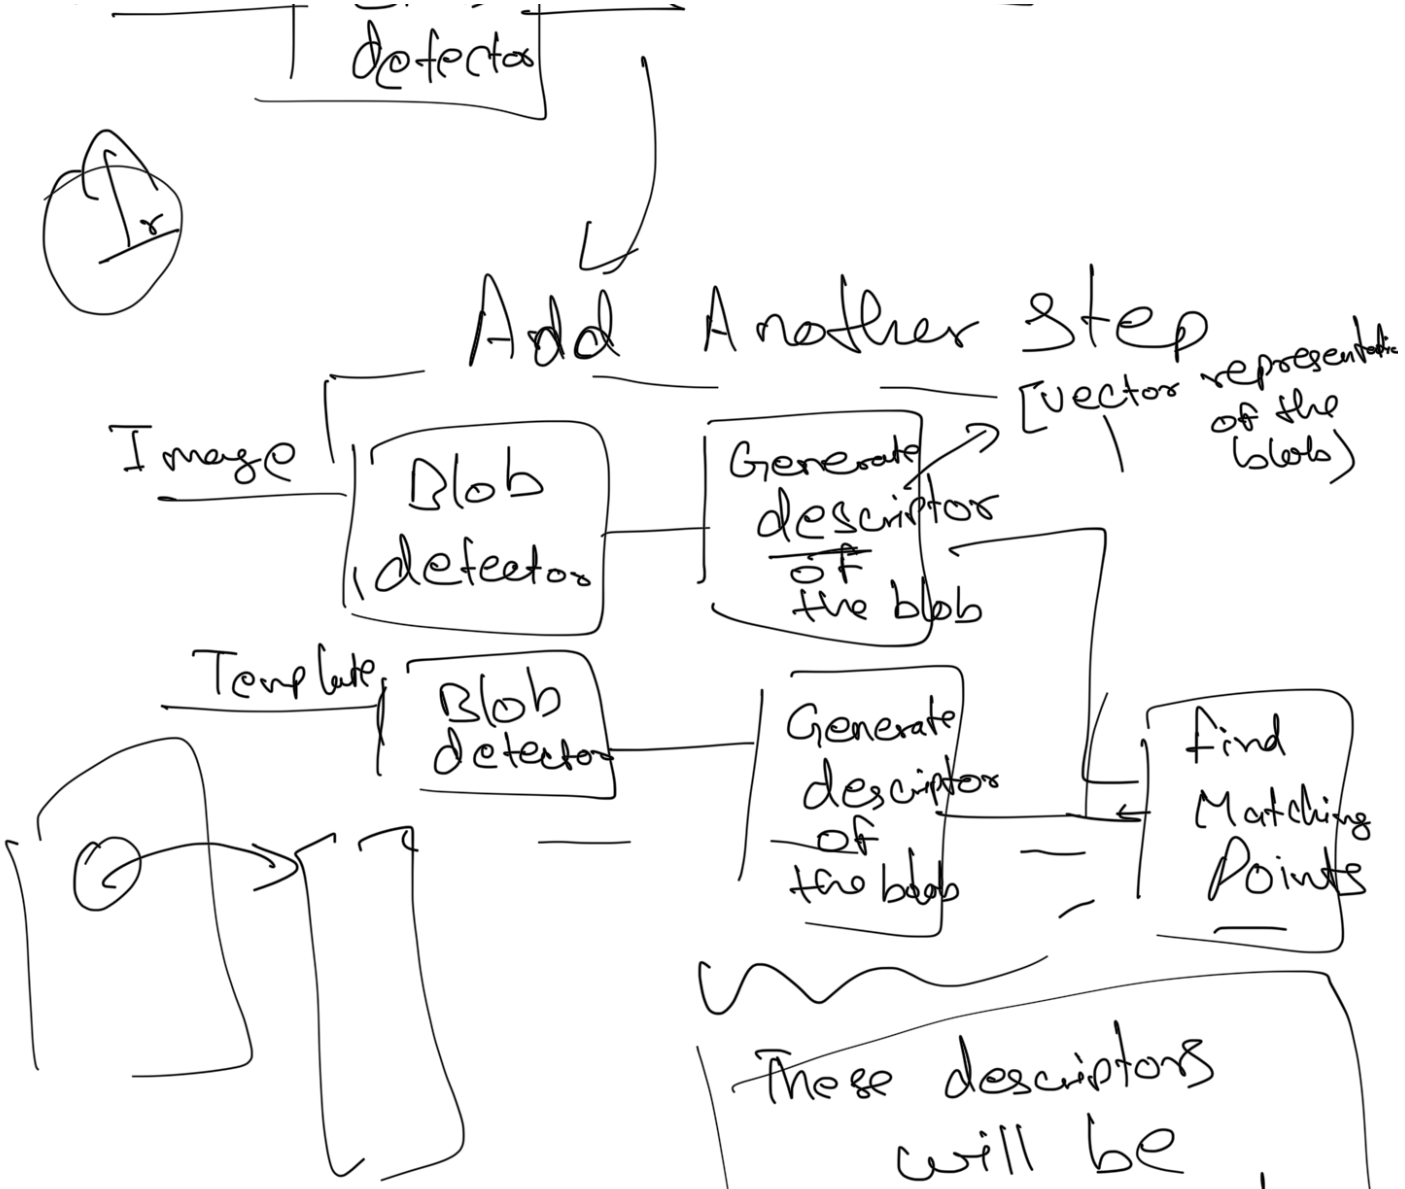

Algo which detects blobs and generates descriptors is known SIFT (Scale Invariant feature Transform)

These final features are known as SIFT descriptors.

RANSAC
(Random Sample Consensus)

Randomly Take a subset of descriptors (from template and image)

Find homography (projection matrix (M)) of the given subset

(projection of the subset on given template)

(At least four non-colinear pairs are required)

Transform your template using the projection matrix M.

If Match is good then this set of descriptors is the true

taken as template

RANSAC repeats these steps for multiple random subsets and selects the homography supported by the largest number of inliers.