

Data Science and Data Analytics (WS 2025/26)

International Business Management (B. A.)

© Benjamin Gross

23.10.2025 10:24

This document provides the course material for Data Science and Data Analytics (B. A. – International Business Management). Upon successful completion of the course, students will be able to: recognize important technological and methodological advancements in data science and distinguish between descriptive, predictive, and prescriptive analytics; demonstrate proficiency in classifying data and variables, collecting and managing data, and conducting comprehensive data evaluations; utilize R for effective data manipulation, cleaning, visualization, outlier detection, and dimensionality reduction; conduct sophisticated data exploration and mining techniques (including PCA, Factor Analysis, and Regression Analysis) to discover underlying patterns and inform decision-making; analyze and interpret causal relationships in data using regression analysis; evaluate and organize the implementation of a data analysis project in a business environment; and communicate the results and effects of a data analysis project in a structured way.

Table of contents

1	Scope and Nature of Data Science	3
1.1	Defining Data Science as an Academic Discipline	4
1.2	Significance of Business Data Analysis for Decision-Making	10
1.2.1	Strategic Decision-Making Framework	10
1.2.2	Operational Decision Support	10
1.2.3	Tactical Decision Integration	11
1.2.4	Contemporary Analytical Capabilities	11
1.3	Emerging Trends	12
1.4	Types of Analytics	13
2	Data Analytic Competencies	15
2.1	Types of Data	15
2.2	Types of Variables	18
2.3	Conceptual Framework: Knowledge & Understanding of Data	34
2.4	Data Collection	34
2.4.1	Core Data Collection Competencies	35
2.4.2	Contemporary Data Collection Landscape	35
2.5	Data Management	35
2.6	Data Evaluation	36

3	Applications in the Programming Language R	38
3.1	Core tidyverse Tooling	38
3.2	Data Visualization Principles	38
3.3	Detecting Outliers and Anomalies	38
3.4	Dimensionality Reduction	38
3.5	Data Exploration and Mining	39
3.6	Causal Inference with Regression Analysis	39
3.7	Essential Readings	40
3.8	Further Readings	40

1 Scope and Nature of Data Science

Let's start this course with some definitions and context.

Definition of Data Science:

The field of Data Science concerns techniques for extracting knowledge from diverse data, with a particular focus on 'big' data exhibiting 'V' attributes such as volume, velocity, variety, value and veracity.

Maneth & Poulouvassilis (2016)

Definition of Data Analytics:

Data analytics is the systematic process of examining data using statistical, computational, and domain-specific methods to extract insights, identify patterns, and support decision-making. It combines competencies in data handling, analysis techniques, and domain knowledge to generate actionable outcomes in organizational contexts (Cuadrado-Gallego et al., 2023).

Definition of Business Analytics:

Business analytics is the science of posing and answering data questions related to business. Business analytics has rapidly expanded in the last few years to include tools drawn from statistics, data management, data visualization, and machine learning. There is increasing emphasis on big data handling to assimilate the advances made in data sciences. As is often the case with applied methodologies, business analytics has to be soundly grounded in applications in various disciplines and business verticals to be valuable. The bridge between the tools and the applications are the modeling methods used by managers and researchers in disciplines such as finance, marketing, and operations.

Pochiraju & Seshadri (2019)

There are many roles in the data science field, including (but not limited to):

Figure 1: **Source:** *LinkedIn*

DATA ANALYST		
Analyzing data to uncover insights and support better decision-making	SKILLS: • SQL • Excel • Power BI / Tableau • Basic Statistics	TASKS: • Creating reports & dashboards • Analyzing trends and patterns

DATA ENGINEER		
Building and maintaining data pipelines and infrastructure	SKILLS: • Python • ETL tools • Big Data • Cloud platforms	TASKS: • Cleaning and transforming raw data • Setting up data warehouses/lakes

DATA SCIENTIST		
Developing and managing data workflows and backend systems.	SKILLS: • Python / R • Machine Learning • Statistics • Data Visualization	TASKS: • Creating ML models • Predictive & prescriptive analytics

For skills and competencies required for data science activities, see [Skills Landscape](#).

1.1 Defining Data Science as an Academic Discipline

Data science emerges as an interdisciplinary field that synthesizes methodologies and insights from multiple academic domains to extract knowledge and actionable insights from data. As an academic discipline, data science represents a convergence of computational, statistical, and domain-specific expertise that addresses the growing need for data-driven decision-making in various sectors.

Data science draws from and interacts with multiple foundational disciplines:

- **Informatics / Information Systems:**

Informatics provides the foundational understanding of information processing, storage, and retrieval systems that underpin data science infrastructure. It encompasses database design, data modeling, information architecture, and system integration principles essential for managing large-scale data ecosystems. Information systems contribute knowledge about organizational data flows, enterprise architectures, and the sociotechnical aspects of data utilization in business contexts.


See the [Technical Applications & Data Analytics coursebook](#) by Gross (2021) for further reading on foundations in informatics.

- **Computer Science (algorithms, data structures, systems design):**

Computer science provides the computational foundation for data science through algorithm design, complexity analysis, and efficient data structures. Core contributions include machine learning algorithms, distributed computing paradigms, database systems, and software engineering practices. System design principles enable scalable data processing architectures, while computational thinking frameworks guide algorithmic problem-solving approaches essential for data-driven solutions.

See also: [Analytical Skills for Business - 1 Introduction](#) and take a look at the AI Universe overview graphic:

Figure 2: Source: *LinkedIn*

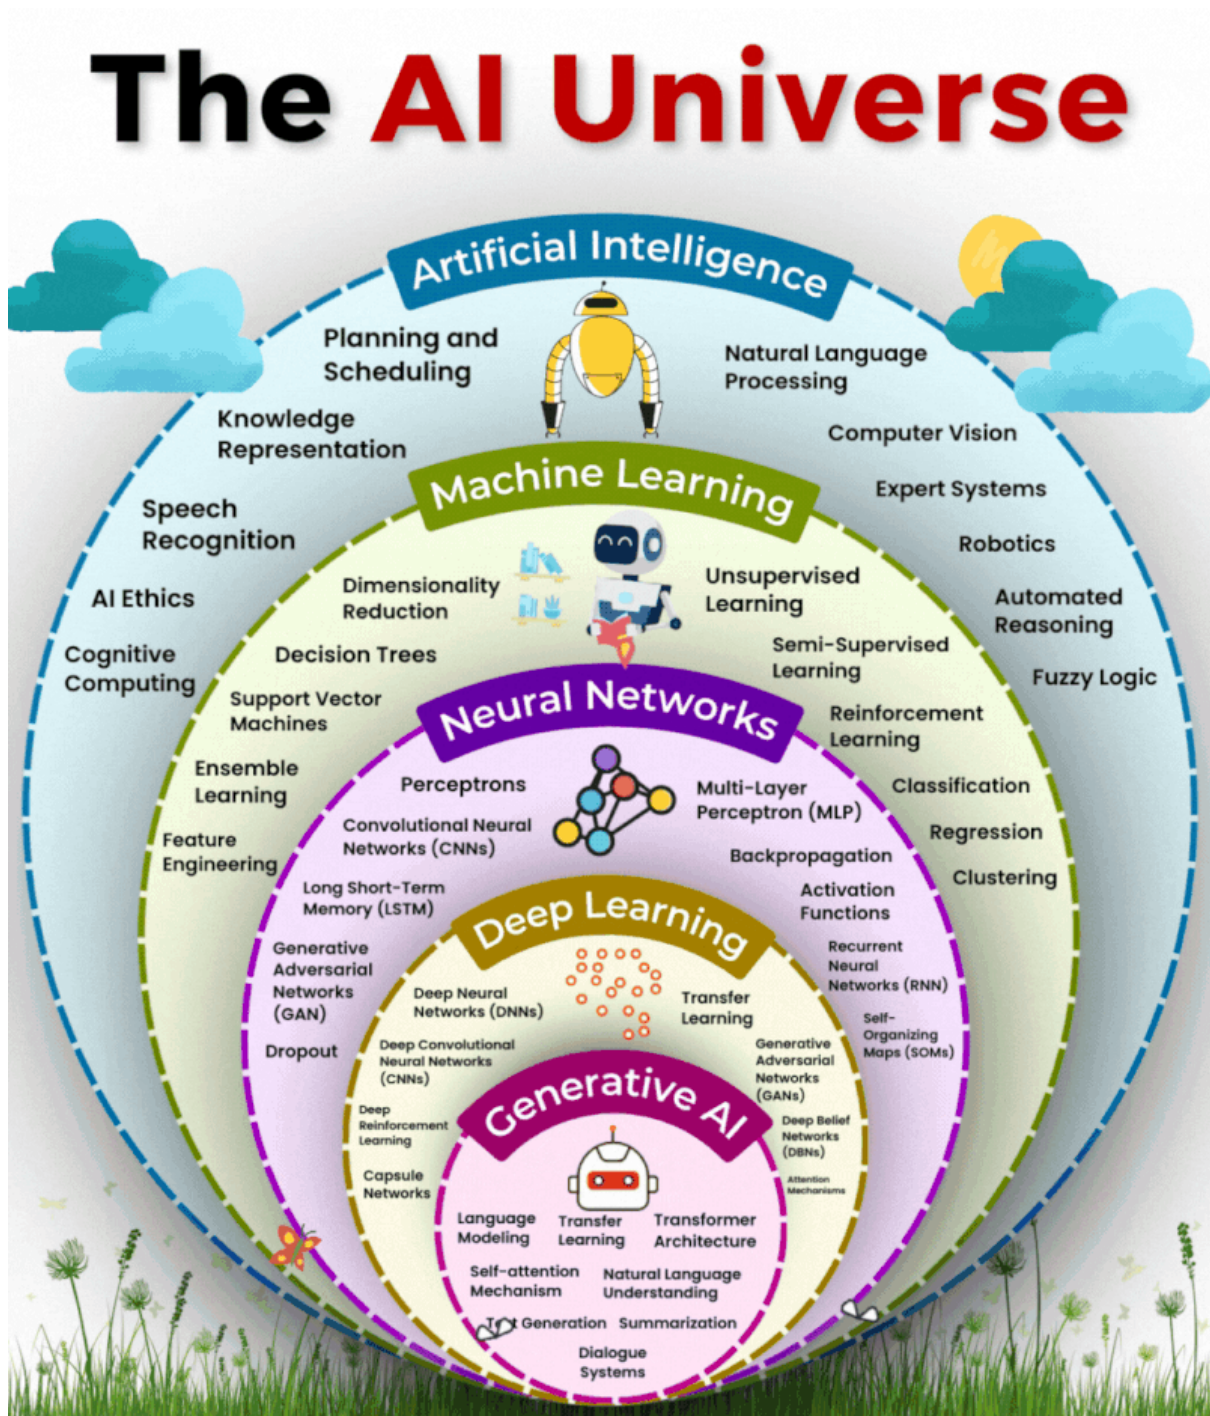


See the [Overview on no-code and low-code tools for data analytics](#) for an overview on no-code and low-code tools for data analytics and AI tooling.

- **Mathematics (linear algebra, calculus, optimization):**

Mathematics provides the theoretical backbone for data science through linear algebra (matrix operations, eigenvalues, vector spaces), calculus (derivatives, gradients, optimization), and discrete mathematics (graph theory, combinatorics). These mathematical foundations enable dimensionality reduction techniques, gradient-based optimization algorithms, statistical modeling, and the rigorous formulation of **machine learning problems** (see the

figure below). Mathematical rigor ensures the validity and interpretability of analytical results.

Figure 3: Source: *LinkedIn*

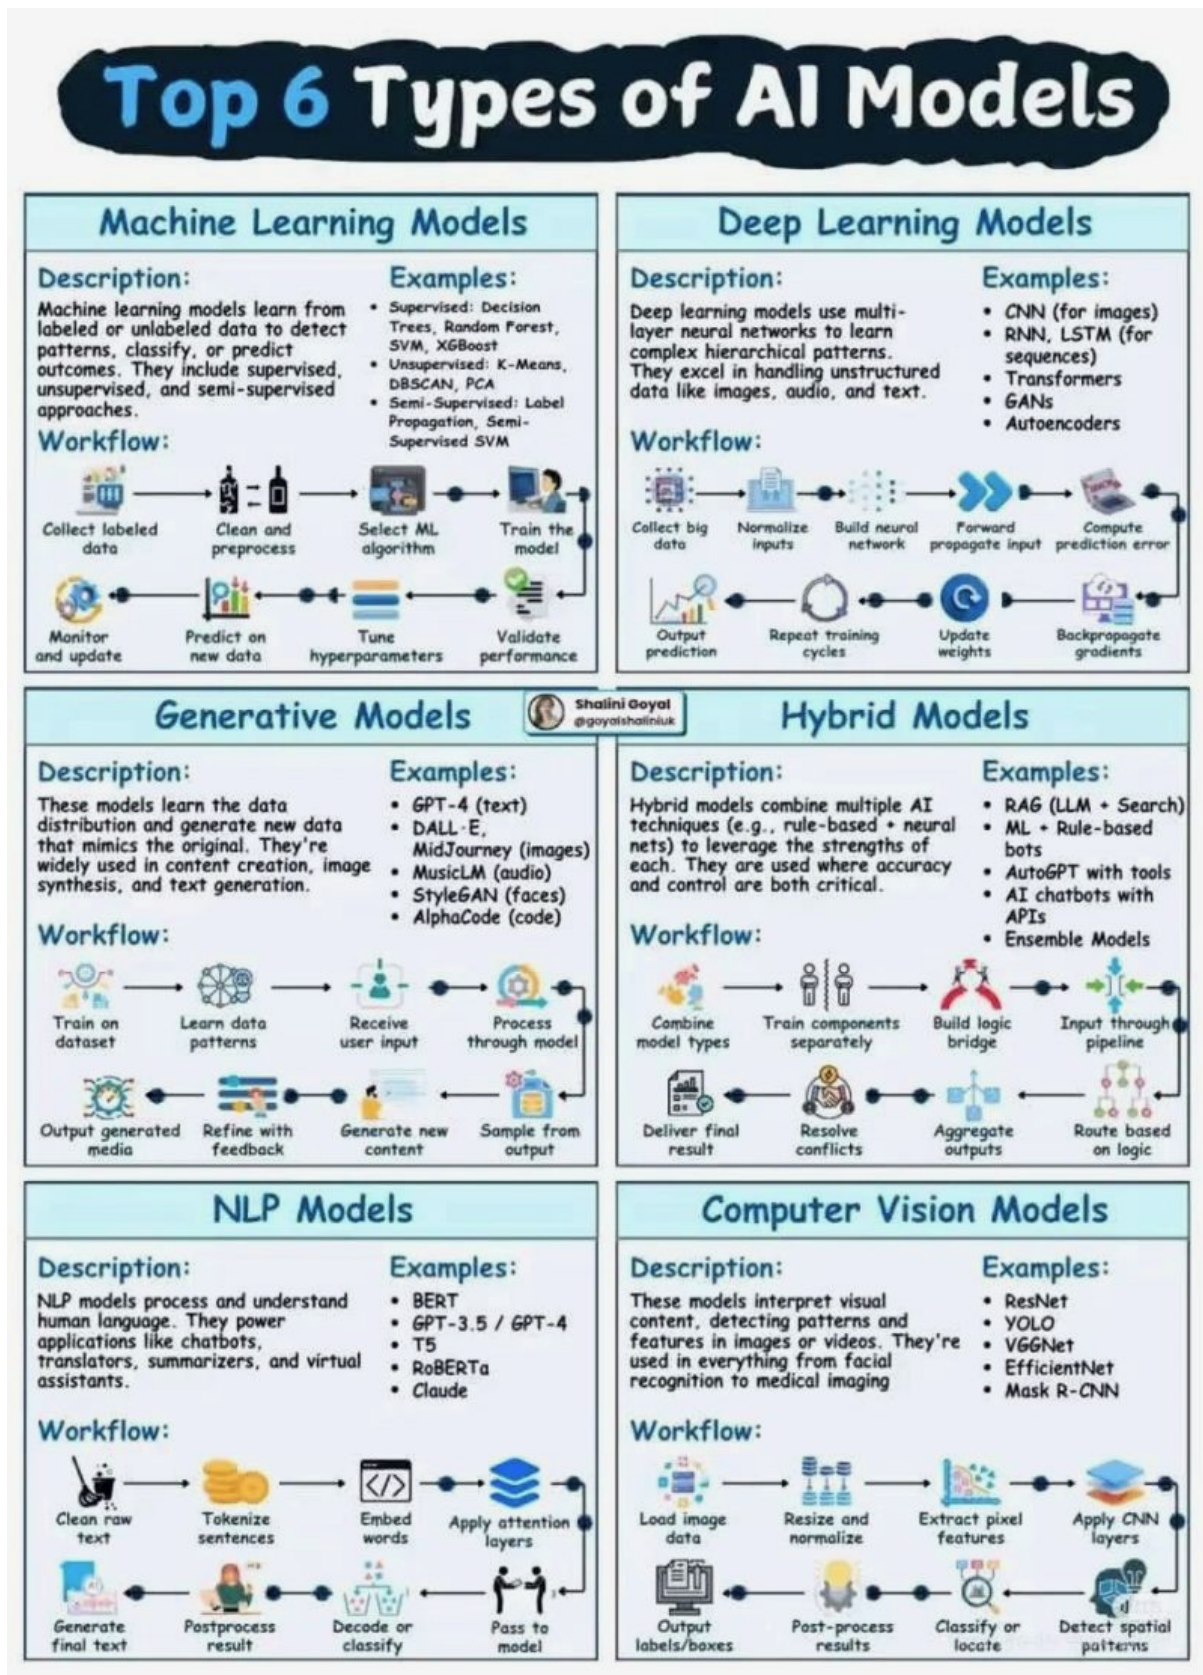


- **Statistics & Econometrics (inference, modeling, causal analysis):**

Statistics provides the methodological framework for data analysis through hypothesis testing, confidence intervals, regression analysis, and experimental design. Econometrics contributes advanced techniques for causal inference, time series analysis, and handling observational data challenges such as endogeneity and selection bias. These disciplines ensure rigorous uncertainty quantification, model validation, and the ability to draw reliable conclusions from data while understanding limitations and assumptions.

- **Social Science & Behavioral Sciences (contextual interpretation, experimental design):**

Social and behavioral sciences contribute essential understanding of human behavior, organizational dynamics, and contextual factors that influence data generation and interpretation. These disciplines provide expertise in experimental design, survey methodology, ethical considerations, and the social implications of data-driven decisions. They ensure that data science applications consider human factors, cultural context, and societal impact while maintaining ethical standards in data collection and analysis.

Figure 4: **Source:** *LinkedIn*

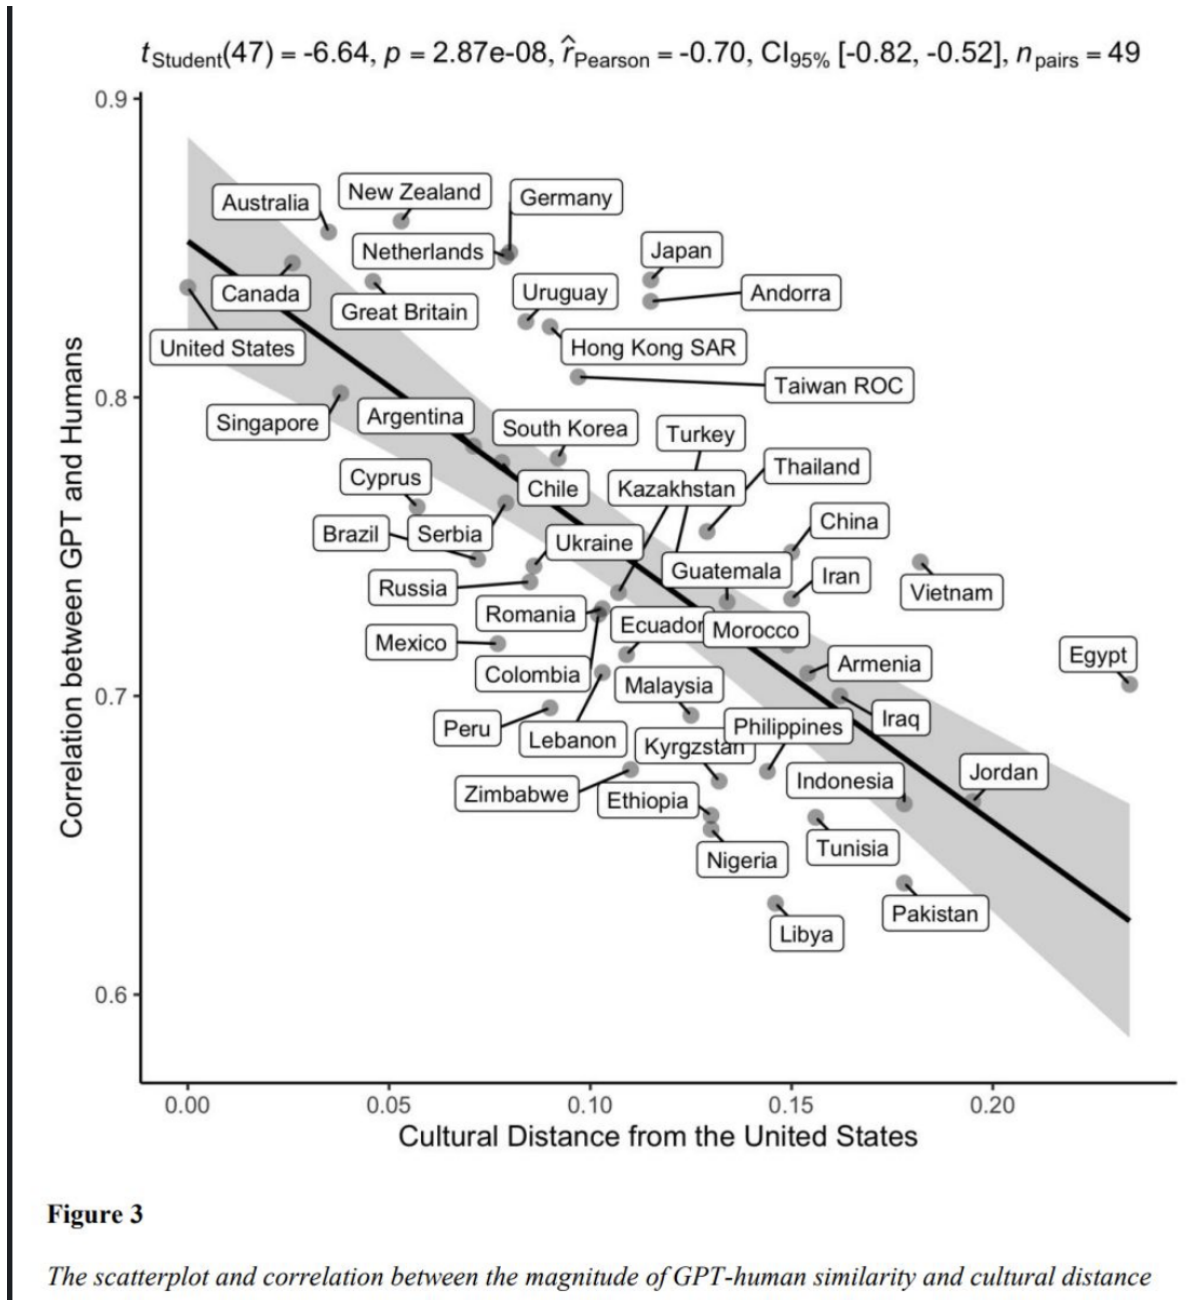

The interdisciplinary nature of data science requires practitioners to develop competencies across these domains while maintaining awareness of how different methodological traditions complement and inform each other. This multidisciplinary foundation enables data scientists to approach complex problems with both technical rigor and contextual understanding, ensuring that analytical solutions are both technically sound and practically relevant.

For further reading on the academic foundations of data science, see the comprehensive analysis in [Defining Data Science as an Academic Discipline](#).

1.2 Significance of Business Data Analysis for Decision-Making

Business data analysis has evolved from a supporting function to a critical strategic capability that fundamentally transforms how organizations make decisions, allocate resources, and compete in modern markets. The systematic application of analytical methods to business data enables evidence-based decision-making that reduces uncertainty, improves operational efficiency, and creates sustainable competitive advantages.

1.2.1 Strategic Decision-Making Framework

Business data analysis provides a structured approach to strategic decision-making through multiple analytical dimensions:

- **Evidence-Based Strategic Planning:** Data analysis supports long-term strategic decisions by providing empirical evidence about market trends, competitive positioning, and organizational capabilities. Statistical analysis of historical performance data, market research, and competitive intelligence enables organizations to formulate strategies grounded in quantifiable evidence rather than intuition alone.
- **Risk Assessment and Mitigation:** Advanced analytical techniques enable comprehensive risk evaluation across operational, financial, and strategic dimensions. Monte Carlo simulations, scenario analysis, and predictive modeling help organizations quantify potential risks and develop contingency plans based on probabilistic assessments of future outcomes.
- **Resource Allocation Optimization:** Data-driven resource allocation models leverage optimization algorithms and statistical analysis to maximize return on investment across different business units, projects, and initiatives. Linear programming, integer optimization, and multi-criteria decision analysis provide frameworks for allocating limited resources to achieve optimal organizational outcomes.

1.2.2 Operational Decision Support

At the operational level, business data analysis transforms day-to-day decision-making through real-time insights and systematic performance measurement:

- **Performance Measurement and Continuous Improvement:** Key Performance Indicators (KPIs) and statistical process control methods enable organizations to monitor operational efficiency, quality metrics, and customer satisfaction in real-time. Time series analysis, control charts, and regression analysis identify trends, anomalies, and improvement opportunities that drive continuous operational enhancement.
- **Forecasting and Demand Planning:** Statistical forecasting models using techniques such as ARIMA, exponential smoothing, and machine learning algorithms enable accurate demand prediction for inventory management, capacity planning, and supply chain optimization. These analytical approaches reduce uncertainty in operational planning while minimizing costs associated with overstock or stockouts.
- **Customer Analytics and Personalization:** Advanced customer analytics leverage segmentation analysis, predictive modeling, and behavioral analytics to understand customer preferences, predict churn, and optimize retention strategies. Clustering algorithms, logistic regression, and recommendation systems enable personalized customer experiences that increase satisfaction and loyalty.

1.2.3 Tactical Decision Integration

Business data analysis bridges strategic planning and operational execution through tactical decision support:

- **Pricing Strategy Optimization:** Price elasticity analysis, competitive pricing models, and revenue optimization techniques enable dynamic pricing strategies that maximize profitability while maintaining market competitiveness. Regression analysis, A/B testing, and econometric modeling provide empirical foundations for pricing decisions.
- **Market Intelligence and Competitive Analysis:** Data analysis transforms market research and competitive intelligence into actionable insights through statistical analysis of market trends, customer behavior, and competitive positioning. Multivariate analysis, factor analysis, and time series forecasting identify market opportunities and competitive threats.
- **Financial Performance Analysis:** Financial analytics encompassing ratio analysis, variance analysis, and predictive financial modeling enable organizations to assess financial health, identify cost reduction opportunities, and optimize capital structure decisions. Statistical analysis of financial data supports both internal performance evaluation and external stakeholder communication.

1.2.4 Contemporary Analytical Capabilities

Modern business data analysis capabilities extend traditional analytical methods through integration of advanced technologies and methodologies:

- **Real-Time Analytics and Decision Support:** Stream processing, event-driven analytics, and real-time dashboards enable immediate response to changing business conditions. Complex event processing and real-time statistical monitoring support dynamic decision-making in fast-paced business environments.
- **Predictive and Prescriptive Analytics:** Machine learning algorithms, neural networks, and optimization models enable organizations to not only predict future outcomes but also recommend optimal actions. These advanced analytical capabilities support automated decision-making and strategic scenario planning.
- **Data-Driven Innovation:** Analytics-driven innovation leverages data science techniques to identify new business opportunities, develop innovative products and services, and create novel revenue streams. Advanced analytics enable organizations to discover hidden patterns, correlations, and insights that drive innovation and competitive differentiation.

The significance of business data analysis for decision-making extends beyond technical capabilities to encompass organizational transformation, cultural change, and strategic competitive positioning. Organizations that successfully integrate analytical capabilities into their decision-making processes achieve superior performance outcomes, enhanced agility, and sustainable competitive advantages in increasingly data-driven markets.


For comprehensive coverage of business data analysis methodologies and applications, see [Advanced Business Analytics](#) and the analytical foundations outlined in Evans (2020).

1.3 Emerging Trends

Key technological and methodological developments shaping the data landscape:


- Evolution of computing and data processing architectures.
- Digitalization of processes and platforms.
- Artificial Intelligence (AI), Machine Learning (ML), and Deep Learning (DL).
- Big Data ecosystems (volume, velocity, variety, veracity, value).

Figure 5: **Source:** *LinkedIn*

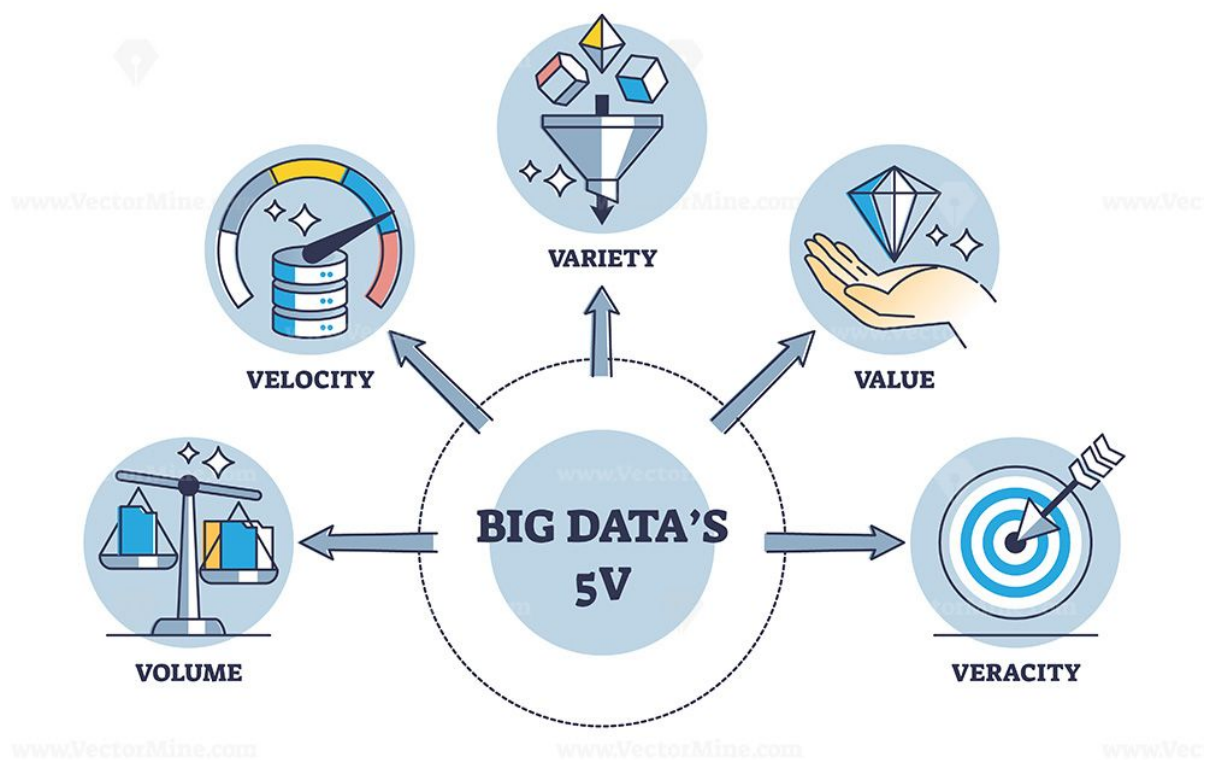

- Internet of Things (IoT) and sensor-driven data generation.

Figure 6: **Source:** <https://businesstech.bus.umich.edu/uncategorized/tech-101-internet-of-things/>

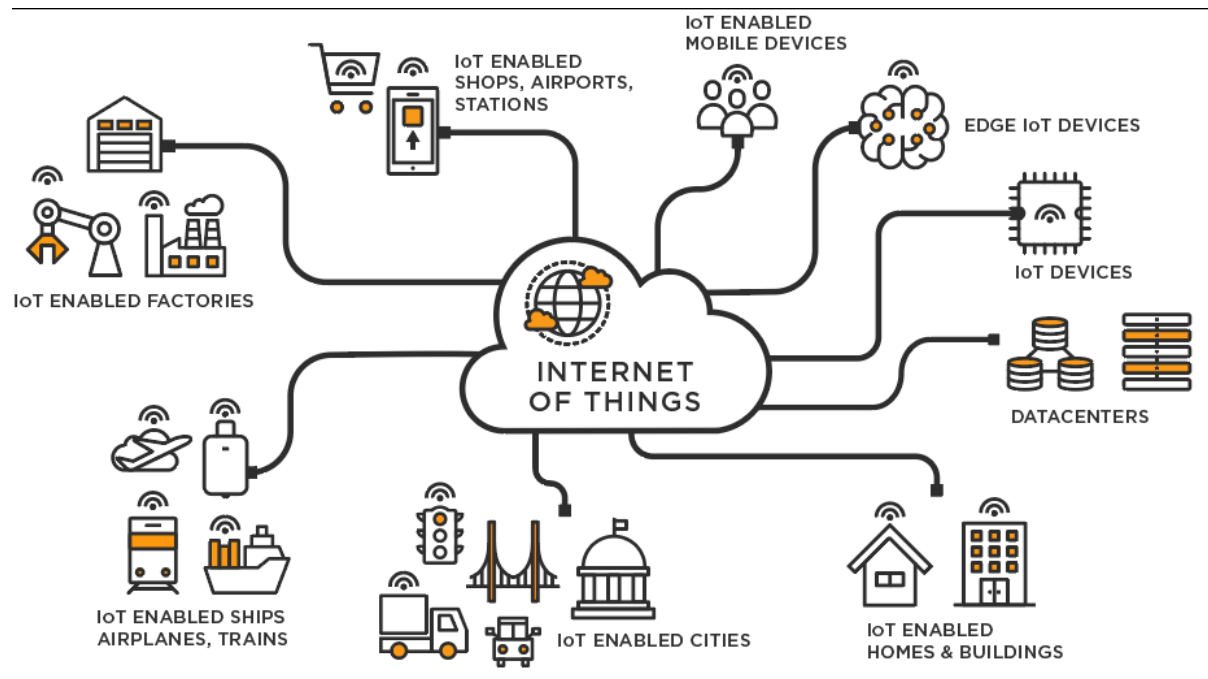


- Cloud computing and elastic infrastructure.
- Blockchain for distributed trust and data integrity.
- Industry 4.0: cyber-physical systems and automation.
- Remote and hybrid working environments: collaboration, distributed analytics, governance.

1.4 Types of Analytics

- Descriptive Analytics: What happened?
- Predictive Analytics: What is likely to happen?
- Prescriptive Analytics: What should we do?

Figure 7: **Source:** <https://datamites.com/blog/descriptive-vs-predictive-vs-prescriptive-analytics/>

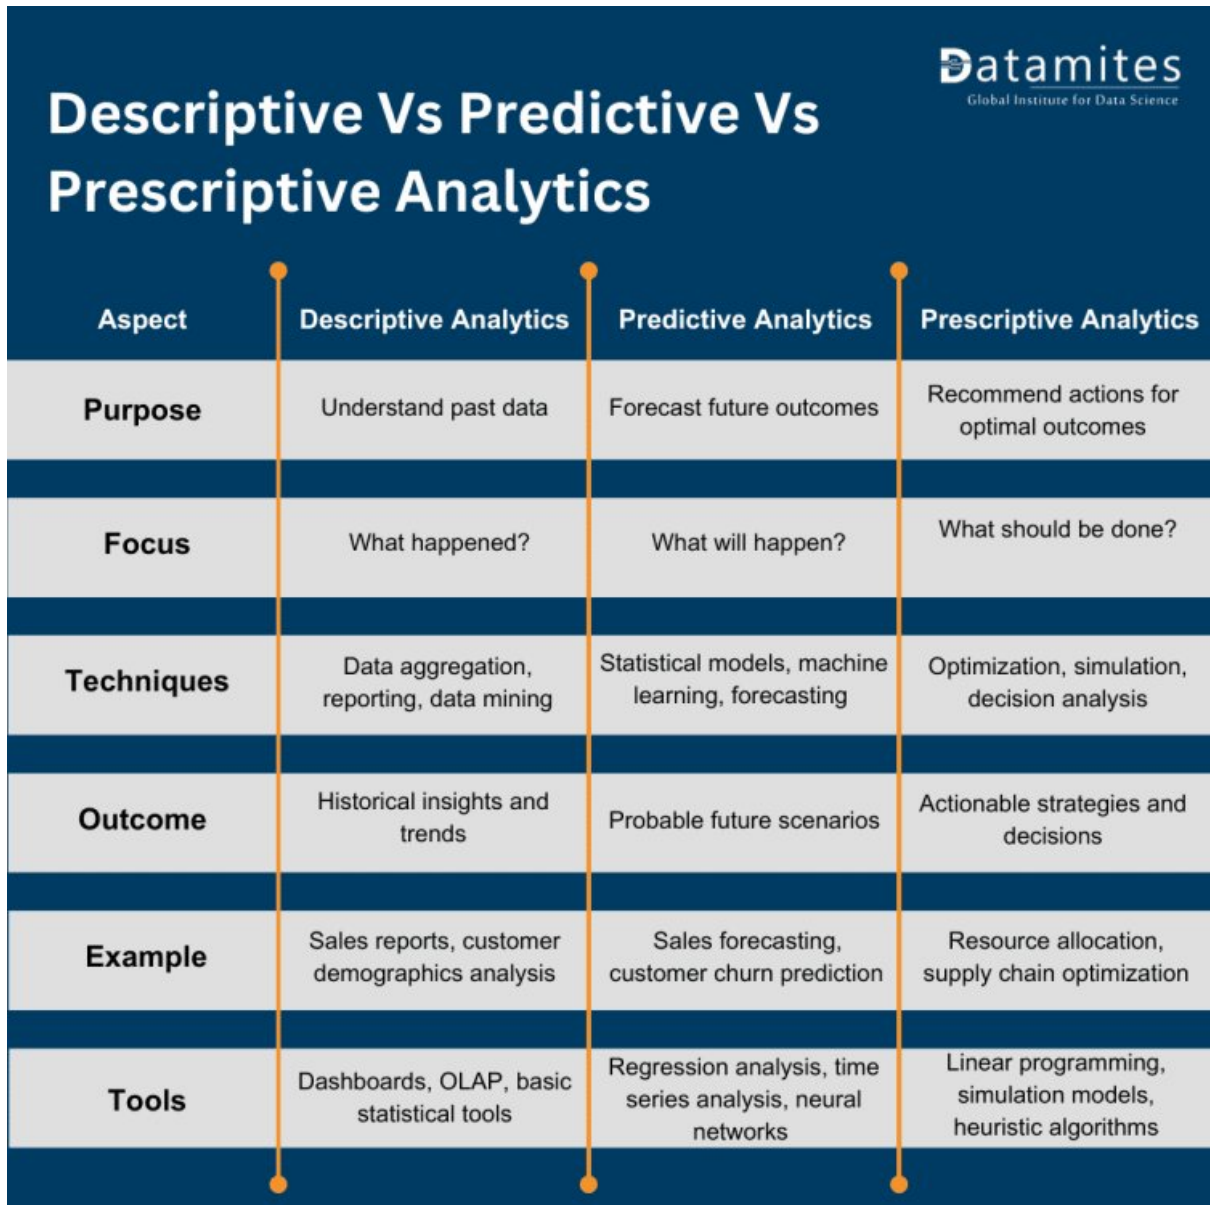

Descriptive Vs Predictive Vs Prescriptive Analytics 			
Aspect	Descriptive Analytics	Predictive Analytics	Prescriptive Analytics
Purpose	Understand past data	Forecast future outcomes	Recommend actions for optimal outcomes
Focus	What happened?	What will happen?	What should be done?
Techniques	Data aggregation, reporting, data mining	Statistical models, machine learning, forecasting	Optimization, simulation, decision analysis
Outcome	Historical insights and trends	Probable future scenarios	Actionable strategies and decisions
Example	Sales reports, customer demographics analysis	Sales forecasting, customer churn prediction	Resource allocation, supply chain optimization
Tools	Dashboards, OLAP, basic statistical tools	Regression analysis, time series analysis, neural networks	Linear programming, simulation models, heuristic algorithms

2 Data Analytic Competencies

Data analytic competencies encompass the ability to apply machine learning, data mining, statistical methods, and algorithmic approaches to extract meaningful patterns, insights, and predictions from complex datasets. They include proficiency in exploratory data analysis, feature engineering, model selection, evaluation, and validation. These skills ensure rigorous interpretation of data, support evidence-based decision-making, and enable the development of robust analytical solutions adaptable to diverse health, social, and technological contexts.


2.1 Types of Data

The structure and temporal dimension of data fundamentally influence analytical approaches and statistical methods. Understanding data types enables researchers to select appropriate modeling techniques and interpret results within proper contextual boundaries.

- **Cross-sectional data** captures observations of multiple entities (individuals, firms, countries) at a single point in time. This structure facilitates comparative analysis across units but does not track changes over time. Cross-sectional studies are particularly valuable for examining relationships between variables at a specific moment and testing hypotheses about population characteristics.
- **Time-series data** records observations of a single entity across multiple time points, enabling the analysis of temporal patterns, trends, seasonality, and cyclical behaviors. Time-series methods account for autocorrelation and temporal dependencies, supporting forecasting and dynamic modeling. This data structure is essential for economic indicators, financial markets, and environmental monitoring.
- **Panel (longitudinal) data** combines both dimensions, tracking multiple entities over time. This structure offers substantial analytical advantages by controlling for unobserved heterogeneity across entities and modeling both within-entity and between-entity variation. Panel data methods support causal inference through fixed-effects and random-effects models, difference-in-differences estimation, and dynamic panel specifications.

Figure 8: **Source:** <https://static.vecteezy.com>

Sequence Analytics

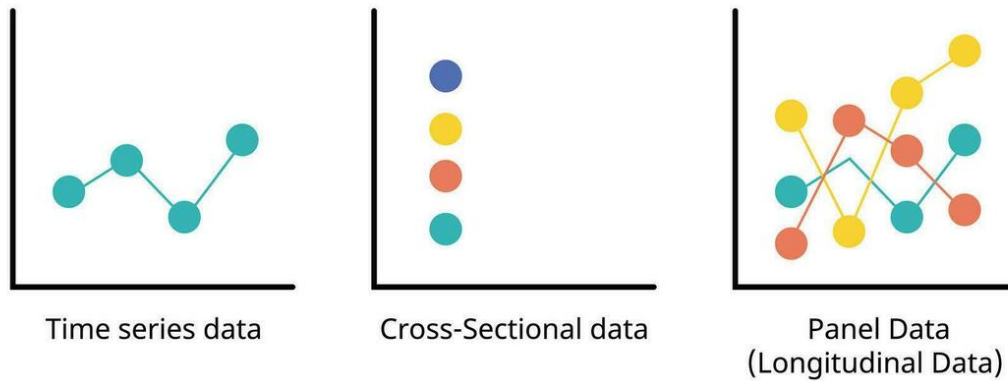


Additional data structures:

- **Geo-referenced / spatial data** is data associated with specific geographic locations, enabling spatial analysis and visualization. Techniques such as Geographic Information Systems (GIS), spatial autocorrelation, and spatial regression models are employed to analyze patterns and relationships in spatially distributed data.

What is GIS Data?

(Geographic Information Service/System)

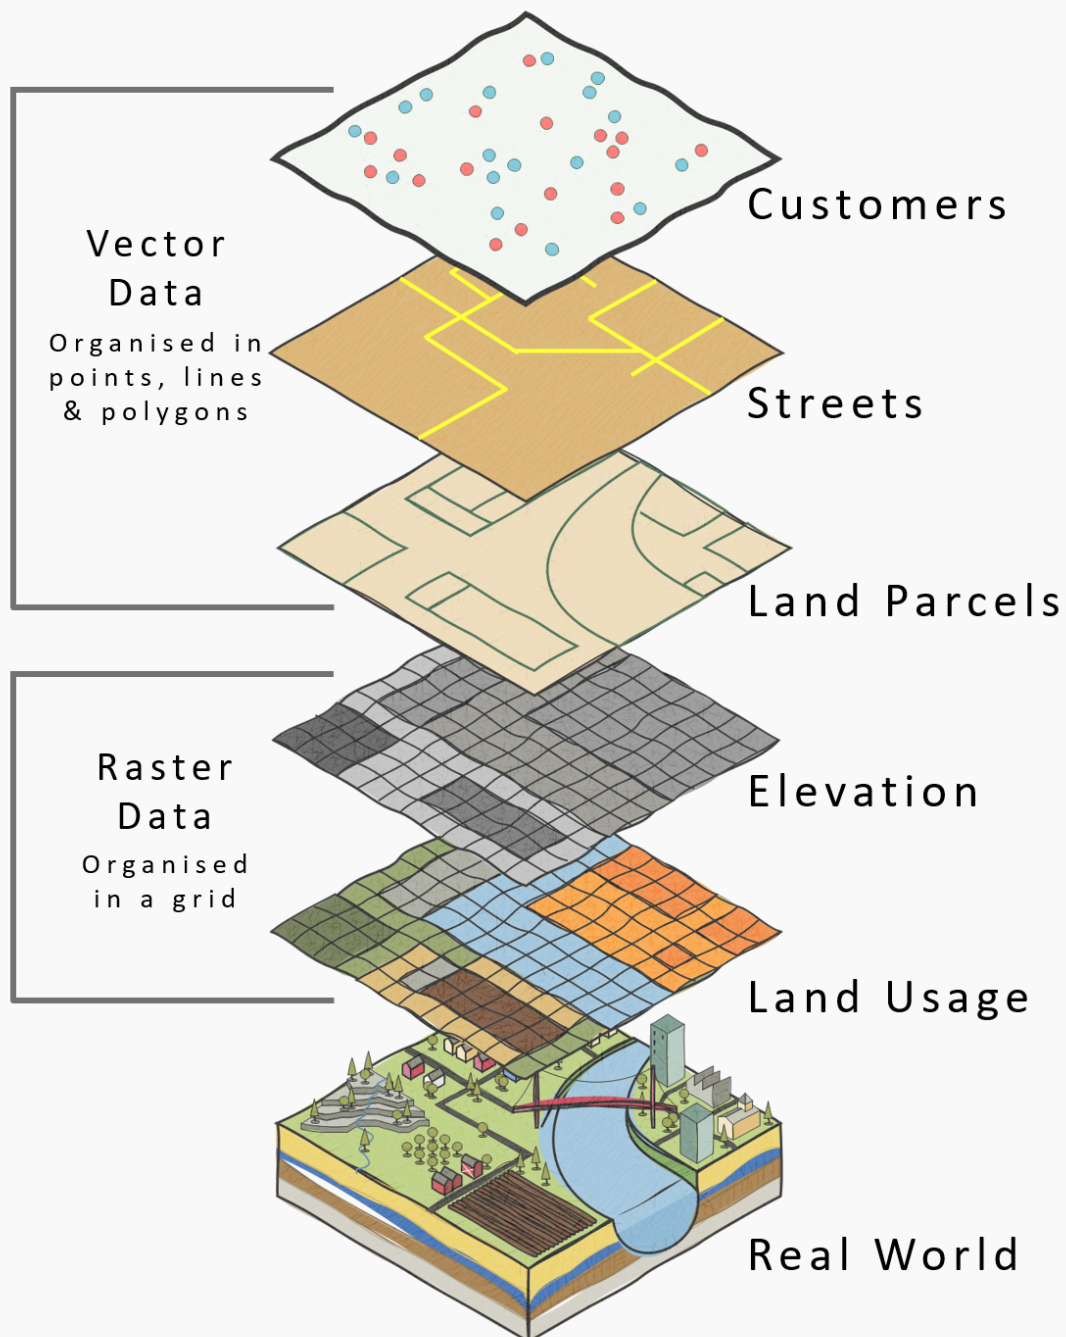

- **Streaming / real-time data** is continuously generated data that is processed and analyzed in real-time. This data structure is crucial for applications requiring immediate insights, such as fraud detection, network monitoring, and real-time recommendation systems.

2.2 Types of Variables

- **Continuous (interval/ratio)** data is measured on a scale with meaningful intervals and a true zero point (ratio) or arbitrary zero point (interval). Examples include height, weight, temperature, and income. Continuous variables support a wide range of statistical analyses, including regression and correlation.

```
# Loading the dplyr library for data manipulation
library(dplyr)

# Assigning continuous data to a data frame and displaying it as a table
continuous_data <- data.frame(
  Height_cm = c(170, 165, 180, 175, 160, 185, 172, 168, 178, 182),
  Weight_kg = c(70, 60, 80, 75, 55, 90, 68, 62, 78, 85)
)

# Displaying the original table
print(continuous_data)
```

	Height_cm	Weight_kg
1	170	70
2	165	60
3	180	80
4	175	75
5	160	55
6	185	90
7	172	68
8	168	62
9	178	78
10	182	85

```
# Ordering the data frame by Height_cm
ordered_data <- continuous_data %>%
  arrange(Height_cm)

# Displaying the ordered data frame
print(ordered_data)
```

	Height_cm	Weight_kg
1	160	55
2	165	60
3	168	62
4	170	70
5	172	68
6	175	75
7	178	78
8	180	80
9	182	85
10	185	90

```
# Practicing:
# 1. Assign continuous data to a data frame and displaying it as a table
# 2. Order the data frame by a specific column
```

- **Count** data represents the number of occurrences of an event or the frequency of a particular characteristic. Count variables are typically non-negative integers and can be analyzed using Poisson regression or negative binomial regression.

```
# Assigning count data to a data frame and displaying it as a table
count_data <- data.frame(
  Height = c(170, 165, 182, 175, 165, 175, 175, 168, 175, 182),
  Weight = c(70, 60, 80, 75, 55, 90, 68, 62, 78, 85)
)

# Displaying the original data as a table
print(count_data)
```

	Height	Weight
1	170	70
2	165	60
3	182	80
4	175	75
5	165	55
6	175	90
7	175	68
8	168	62
9	175	78
10	182	85

```
# Ordering the data frame by Height_cm in ascending order
ordered_count_data <- count_data %>%
  arrange(desc(Height), Weight) %>%
  count(Height)

# Displaying the ordered count data
print(ordered_count_data)
```

	Height	n
1	165	2
2	168	1
3	170	1
4	175	4
5	182	2

```
# Practicing:
# 1. Assign count data to a data frame and displaying it as a table
```

- **Ordinal** data represents categories with a meaningful order or ranking but no consistent interval between categories. Examples include survey responses (e.g., Likert scales) and socioeconomic status (e.g., low, medium, high). Ordinal variables can be analyzed using non-parametric tests or ordinal regression.


```
# Loading the dplyr library for data manipulation
library(dplyr)

# Assigning ordinal data to a data frame and displaying it as a table
ordinal_data <- data.frame(
  Response = c("Strongly Disagree", "Disagree", "Neutral", "Agree", "Strongly Agree"),
  Value = c(5, 4, 3, 2, 1)
)

# Displaying the original table
print(ordinal_data)
```

	Response	Value
1	Strongly Disagree	5
2	Disagree	4
3	Neutral	3
4	Agree	2
5	Strongly Agree	1

```
# Ordering the data frame by Value
ordinal_data <- ordinal_data %>%
  arrange(Value)

# Displaying the ordered data frame
print(ordinal_data)
```

	Response	Value
1	Strongly Agree	1
2	Agree	2
3	Neutral	3
4	Disagree	4
5	Strongly Disagree	5

```
# Practicing:
# 1. Assign ordinal data to adata frame and displaying it as a table
# 2. Order the data frame by the ordinal value
```

- **Categorical (nominal / binary)** data represents distinct categories without any inherent order. Nominal variables have two or more categories (e.g., gender, race, or marital status), while binary variables have only two categories (e.g., yes/no, success/failure). Categorical variables can be analyzed using chi-square tests or logistic regression.

```
# Loading the dplyr library for data manipulation
library(dplyr)

# Assigning categorical data to a data frame and displaying it as a table
categorical_data <- data.frame(
  Event = c("A", "C", "B", "D", "E"),
  Category = c("Type1", "Type2", "Type1", "Type3", "Type2")
)
```

```
)

# Displaying the original table
print(categorical_data)
```

	Event	Category
1	A	Type1
2	C	Type2
3	B	Type1
4	D	Type3
5	E	Type2

```
# Ordering the data frame by Event
categorical_data <- categorical_data %>%
  arrange(Event)

# Displaying the table
print(categorical_data)
```

	Event	Category
1	A	Type1
2	B	Type1
3	C	Type2
4	D	Type3
5	E	Type2

```
# Practicing:
# 1. Assign categorical data to a data frame and displaying it as a table
# 2. Order the data frame by a specific column
```

- **Compositional or hierarchical structures** represent data with a part-to-whole relationship or nested categories. Examples include demographic data (e.g., age groups within gender) and geographical data (e.g., countries within continents). Compositional data can be analyzed using techniques such as hierarchical clustering or multilevel modeling.

```
# Loading the dplyr library for data manipulation
library(dplyr)

# Assigning hierarchical data to a data frame and displaying it as a table
hierarchical_data <- data.frame(
  Country = c("USA", "Canada", "USA", "Canada", "Mexico"),
  State_Province = c("California", "Ontario", "Texas", "Quebec", "Jalisco"),
  Population_Millions = c(39.5, 14.5, 29.0, 8.5, 8.3)
)

# Displaying the table
print(hierarchical_data)
```

	Country	State_Province	Population_Millions
1	USA	California	39.5
2	Canada	Ontario	14.5
3	USA	Texas	29.0
4	Canada	Quebec	8.5
5	Mexico	Jalisco	8.3

```
# Ordering the data frame by Country and then State_Province
hierarchical_data <- hierarchical_data %>%
  arrange(Country, State_Province)

# Displaying the ordered data frame
print(hierarchical_data)
```

	Country	State_Province	Population_Millions
1	Canada	Ontario	14.5
2	Canada	Quebec	8.5
3	Mexico	Jalisco	8.3
4	USA	California	39.5
5	USA	Texas	29.0


```
# Grouping the data by Country and summarizing total population
hierarchical_data_grouped <- hierarchical_data %>%
  group_by(Country) %>%
  summarise(Total_Population = sum(Population_Millions))

# Displaying the grouped data frame
print(hierarchical_data_grouped)
```

```
# A tibble: 3 x 2
  Country Total_Population
  <chr>      <dbl>
1 Canada      23
2 Mexico      8.3
3 USA       68.5
```

```
# Practicing:
# 1. Assign hierarchical data to a data frame and displaying it as a table
# 2. Order the data frame by multiple columns
```

Figure 10: Source: <https://www.collegedisha.com/>

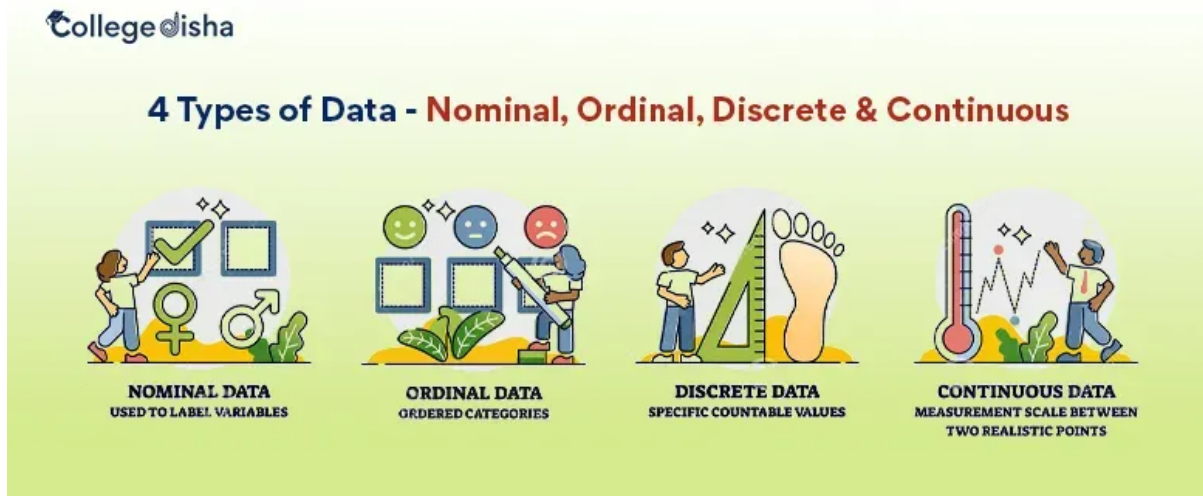

Some small datasets to start with

A custom R package `ourdata` has been created to provide some small datasets (and also some helper R functions) for practice. You can install it from GitHub using the following commands:

```
# Installing Github R packages
devtools::install_github("DrBenjamin/ourdata")
```

Using the package and exploring its documentation:

```
# Loading package
library(ourdata)

# Opening help of package
??ourdata

# Showing welcome message
ourdata()
```

This is the R package ``ourdata`` used for Data Science courses at the Fresenius University of Applied Sciences. Type ``help(ourdata)`` to display the content. Type ``ourdata_website()`` to open the package website. Have fun in the course!
Benjamin Gross

```
# Printing some datasets
print(koelsch)
```

```
  Jahr   Koelsch
1 2017 186784000
2 2018 191308000
3 2019 179322000
4 2020 169182000
```

```
print(kirche)
```

```
  Jahr Austritte
1 2017    364711
2 2018    437416
3 2019    539509
4 2020    441390
```

```
# Using help function from the package for a specific function from the `ourdata` R package
help(combine)
```

Help on topic 'combine' was found in the following packages:

Package	Library
ourdata	/home/runner/R-library
dplyr	/home/runner/R-library

Using the first match ...

```
# Using the `combine` function from the `ourdata` R package to combine two vectors into a data frame
combine(kirche$Jahr, koelsch$Jahr, kirche$Austritte, koelsch$Koelsch)
```

```
'data.frame':  4 obs. of  3 variables:
 $ C1: chr  "2017" "2018" "2019" "2020"
 $ C2: num  364711 437416 539509 441390
 $ C3: num  1.87e+08 1.91e+08 1.79e+08 1.69e+08
```

```
   C1    C2    C3
1 2017 364711 186784000
2 2018 437416 191308000
3 2019 539509 179322000
4 2020 441390 169182000
```

**** A messy dataset example****

We collect [data](#) from OECD (Organization for Economic Co-operation and Development), an international organization that works to build better policies for better lives. The dataset shows many columns (variables) with non-informative data and needs to be cleaned (wrangled) before analysis. First load the data into R from CSV file:

```
# Reading the dataset from a CSV file
preventable_deaths <- read.csv(
  "./topics/data/OECD_Preventable_Deaths.csv",
  stringsAsFactors = FALSE
)
```

or use the dataset directly from the `ourdata` R package:

```
# Reading the dataset from `ourdata` R package
library(ourdata)
preventable_deaths <- oecd_preventable
```

First we explore the data:

```
# Viewing structure of the dataset
str(preventable_deaths)
```

```
'data.frame':  1162 obs. of  44 variables:
 $ STRUCTURE           : chr  "DATAFLOW" "DATAFLOW" "DATAFLOW" "DATAFLOW" ...
 $ STRUCTURE_ID        : chr  "OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)" "OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)" ...
 $ STRUCTURE_NAME      : chr  "Avoidable mortality" "Avoidable mortality" "Avoidable mortality" ...
 $ ACTION              : chr  "I" "I" "I" "I" ...
 $ REF_AREA            : chr  "AUS" "AUS" "AUS" "AUS" ...
 $ Reference.area      : chr  "Australia" "Australia" "Australia" "Australia" ...
 $ FREQ                : chr  "A" "A" "A" "A" ...
 $ Frequency.of.observation : chr  "Annual" "Annual" "Annual" "Annual" ...
 $ MEASURE             : chr  "PREVM" "PREVM" "PREVM" "PREVM" ...
 $ Measure            : chr  "Preventable mortality" "Preventable mortality" "Preventable mortality" ...
 $ UNIT_MEASURE        : chr  "DT_10P5HB" "DT_10P5HB" "DT_10P5HB" "DT_10P5HB" ...
 $ Unit.of.measure     : chr  "Deaths per 100 000 inhabitants" "Deaths per 100 000 inhabitants" ...
 $ AGE                : chr  "_T" "_T" "_T" "_T" ...
 $ Age                : chr  "Total" "Total" "Total" "Total" ...
 $ SEX                : chr  "_T" "_T" "_T" "_T" ...
 $ Sex               : chr  "Total" "Total" "Total" "Total" ...
 $ SOCIO_ECON_STATUS   : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Socio.economic.status : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ DEATH_CAUSE        : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Cause.of.death     : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ CALC_METHODODOLOGY : chr  "STANDARD" "STANDARD" "STANDARD" "STANDARD" ...
 $ Calculation.methodology : chr  "Standardised rate" "Standardised rate" "Standardised rate" ...
 $ GESTATION_THRESHOLD : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Gestation.period.threshold : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ HEALTH_STATUS      : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Health.status      : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ DISEASE            : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Disease           : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ CANCER_SITE        : chr  "_Z" "_Z" "_Z" "_Z" ...
 $ Cancer.site       : chr  "Not applicable" "Not applicable" "Not applicable" "Not applicable" ...
 $ TIME_PERIOD        : int  2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 ...
 $ Time.period       : logi  NA NA NA NA NA NA NA ...
 $ OBS_VALUE         : int  110 109 105 105 107 108 103 103 101 104 ...
 $ Observation.value  : logi  NA NA NA NA NA NA NA ...
 $ DECIMALS          : int  1 1 1 1 1 1 1 1 1 1 ...
 $ Decimals         : chr  "One" "One" "One" "One" ...
 $ OBS_STATUS        : logi  NA NA NA NA NA NA NA ...
 $ Observation.status : logi  NA NA NA NA NA NA NA ...
 $ OBS_STATUS2       : logi  NA NA NA NA NA NA NA ...
 $ Observation.status.2 : logi  NA NA NA NA NA NA NA ...
```

```

$ OBS_STATUS3          : logi  NA NA NA NA NA NA ...
$ Observation.status.3  : logi  NA NA NA NA NA NA ...
$ UNIT_MULT            : int   0 0 0 0 0 0 0 0 0 0 ...
$ Unit.multiplier       : chr   "Units" "Units" "Units" "Units" ...

```

```
# Viewing first few rows
```

```
head(preventable_deaths)
```

	STRUCTURE	STRUCTURE_ID	STRUCTURE_NAME	ACTION
1	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	
2	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	
3	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	
4	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	
5	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	
6	DATAFLOW OECD.ELS.HD:DSD_HEALTH_STAT@DF_AM(1.1)	Avoidable mortality	I	

	REF_AREA	Reference.area	FREQ	Frequency.of.observation	MEASURE
1	AUS	Australia	A	Annual	PREVM
2	AUS	Australia	A	Annual	PREVM
3	AUS	Australia	A	Annual	PREVM
4	AUS	Australia	A	Annual	PREVM
5	AUS	Australia	A	Annual	PREVM
6	AUS	Australia	A	Annual	PREVM

	Measure	UNIT_MEASURE	Unit.of.measure	AGE	Age
1	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total
2	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total
3	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total
4	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total
5	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total
6	Preventable mortality	DT_10P5HB	Deaths per 100 000 inhabitants	_T	Total

	SEX	Sex	SOCIO_ECON_STATUS	Socio.economic.status	DEATH_CAUSE	Cause.of.death
1	_T	Total	_Z	Not applicable	_Z	Not applicable
2	_T	Total	_Z	Not applicable	_Z	Not applicable
3	_T	Total	_Z	Not applicable	_Z	Not applicable
4	_T	Total	_Z	Not applicable	_Z	Not applicable
5	_T	Total	_Z	Not applicable	_Z	Not applicable
6	_T	Total	_Z	Not applicable	_Z	Not applicable

	CALC_METHODODOLOGY	Calculation.methodology	GESTATION_THRESHOLD
1	STANDARD	Standardised rate	_Z
2	STANDARD	Standardised rate	_Z
3	STANDARD	Standardised rate	_Z
4	STANDARD	Standardised rate	_Z
5	STANDARD	Standardised rate	_Z
6	STANDARD	Standardised rate	_Z

	Gestation.period.threshold	HEALTH_STATUS	Health.status	DISEASE
1	Not applicable	_Z	Not applicable	_Z
2	Not applicable	_Z	Not applicable	_Z
3	Not applicable	_Z	Not applicable	_Z
4	Not applicable	_Z	Not applicable	_Z
5	Not applicable	_Z	Not applicable	_Z
6	Not applicable	_Z	Not applicable	_Z

	Disease	CANCER_SITE	Cancer.site	TIME_PERIOD	Time.period	OBS_VALUE
--	---------	-------------	-------------	-------------	-------------	-----------

1	Not applicable	_Z	Not applicable	2010	NA	110
2	Not applicable	_Z	Not applicable	2011	NA	109
3	Not applicable	_Z	Not applicable	2012	NA	105
4	Not applicable	_Z	Not applicable	2013	NA	105
5	Not applicable	_Z	Not applicable	2014	NA	107
6	Not applicable	_Z	Not applicable	2015	NA	108
Observation.value DECIMALS Decimals OBS_STATUS Observation.status OBS_STATUS2						
1	NA	1	One	NA	NA	NA
2	NA	1	One	NA	NA	NA
3	NA	1	One	NA	NA	NA
4	NA	1	One	NA	NA	NA
5	NA	1	One	NA	NA	NA
6	NA	1	One	NA	NA	NA
Observation.status.2 OBS_STATUS3 Observation.status.3 UNIT_MULT						
1	NA	NA	NA	0		
2	NA	NA	NA	0		
3	NA	NA	NA	0		
4	NA	NA	NA	0		
5	NA	NA	NA	0		
6	NA	NA	NA	0		
Unit.multiplier						
1	Units					
2	Units					
3	Units					
4	Units					
5	Units					
6	Units					

```
# Checking dimensions
dim(preventable_deaths)
```

```
[1] 1162 44
```

```
# Viewing column names
colnames(preventable_deaths)
```

```
[1] "STRUCTURE"           "STRUCTURE_ID"
[3] "STRUCTURE_NAME"      "ACTION"
[5] "REF_AREA"            "Reference.area"
[7] "FREQ"                "Frequency.of.observation"
[9] "MEASURE"             "Measure"
[11] "UNIT_MEASURE"        "Unit.of.measure"
[13] "AGE"                 "Age"
[15] "SEX"                 "Sex"
[17] "SOCIO_ECON_STATUS"   "Socio.economic.status"
[19] "DEATH_CAUSE"         "Cause.of.death"
[21] "CALC_METHODOLOGY"    "Calculation.methodology"
[23] "GESTATION_THRESHOLD" "Gestation.period.threshold"
[25] "HEALTH_STATUS"       "Health.status"
[27] "DISEASE"             "Disease"
```

[29]	"CANCER_SITE"	"Cancer.site"
[31]	"TIME_PERIOD"	"Time.period"
[33]	"OBS_VALUE"	"Observation.value"
[35]	"DECIMALS"	"Decimals"
[37]	"OBS_STATUS"	"Observation.status"
[39]	"OBS_STATUS2"	"Observation.status.2"
[41]	"OBS_STATUS3"	"Observation.status.3"
[43]	"UNIT_MULT"	"Unit.multiplier"

```
# Summary statistics
summary(preventable_deaths)
```

STRUCTURE	STRUCTURE_ID	STRUCTURE_NAME	ACTION
Length:1162	Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character	Mode :character

REF_AREA	Reference.area	FREQ
Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character

Frequency.of.observation	MEASURE	Measure
Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character

UNIT_MEASURE	Unit.of.measure	AGE	Age
Length:1162	Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character	Mode :character

SEX	Sex	SOCIO_ECON_STATUS	Socio.economic.status
Length:1162	Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character	Mode :character

DEATH_CAUSE	Cause.of.death	CALC_METHODODOLOGY
Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character

Calculation.methodology	GESTATION_THRESHOLD	Gestation.period.threshold
Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character

HEALTH_STATUS	Health.status	DISEASE	Disease
Length:1162	Length:1162	Length:1162	Length:1162
Class :character	Class :character	Class :character	Class :character
Mode :character	Mode :character	Mode :character	Mode :character

CANCER_SITE	Cancer.site	TIME_PERIOD	Time.period
Length:1162	Length:1162	Min. :2010	Mode:logical
Class :character	Class :character	1st Qu.:2013	NA's:1162
Mode :character	Mode :character	Median :2016	
		Mean :2016	
		3rd Qu.:2019	
		Max. :2023	

OBS_VALUE	Observation.value	DECIMALS	Decimals
Min. : 34.0	Mode:logical	Min. :1	Length:1162
1st Qu.: 75.0	NA's:1162	1st Qu.:1	Class :character
Median :116.0		Median :1	Mode :character
Mean :128.7		Mean :1	
3rd Qu.:156.0		3rd Qu.:1	
Max. :453.0		Max. :1	
OBS_STATUS	Observation.status	OBS_STATUS2	Observation.status.2
Mode:logical	Mode:logical	Mode:logical	Mode:logical
NA's:1162	NA's:1162	NA's:1162	NA's:1162

OBS_STATUS3	Observation.status.3	UNIT_MULT	Unit.multiplier
Mode:logical	Mode:logical	Min. :0	Length:1162
NA's:1162	NA's:1162	1st Qu.:0	Class :character
		Median :0	Mode :character
		Mean :0	
		3rd Qu.:0	
		Max. :0	

```
# Checking for missing values
colSums(is.na(preventable_deaths))
```

STRUCTURE	STRUCTURE_ID
0	0

STRUCTURE_NAME		ACTION
0		0
REF_AREA		Reference.area
0		0
FREQ	Frequency.of.observation	
0		0
MEASURE		Measure
0		0
UNIT_MEASURE	Unit.of.measure	
0		0
AGE		Age
0		0
SEX		Sex
0		0
SOCIO_ECON_STATUS	Socio.economic.status	
0		0
DEATH_CAUSE	Cause.of.death	
0		0
CALC_METHODODOLOGY	Calculation.methodology	
0		0
GESTATION_THRESHOLD	Gestation.period.threshold	
0		0
HEALTH_STATUS	Health.status	
0		0
DISEASE	Disease	
0		0
CANCER_SITE	Cancer.site	
0		0
TIME_PERIOD	Time.period	
0		1162
OBS_VALUE	Observation.value	
0		1162
DECIMALS	Decimals	
0		0
OBS_STATUS	Observation.status	
1162		1162
OBS_STATUS2	Observation.status.2	
1162		1162
OBS_STATUS3	Observation.status.3	
1162		1162
UNIT_MULT	Unit.multiplier	
0		0

Now we can start cleaning the data by removing non-informative columns and rows with missing values:

```
# Loading necessary library
library(dplyr)

# Selecting relevant columns for analysis
df_clean <- preventable_deaths %>%
```

```

select(
  REF_AREA,
  Reference.area,
  TIME_PERIOD,
  OBS_VALUE
) %>%
rename(
  country_code = REF_AREA,
  country = Reference.area,
  year = TIME_PERIOD,
  death_rate = OBS_VALUE
)

# Converting year to numeric
df_clean$year <- as.numeric(df_clean$year)

# Converting death_rate to numeric (handling empty strings)
df_clean$death_rate <- as.numeric(df_clean$death_rate)

# Removing rows with missing death rates
df_clean <- df_clean %>%
  filter(!is.na(death_rate))

# Viewing cleaned data structure
str(df_clean)

'data.frame': 1162 obs. of 4 variables:
 $ country_code: chr "AUS" "AUS" "AUS" "AUS" ...
 $ country : chr "Australia" "Australia" "Australia" "Australia" ...
 $ year : num 2010 2011 2012 2013 2014 ...
 $ death_rate : num 110 109 105 105 107 108 103 103 101 104 ...

# Summary of cleaned data
summary(df_clean)

```

country_code	country	year	death_rate
Length:1162	Length:1162	Min. :2010	Min. : 34.0
Class :character	Class :character	1st Qu.:2013	1st Qu.: 75.0
Mode :character	Mode :character	Median :2016	Median :116.0
		Mean :2016	Mean :128.7
		3rd Qu.:2019	3rd Qu.:156.0
		Max. :2023	Max. :453.0

Showing some basic statistics of the cleaned data:

```

# Loading necessary library
library(dplyr)

# Printing overall statistics
cat("\n=== OVERALL STATISTICS ===\n")

```

=== OVERALL STATISTICS ===

```
cat("Mean death rate:", mean(df_clean$death_rate, na.rm = TRUE), "\n")
```

Mean death rate: 128.7151

```
cat("Median death rate:", median(df_clean$death_rate, na.rm = TRUE), "\n")
```

Median death rate: 116

```
cat("Standard deviation:", sd(df_clean$death_rate, na.rm = TRUE), "\n")
```

Standard deviation: 69.58822

```
cat("Min death rate:", min(df_clean$death_rate, na.rm = TRUE), "\n")
```

Min death rate: 34

```
cat("Max death rate:", max(df_clean$death_rate, na.rm = TRUE), "\n")
```

Max death rate: 453

```
# Printing statistics by country
country_stats <- df_clean %>%
  group_by(country) %>%
  summarise(
    mean_rate = mean(death_rate, na.rm = TRUE),
    median_rate = median(death_rate, na.rm = TRUE),
    sd_rate = sd(death_rate, na.rm = TRUE),
    min_rate = min(death_rate, na.rm = TRUE),
    max_rate = max(death_rate, na.rm = TRUE),
    n_observations = n()
  ) %>%
  arrange(desc(mean_rate))
print(country_stats)
```

A tibble: 46 x 7

country	mean_rate	median_rate	sd_rate	min_rate	max_rate	n_observations
<chr>	<dbl>	<dbl>	<dbl>	<dbl>	<dbl>	<int>
1 South Africa	330.	338	53.1	241	438	22
2 Latvia	230.	226.	65.8	151	364	28
3 Lithuania	225.	204.	67.9	134	340	28
4 Romania	223.	220.	46.5	172	303	24
5 Hungary	218.	208	72.4	141	375	28
6 Mexico	216.	217	75.5	155	453	26

7	Bulgaria	193.	186	45.5	156	378	26
8	Brazil	185.	172.	51.6	133	356	24
9	Slovak Republ~	178.	167	43.4	130	308	24
10	Estonia	172.	167	59.7	100	265	26

i 36 more rows

```
# Printing statistics by year
year_stats <- df_clean %>%
  group_by(year) %>%
  summarise(
    mean_rate = mean(death_rate, na.rm = TRUE),
    median_rate = median(death_rate, na.rm = TRUE),
    n_countries = n_distinct(country)
  ) %>%
  arrange(year)
print(year_stats)
```

```
# A tibble: 14 x 4
  year mean_rate median_rate n_countries
  <dbl>   <dbl>       <dbl>       <int>
1  2010    141.         128           45
2  2011    135.         124           44
3  2012    133.         120           45
4  2013    130.         116           45
5  2014    126.         117           46
6  2015    125.         114           45
7  2016    124.         112           46
8  2017    122.         111           45
9  2018    121.         108           45
10 2019    118.         106           44
11 2020    137.         118           42
12 2021    148.         118           40
13 2022    120.         108           35
14 2023    112.          99.5          14
```

To visualize the cleaned data, we can create a distribution plot of preventable death rates:

```
# Loading necessary library
library(ggplot2)

# Plotting distribution of death rates
ggplot(df_clean, aes(x = death_rate)) +
  geom_histogram(bins = 30, fill = "#9B59B6", color = "white", alpha = 0.8) +
  labs(
    title = "Distribution of Preventable Death Rates",
    x = "Death Rate per 100,000",
    y = "Frequency",
    caption = "Source: OECD Health Statistics"
  ) +
  theme_minimal() +
```



```
theme(
  plot.title = element_text(face = "bold", size = 14)
)
```


2.3 Conceptual Framework: Knowledge & Understanding of Data

- **Clarify analytical purpose and domain context** to guide data selection and interpretation.
- **Define entities, observational units, and identifiers** to ensure accurate data representation.
- **Align business concepts with data structures** for meaningful analysis.

2.4 Data Collection

Data collection forms the foundational stage of any data science project, requiring systematic approaches to gather information that aligns with research objectives and analytical requirements. As outlined in modern statistical frameworks, effective data collection strategies must balance methodological rigor with practical constraints (M. & Hardin, 2021).

Figure 11: Methods of Data Collection

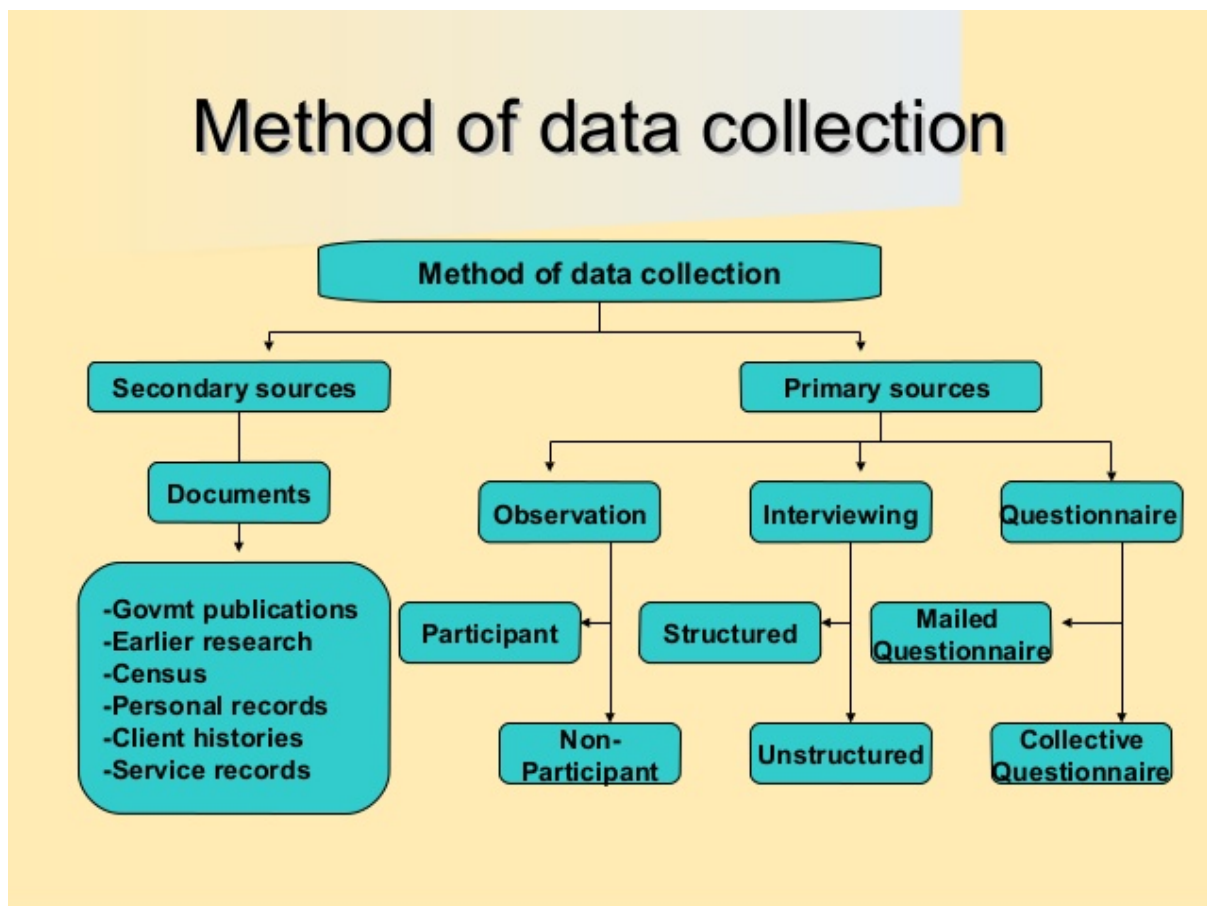

2.4.1 Core Data Collection Competencies

The competencies required for effective data collection encompass both technical proficiency and methodological understanding (see [Data Collection Competencies.pdf](#)):

- **Source Identification and Assessment:** Systematically identify internal and external data sources, evaluating their relevance, quality, and accessibility for the analytical objectives.
- **Data Acquisition Methods:** Implement appropriate collection techniques including APIs, database queries, survey instruments, sensor networks, web scraping, and third-party vendor partnerships, ensuring methodological alignment with research design.
- **Quality and Governance Framework:** Establish protocols for assessing data provenance, licensing agreements, ethical compliance, and regulatory requirements (GDPR, industry-specific standards).
- **Methodological Considerations:** Apply principles from research methodology to ensure data collection approaches support valid statistical inference and minimize bias introduction during the acquisition process.

2.4.2 Contemporary Data Collection Landscape

Modern data collection operates within an increasingly complex ecosystem characterized by diverse data types, real-time requirements, and distributed sources. The integration of traditional survey methods with emerging IoT sensors, social media APIs, and automated data pipelines requires comprehensive competency frameworks that address both technical implementation and methodological validity.

For comprehensive coverage of data collection methodologies and best practices, refer to: [Research Methodology - Data Collection](#)

2.5 Data Management

- Organize: schema design, naming conventions.
- Clean: resolve duplicates, inconsistencies, missingness.
- Convert: type casting, normalization, encoding.
- Curate: maintain lineage, documentation, metadata.
- Preserve: backups, versioning (see also [Analytical Skills for Business - Implementing version control systems](#)), retention policies.

Data Management in data science curricula requires a coherent, multi-facet framework that spans data quality, FAIR stewardship, master data governance, privacy/compliance, and modern architectures. Data quality assessment and governance define objective metrics (completeness, accuracy, consistency, plausibility, conformance) and governance processes that balance automated checks with human oversight. FAIR data principles provide a practical blueprint for metadata-rich stewardship to support findability, accessibility, interoperability, and reuse through machine-actionable metadata and persistent identifiers. Master Data Management ensures clean, trusted core entities across systems via governance and harmonization. Data privacy, security, and regulatory compliance embed responsible data handling and risk management, guided by purpose limitation, data minimization, accuracy, storage limitations, integrity/confidentiality,

and accountability. Emerging trends in cloud-native data platforms, ETL/ELT, data lakes/lake-houses, and broader metadata automation shape scalable storage/compute and governance, enabling reproducible analytics and ML workflows. Together, these strands underpin trustworthy, discoverable, and compliant data inputs for research and coursework (Weiskopf & Weng, 2016; Wilkinson et al., 2016; GO FAIR Foundation, n.d.; Semarchy, n.d.; IBM, n.d.).

2.6 Data Evaluation

- Define data quality dimensions and assessment frameworks.
- Distinguish validation from verification in data pipelines.
- Apply statistical methods and data profiling for evaluation.
- Balance automated and manual (human-in-the-loop) evaluation approaches.
- Implement tools, workflows, and governance for data evaluation.

Data evaluation is a critical competency in data science that ensures datasets are fit-for-purpose, reliable, and trustworthy throughout the analytical lifecycle. Effective data evaluation encompasses systematic assessment of data quality dimensions (completeness, accuracy, consistency, validity, timeliness, and uniqueness), rigorous validation and verification processes within data pipelines, and the strategic application of statistical methods and data profiling techniques. Data quality dimensions provide measurable criteria and benchmarks to determine whether data meets requirements for downstream analysis and decision-making (Weiskopf & Weng, 2013; Lee et al., 2018; Colibra, 2022). Assessment frameworks translate these abstract dimensions into actionable metrics and evaluation workflows, enabling both objective measurement and contextual interpretation.

The distinction between data validation and data verification is essential for maintaining data integrity across analytical pipelines. Validation checks occur at entry or ingestion points, preventing bad data from entering systems through constraint checks, format validation, and business rule enforcement. Verification, in contrast, involves post-collection checks ensuring data remained accurate and consistent over time and across system boundaries, supporting reproducibility and traceability (Precisely, n.d.). Both processes are complementary: validation acts as a gatekeeper, while verification provides ongoing assurance that data quality has not degraded through processing, transformation, or storage.

Statistical methods and data profiling form the technical foundation for data evaluation. Outlier detection techniques (z-score, IQR, DBSCAN) identify anomalous observations that may represent errors or novel phenomena requiring investigation. Distribution checks assess whether data conforms to expected patterns, while data profiling describes dataset structure, missingness patterns, and statistical properties. Regression analysis and hypothesis testing can diagnose data quality issues and quantify relationships between quality metrics and analytical outcomes. Integrating profiling with quality dimensions enables targeted improvements and prioritization of data quality initiatives (ActivityInfo, 2023).

Modern data evaluation requires balancing automated and manual approaches. Automated evaluation offers speed, scalability, and consistency for large datasets, enabling continuous monitoring and real-time quality checks. Rule-based validation, statistical profiling, and machine learning-based anomaly detection can process millions of records efficiently. However, manual evaluation contributes domain expertise, contextual understanding, and interpretative judgment that automated systems cannot replicate. Human-in-the-loop approaches combine automation's efficiency with human interpretability, particularly valuable for nuanced or high-stakes data where context matters (Lee et al., 2018). Hybrid workflows might automate initial screening while flagging edge cases for expert review, optimizing both throughput and quality.

Tools, workflows, and governance frameworks provide the infrastructure for systematic data evaluation across the data lifecycle. Data profiling tools (e.g., Pandas Profiling, Great Expectations, Deequ) automate quality assessment and generate summary reports. Validation frameworks embed checks into ETL/ELT pipelines, ensuring quality gates at critical processing stages. Data lineage tracking and metadata management support traceability and impact analysis, documenting data provenance and transformation history. Governance frameworks establish roles, responsibilities, and processes for data quality management, aligning evaluation practices with regulatory requirements and reproducibility needs. Together, these elements create a comprehensive ecosystem for maintaining data quality, supporting both exploratory research and production analytics (Weiskopf & Weng, 2013; Colibra, 2022).

3 Applications in the Programming Language R

Please read the [How to Use R for Data Science](#) by Prof. Dr. Huber for any basic questions regarding R programming.

3.1 Core tidyverse Tooling

Fundamental packages:

- `dplyr` for data manipulation (filter, mutate, summarize, joins).
- `tidyr` for data reshaping (pivoting, nesting, separating, unnesting).
- `ggplot2` for layered grammar-based visualization.
- some more R libraries:
 - `readr`
 - `purrr`
 - `stringr`
 - `forcats`

for ingestion, functional iteration, text, and factor handling.

3.2 Data Visualization Principles

- Choose encodings appropriate to variable types.
- Emphasize clarity: reduce chart junk; apply perceptual best practices.
- Support comparison, trend detection, and anomaly spotting.

3.3 Detecting Outliers and Anomalies

- Rule-based methods (IQR, z-scores).
- Robust statistics (median, MAD).
- Model-based or multivariate detection (e.g., Mahalanobis distance, clustering residuals).
- Distinguish errors vs. novel but valid observations.

3.4 Dimensionality Reduction

- Motivation: mitigate multicollinearity, noise, and curse of dimensionality.
- Techniques: Principal Component Analysis (PCA), Factor Analysis, (optionally) t-SNE / UMAP (for exploration).
- Interpretability vs. compression trade-offs.

3.5 Data Exploration and Mining

- Structured EDA workflow: question → visualize → quantify → refine.
- PCA for variance structure.
- Factor Analysis for latent constructs.
- Regression Analysis for relationships and predictive structure.
- Clustering (k-means, hierarchical) for pattern discovery (if included).

3.6 Causal Inference with Regression Analysis

- Distinguish association vs. causation.
- Model specification and confounding control.
- Assumptions: linearity, independence, homoskedasticity, exogeneity.
- Interpretation of coefficients and marginal effects.
- Sensitivity and robustness checks.

→

Literature {#sec-literature}

All references for this course.

3.7 Essential Readings

Békés, G. and G. Kézdi (2021). *Resources for Data Analysis for Business, Economics, and Policy*. <https://www-cambridge-org.eux.idm.oclc.org/highereducation/books/data-analysis-for-business-economics-and-policy/D67A1B0B56176D6D6A92E27F3F82AA20/resources/instructor-resources/F57C5762D1593E72250729668A08A53B>. https://github.com/DrBenjamin/Analytical-Skills-for-Business/blob/c2ec1b2061c7dc36200977cfd58daf6020c1c774/literature/B%C3%A9k%C3%A9s_Data%20Analysis%20for%20Business%2C%20Economics%2C%20and%20Policy_2021_First%20Day%20of%20Class%20Slides.pdf/?raw=true.}

Evans, J. R. (2020). “Evans, J. R. (2020). Business analytics’”.

Huntington-Klein, N. (2025). *The Effect: An Introduction to Research Design and Causality*. <https://theeffectbook.net/>.

Wickham, H., M. Çetinkaya-Rundel, and G. Golemund (2023). *R for Data Science (2e)*. <https://r4ds.hadley.nz/>.

3.8 Further Readings

ActivityInfo (2023). *A six-step guide to data quality assessments*. Web article. <https://www.activityinfo.org/blog/posts/2023-03-10-a-six-step-guide-to-data-quality-assessments.html>.

Collibra (2022). *The 6 dimensions of data quality*. Web article. <https://www.collibra.com/blog/the-6-dimensions-of-data-quality>.

Cuadrado-Gallego, J. J., Y. Demchenko, J. G. Pérez, et al. (2023). “Data Analytics: A Theoretical and Practical View from the EDISON Project’”. In: *Data Analytics: A Theoretical and Practical View from the EDISON Project*, pp. 1-477. DOI: 10.1007/978-3-031-39129-3/COVER.

Foundation, G. F. *The FAIR Principles*. <https://www.go-fair.org/fair-principles/>.

Gross, B. (2021). *Technical Applications & Data Analytics coursebook*. <https://github.com/DrBenjamin/ourdata>. <https://github.com/DrBenjamin/Data-Science-and-Data-Analytics/blob/66da3d5a65a1f57ab9ca5e35fd91df4077a7bad7/literature/Technical%20Applications%20%26%20Data%20Analytics.pdf/?raw=true>.}

IBM *Data Warehouses vs. Data Lakes vs. Data Lakehouse*. <https://www.ibm.com/think/topics/data-warehouse-vs-data-lake-vs-data-lakehouse>.

Irizarry, R. A. (2024). *Introduction to Data Science: Data Wrangling and Visualization with R*. <https://rafalab.dfci.harvard.edu/dsbook-part-1/>.

Kumar, U. D. (2017). “Business analytics: The science of data-driven decision making.’”

Lee, K., N. G. Weiskopf, and J. Pathak (2018). “A framework for data quality assessment in clinical research datasets’”. In: *AMIA Annual Symposium Proceedings*. , pp. 1080–1089. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5977591/>.

M., Ç. and J. Hardin (2021). *Introduction to Modern Statistics*. <https://www.openintro.org/book/ims/>. <https://github.com/DrBenjamin/Analytical-Skills-for-Business/blob/>

491a9a84dd0227aab44e0a6db7e6330830a05a6b/literature/Introduction_to_Modern_Statistics_2e.pdf/?raw=true.

Maneth, S. and A. Poulouvassilis (2016). “Data Science’’. In: *Advance Access publication on* 12. DOI: 10.1093/comjnl/bxw073. <https://academic.oup.com/comjnl/article/60/3/285/2608072>.

Pochiraju, B. and S. Seshadri (2019). *Essentials of Business Analytics*. Ed. by B. Pochiraju and S. Seshadri. Vol. 264. <https://link.springer.com/10.1007/978-3-319-68837-4>. Springer International Publishing. ISBN: 978-3-319-68836-7. DOI: 10.1007/978-3-319-68837-4. <https://github.com/DrBenjamin/Analytical-Skills-for-Business/blob/c2ec1b2061c7dc36200977cfd58daf6020c1c774/literature/Essentials%20of%20Business%20Analytics.pdf/?raw=true>.}

Precisely *Data validation vs. data verification: What’s the difference?* Web article. <https://www.precisely.com/data-quality/data-validation-vs-data-verification/>.

Semarchy *Master Data Management Frameworks Explained*. <https://semarchy.com/blog/master-data-management-frameworks/>.

Vaughan, D. (2020). “Analytical skills for AI and data science’’.

<https://learning.oreilly.com/library/view/analytical-skills-for/9781492060932/preface01.html#idm46388898852872>.

Weiskopf, N. G. and C. Weng (2013). “Methods and dimensions of electronic health record data quality assessment: Enabling reuse for clinical research’’. In: *Journal of the American Medical Informatics Association* 20.1, pp. 144–151. DOI: 10.1136/amiajnl-2011-000681.

——— (2016). “Data quality assessment framework to assess electronic medical record data for use in research’’. In: *International Journal of Medical Informatics* 90, pp. 40–47. <https://pmc.ncbi.nlm.nih.gov/articles/PMC12335082/>.

Wilkinson, M. D., M. Dumontier, I. J. Aalbersberg, et al. (2016). “The FAIR guiding principles for scientific data management and stewardship’’. In: *Scientific Data* 3.160018. <https://www.nature.com/articles/sdata.2016.18>.