


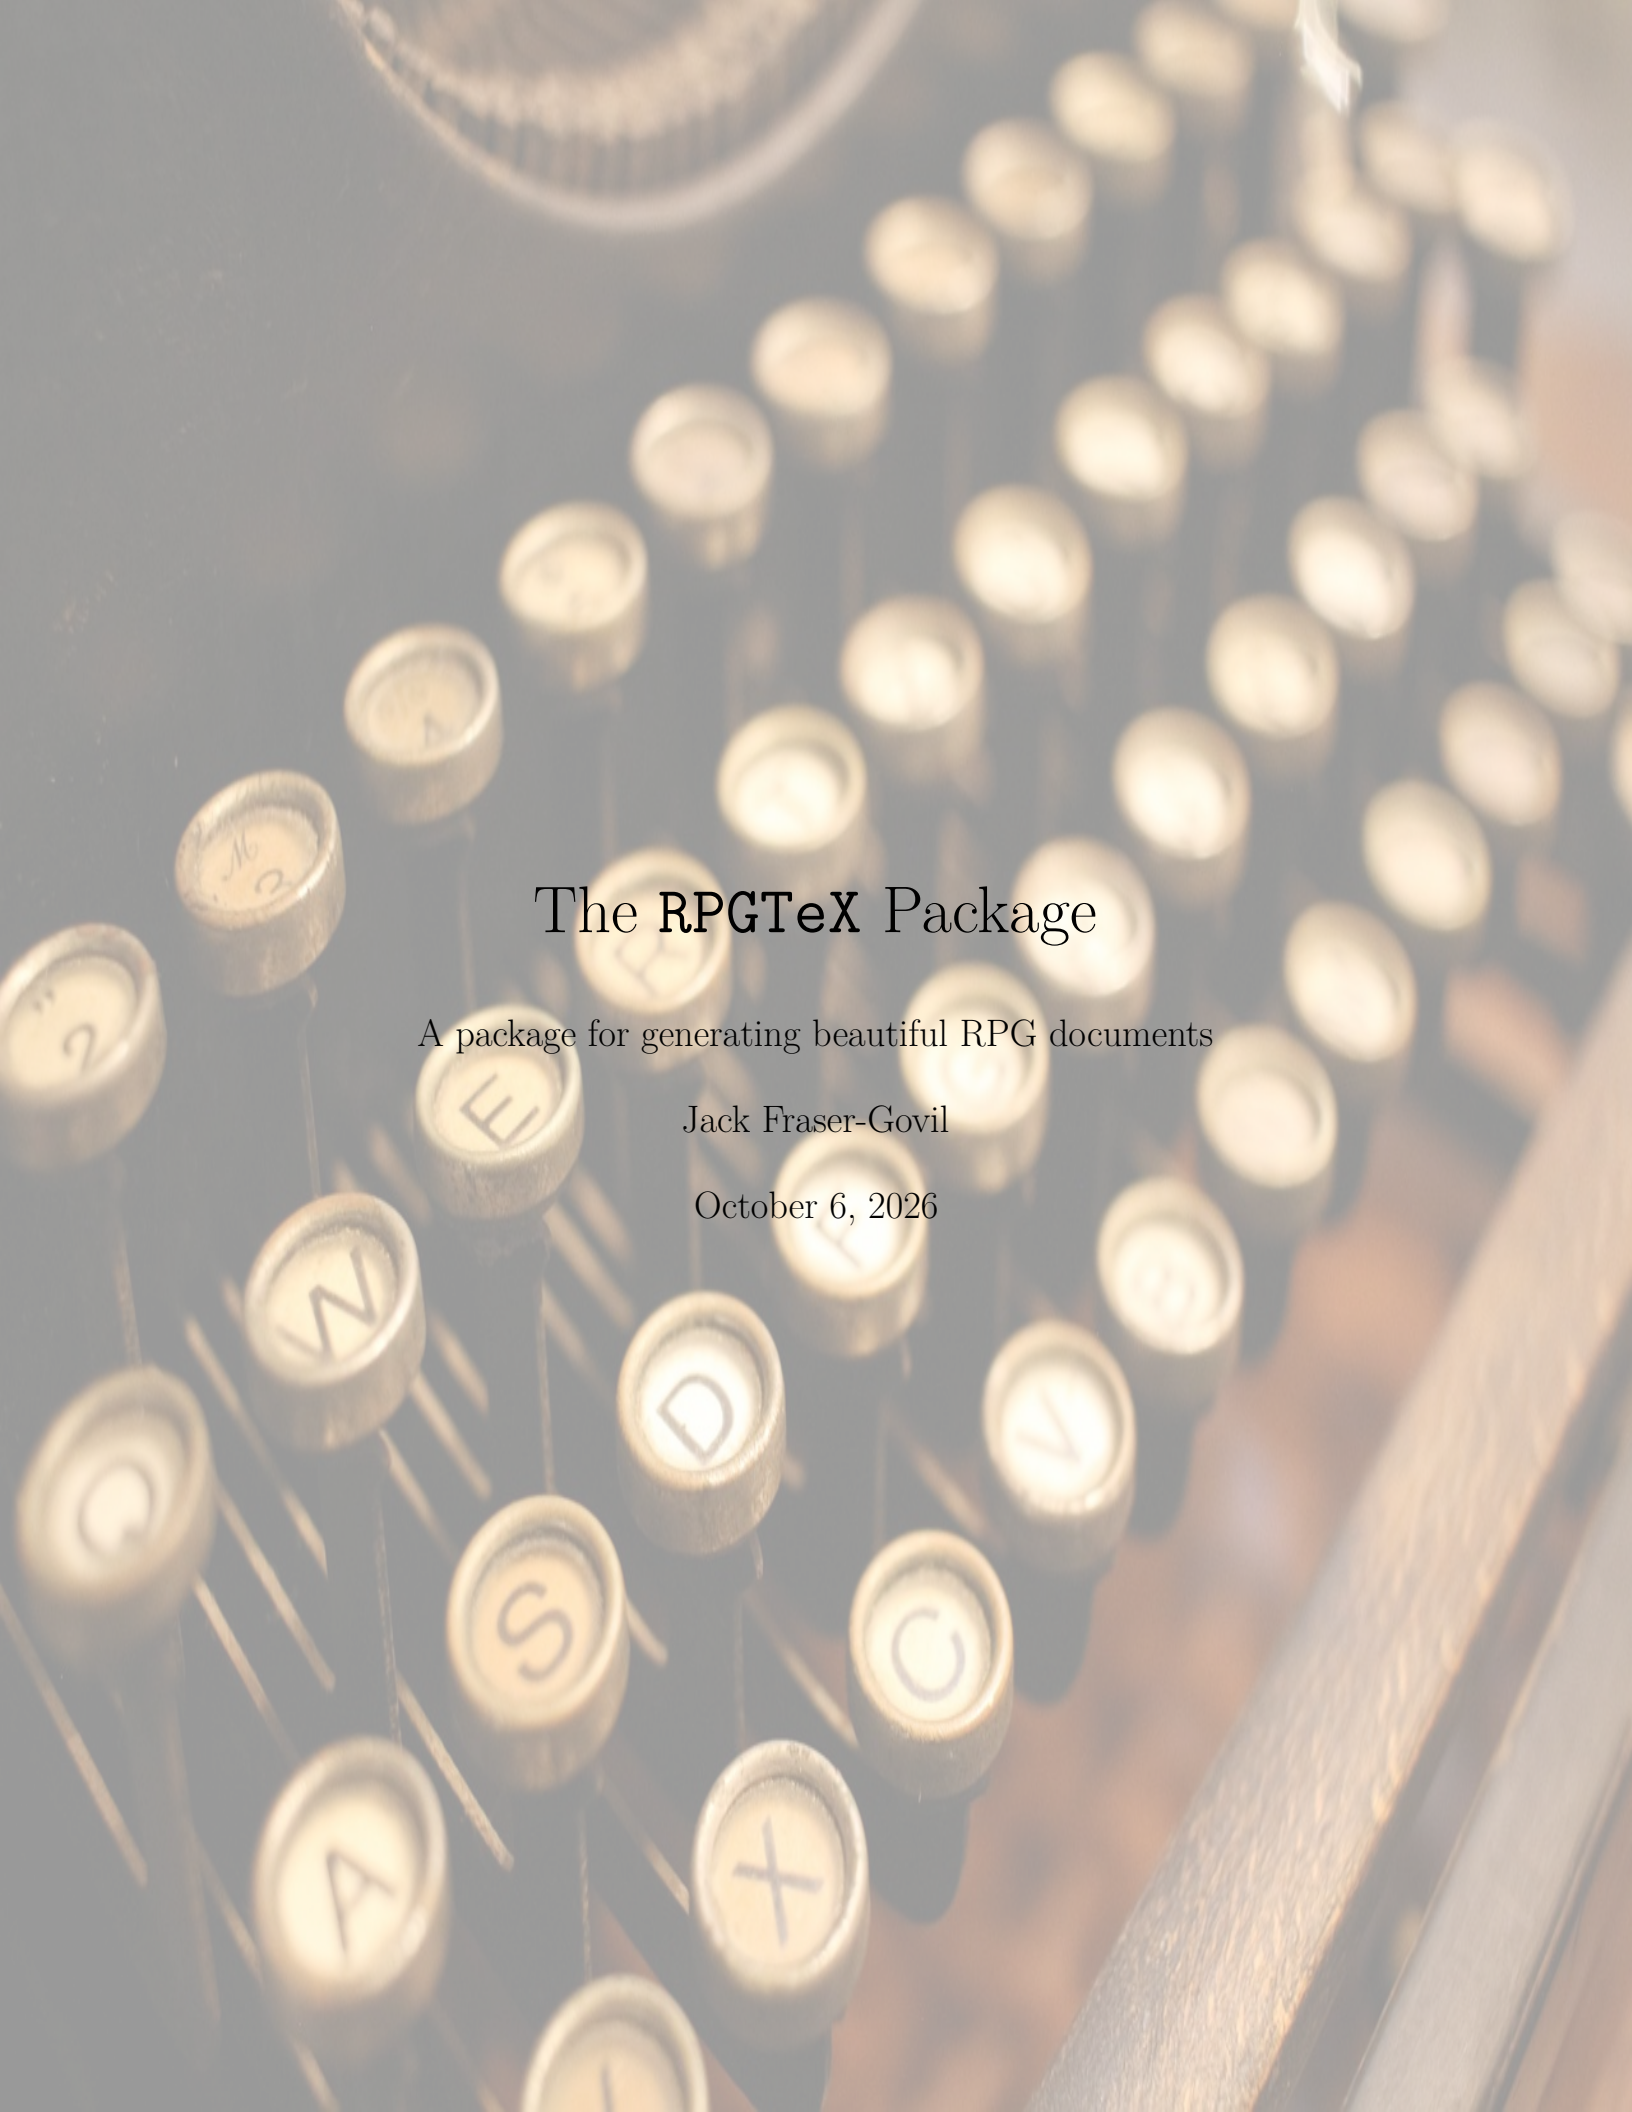

The **RPGTeX** Package

A package for generating beautiful RPG documents

Jack Fraser-Govil

October 6, 2026

Welcome to the *RPGTeX* package. This $\text{\LaTeX}$ package is designed to allow users to flexibly typeset documents associated with Role Playing Games such as *Dungeons & Dragons* -- and many more besides. This package defines a central engine: `rpgcore` which define a number of useful functions and classes, and a flexible set of `themes` which control how those commands are rendered in the final document.

Getting Started

This document is the full reference manual. For a quick example of how to get started with your first *RPGTeX* document, see the [example documents](#), which demonstrate the basic features of this package in a readable fashion.

Attribution & License

This package would not have been possible without the team who developed [its predecessor, the 'DND 5e LaTeX Template'](#). That code was released under an MIT license, the text of which can be found in the `LICENSE` file. `rpgtex` is released under the same license.

AI Usage Declaration

The author of this package used a handful of AI chat tools over the course of the development to help guide the thoughts of the human author. No automated coding tools were used anywhere in this package, and all code was written by hand. All mistakes and bad decisions are organic in nature.

Contents

1: Installation & Usage	
Getting RPGTeX	1
Configuring RPGTeX	2
Package & Class Usage	2
Compiling rpgtex Documents	3

Part I: **rpgtex For Users**

2: Options & Configuration	
Package Options	6

Colo(u)rs.....	8
Command Line Interface.....	9

3: Commands & Macros	
Document Structure.....	10

Part II: **rpgtex For Designers**

4: Fonts	
Font Commands.....	15
Font Elements	16

Chapter 1: Installation & Usage

Getting R_PG_TE_X

There are a number of different ways to acquire R_PG_TE_X. Once you have installed it, it is vital to ensure that it is properly configured (see below).

Direct Installation

The simplest way to use R_PG_TE_X is to install it on the `texmf` path, where the compiler can automatically find it:

bash

```
mkdir -p "$(kpsewhich -var-value TEXMFHOME)/tex/latex" %make sure the directory exists
git clone https://github.com/DrFraserGovil/rpgtex.git "$(kpsewhich -var-value
    TEXMFHOME)/tex/latex/rpgtex"
```

This will clone the repository into your L^AT_EX path.

Indirect Installation

If you want to tinker with R_PG_TE_X -- such as by creating a new theme -- it is helpful to have it in a more accessible location. Clone the repository into a location of your choice:

bash

```
git clone https://github.com/DrFraserGovil/rpgtex.git /your/rpgtex/directory
```

You then have two options to make the package visible to the compiler:

Use TEXINPUTS

Setting the environment variable `TEXINPUTS` allows the compiler access:

bash

```
TEXINPUTS=~ /your/rpgtex/directory/::
```

(Or similar commands, depending on your shell).

Use Symlinks

You can symlink the install location to the `texmf` directory, allowing the compiler to act as if you had performed the `texmf` installation:

bash

```
mkdir -p "$(kpsewhich -var-value TEXMFHOME)/tex/latex"
ln -sf ~/your/rpgtex/directory "$(kpsewhich -var-value TEXMFHOME)/tex/latex/rpgtex"
```

Overleaf (Not recommended!)

We do not recommend using Overleaf since the free-tier subscription has reduced compilation times drastically, making compiling documents using complex packages such as this one extremely difficult. Nevertheless:

1. Download this GitHub repository as a ZIP archive using the Clone or download link above.

2. On Overleaf, click the New Project button and select Upload Project. Upload the ZIP archive you downloaded from this repository.
3. Manually create the file `rpg-config.cfg` with the contents `\edef\RpgPackagePath{}`. This replaces the configuration step described below.

Configuring RPGTeX

Because RPGTeX comes packaged with some resources (namely some fonts) for which TeX does not support relative-pathfinding, it is necessary to provide RPGTeX with a value for the `\RpgPackagePath`.

`\RpgPackagePath {}` (Variable)

A variable holding the absolute path to the root directory of the rpgtex install location.

We provide a number of different ways to set this variable:

1. The provided `rpglatex` compiler automatically inserts a definition based on a `kpsewhich`, using the Command Line Interface (page 9).
2. If the variable does not exist, the RPGTeX engine itself tries the following
 - (a) Searches for the file `core/rpg-config.cfg`, which (hopefully) contains a definition¹, and `\inputs` it.
 - (b) If no file is found, RPGTeX used the `\write18` utility to dispatch its own calls to `\kpsewhich` and build a config file in the expected location. This requires the compiler be run with `-shell-escape` active
 - (c) If this doesn't work, the compiler exits, and suggests that the user manually creates the config file:

```
cd <rpgtex root directory>
cmd="\edef\RpgPackagePath{ $(pwd) }"
echo $cmd >> core/rpg-config.cfg
```

3. We provide a shell script which executes these commands for the user.

The extra configuration steps need only be run once -- once the config file exists, the package will be able to configure itself.

Why is configuration necessary?

TeX is generally set up so that when a file calls `include` or `input` it is possible to use filepaths relative to the package itself. `package.sty` can call `\input{dir/subpackage.tex}` and it will know to first check for the file relative to `package.sty`; even if the package resides within the texmf path and the user has no idea where `package.sty` is.

An annoying exception to this is fonts and typefaces. `xelatex` searches for fonts based on *filepaths relative to the current working directory* -- or from those installed in as system fonts.

Since RPGTeX includes several (license free) typefaces as part of the provided themes, this poses a problem. We must either require that:

1. RPGTeX documents can only be prepared in restricted locations relative to the install location of RPGTeX.
2. Users must identify and specify the RPGTeX root path when preparing a document
3. Users must install the provided fonts to the system path
4. RPGTeX must be configured to know 'where it is', and so provide an absolute filepath to the internal fonts.

The Configuration step is the most portable and easiest-to-use of these options.

Package & Class Usage

RPGTeX can be used either as a standalone package, or as part of a number of classes

¹In the form of `\edef\RpgPackagePath{ path/to/package }`

Standalone Package

The standalone package can be used directly by including the `RPGTeX` package:

```
\documentclass{arbitrary-class}
\usepackage[options]{rpgtex}
```

This will load only the core commands into the document, and (unless called explicitly) no themes will be imported. Using the package in this way does not activate any of the commands which change the overall geometry, background or headers of the document.

Classes

RPGTeX can also be loaded through a number of classes which drastically alter the appearance of the document, defining new geometries backgrounds and adding headers.

The provided classes are:

1. `rpgbook` (page ??). Based on the standard book class, this is designed for larger RPG documents.
2. `rpghandout` (page ??). Based on the article class, this is designed for shorter documents
3. `rpgcard` (page ??). A small-document class designed for creating modular 'handout' cards for items, spells or abilities.

Compiling rpgtex Documents

RPGTeX uses the `fontspec` package to allow custom fonts, and therefore requires compiling with `xelatex` or `luatex`:

```
xelatex main.tex #works
luatex main.tex #works
pdflatex main.tex #fails if fonts option passed
```

So long as RPGTeX is on the user's latex path, and the package properly configured (page 2) no further compilation steps are required. However, for ease of use, we provide the `rpglatex` compiler as part of the RPGTeX distribution.

The rpglatex compiler

RPGTeX is shipped with a special compiler, `rpglatex`. This is simply a python3 script which acts as a wrapper around either `xelatex` or `luatex`, but includes several quality-of-life changes to the interface to make it easier to use with `rpgtex`.

```
rpglatex [options] <file>
```

`rpglatex` has the following features:

Feature	Description	Options
Compiler Selection	The <code>xelatex</code> compiler is selected by default, but the <code>-l</code> , <code>-luatex</code> flags set it to use <code>luatex</code> instead.	<code>-l</code> , <code>-luatex</code>
Build Directory	Compilation files (<code>.aux</code> , <code>.log</code> etc.) are stored in a build directory. The default is <code>.build</code> in the calling location, but can be changed with the <code>-b</code> flag	<code>-b <build dir></code>
Output Naming	The name of the output file can be changed from the default (equal to the input tex name)	<code>-o <output name></code>
Multi-pass Compiling	By default, the compiler runs twice in a row to enable references and <code>tikz[remember]</code> commands to function. A full three-compilation suite (necessary for very complex or reference-heavy documents) can be activated with the <code>-f</code> , <code>-full</code> flag	<code>-f</code> , <code>-full</code>

Volume Control	latex is notoriously noisy, producing copious output. By default, this is suppressed and only a summary is printed. The summary can be removed (rendering it completely silent) with the <code>-q</code> command, or the original output recovered in verbose mode; <code>-v</code>. These outputs are always overridden if a compilation error occurs, in which case the full trace is output to the console.	<code>-q, -v</code>
Auto-bibtex	If the <code>-r</code> or <code>-ref</code> flag is set, <code>bibtex</code> is automatically called in between the multi-compilation steps	<code>-r, -ref</code>
Auto-visualisation	If the <code>-show 1</code> option is set (which it is by default), the compiler will attempt to open the output file upon completion of the compilation; automatically opening or context-switching to the document. This can be turned off by calling <code>-show 0</code>	<code>-show</code>
Print Mode	A special interface for R _P G _T E _X , this uses the <code>\RpgCMD</code> interface (page 9) to inject code into the latex document, setting the <code>bg=print</code> mode and suppressing the background output.	<code>-p, -print</code>

PART I

rpgtex For Users

Chapter 2: Options & Configuration

This chapter describes the ways in which the behaviour of R_PG_TE_X may be configured without writing any new code: the options which may be passed to the package or class, the named colours used by its elements, and the command line interface for changing these options at compile time.

Package Options

Whether R_PG_TE_X is loaded directly as a package or indirectly through one of its classes, options may be passed to it which change the behaviour of the resulting document:

```
\documentclass[<options>]{rpgbook}  
\usepackage[<options>]{rpgtex}
```

Each option takes one of two forms:

Key-value options: The name of the option is followed by an equals sign and a value:

```
\usepackage[bg = print, theme = dnd]{rpgtex}
```

Flags: Only the name of the option is provided. Its presence enables the associated behaviour:

```
\usepackage[justified]{rpgtex}
```

The available options are:

background <flag>

If present, activates the ‘paper background’ modules, which control the paper colour and background images, the footer decorations, and the spacing around floats.

This flag is set by default when loading a class, but must be passed explicitly to enable these modules when loading the package directly.

bg = full / print / none

Controls the behaviour of the background and footer decorations. The value must be one of the three listed above, else an error is thrown. The default value is **full**.

The most visible effect of this option is to control whether the ‘background paper’ set by `\RpgThemePaperImage` (page ??) and `\RpgThemePaperColor` (page ??), and the footer decorations set by `\RpgThemeFooterDecoration` (page ??), appear in the document:

Value	Paper	Footer Decorations
full	✓	✓
print	✗	✓
none	✗	✗

This option also changes the behaviour of the `rpgcard` class (page ??), and other environments may similarly alter their colours or layouts in response to its value.

columns = 1 / 2

Places the document into either `onecolumn` or `twocolumn` mode. The default value is 2.

More advanced column layouts require the user to manually use the `multicols` environment.

This option only has an effect when using one of the `RPGTeX` classes.

`font` <flag>

If present, activates the font modules, applying the package fonts wherever possible.

This flag is set by default when loading a class, but must be passed explicitly to enable these modules when loading the package directly.

`justified` <flag>

If present, sets the text to be justified throughout the document. By default, text is left-aligned ('ragged right').

`noemph` <flag>

If present, the default behaviour of `\emph` is left unchanged. By default, `\emph` is redefined to be an alias of `\RpgKey` (page ??).

`nomultitoc` <flag>

If present, disables the multi-column table of contents.

`oneside` <flag>

If present, places the document into one-sided mode. This disables alternating footers, but allows for consistent asymmetric margins (as in this document, where the left margin is enlarged to accommodate macro names).

This option only has an effect when using one of the `RPGTeX` classes.

`openright` <flag>

If present, places the document into right-opening mode, such that chapters always begin on a right-hand page. By default, chapters may begin on any page (see the documentation of the `book` class for more details).

This option only has an effect when using one of the `RPGTeX` classes.

`sections` <flag>

If present, activates the sections modules, including the part-page overloads and any theme behaviour which modifies the section commands.

This flag is set by default when loading a class, but must be passed explicitly to enable these modules when loading the package directly.

`size` = <font-size>pt

Sets the base font size of the document, if permitted by the parent class. The default value is 10pt.

This option only has an effect when using one of the `RPGTeX` classes.

The allowed values depend on the class being used (see the class section, beginning on page ??).

`theme` = <theme name>

The initial value passed to `\RpgSetTheme` (page ??) once package initialisation is complete.

The default value is `default`, which activates the Default Theme (page ??).

`themepath = </path/to/themes/>`

Calls `\RpgSetThemePath` (page ??) before the theme is loaded, allowing custom themes to be used.

The default value is `themes`, which `TEX` locates within the `RPGTeX` installation. A theme called `name` is then expected to be stored in `<themepath>/name/name.cfg`.

`title <flag>`

If present, activates the titling module and any theme presets which alter the behaviour of `\maketitle`.

This flag is set by default when loading a class, but must be passed explicitly to enable this module when loading the package directly.

Colo(u)rs

`RPGTeX` defines a number of named colours¹ which are used by its various elements. The default values listed below may be overridden by the active theme.

Co-varying Colours

The following colours are coupled together, and by default all take the same value:

ThemeColor A general-purpose colour from which the other co-varying colours inherit. Default: `white!60!black`.

SidebarColor The background colour of the `RpgSidebar` (page ??) environment.

TableColor The background colour of alternate rows in an `RpgTable` (page ??).

TipColor The background colour of the `RpgTip` (page ??) environment.

Calling `\RpgSetThemeColor` (page ??) assigns a new value to `ThemeColor` and all three co-varying colours simultaneously:

```
\RpgSetThemeColor{blue!20!white}
```

Independent Colours

The remaining colours are set individually:

ContourInnerColor The default colour of the inner text produced by `\RpgContour` (page ??). Default: `black`.

ContourOuterColor The default colour of the outer contour drawn around text by `\RpgContour` (page ??). Default: `white!50!black`.

FiligreeBackColor The background colour of the `RpgFiligree` (page ??) environment. Default: `white`.

FiligreeColor The colour used to draw the filigree frame applied by the `rpgfiligree` style. Default: `black`.

NarrationColor The background colour of the `RpgNarration` (page ??) environment. Default: `F7F2E5` (HTML).

PaperColor The background colour of each page, applied only when the paper background is enabled (see the `bg` option, page 6). Default: `white`.

SecretColor The default frame colour of the `RpgSecret` (page ??) environment. Default: `black!30!white`.

Any of these colours, including the co-varying colours, may be modified individually using the standard `xcolor` interface:

```
\definecolor{NarrationColor}{HTML}{FFFFFF}  
\colorlet{SidebarColor}{red!10!white}
```

Modifying a co-varying colour in this way changes only that colour, leaving the others unaffected.

¹Although this document uses British spelling, the colour names follow the American spelling used throughout `LATEX` and `xcolor`, and must be written exactly as given (including capitalisation).

Command Line Interface

L^AT_EX does not natively provide a 'command line interface' through which a document may be modified at compile time: any change must be made within the source file itself. It is, however, often convenient to compile the same document in several configurations without editing it -- most notably to produce both a standard version and a printer-friendly version (using `bg = print`, which removes the paper background to reduce ink usage).

To support this, R^PG_TE_X checks for a pseudo command-line variable when processing its options. Because T_EX treats the text passed to it on the command line as the beginning of its input stream, this variable can be defined before the document itself is read.

`\RpgCMD {}` (Variable)

If defined, holds a comma-separated list of package options (page 6), which are applied after all other options have been processed. The options are applied in the following order, with later values overriding earlier ones:

1. The defaults set by the class (if one is being used).
2. The options passed in the document, via `\documentclass` or `\usepackage`.
3. The contents of `\RpgCMD`.

Since the options are processed before they are passed to the parent class, options which affect the class (such as `columns` or `size`) may also be set in this way.

`\RpgCMD` is defined by passing a short piece of T_EX code to the compiler before the document is input:

```
xelatex "\def\RpgCMD{<rpg-options>} \input{<document>}"
```

This compiles `<document>` as though `<rpg-options>` had been passed to the class or package. For example, the following produces a printer-friendly, single-column version of a document without modifying the source:

```
xelatex "\def\RpgCMD{bg=print, columns=1} \input{document.tex}"
```

The `rpglatex` compiler (page 3) performs this insertion automatically: the `-p` (`--print`) flag sets `bg=print`, allowing the user to switch between the standard and print versions of a document with a single flag:

```
rpglatex document.tex -p
```

Chapter 3: Commands & Macros

Document Structure

RPGTeX extends the standard L^AT_EX commands for structuring a document. It provides title and part pages designed by the active theme, records the names of the current headings so that they may be reused elsewhere, and allows 'fake' headings to be added to the table of contents.

The Title & Sections Options

Much of the behaviour described in this section is provided by redefining standard L^AT_EX commands, and is controlled by two package options (page 6). Both are active by default when using one of the RPGTeX classes; otherwise, they must be passed to the package explicitly.

title Redefines `\maketitle` to produce the title designed by the active theme (equivalent to calling `\RpgMakeTitle`). Otherwise, `\maketitle` retains its original L^AT_EX behaviour.

sections Activates *sections mode*, which:

- Redefines `\chaptermark`, `\sectionmark`, `\subsectionmark` and `\subsubsectionmark` so that, in addition to their usual behaviour, they store the name they are given (page 12).
- Sets `\secnumdepth` to 0, so that sections and their subdivisions are unnumbered.
- Replaces `\part` with a version which records the part name and draws a full-page part page using the active theme. The starred form, `\part*`, records the name but otherwise falls back to the original L^AT_EX command.

Themes may additionally alter the formatting of the sectioning commands when sections mode is active.

All of the other commands in this section, including `\RpgMakeTitle`, are available regardless of these options, although the stored heading names are only updated in sections mode.

Title Pages

The title page draws on the usual `\title` and `\author` commands, along with the following additions.

`\subtitle { text }`

Sets the subtitle of the document. As with `\title` and `\author`, this has no visible effect by itself: the subtitle is displayed by `\maketitle` if the theme includes it. The default value is empty.

`\cover { path/to/image }`

Sets an image to be used as the full-page background of the cover page created by `\maketitle` in *cover* mode (see below). The theme's title design is drawn over the top of the image.

The default value is empty, in which case the title design is drawn on a plain page.

`\RpgCoverTransparency { value }`

Fades the `\cover` image towards white, which can help to keep the title legible over a busy image. The *value* is the opacity of a white layer placed over the image, between 0 (the image is unaltered) and 1 (the image is completely hidden). The default value is 0.

`\maketitle {}`

\RpgMakeTitle Creates the title of the document using the design provided by the theme (only when the **title** option is active; see above). There are two title modes:

cover A full-page cover, drawn over the **\cover** image (if one has been set). This is the default for the **rpgbook** class.

header A title heading placed at the top of the first page of text.

The mode is selected with **\RpgThemeTitleMode{ cover / header }**. If the theme does not define a title for the active mode, the original L^AT_EX **\maketitle** is used instead.

\RpgMakeTitle is equivalent to **\maketitle**, but remains available even if the **title** option is not active, or if another package redefines **\maketitle**.

```
\title{title-name}
\subtitle{subtitle-name} % optional
\cover{path/to/cover} % optional
\author{Dr. W. Riter} % optional

\begin{document}
\RpgMakeTitle
...
```

\RpgGetTitle {} (*Variable*)

\RpgGetTitle* The title set by **\title**, formatted with the **\RpgFontTitle** font element (page 15). The starred form gives the title as plain text, without applying the font.

\RpgGetSubtitle {} (*Variable*)

\RpgGetSubtitle* The subtitle set by **\subtitle**, formatted with the **\RpgFontSubTitle** font element. The starred form gives the subtitle as plain text.

\RpgGetAuthor {} (*Variable*)

\RpgGetAuthor* The author set by **\author**, formatted with the **\RpgFontSubTitle** font element. The starred form gives the author as plain text.

Part Pages

\part (*) [**<image>**] { **name** }

In sections mode (page ??), **\part** is redefined to create a full-page part page using the design provided by the theme. Its behaviour depends on the form used:

\part{name} Adds the part to the table of contents and creates a part page on a plain background, or over the default part image if one has been set with **\RpgDefaultPartImage**.

\part[image]{name} As above, but uses **image** as the full-page background.

\part*{name} Uses the original **\part** command of the underlying class. Any image argument is ignored.

In all cases, **name** is recorded in **\RpgPartName** (page 12).

\RpgDefaultPartImage { **path/to/image** }

Sets an image to be used as the full-page background of every part page which is not given its own image. By default, no image is used.

\RpgPartTransparency { **value** }

Fades all subsequent images set by **\part** image towards white, which can help to keep the text legible over a busy image. The **value** is the opacity of a white layer placed over the image, between 0 (the image is unaltered) and 1 (the image is completely hidden). The default value is 0.

Section Names

Many RPG documents display the name of the current chapter or section outside of the heading itself -- in a running header, a footer, or a decorative page border, for example. To support this, **RPGTeX** records the names of the current part, chapter, section, subsection and subsubsection, so that they may be reused anywhere in the document.

These names are only recorded in sections mode (page ??).

Each of the following variables is initially blank, and holds its value until the next command of the same level is called: beginning a new chapter does not, for example, reset `\RpgSectionName`.

`\RpgPartName` {} (Variable)

The name given to the last `\part` or `\part*` command.

`\RpgChapterName` {} (Variable)

The name given to the last `\chapter` command, or set by calling `\chaptermark`. Starred chapters (`\chapter*`) do not update this value.

`\RpgSectionName` {} (Variable)

The name given to the last `\section` command, or set by calling `\sectionmark`. Starred sections (`\section*`) do not update this value.

`\RpgSubsectionName` {} (Variable)

The name given to the last `\subsection` command, or set by calling `\subsectionmark`. Starred subsections (`\subsection*`) do not update this value.

`\RpgSubsubsectionName` {} (Variable)

The name given to the last `\subsubsection` command, or set by calling `\subsubsectionmark`. Starred subsubsections (`\subsubsection*`) do not update this value.

`\RpgGetName` { part / chapter / section / subsection / subsubsection }

Returns the name stored for the given level (equivalent to the corresponding variable above). Any other input results in an error.

Since these names (other than that of the part) are taken from the `mark` commands, they may be set manually, without creating a new heading, by calling the relevant `mark` command directly.

```
We are in Chapter '\RpgGetName{chapter}',
section '\RpgGetName{section}'.

\subsubsection{An example subsubsection}

Now I am in
'\RpgGetName{subsubsection}'.
```

We are in Chapter `Commands & Macros',
section `Document Structure'.

An example subsubsection
Now I am in `An example subsubsection'.

Fake Sections

It can be helpful to be able to integrate common RPG elements (such as full page maps or images) into the document structure. The following command provides a simple interface for spoofing in a section (or part, chapter etc.) into the table of contents, without actually invoking a sectioning command:

`\RpgFake` { level }{ name }

Mimics the creation of a new heading at the given `level` without printing a heading in the document. Specifically, it:

- Adds an entry called **name** to the table of contents at the given level, with a hyperlink anchor at the current position.
- Updates the stored name for that level, as if a real heading had been created. For **chapter** to **subsection** this is done by calling the corresponding **mark** command, so any running headers are also updated.

The **level** must be one of **part**, **chapter**, **section**, **subsection** or **subsection**. Any other value results in an error.

```
\subsection{Real Subsection}
I believe I am in
  '\RpgGetName{subsection}'.

\RpgFake{subsection}{Fake Subsection}
Now I believe I am in
  '\RpgGetName{subsection}'
```

Real Subsection

I believe I am in `Real Subsection'.

Now I believe I am in `Fake Subsection'

PART II

rpgtex For Designers

Chapter 4: Fonts

RPGTeX allows a high degree of customisation of the fonts and typefaces used throughout a document. Rather than setting fonts directly, each part of the document (headings, table text, footers and so on) draws its font from a named *font element*, such as `\RpgFontSection`. The theme defines the appearance of each element using `\RpgThemeFont`, and assigns each element to the relevant part of the document. Changing the appearance of an element therefore changes it consistently wherever that element is used.

Why didn't my font change?

`\RpgThemeFont` does not change any fonts directly: it updates the stored definition of a *font element*, which a theme designer must then assign to the relevant part of the document. For example, the `\RpgFontSection` element does not 'hook in' to the `\section` command by itself; it changes the section font only because most themes call `\titleformat{\section}{\RpgFontSection}...`. If the `\titleformat` were later changed (for whatever reason), the section font would no longer update.

If an element does not change font after its definition is updated, first check that the font element is actually being invoked -- and if not, invoke it manually. Once the command is in place, the font will change as expected.

Note also that `\RpgThemeFont` has no effect unless the `font` option is active (page 6). This is the default when using one of the RPGTeX classes.

Font Commands

`\RpgThemeFont { key-value-list }`

Updates the font elements specified by a comma-separated list of key-value pairs. Each element has two keys, `<name>-family` and `<name>-style`, where `<name>` is given in the 'Components' column of the table below (or was assigned by `\RpgThemeCreateFont`).

The values may be any L^AT_EX font or formatting commands (such as `\slshape\scriptsize\bfseries`), which are applied whenever the element is invoked. To change the typeface itself, a font family must first be defined, for example using `\newfontfamily` from the `fontspec` package.

Font Interface

`\subsection{The Original Font}`

Here is some text

`\newfontfamily{\courier}{Courier}`

`\RpgThemeFont{main-body-family=\courier,
subsection-style=\slshape\Huge}`

`\subsection{The New Font}`

And after the change is introduced

The Original Font

Here is some text

The New Font

And after the change is introduced

`\RpgThemeCreateFont { \ElementName }{ key-base }`

Creates a new font element, `\ElementName`, along with the keys `<key-base>-family` and `<key-base>-style`. A new element is initially blank (it applies no formatting) until it is assigned a value using `\RpgThemeFont`. Thereafter, it may be used and modified in exactly the same way as the built-in font elements.

Create Font

```
\RpgThemeCreateFont{\MyFont}{myfont}
\newfontfamily{\courier}{Courier}
\RpgThemeFont{
  myfont-family = \courier,
  myfont-style = \slshape
}

This is text

{\MyFont This is text in my new font}
```

This is text
This is text in my new font

Font Elements

RPGTeX provides 35 font elements by default (themes may define more). Since each element is assigned to part of the document by the theme designer, an element intended for one purpose (such as section headings) may be used for a different purpose within another theme. The descriptions below therefore reflect how the elements are used by RPGTeX itself and by the provided themes.

Family vs Style

Each font element is defined by two components: a **family** and a **style**. Formally, the **family** defines the **typeface** used by the element, whilst the **style** determines the options applied to that typeface (weight, shape, size, colour and so on).

In practice the distinction is largely one of clarity, since the font element simply applies the two in sequence:

```
\RpgFontX = <x-family> <x-style>
```

It is therefore generally safe to place commands which belong in the family within the style key, provided that they do not conflict with other styling.

Font vs Implementation

We encourage designers to place all text styling within the relevant font element, rather than elsewhere. If all subsections are to be red, then set `subsection-style=\color{ red }`, rather than setting the colour within the `titlesec` specification.

There will naturally be some exceptions to this: we found that the `RpgTitleFont` colour we wanted within `RpgDrawCover` diverged so strongly from that in `RpgSimpleTitle` that it made sense to define a special colour when rendering over a background image.

Font Element	Components	Usage
\RpgFontBody	main-body-family main-body-style	The main body text of the document. \RpgThemeFont sets \normalfont equal to this element. Changing the font size here (e.g. with \large) can give counterintuitive results, since it affects <i>only</i> the body text and does not scale the other elements accordingly. The font size of the whole document should instead be set using the <code>size</code> option (page 6).
\RpgFontEmphasis	emph-family emph-style	The font used by \RpgKey, and therefore by \emph unless the <code>noemph</code> option is passed.
\RpgFontTitle	title-family title-style	The font used for the document title, as returned by \RpgGetTitle and displayed by \maketitle.
\RpgFontSubTitle	subtitle-family subtitle-style	The font used for the subtitle and author, as returned by \RpgGetSubtitle and \RpgGetAuthor and displayed by \maketitle.
\RpgFontPart	part-family part-style	The font used for the part name on the part page created by \part.
\RpgFontChapter	chapter-family chapter-style	The font used for \chapter headings.

<code>\RpgFontSection</code>	section-family section-style	The font used for <code>\section</code> headings.
<code>\RpgFontSubsection</code>	subsection-family subsection-style	The font used for <code>\subsection</code> headings.
<code>\RpgFontSubsubsection</code>	subsubsection-family subsubsection-style	The font used for <code>\subsubsection</code> headings.
<code>\RpgFontParagraph</code>	paragraph-family paragraph-style	The font used for <code>\paragraph</code> headings.
<code>\RpgFontSubparagraph</code>	subparagraph-family subparagraph-style	The font used for <code>\subparagraph</code> headings.
<code>\RpgFontTableTitle</code>	table-title-family table-title-style	The title of an <code>RpgTable</code> (page ??), if one is set using the <code>title</code> option.
<code>\RpgFontTableHeader</code>	table-header-family table-header-style	The first (header) row of an <code>RpgTable</code> (page ??).
<code>\RpgFontTableBody</code>	table-body-family table-body-style	The rows of an <code>RpgTable</code> (page ??) after the header row.
<code>\RpgFontTipTitle</code>	tip-title-family tip-title-style	The title of an <code>RpgTip</code> (page ??) environment.
<code>\RpgFontTipBody</code>	tip-body-family tip-body-style	The body of an <code>RpgTip</code> (page ??) environment.
<code>\RpgFontSidebarTitle</code>	sidebar-title-family sidebar-title-style	The title of an <code>RpgSidebar</code> (page ??) environment.
<code>\RpgFontSidebarBody</code>	sidebar-body-family sidebar-body-style	The body of an <code>RpgSidebar</code> (page ??) environment.
<code>\RpgFontNarration</code>	narration-family narration-style	All text within an <code>RpgNarration</code> (page ??) environment (which has no title).
<code>\RpgFontAbstractTitle</code>	abstract-title-family abstract-title-style	The title of an <code>RpgAbstract</code> (page ??) environment.
<code>\RpgFontAbstractBody</code>	abstract-body-family abstract-body-style	The body of an <code>RpgAbstract</code> (page ??) environment.
<code>\RpgFontSecretTitle</code>	secret-title-family secret-title-style	The labels which distinguish the hidden and public text of an <code>RpgSecret</code> (page ??) environment when secrets are shown.
<code>\RpgFontCardTitle</code>	card-title-family card-title-style	The title of a card, as used by the card-switching environments of the provided themes (such as <code>RpgItem</code>).
<code>\RpgFontCardHeader</code>	card-header-family card-header-style	Subheadings and descriptive headers within a card (such as the type and rarity of an <code>RpgItem</code>).
<code>\RpgFontCardBody</code>	card-body-family card-body-style	The body text of an <code>RpgCard</code> (page ??).
<code>\RpgFontTocPart</code>	toc-part-family toc-part-style	Part entries in the table of contents.
<code>\RpgFontTocChapter</code>	toc-chapter-family toc-chapter-style	Chapter entries in the table of contents.
<code>\RpgFontTocSection</code>	toc-section-family toc-section-style	Section entries in the table of contents.
<code>\RpgFontStatBlockTitle</code>	stat-block-title-family stat-block-title-style	The title of a <code>statblock</code> environment (in the <code>dnd</code> theme, <code>RpgStat</code>).
<code>\RpgFontStatBlockBody</code>	stat-block-body-family stat-block-body-style	The body text of a <code>statblock</code> environment.
<code>\RpgFontStatBlockSection</code>	stat-block-section-family stat-block-section-style	Section headings within a <code>statblock</code> environment.
<code>\RpgFontFooter</code>	footer-family footer-style	The footer text.
<code>\RpgFontPageNumber</code>	page-number-family page-number-style	The page number within the footer.
<code>\RpgFontDropCap</code>	drop-cap-family drop-cap-style	The large initial letter created by <code>\RpgDropCap</code> .
<code>\RpgFontDropCapAfter</code>	drop-cap-after-family drop-cap-after-style	The text which follows the initial letter of an <code>\RpgDropCap</code> , on the first line.

Index

- RpgAbstract, 17
 - RpgCMD, 4, 9
 - RpgCard, 17
 - RpgChapterName, 12
 - RpgContour, 8
 - RpgCoverTransparency, 10
 - RpgDefaultPartImage, 11
 - RpgDropCap, 17
 - RpgFake, 13
 - RpgFiligree, 8
 - RpgFontAbstractBody, 17
 - RpgFontAbstractTitle, 17
 - RpgFontBody, 16
 - RpgFontCardBody, 17
 - RpgFontCardHeader, 17
 - RpgFontCardTitle, 17
 - RpgFontChapter, 16
 - RpgFontDropCapAfter, 17
 - RpgFontDropCap, 17
 - RpgFontEmphasis, 16
 - RpgFontFooter, 17
 - RpgFontNarration, 17
 - RpgFontPageNumber, 17
 - RpgFontParagraph, 17
 - RpgFontPart, 16
 - RpgFontSecretTitle, 17
 - RpgFontSection, 15, 17
 - RpgFontSidebarBody, 17
 - RpgFontSidebarTitle, 17
 - RpgFontStatBlockBody, 17
 - RpgFontStatBlockSection, 17
 - RpgFontStatBlockTitle, 17
 - RpgFontSubTitle, 11, 16
 - RpgFontSubparagraph, 17
 - RpgFontSubsection, 17
 - RpgFontSubsubsection, 17
 - RpgFontTableBody, 17
 - RpgFontTableHeader, 17
 - RpgFontTableTitle, 17
 - RpgFontTipBody, 17
 - RpgFontTipTitle, 17
 - RpgFontTitle, 11, 16
 - RpgFontTocChapter, 17
 - RpgFontTocPart, 17
 - RpgFontTocSection, 17
 - RpgGetAuthor*, 11
 - RpgGetAuthor, 11, 16
 - RpgGetName, 12
 - RpgGetSubtitle*, 11
 - RpgGetSubtitle, 11, 16
 - RpgGetTitle*, 11
 - RpgGetTitle, 11, 16
 - RpgKey, 7, 16
 - RpgMakeTitle, 10, 11
 - RpgNarration, 8, 17
 - RpgPackagePath, 2
 - RpgPartName, 11, 12
 - RpgPartTransparency, 11
 - RpgSecret, 8, 17
 - RpgSectionName, 12
 - RpgSetThemeColor, 8
 - RpgSetThemePath, 8
 - RpgSetTheme, 7
 - RpgSidebar, 8, 17
 - RpgSubsectionName, 12
 - RpgSubsubsectionName, 12
 - RpgTable, 8, 17
 - RpgThemeCreateFont, 15
 - RpgThemeFont, 15, 16
 - RpgThemeFooterDecoration, 6
 - RpgThemePaperColor, 6
 - RpgThemePaperImage, 6
 - RpgThemeTitleMode, 11
 - RpgTip, 8, 17
 - author, 10, 11
 - background, 6
 - bg, 6
 - chapter*, 12
 - chaptermark, 12
 - chapter, 12, 16
 - colorlet, 8
 - columns, 6
 - cover, 10, 11
 - definecolor, 8
 - documentclass, 9
 - edef, 2
 - emph, 7, 16
 - font, 7
 - justified, 7
 - kpsewhich, 2
 - large, 16
 - maketitle, 8, 10, 11, 16
 - newfontfamily, 15
 - noemph, 7
 - nomultitoc, 7
 - normalfont, 16
 - oneside, 7
 - openright, 7
 - paragraph, 17
 - part*, 12
 - part, 11, 12, 16
 - rpglatex, 3
 - section*, 12
 - sectionmark, 12
 - sections, 7
 - section, 12, 15, 17
 - size, 7
 - subparagraph, 17
 - subsection*, 12
 - subsectionmark, 12
 - subsection, 12, 17
 - subsubsection*, 12
 - subsubsectionmark, 12
 - subsubsection, 12, 17
 - subtitle, 10, 11
 - themepath, 8
 - theme, 7
 - title, 8, 10, 11
 - usepackage, 9
 - write18, 2
- Fonts, *see* RpgFont[X]
- RpgFont[X], 16