

1.) DIP(P)

2.) DIP(T)

1.)DIP(P)

1. imread('D/yellowlilly.jpg');

2. imshow()

3. imwrite(I,'image.jpg');

4. imbinarize(I,0.2);

5. rgb2gray;

6. rgb2hsv

7. hsvrgb;

8. imfilter(

9. **im2bw**; => take default 0 and 1 for picture for give a value for thresh hold

10. im2double;

11. img=graythresh(I) ;

img2=imbinarize(I,img);

imshow(img2);

12. uint8 => datatype => uint(x);

13. imadd(),imsubtract(),imdivide(),immulti
ply()

```
14. [add,subtract]=sub(5,2);function
    subimg (add,subtract)= sub(x,y);
    subtract= x-y; end
15. edge=edges(I,'canny'); imshow(edge);
16. colorbar;
17. colormap(gca,gray);
18. laplacian filter => k= fspecial(double(I),
    [0.2 0.4], 8.0); imfilter('laplacian', k);
19. imfilter(double(I),fspecial('laplacian',
    [0.2 0.4]),8.0);
20. imhist(i);
21. histequ(i);
22. gray,hot,??
23. red_channel=img(:,:,1);
    blue_channel=img(:,:,2);
    green_channel=img(:,:,3);
    img=cat(3,red_channel:zeros(size(red_
    channel),'like', red_channel) likewise to
    other channels.imshow(img);
24. same name using like img to more
    variables is not correct bcz showed
```

wrong to me.


25. `imabsdiff(a,b);`

26. `%median` filter =>

`imfilter(double(I),'mean',fspecial([0.2
0.4],[]));`

27. `subplot(4,3,1)` => 4 row 3 column 1
number of picture.

DIP(T) =>

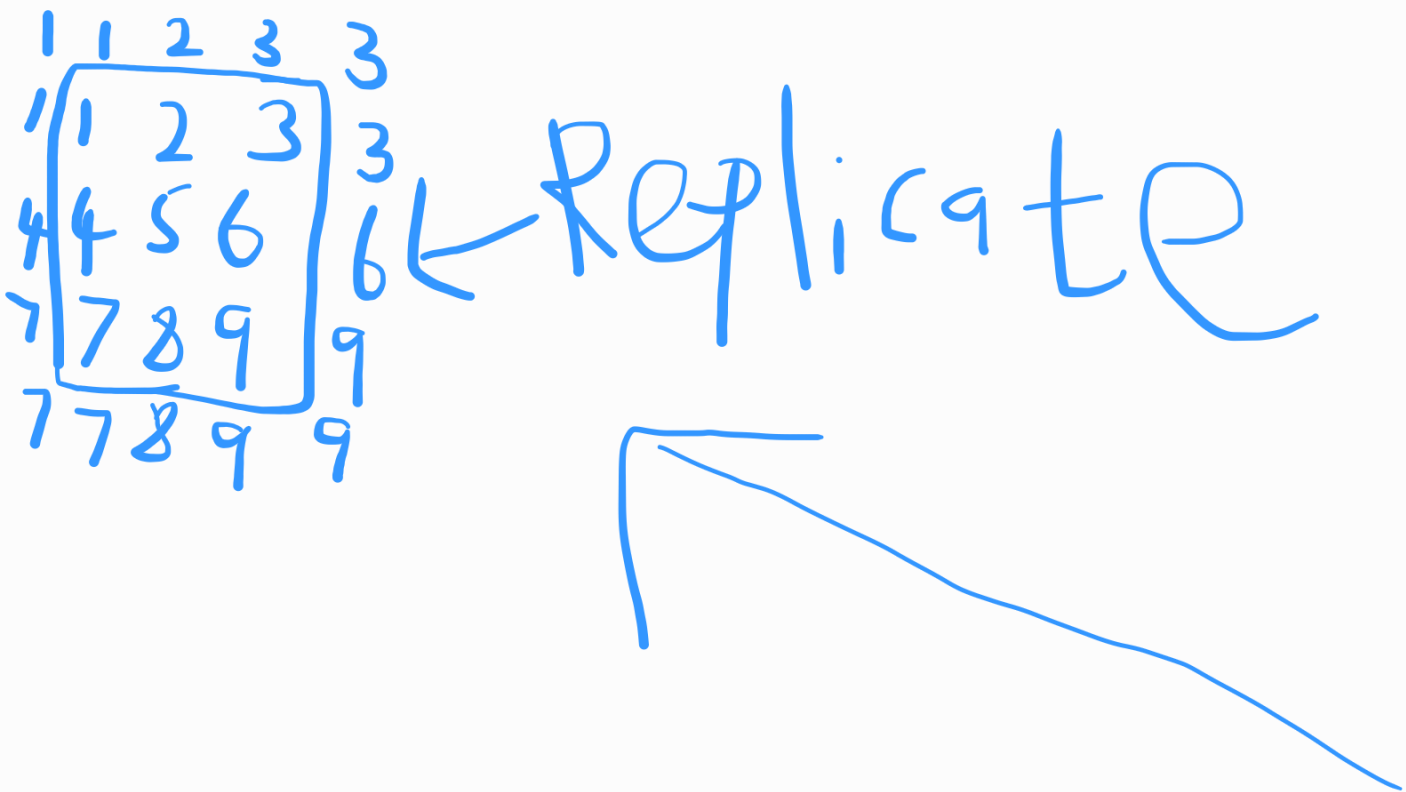

2.DIP(T)

1. Sharpened image= original image + unsharp mask
2. unsharp mask = original image - blurred image
3. replicated means eg=>
4. first derivative => $g(x) = f(x) - \text{or } +\text{dev}(x)$ squared
5. second derivative=> $f(x-1) + f(x+1) - 2 * f(x)$
6. forgotten => **unsharpen** mask = $f(x) - \text{or } +\text{dev}(x)$ squared

song line remember =>

forgetten

thirukural => iniyavai irukka innathavai
kuural kani irukka kaai kavarnthattu