Fiche de procédure d'installation de GLPI

I Procédure d'installation de GLPI sur le serveur Debian 13 2
A. Installer le socle LAMP 2
B. Préparer une base de données pour GLPI 3
C. Télécharger GLPI et préparer son installation 7
D. Préparer la configuration Apache2 8
E. Utilisation de PHP8.3-FPM avec Apache2 9
II. Installation de GLPI 12

D'après le tutoriel du site IT-Connect :

https://www.it-connect.fr/installation-pas-a-pas-de-glpi-10-sur-debian-12/

I Procédure d'installation de GLPI sur le serveur Debian 13

Sur une machine virtuelle Debian 13 (Proxmox), installer le socle LAMP pour accueillir GLPI.

Mettre à jour les paquets

```
apt-get update/upgrade
```

A. Installer le socle LAMP

Installer les services : Apache2, MariaDB, PHP, PHPMyAdmin

```
apt-get install apache2 php mariadb-server
```

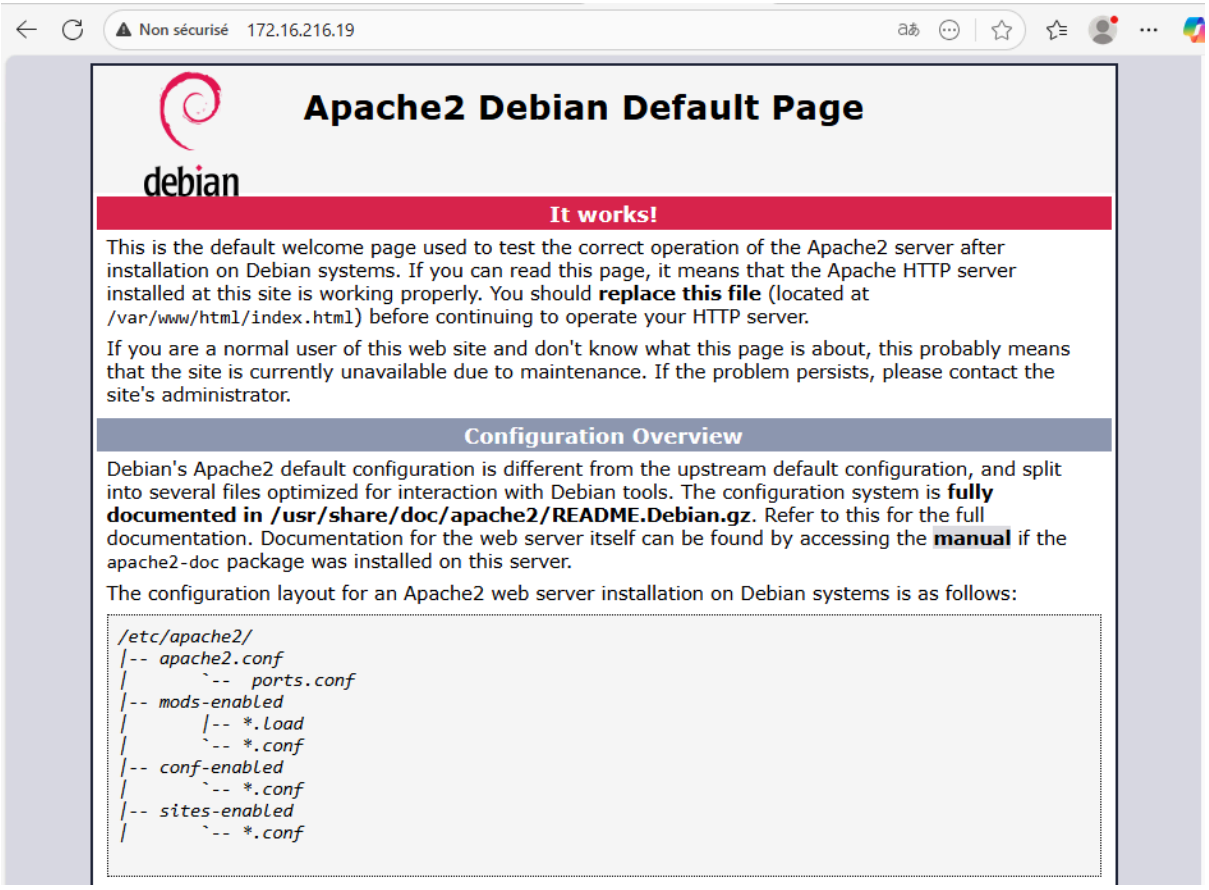

Installer des dépendances nécessaires php

```
apt-get install php-xml php-common php-json php-mysql
php-mbstring php-curl php-gd php-intl php-zip php-bz2 php-imap
php-apcu
```

```
root@Debian:~# mariadb-secure-installation

NOTE: MariaDB is secure by default in Debian. Running this script is
      useless at best, and misleading at worst. This script will be
      removed in a future MariaDB release in Debian. Please read
      mariadb-server.README.Debian for details.

Enter root user password or leave blank:

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] n
 ... skipping.

You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] y
New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.
```

B. Préparer une base de données pour GLPI

Effectuer au moins le minimum en matière de sécurisation de MariaDB avec la commande :

```
sudo mysql_secure_installation
```

```
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] n
 ... skipping.

You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] y
New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] y
 - Dropping test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.
 - Removing privileges on test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
root@Debian:~#
```

```
apt-get install php-ldap
```

```
root@Debian:~# apt-get install php-ldap
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
Les paquets supplémentaires suivants seront installés :
  php8.4-ldap
Les NOUVEAUX paquets suivants seront installés :
  php-ldap php8.4-ldap
0 mis à jour, 2 nouvellement installés, 0 à enlever et 1 non mis à jour.
Il est nécessaire de prendre 36,5 kB dans les archives.
Après cette opération, 145 ko d'espace disque supplémentaires seront utilisés.
Souhaitez-vous continuer ? [O/n] o
Réception de : 1 http://deb.debian.org/debian trixie/main amd64 php8.4-ldap amd64 8.4.11-1 [32,5 kB]
Réception de : 2 http://deb.debian.org/debian trixie/main amd64 php-ldap all 2:8.4+96 [3 964 B]
36,5 ko réceptionnés en 0s (305 ko/s)
lection du paquet php8.4-ldap précédemment désélectionné.
ecture de la base de données... 45086 fichiers et répertoires déjà installés.)
éparation du dépaquetage de .../php8.4-ldap_8.4.11-1_amd64.deb ...
Dépaquetage de php8.4-ldap (8.4.11-1) ...
Sélection du paquet php-ldap précédemment désélectionné.
Préparation du dépaquetage de .../php-ldap_2%3a8.4+96_all.deb ...
Dépaquetage de php-ldap (2:8.4+96) ...
Paramétrage de php8.4-ldap (8.4.11-1) ...
Creating config file /etc/php/8.4/mods-available/ldap.ini with new version
Paramétrage de php-ldap (2:8.4+96) ...
Traitement des actions différées (« triggers ») pour libapache2-mod-php8.4 (8.4.11-1) ...
Traitement des actions différées (« triggers ») pour php8.4-cli (8.4.11-1) ...
```

Connection à MariaDB :

```
mysql -u root -p
```

Création de la base de données :

```
CREATE DATABASE glpidb;
```

Création d'un utilisateur "proot" avec comme mot de passe "Azerty31" :

```
GRANT ALL PRIVILEGES ON glpidb.* TO 'proot'@'localhost';
```

```
DROP USER 'proot'@'hôte';
```

```sql
CREATE USER 'glpi_adm'@'localhost' IDENTIFIED BY
'ton_mot_de_passe';

GRANT ALL PRIVILEGES ON glpidb.* TO 'glpi_adm'@'localhost';
FLUSH PRIVILEGES;
```

```
MariaDB [(none)]> CREATE USER 'adminglpi'@'localhost' IDENTIFIED BY 'Azerty31';
Query OK, 0 rows affected (0,006 sec)

MariaDB [(none)]> SELECT User, Host FROM mysql.user;
+-------------+-----------+
| User        | Host      |
+-------------+-----------+
| adminglpi   | localhost |
| mariadb.sys | localhost |
| mysql       | localhost |
| phpmyadmin  | localhost |
| root        | localhost |
+-------------+-----------+
5 rows in set (0,002 sec)
```

Donner les droits et creer la base via sql

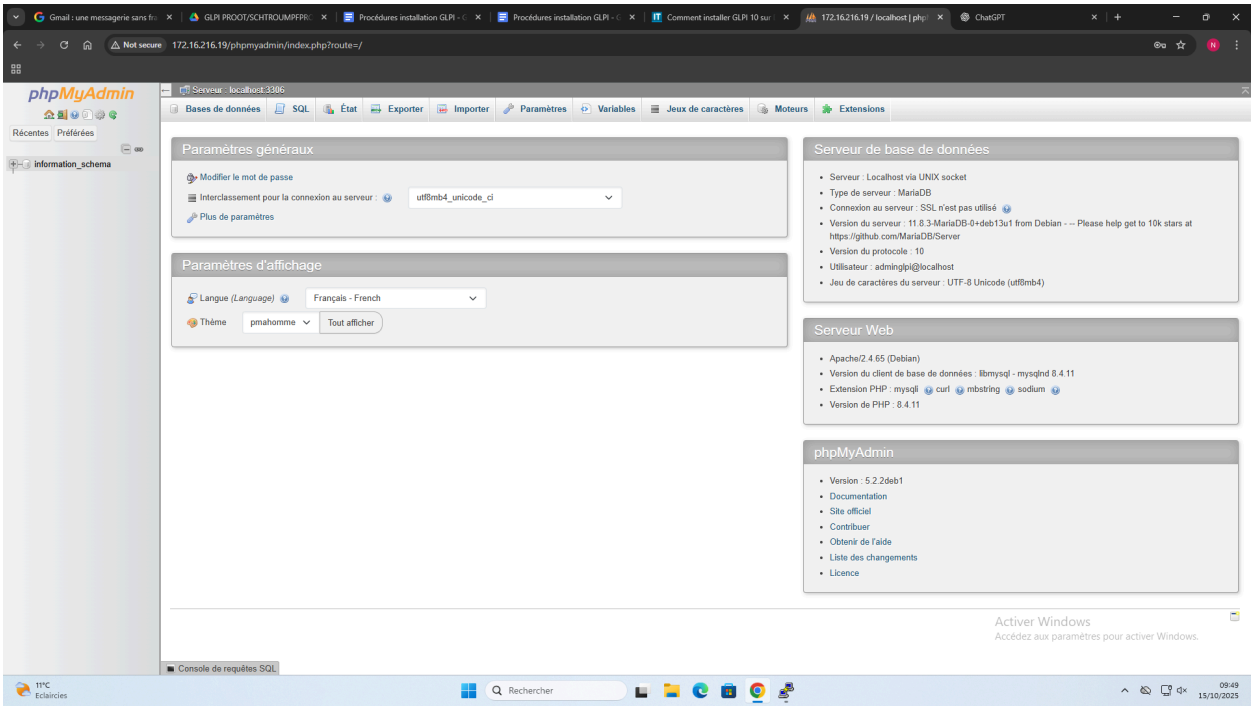

C. Télécharger GLPI et préparer son installation

télécharger l'archive dans le répertoire "/tmp" :

```
cd /tmp
```

```
wget https://github.com/glpi-project/glpi/releases/download/10.0.10/glpi-10.0.10.tgz
```

```
root@Debian:~# cd /tmp
root@Debian:/tmp# wget https://github.com/glpi-project/glpi/releases/download/10
.0.10/glpi-10.0.10.tgz
--2025-11-05 08:43:36--  https://github.com/glpi-project/glpi/releases/download/
10.0.10/glpi-10.0.10.tgz
Résolution de github.com (github.com)… 140.82.121.4
Connexion à github.com (github.com)|140.82.121.4|:443… connecté.
requête HTTP transmise, en attente de la réponse… 302 Found
Emplacement : https://release-assets.githubusercontent.com/github-production-rel
ease-asset/39182755/2799160e-e62f-47bd-8fe6-a8c50209f3ab?sp=r&sv=2018-11-09&sr=b
&spr=https&se=2025-11-05T08%3A22%3A43Z&rscd=attachment%3B+filename%3Dglpi-10.0.1
0.tgz&rsct=application%2Foctet-stream&skoid=96c2d410-5711-43a1-aedd-ab1947aa7ab0
&sktid=398a6654-997b-47e9-b12b-9515b896b4de&skt=2025-11-05T07%3A22%3A08Z&ske=202
5-11-05T08%3A22%3A43Z&sks=b&skv=2018-11-09&sig=Hy7Brxhw6YBAZpRVZCFr00rs7sJrGcTUa
7naldt9PTI%3D&jwt=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiJnaXRodWIuY29tI
iwiYXVkIjoicmVsZWFzZS1hc3N1dHMuZ210aHVidXN1cmNvbnR1bnQuY29tIiwia2V5Ijoia2V5MSIsI
mV4cCI6MTc2MjMzMDQxNiwibmJmIjoxNzYyMzI4NjE2LCJwYXRoIjoicmVsZWFzZWFzc2V0cHJvZHVjd
Glvbi5ibG9iLmNvcmUud2luZG93cy5uZXQifQ.73ljYzFmX1ukYYZ00WghKL37kS3q30dtvfw57PD35i
w&response-content-disposition=attachment%3B%20filename%3Dglpi-10.0.10.tgz&respo
nse-content-type=application%2Foctet-stream [suivant]
--2025-11-05 08:43:37--  https://release-assets.githubusercontent.com/github-pro
duction-release-asset/39182755/2799160e-e62f-47bd-8fe6-a8c50209f3ab?sp=r&sv=2018
-11-09&sr=b&spr=https&se=2025-11-05T08%3A22%3A43Z&rscd=attachment%3B+filename%3D
glpi-10.0.10.tgz&rsct=application%2Foctet-stream&skoid=96c2d410-5711-43a1-aedd-a
b1947aa7ab0&sktid=398a6654-997b-47e9-b12b-9515b896b4de&skt=2025-11-05T07%3A22%3A
08Z&ske=2025-11-05T08%3A22%3A43Z&sks=b&skv=2018-11-09&sig=Hy7Brxhw6YBAZpRVZCFr00
rs7sJrGcTUa7naldt9PTI%3D&jwt=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiJnaX
RodWIuY29tIiwiYXVkIjoicmVsZWFzZS1hc3N1dHMuZ210aHVidXN1cmNvbnR1bnQuY29tIiwia2V5Ij
oia2V5MSIsImV4cCI6MTc2MjMzMDQxNiwibmJmIjoxNzYyMzI4NjE2LCJwYXRoIjoicmVsZWFzZWFzc2
V0cHJvZHVjdGlvbi5ibG9iLmNvcmUud2luZG93cy5uZXQifQ.73ljYzFmX1ukYYZ00WghKL37kS3q30d
tvfw57PD35iw&response-content-disposition=attachment%3B%20filename%3Dglpi-10.0.1
0.tgz&response-content-type=application%2Foctet-stream
Résolution de release-assets.githubusercontent.com (release-assets.githubusercon
tent.com)… 185.199.111.133, 185.199.110.133, 185.199.109.133, ...
Connexion à release-assets.githubusercontent.com (release-assets.githubuserconte
nt.com)|185.199.111.133|:443… connecté.
requête HTTP transmise, en attente de la réponse… 200 OK
Taille : 59092816 (56M) [application/octet-stream]
Sauvegarde en : « glpi-10.0.10.tgz »

glpi-10.0.10.tgz    100%[===================>]  56,35M  44,4MB/s    ds 1,3s

2025-11-05 08:43:38 (44,4 MB/s) – « glpi-10.0.10.tgz » sauvegardé [59092816/5909
2816]
```

Décompresser l'archive .tgz dans le répertoire "/var/www/", afin d'obtenir le chemin d'accès "/var/www/glpi" pour GLPI.

```
tar -xzvf glpi-10.0.10.tgz -C /var/www/
```

Définir l'utilisateur “**www-data**” correspondant à Apache2, en tant que propriétaire sur les fichiers GLPI.

```
chown www-data /var/www/glpi/ -R
```

D. Préparer la configuration Apache2

Configuration GLPI:

Créer un nouveau fichier de configuration qui va permettre de configurer le VirtualHost dédié à GLPI. On va appeler ce fichier "**glpi.conf**"

nano /etc/apache2/sites-available/glpi.conf:

```
  GNU nano 8.4                                          /etc/apache2/sites-available/glpi.conf *
<VirtualHost *:80>
    ServerName glpi

    DocumentRoot /var/www/glpi/public

    # If you want to place GLPI in a subfolder of your site (e.g. your virtual host is serving multiple applications),
    # you can use an Alias directive. If you do this, the DocumentRoot directive MUST NOT target the GLPI directory itself.
    # Alias "/glpi" "/var/www/glpi/public"

    <Directory /var/www/glpi/public>
        AllowOverride All
        Require all granted
        RewriteEngine On

        # Redirect all requests to GLPI router, unless file exists.
        RewriteCond %{REQUEST_FILENAME} !-f
        RewriteRule ^(.*)$ index.php [QSA,L]
    </Directory>
        <FilesMatch \.php$>
    SetHandler "proxy:unix:/run/php/php8.2-fpm.sock|fcgi://localhost/"
</FilesMatch>

</VirtualHost>
```

Enregistrer le fichier une fois la configuration terminée. Puis, activer ce nouveau site dans Apache2 : **sudo a2ensite glpi.conf**

```
  GNU nano 8.4                                          /etc/apache2/sites-enabled/glpi.conf
<VirtualHost *:80>
    ServerName glpi

    DocumentRoot /var/www/glpi/public

    # If you want to place GLPI in a subfolder of your site (e.g. your virtual host is serving multiple applications),
    # you can use an Alias directive. If you do this, the DocumentRoot directive MUST NOT target the GLPI directory itself.
    # Alias "/glpi" "/var/www/glpi/public"

    <Directory /var/www/glpi/public>
        AllowOverride All
        Require all granted
        RewriteEngine On

        # Redirect all requests to GLPI router, unless file exists.
        RewriteCond %{REQUEST_FILENAME} !-f
        RewriteRule ^(.*)$ index.php [QSA,L]
    </Directory>
        <FilesMatch \.php$>
    SetHandler "proxy:unix:/run/php/php8.3-fpm.sock|fcgi://localhost/"
</FilesMatch>

</VirtualHost>
```

Désactiver le site par défaut car il est inutile :

```
sudo a2dissite 000-default.conf
```

Activer le module "rewrite"

```
sudo a2enmod rewrite
```

```
Enabling site glpi.
To activate the new configuration, you need to run:
  systemctl reload apache2
root@Debian:~# a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
  systemctl reload apache2
root@Debian:~#  a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
  systemctl restart apache2
root@Debian:~# systemctl restart apache2
root@Debian:~#
```

Redémarrer le service Apache2 :

```
sudo systemctl restart apache2
```

E. Utilisation de PHP8.3-FPM avec Apache2

Installer PHP8.2-FPM avec la commande suivante :

```
sudo apt-get install php8.3-fpm
```

Activer 2 modules dans Apache et la configuration de PHP-FPM, avant de recharger Apache2 :

```
root@Debian:~# rm -f /usr/share/keyrings/deb.sury.org-php.gpg
root@Debian:~# curl -fsSL https://packages.sury.org/php/apt.gpg | gpg --dearmor -o /usr/share/keyrings/deb.sury.org-php.gpg
root@Debian:~# apt update
Atteint : 1 http://security.debian.org/debian-security trixie-security InRelease
Atteint : 2 http://deb.debian.org/debian trixie InRelease
Atteint : 3 http://deb.debian.org/debian trixie-updates InRelease
Réception de : 4 https://packages.sury.org/php trixie InRelease [7□547 B]
Réception de : 5 https://packages.sury.org/php trixie/main amd64 Packages [257 kB]
257 ko réceptionnés en 1s (503 ko/s)
69 paquets peuvent être mis à jour. Exécutez « apt list --upgradable » pour les voir.
root@Debian:~# apt install -y php8.3 php8.3-fpm php8.3-cli php8.3-mysql php8.3-xml php8.3-curl php8.3-mbstring php8.3-zip php8.3-gd php8.3-intl
Mis à jour :
  php-common

Installation de :
  php8.3  php8.3-cli  php8.3-curl  php8.3-fpm  php8.3-gd  php8.3-intl  php8.3-mbstring  php8.3-mysql  php8.3-xml  php8.3-zip

Installation de dépendances :
  php8.3-common  php8.3-opcache  php8.3-readline

Paquets suggérés :
  php-pear

Sommaire :
  Mise à niveau de : 1. Installation de : 13Supprimé : 0. Non mis à jour : 68
Taille du téléchargement : 5□662 kB
  Espace nécessaire : 25,9 MB / 28,1 GB disponible

Réception de : 1 https://packages.sury.org/php trixie/main amd64 php-common all 2:96+0~20250402.56+debian13~1.gbp84a5b7 [13,1 kB]
Réception de : 2 https://packages.sury.org/php trixie/main amd64 php8.3-common amd64 8.3.27-1+0~20251113.72+debian13~1.gbpd9af90 [731 kB]
```

```
sudo a2enmod proxy_fcgi setenvif
```

```
sudo a2enconf php8.3-fpm
```

```
sudo systemctl reload apache2
```

Pour configurer PHP-FPM pour Apache2, éditer le fichier :

```
sudo nano /etc/php/8.3/fpm/php.ini
```

Recherchez l'option "**session.cookie_httponly**" et indiquez la valeur "**on**" pour l'activer, afin de protéger les cookies de GLPI.

```
  GNU nano 8.4                                                    /etc/php/8.3/fpm/php.ini *

; Name of the session (used as cookie name).
; https://php.net/session.name
session.name = PHPSESSID

; Initialize session on request startup.
; https://php.net/session.auto-start
session.auto_start = 0

; Lifetime in seconds of cookie or, if 0, until browser is restarted.
; https://php.net/session.cookie-lifetime
session.cookie_lifetime = 0

; The path for which the cookie is valid.
; https://php.net/session.cookie-path
session.cookie_path = /

; The domain for which the cookie is valid.
; https://php.net/session.cookie-domain
session.cookie_domain =

; Whether or not to add the httpOnly flag to the cookie, which makes it
; inaccessible to browser scripting languages such as JavaScript.
; https://php.net/session.cookie-httponly
session.cookie_httponly = on
```

Enregistrer le fichier une fois que c'est fait.

Appliquer les modifications en redémarrant PHP-FPM avec la ommande :

```
sudo systemctl restart php8.2-fpm.service
```

Modifier VirtualHost pour préciser à Apache2 que PHP-FPM doit être utilisé pour les fichiers PHP :

```
<FilesMatch \.php$>
    SetHandler
"proxy:unix:/run/php/php8.2-fpm.sock|fcgi://localhost/"
</FilesMatch>
```

```
  GNU nano 8.4                                                    /etc/apache2/sites-available/glpi.conf *
<VirtualHost *:80>
    ServerName glpi

    DocumentRoot /var/www/glpi/public

    # If you want to place GLPI in a subfolder of your site (e.g. your virtual host is serving multiple applications),
    # you can use an Alias directive. If you do this, the DocumentRoot directive MUST NOT target the GLPI directory itself.
    # Alias "/glpi" "/var/www/glpi/public"

    <Directory /var/www/glpi/public>
        AllowOverride All
        Require all granted
        RewriteEngine On

        # Redirect all requests to GLPI router, unless file exists.
        RewriteCond %{REQUEST_FILENAME} !-f
        RewriteRule ^(.*)$ index.php [QSA,L]
    </Directory>
        <FilesMatch \.php$>
    SetHandler "proxy:unix:/run/php/php8.2-fpm.sock|fcgi://localhost/"
</FilesMatch>

</VirtualHost>
```

Relancer Apache2 :

```
sudo systemctl restart apache2
```

Maintenant la préparation du serveur GLPI est terminée, il ne reste quà installer GLPI.

II. Installation de GLPI

Taper l'adresse IP du serveur GLPI dans l'url d'un navigateur Web pour arriver sur la page d'accueil : **172.16.143.100/install/install.php**

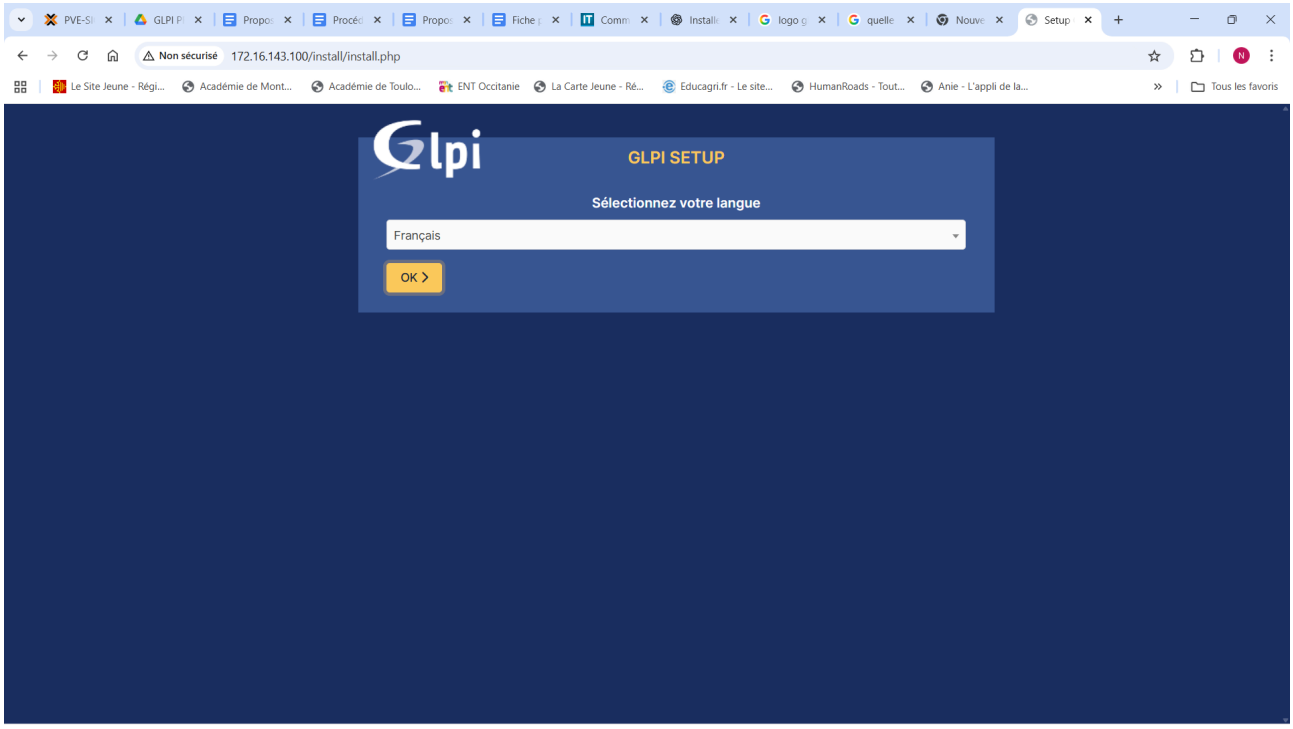

Choisir la langue "**Français**", puis faite "**Continuer**"

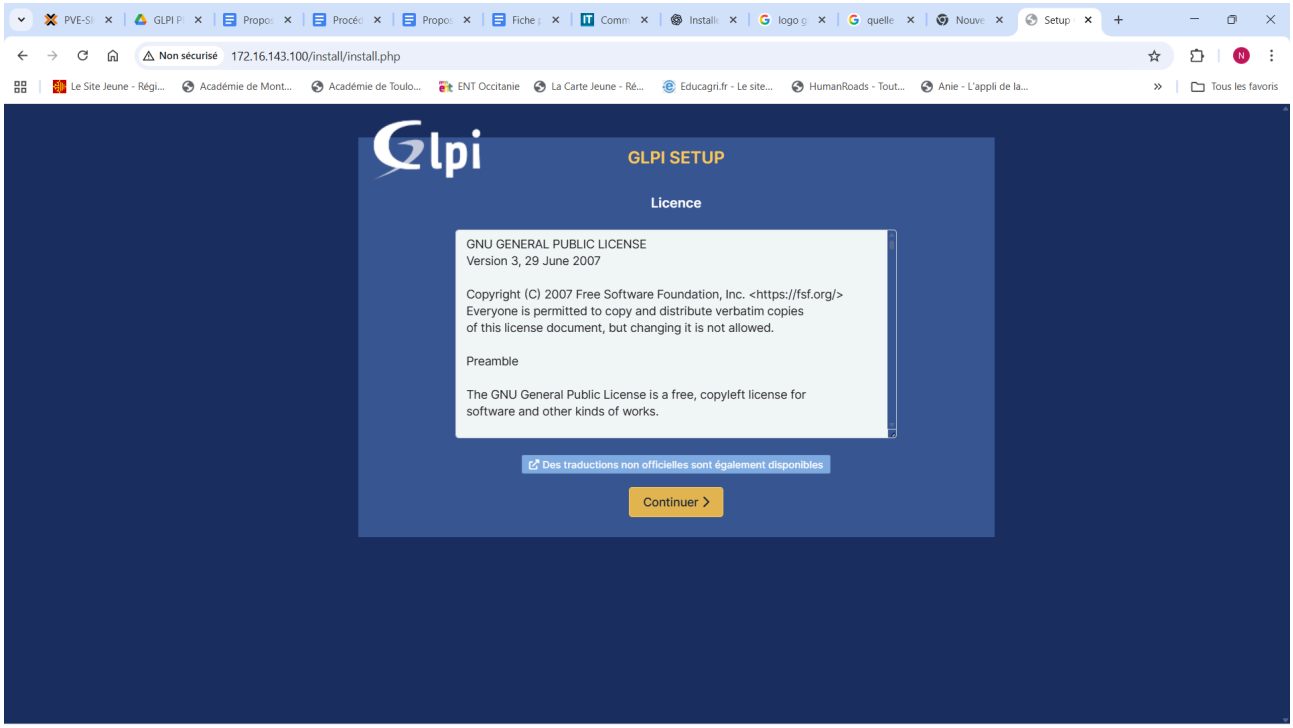

Faire “**Installer**” :

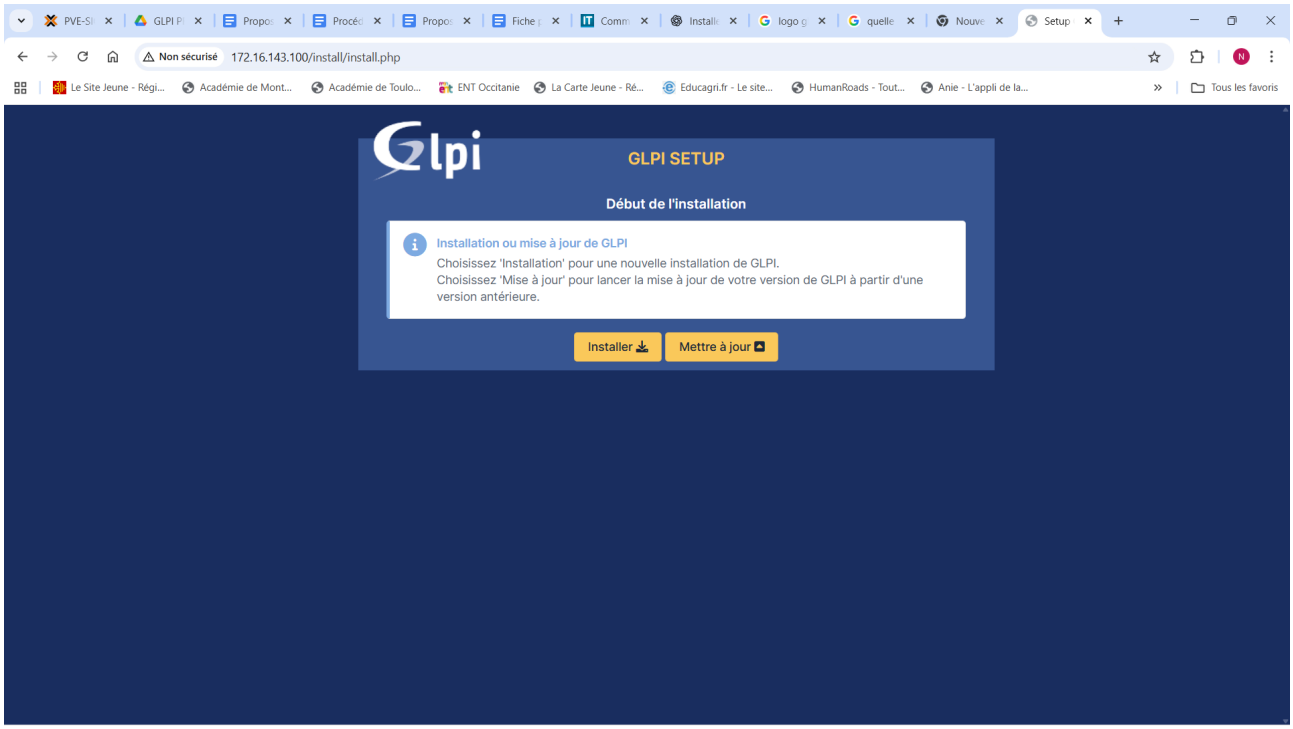

Vérifier la configuration du serveur GLPI pour voir si tous les prérequis sont respectés. Si tout est bon, alors faire “**Continuer**”.

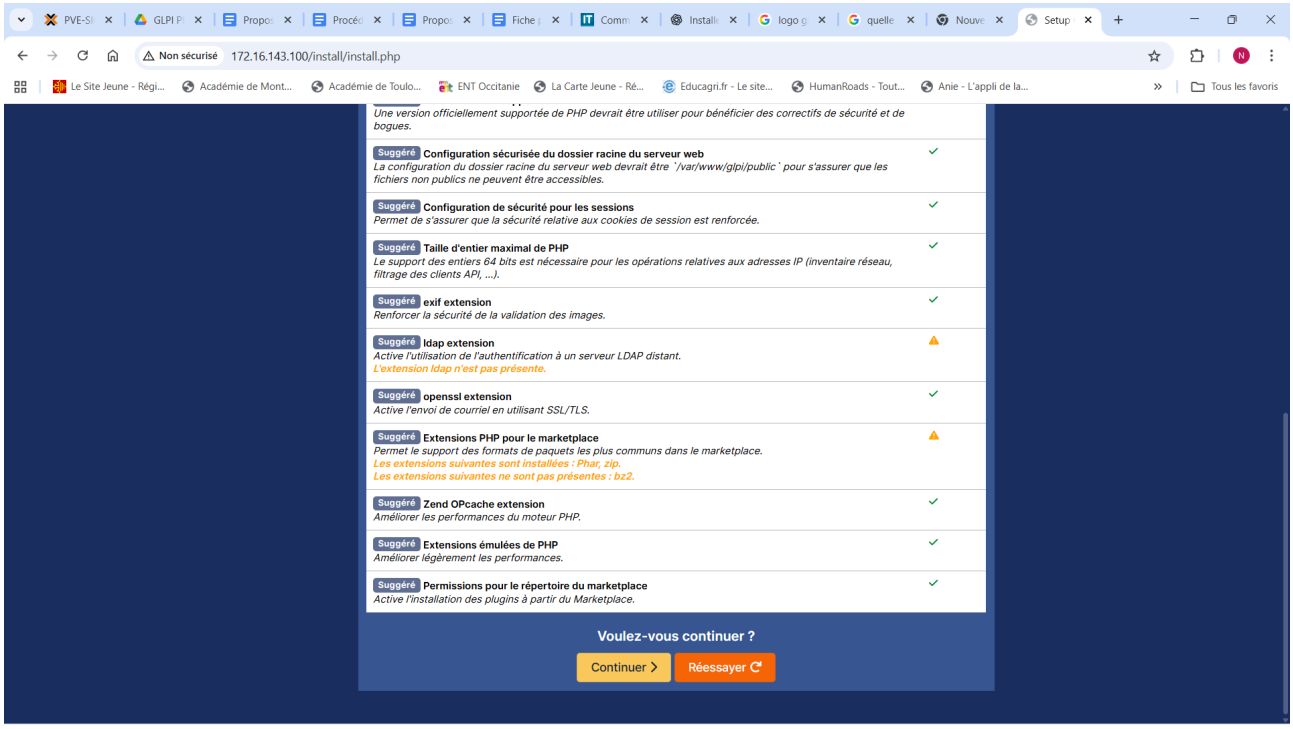

Renseigner les informations pour se connecter à la base de données.

- "**`localhost`**" en tant que serveur SQL puisque MariaDB est installé en local, sur le même serveur que GLPI.
- utilisateur "**`admin1`**"
- et le mot de passe associé.

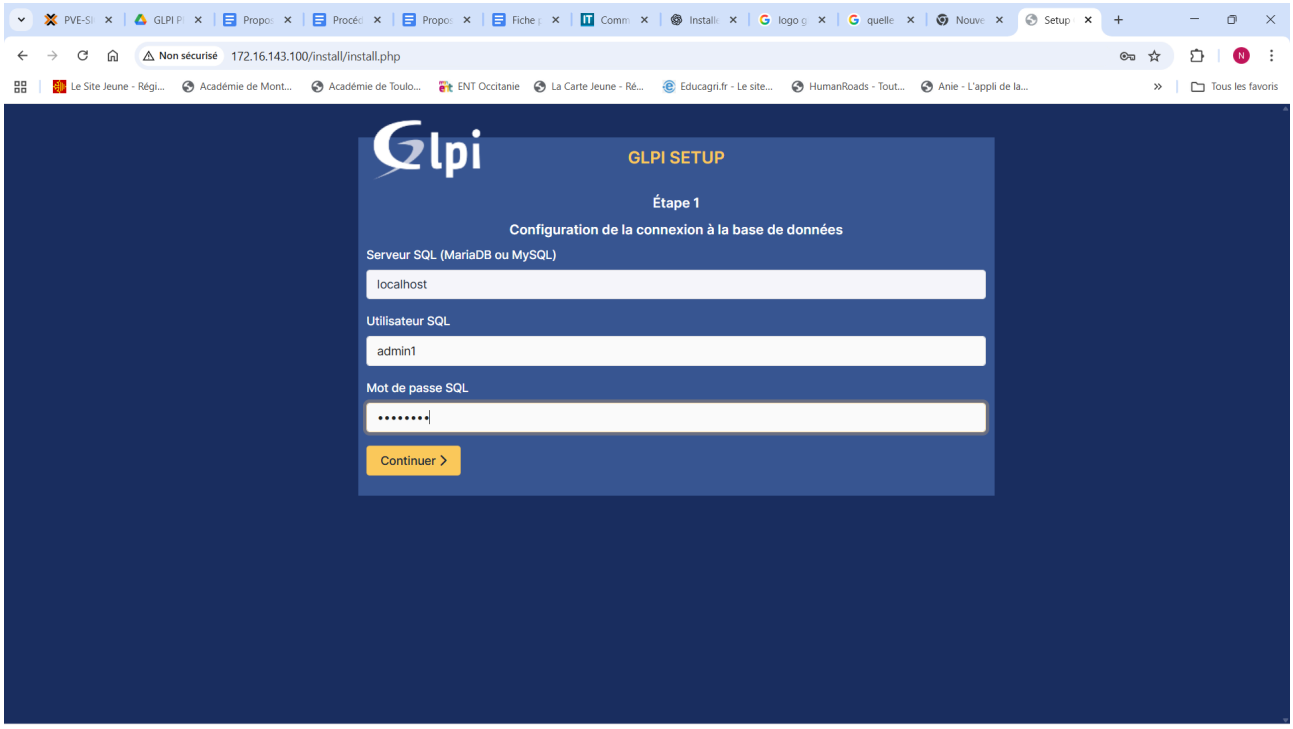

Cliquer sur "**Continuer**", puis choisir la base de données "**glpi**" créée un peu plus tôt.

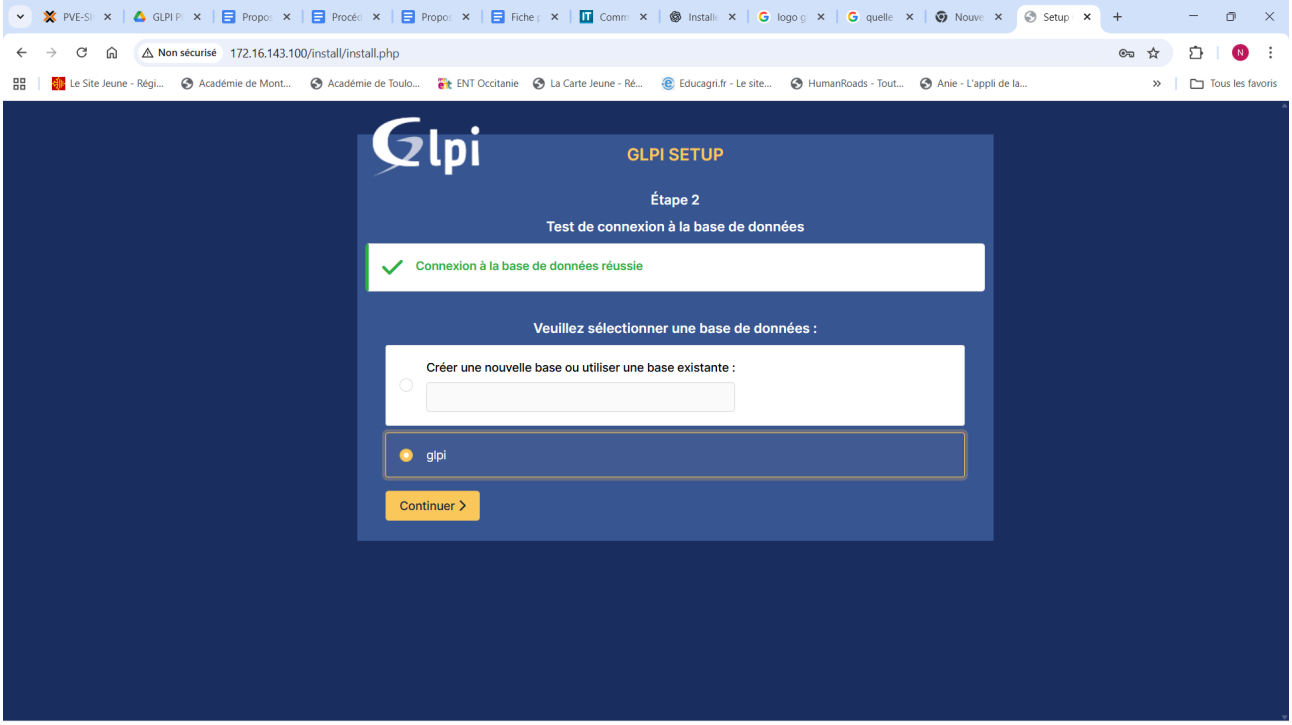

Faire que "**Continuer**"

Faire “**`Utiliser GLPI`**”

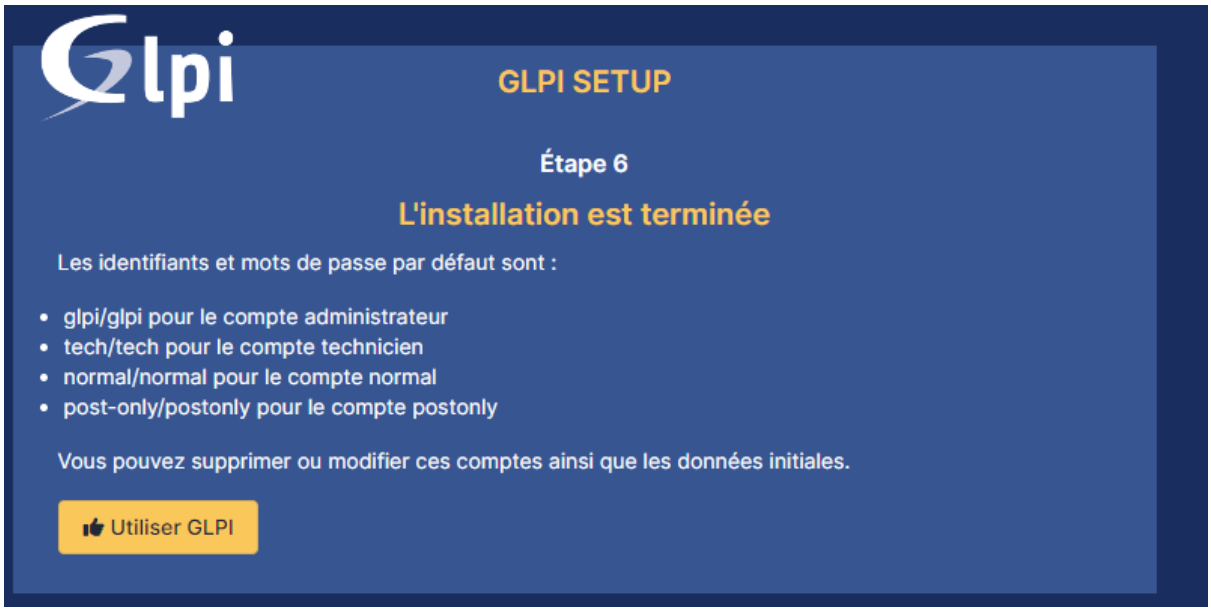

Se connecter avec le compte "**`glpi`**" et le mot de passe "**`glpi`**".

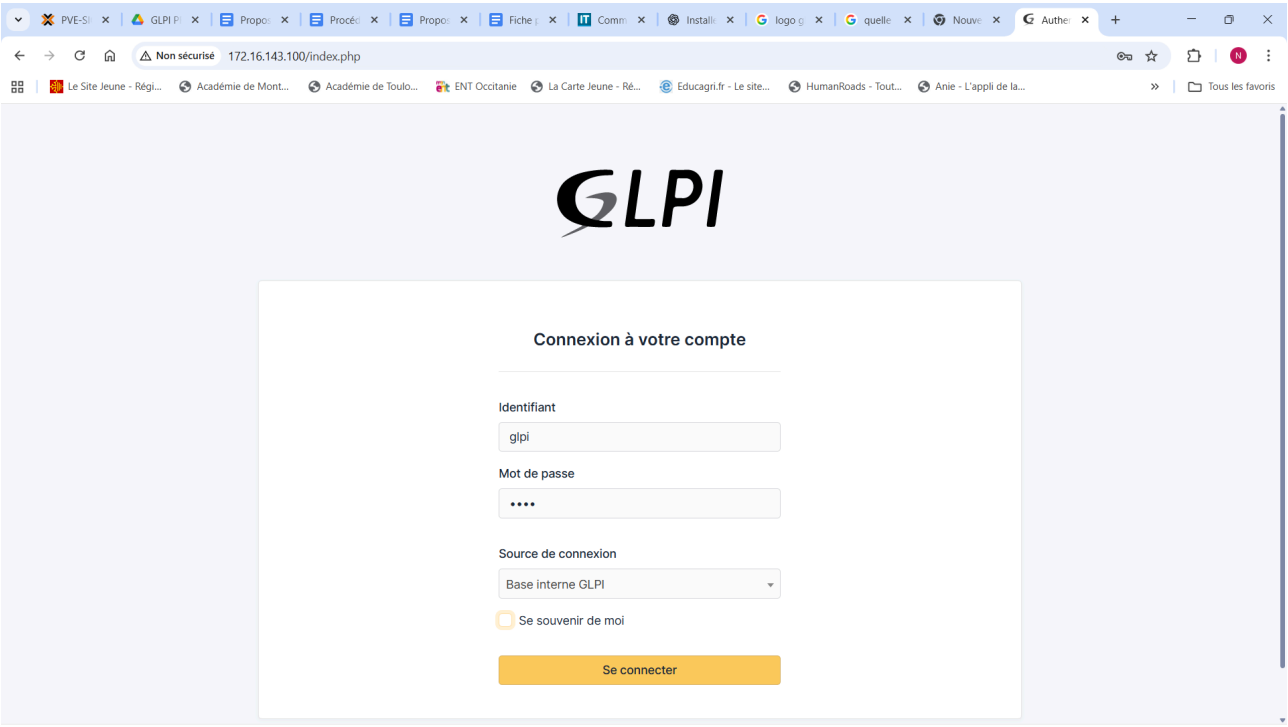

Nous voila sur GLPI :

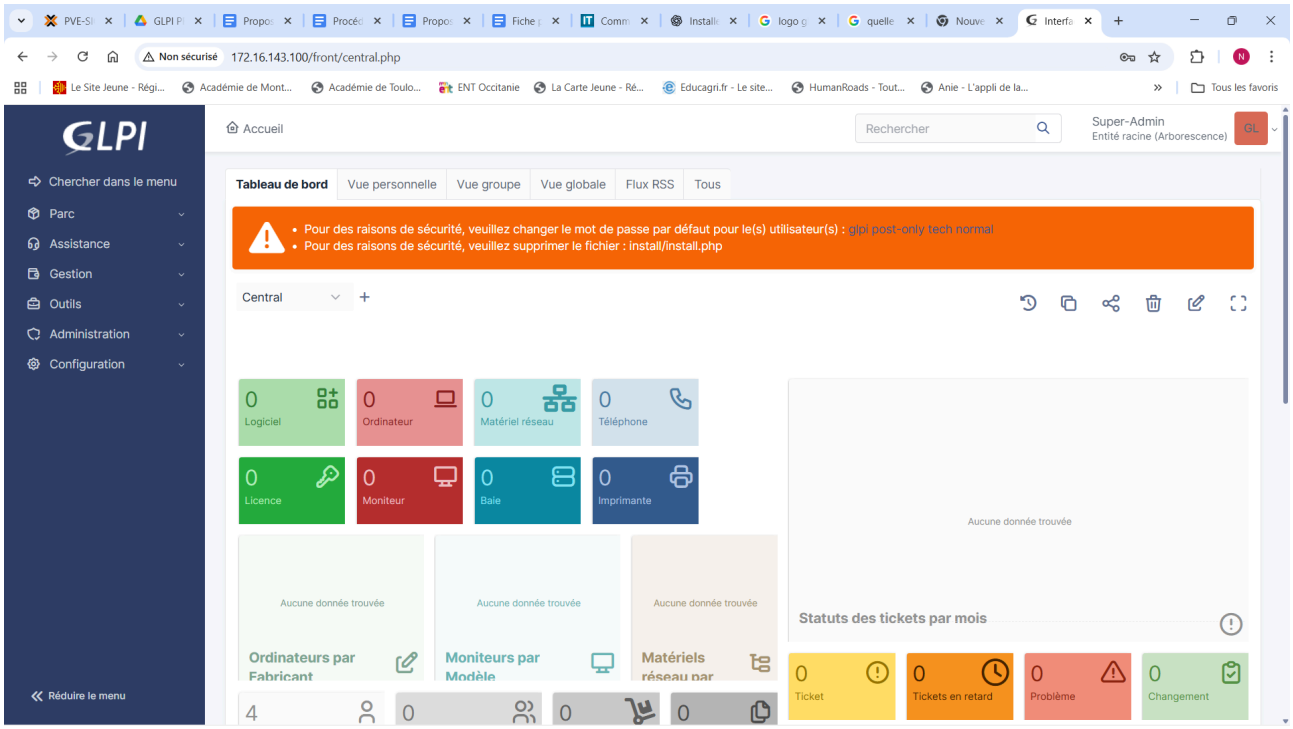

GLPI est désormais prêt à être utilisé et configuré (création d'utilisateurs, de catégories, de tickets,...).