




Open-source software that allows you to create and simulate APIs (Application Programming Interfaces) locally on your computer


The goal of Mockoon ?

- **Simulate an API**, no need to use a real one to do tests
- **Simulate different statuses** (404 – Not Found, 204 – No Content,...)
- **Create CRUD routes** which will dynamically manages methods for a same endpoint
- Be able to work offline



Some ways to use Mockoon

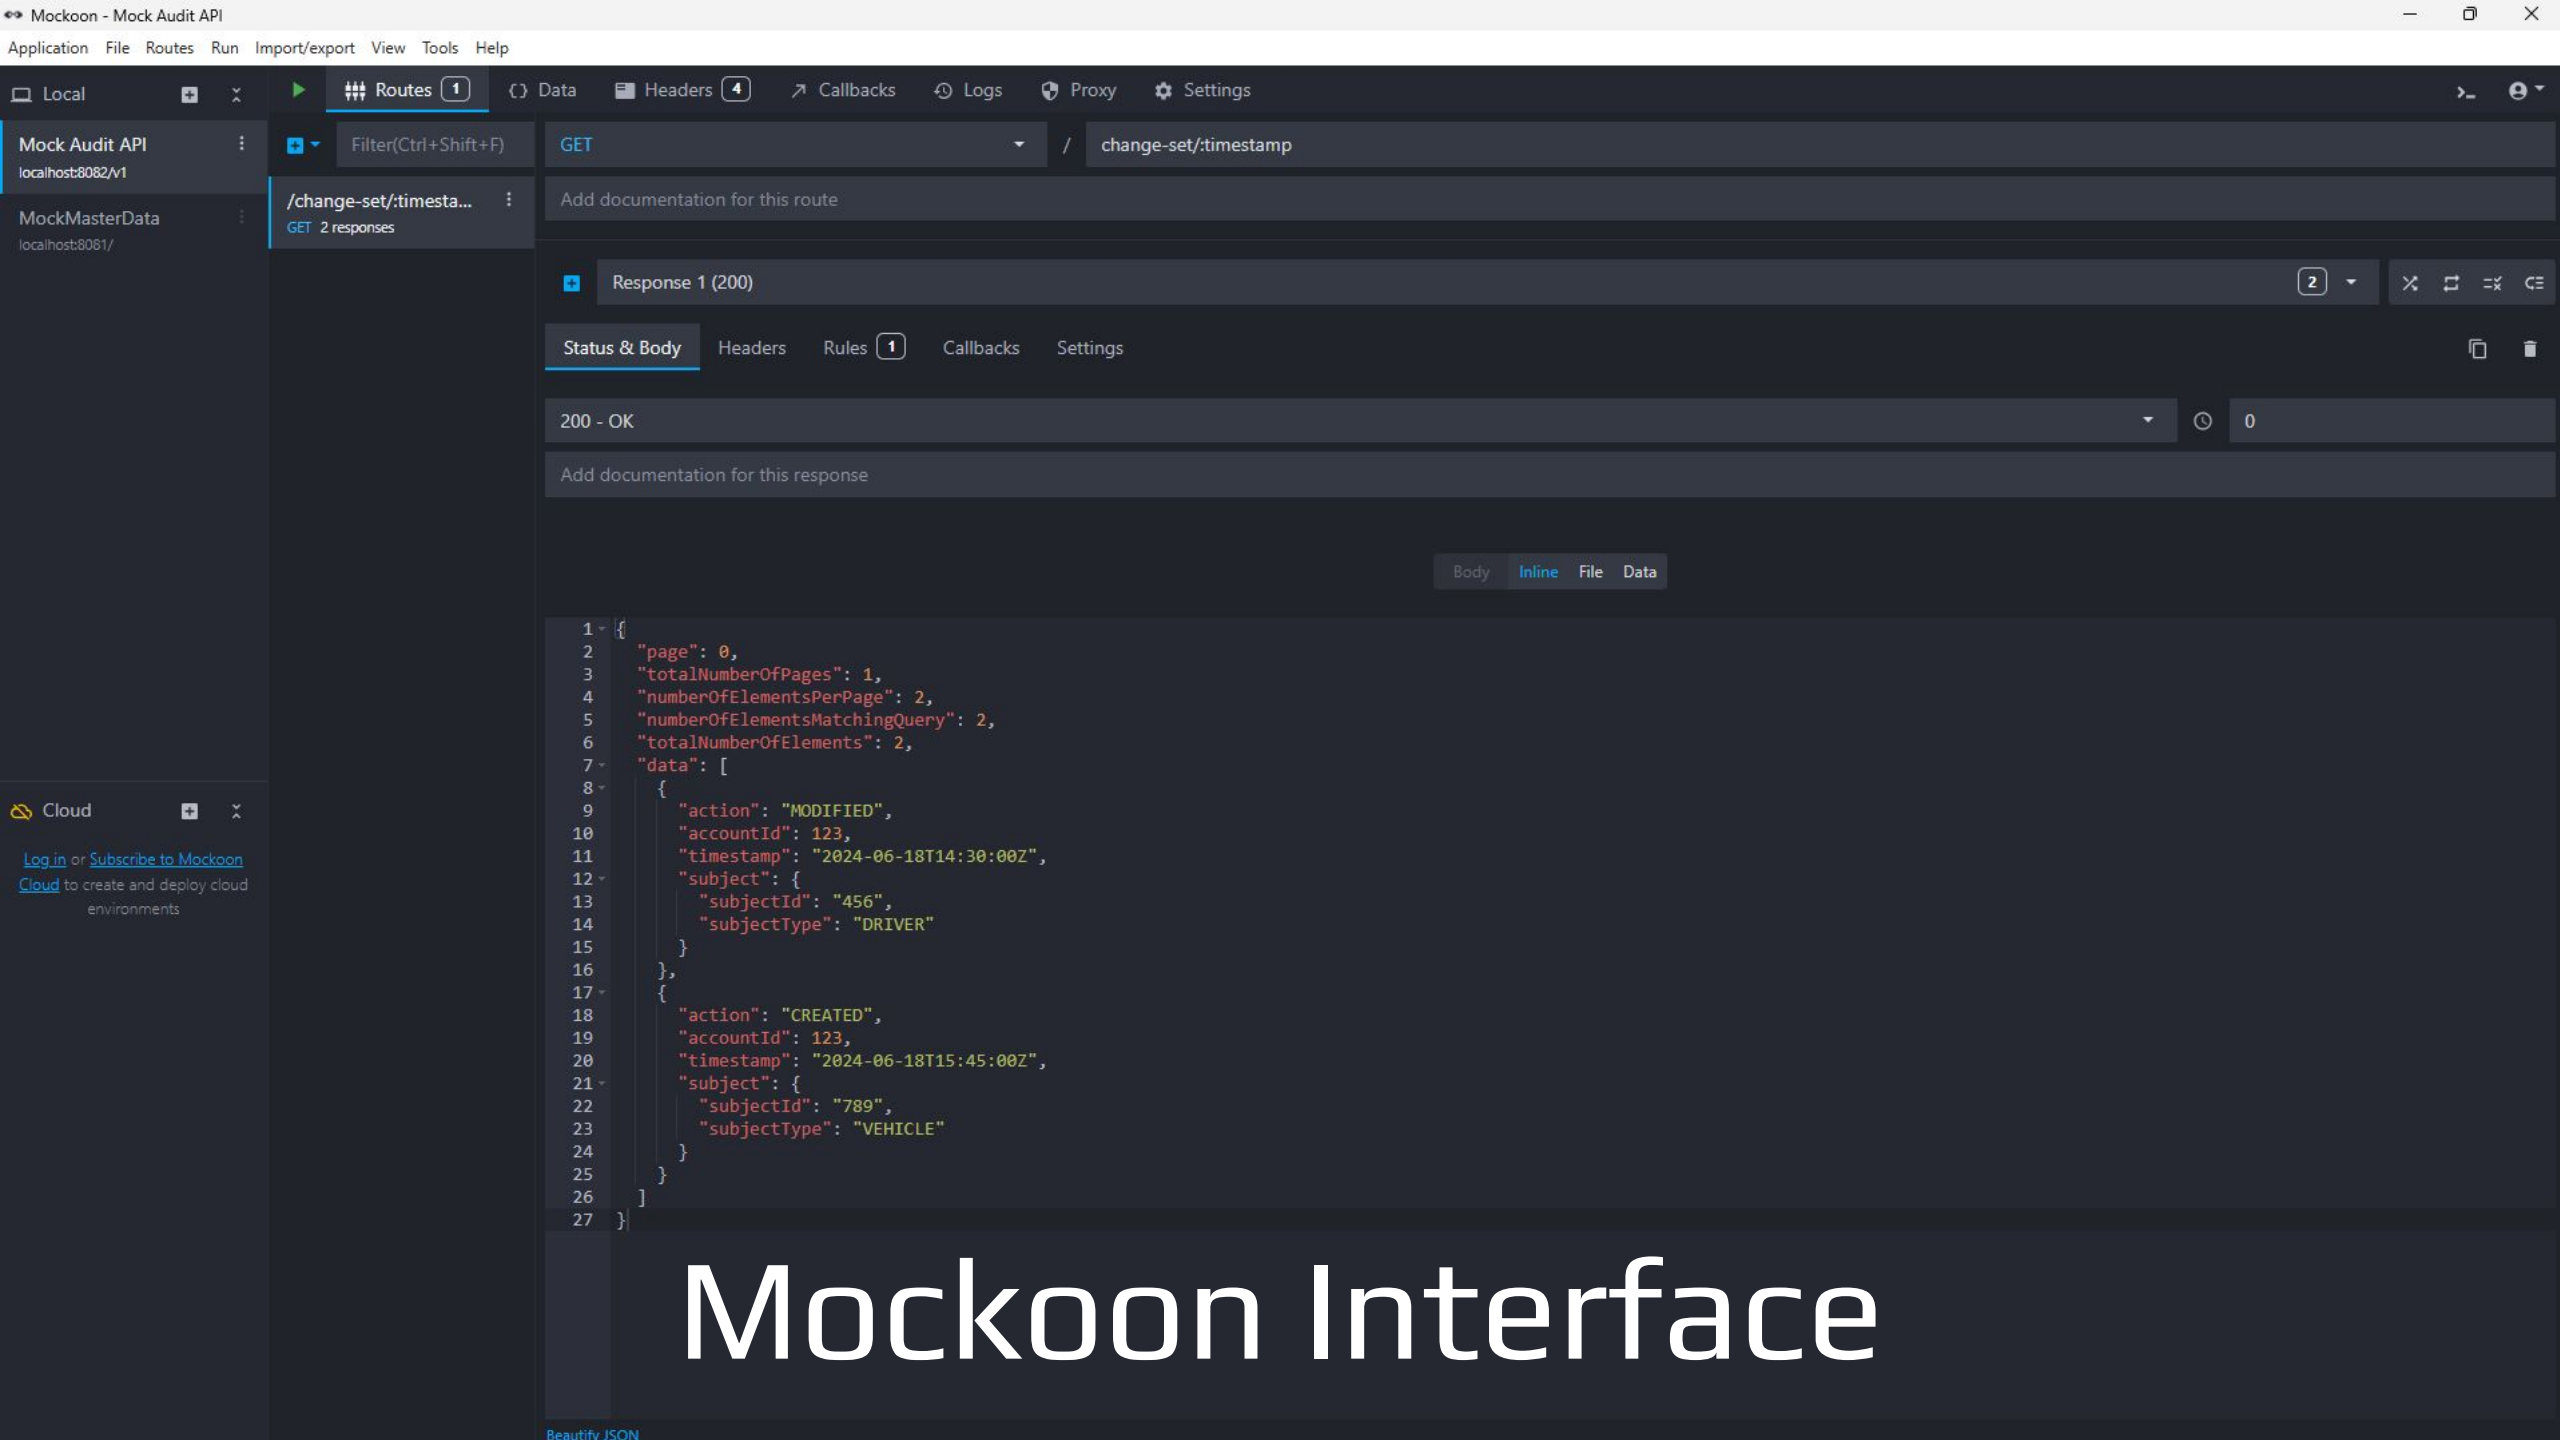


Settings of the API URL

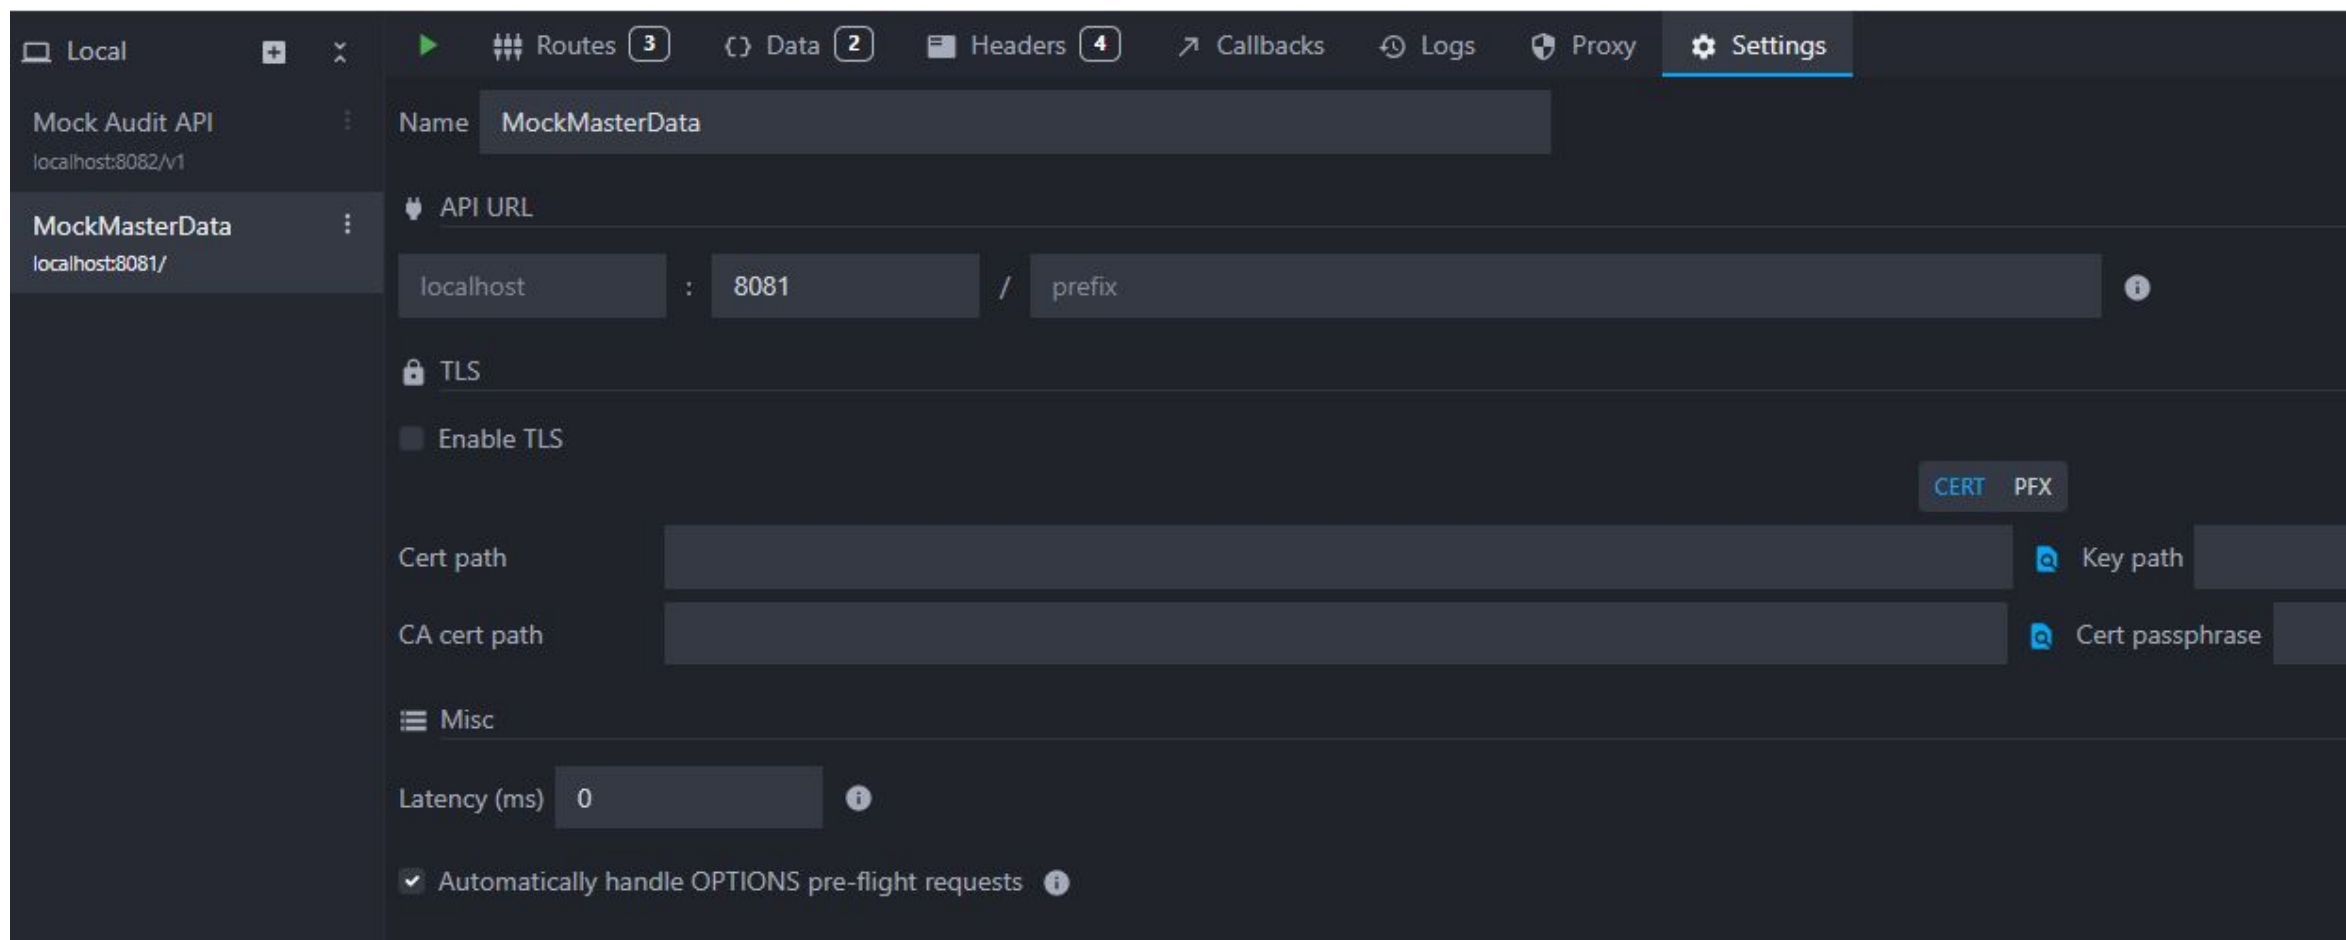


Create a HTTP/CRUD route

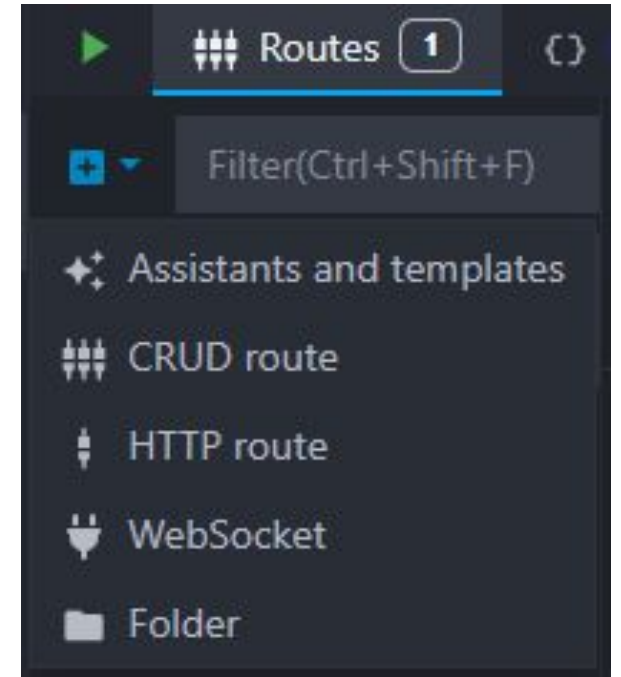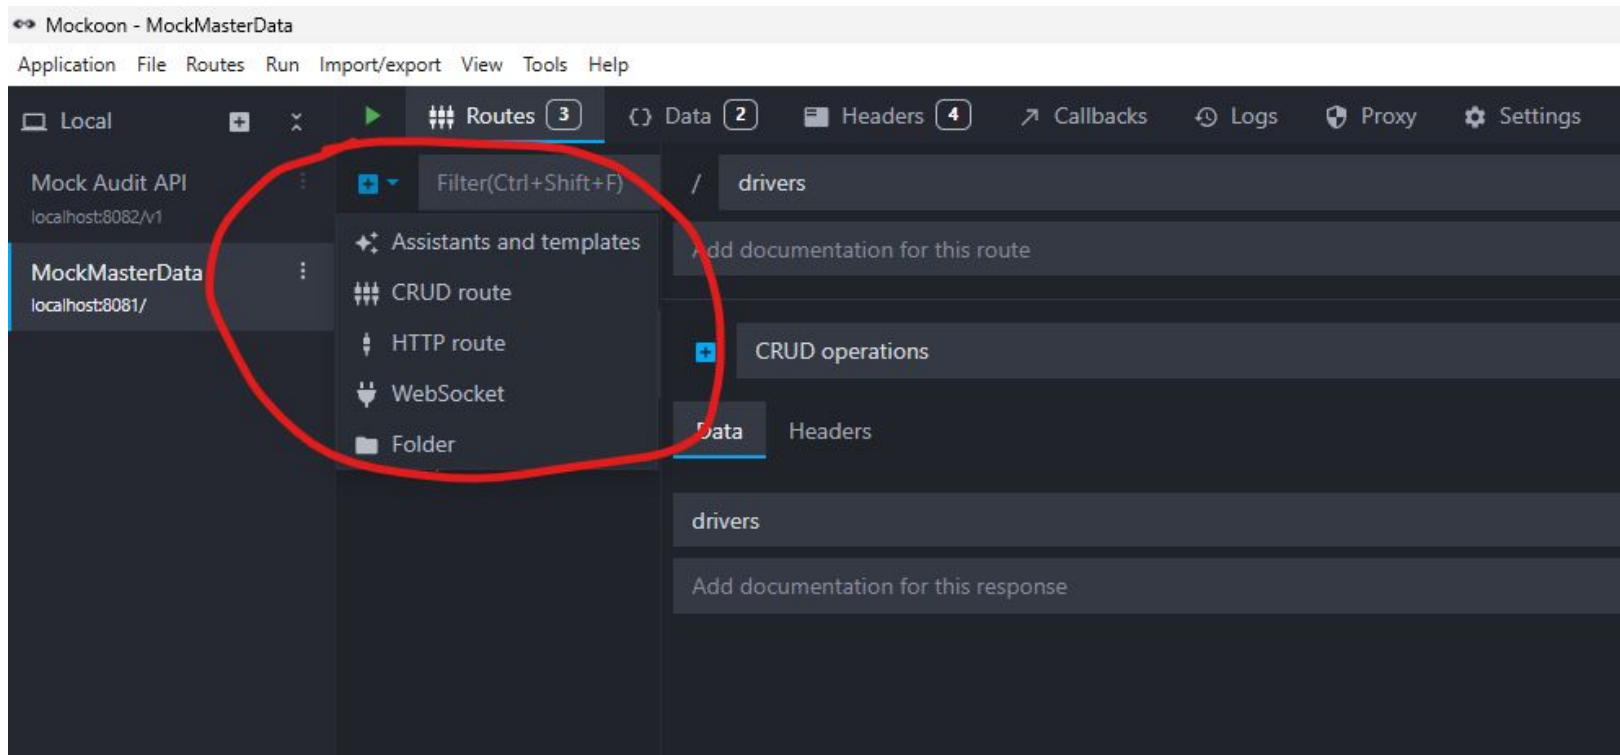

- Create a Data Bucket

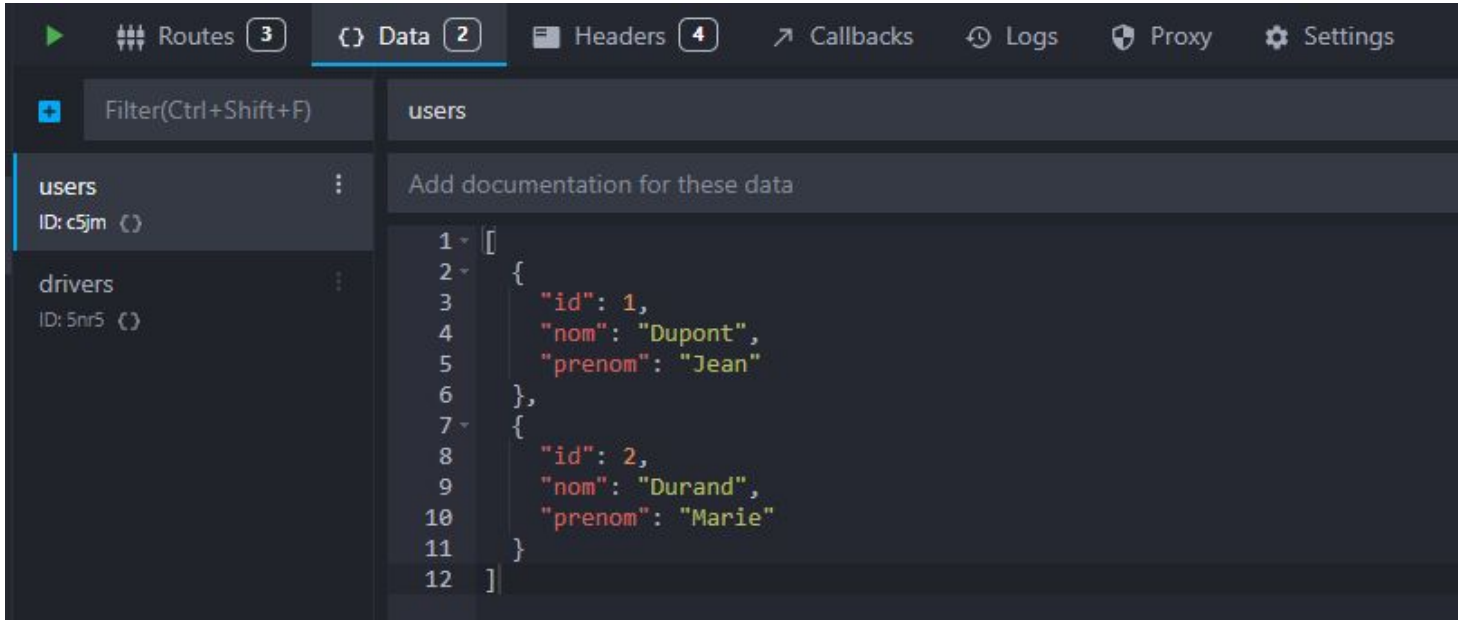

- Select a Data Bucket

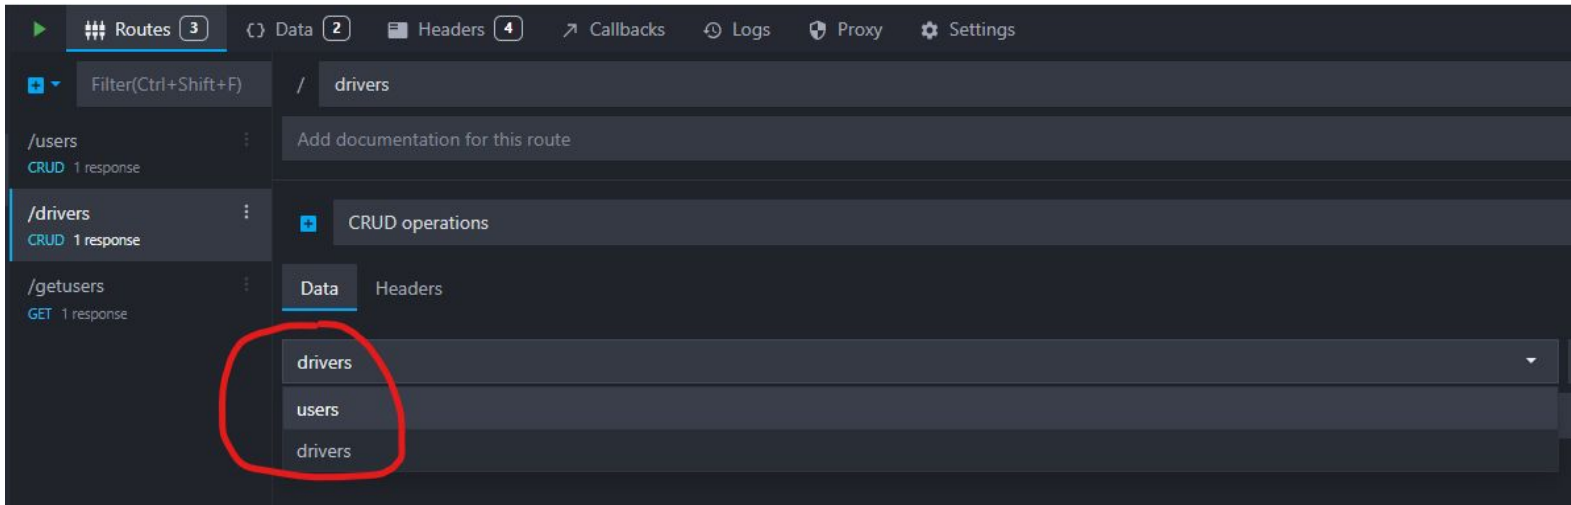

Example of a HTTP route

The screenshot shows a web browser's developer tools interface. At the top, the address bar displays the URL `http://localhost:8081/getusers`. Below the address bar, the **GET** method is selected, and the same URL is entered in the request field. A **Send** button is visible. The **Body** tab is active, showing the response body as a JSON array. The response status is **200 OK** with a response time of **28 ms** and a size of **463 B**. The JSON body contains two user objects:

```
1  [
2    {
3      "id": 1,
4      "nom": "Dupont",
5      "prenom": "Jean"
6    },
7    {
8      "id": 2,
9      "nom": "Durand",
10     "prenom": "Marie"
11   }
12 ]
```

Example of a CRUD route

CRUD route can handle different methods :

Overview PUT http://localho POST http://localh GET http://localho DEL http://localho

HTTP http://localhost:8081/users

POST http://localhost:8081/users

GET POST PUT PATCH DELETE HEAD OPTIONS

Type a new method

Headers (8) Body Scripts Tests Settings

	Value
	Value

POST http://localhost:8081/users

Params Authorization Headers (8) Body Scripts Tests Settings

Body Cookies Headers (8) Test Results

{ } JSON Preview Visualize

```
1 {
2   "nom": "Dupont",
3   "prenom": "bob",
4   "id": 3
5 }
```

GET http://localhost:8081/users


Params Authorization Headers (6) Body Scripts Tests Settings

Body Cookies Headers (10) Test Results



{ } JSON Preview Visualize

```
1 [
2   {
3     "id": 1,
4     "nom": "Dupont",
5     "prenom": "Jean"
6   },
7   {
8     "id": 2,
9     "nom": "Durand",
10    "prenom": "Marie"
11  },
12  {
13    "nom": "Dupont",
14    "prenom": "bob",
15    "id": 3
16  }
17 ]
```



Simulate a status for a Response

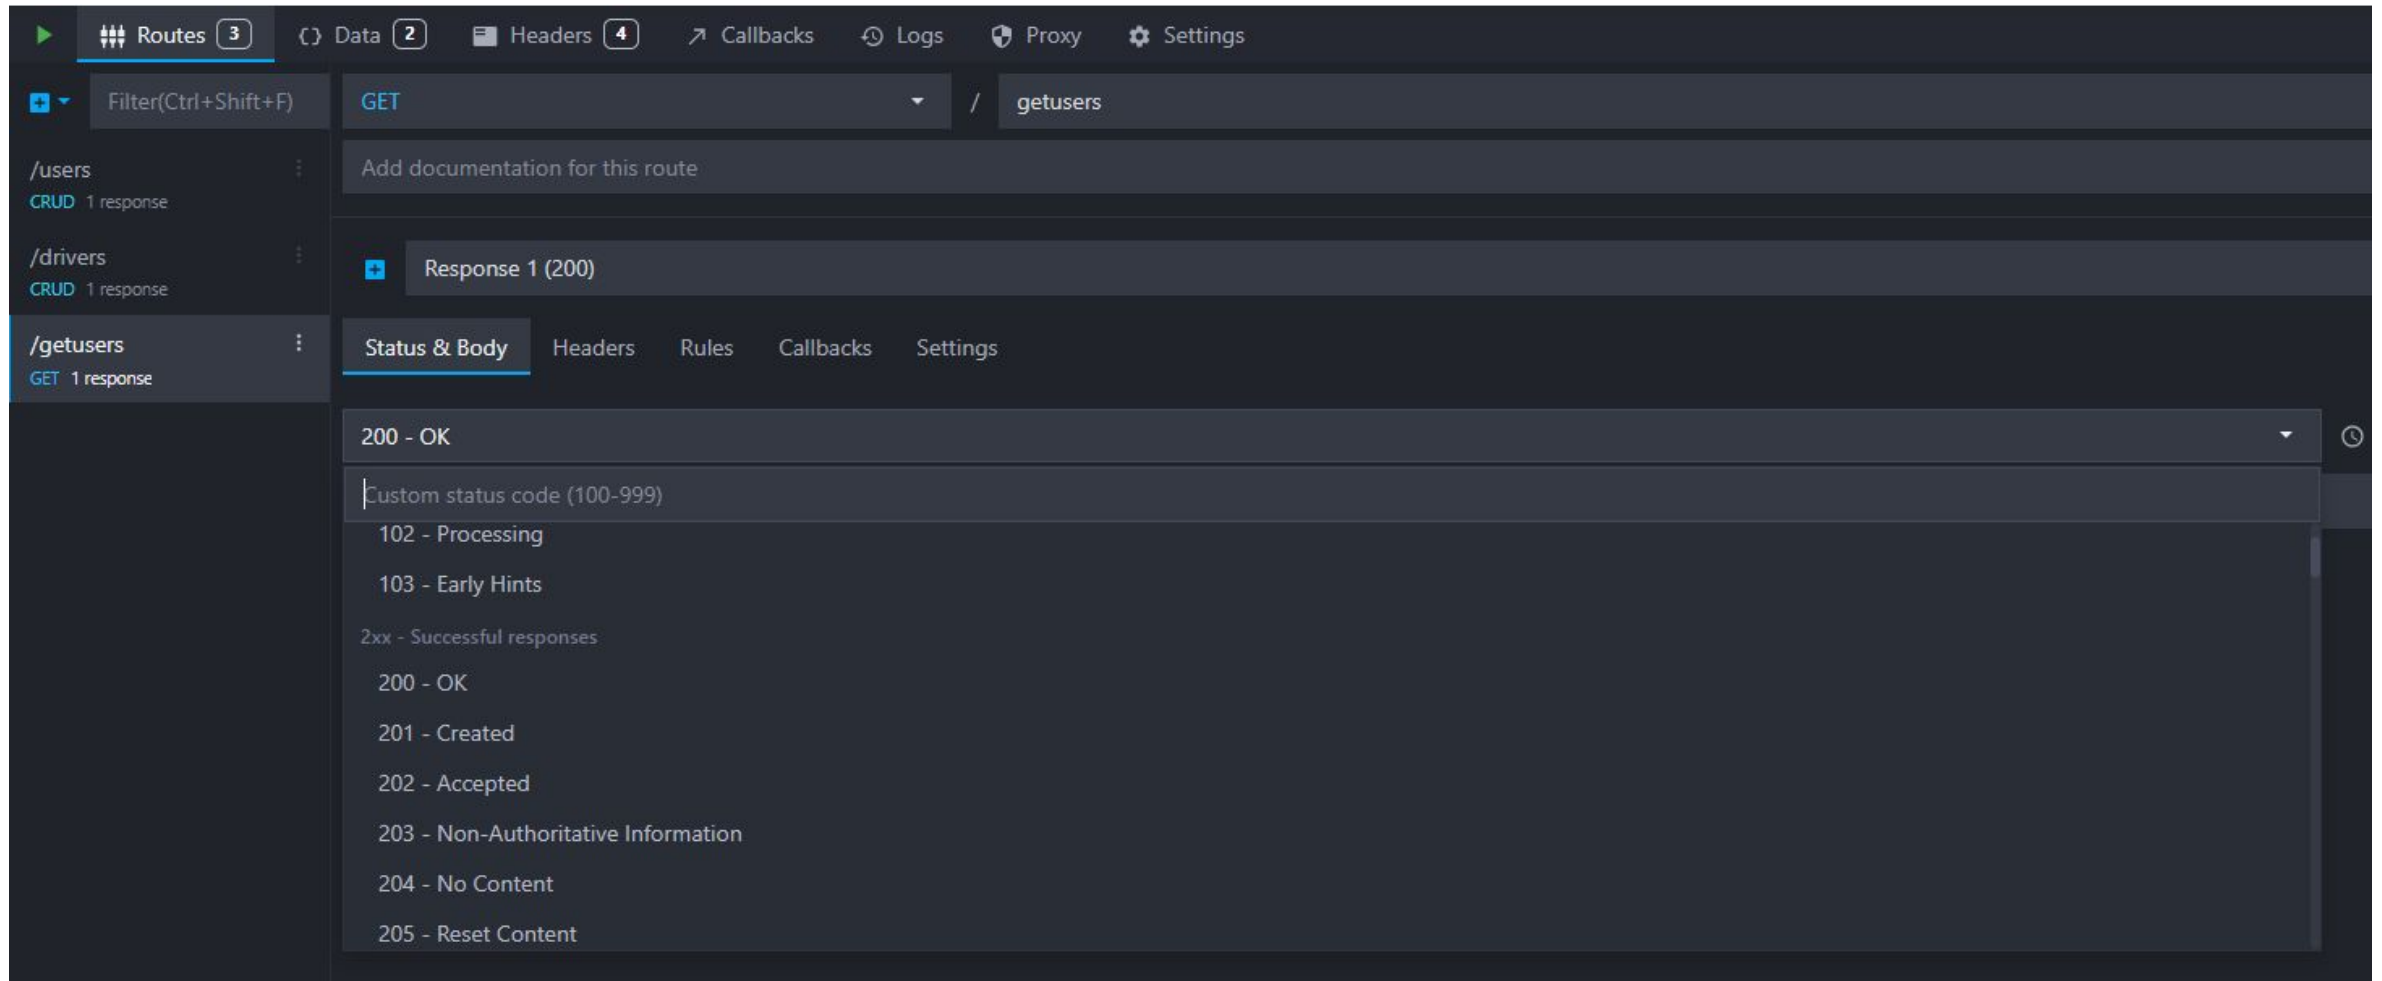


Add Rules

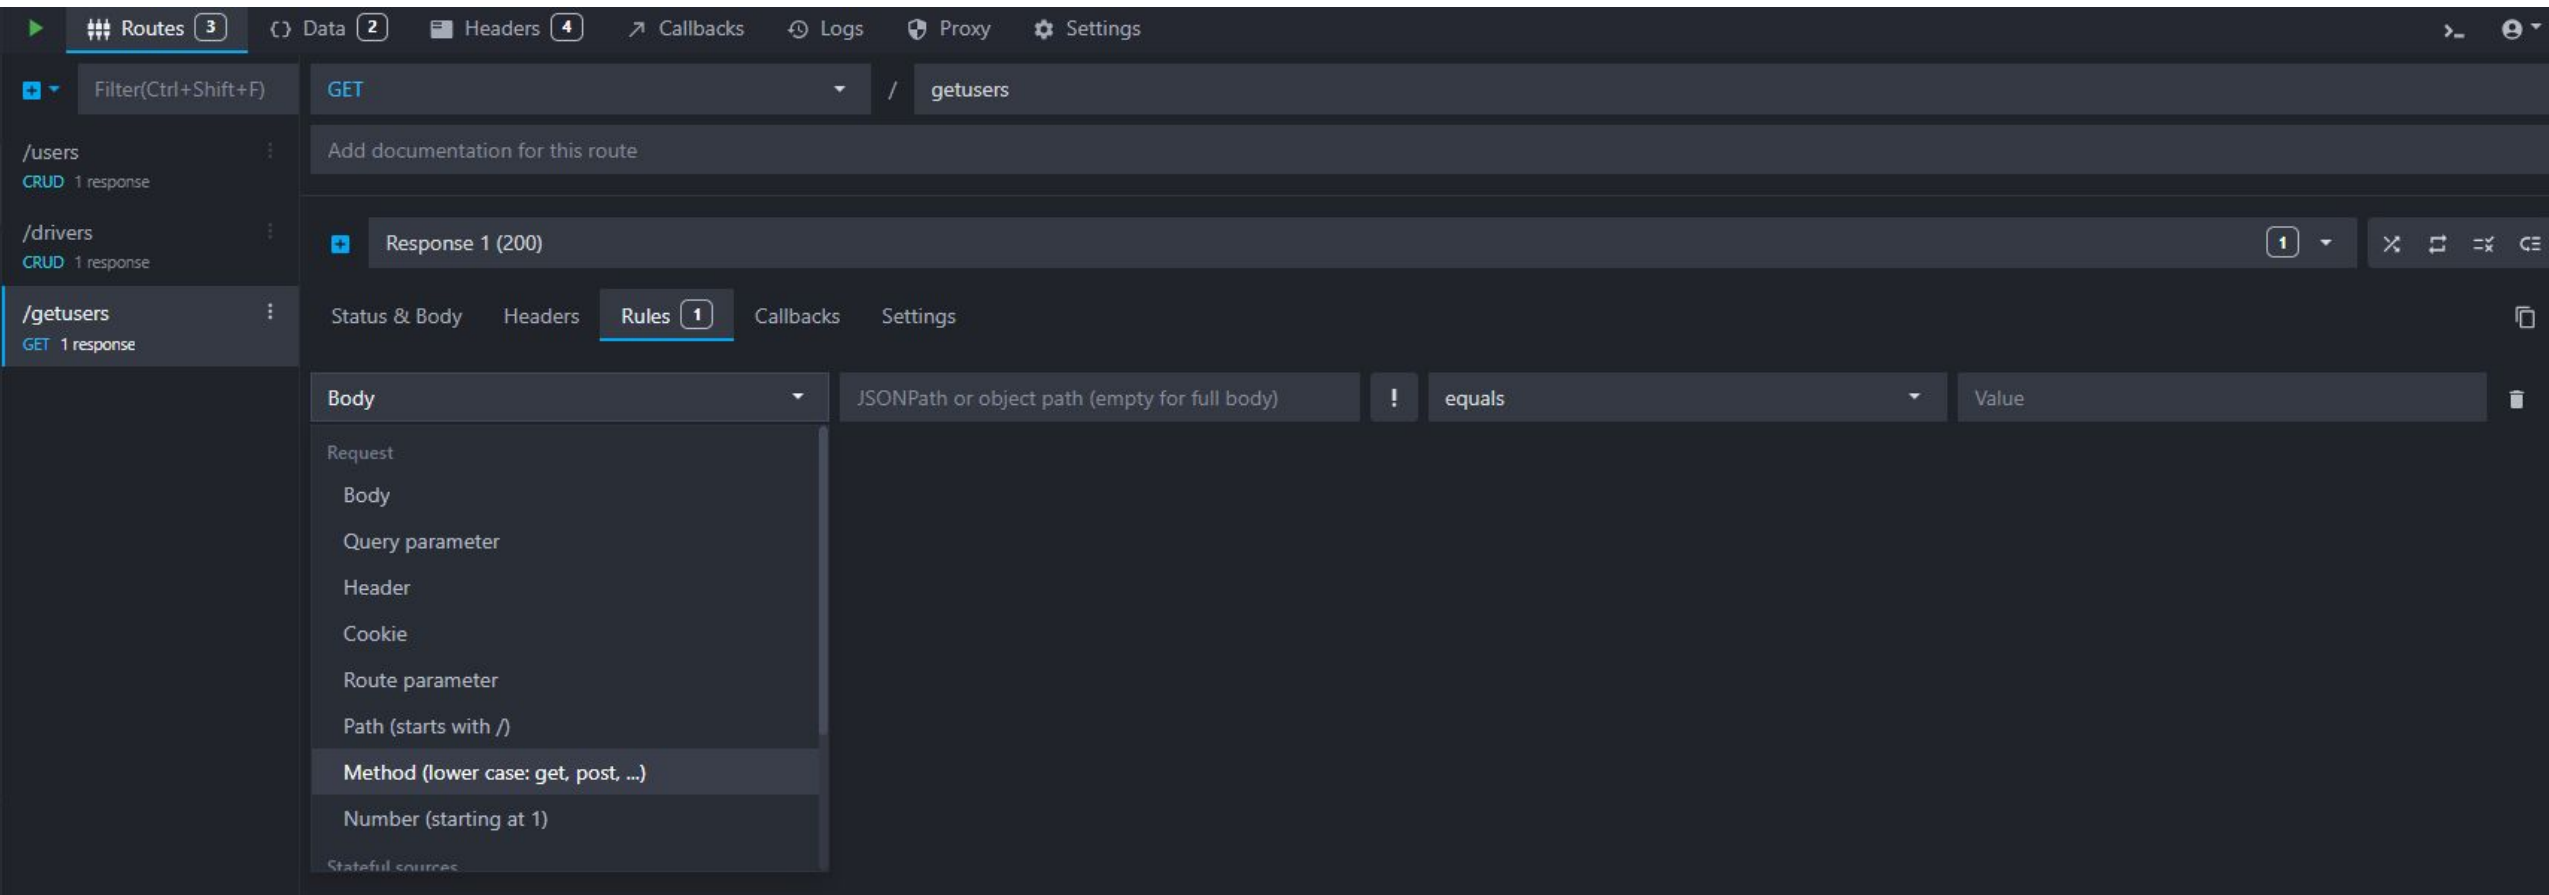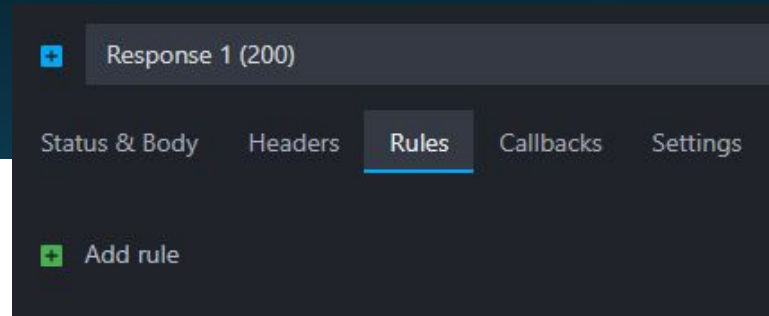

Create a Mockoon File / Open a Mockoon File

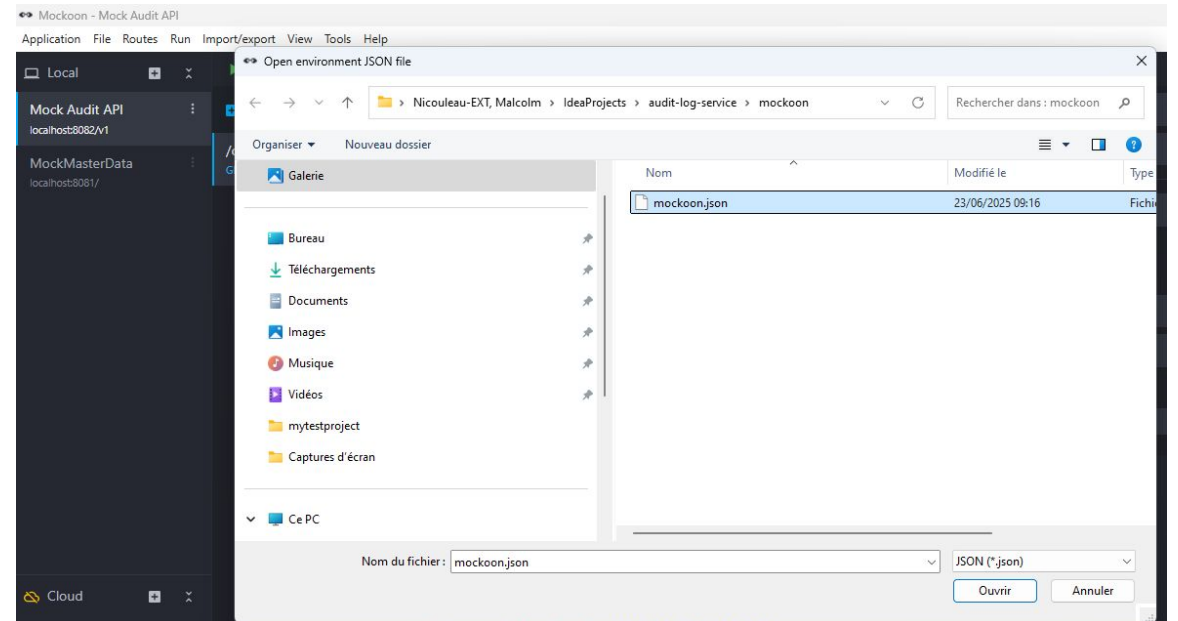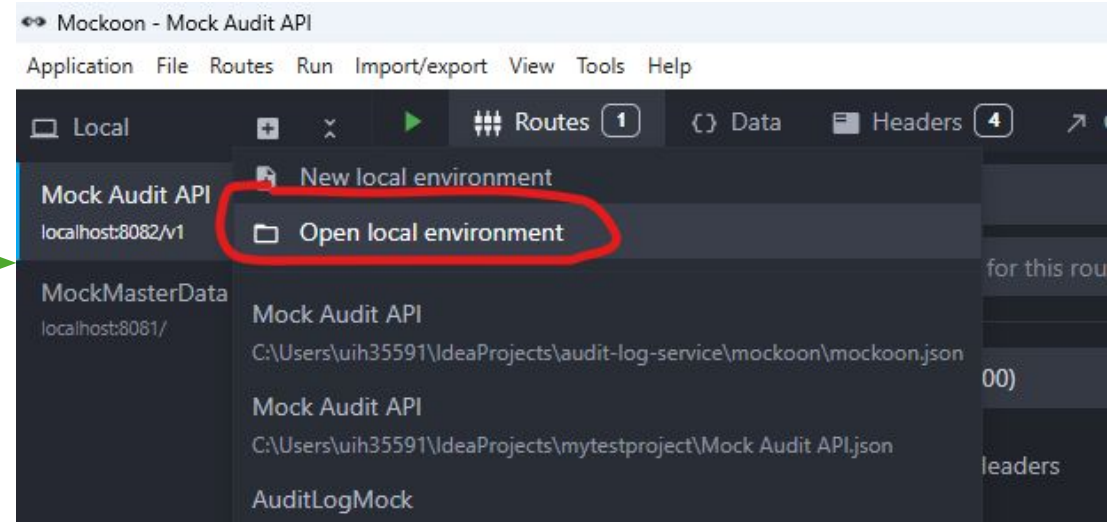




• Copy and Paste it into a JSON file on your IDEA Project

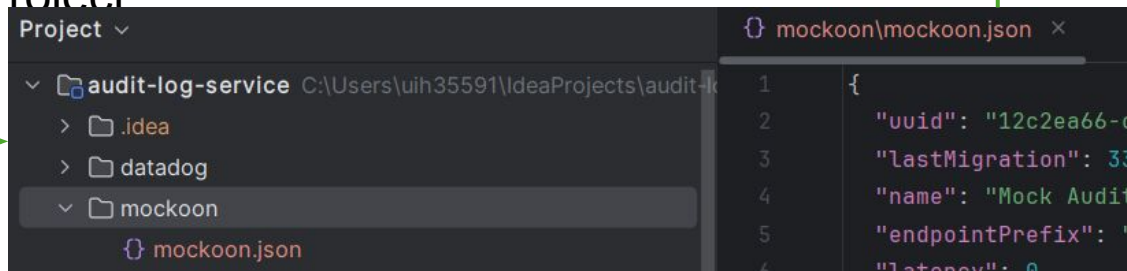

Mockoon Cloud subscription

- **Collaborate** with the team in real time
- Instantly **deploy** mock APIs to the cloud
- **Prototype** APIs faster with AI assistants
- Create mock APIs using the **web app**
- Keep the data in **synchronization**

Open a .openapi.yaml file

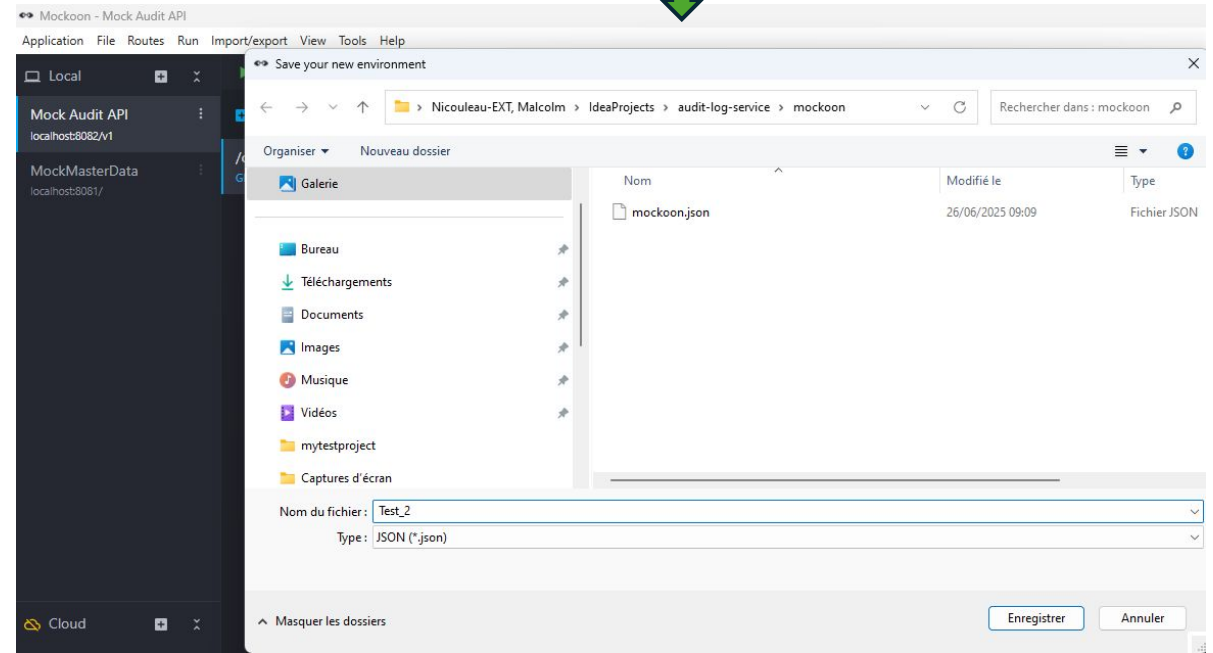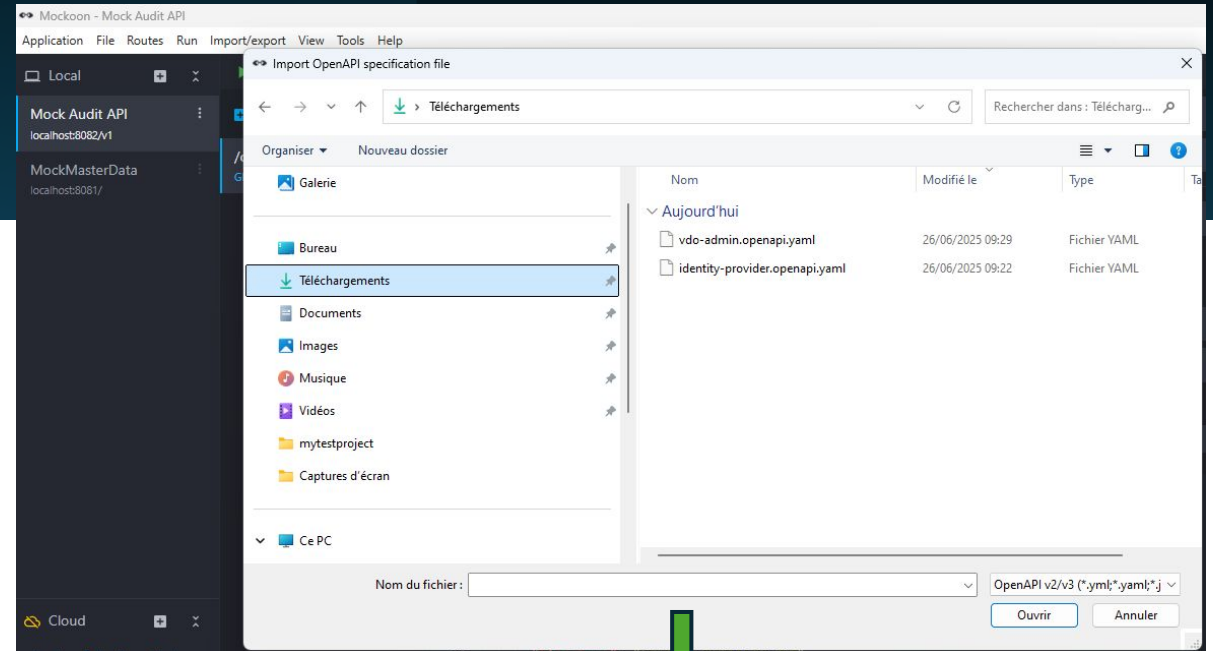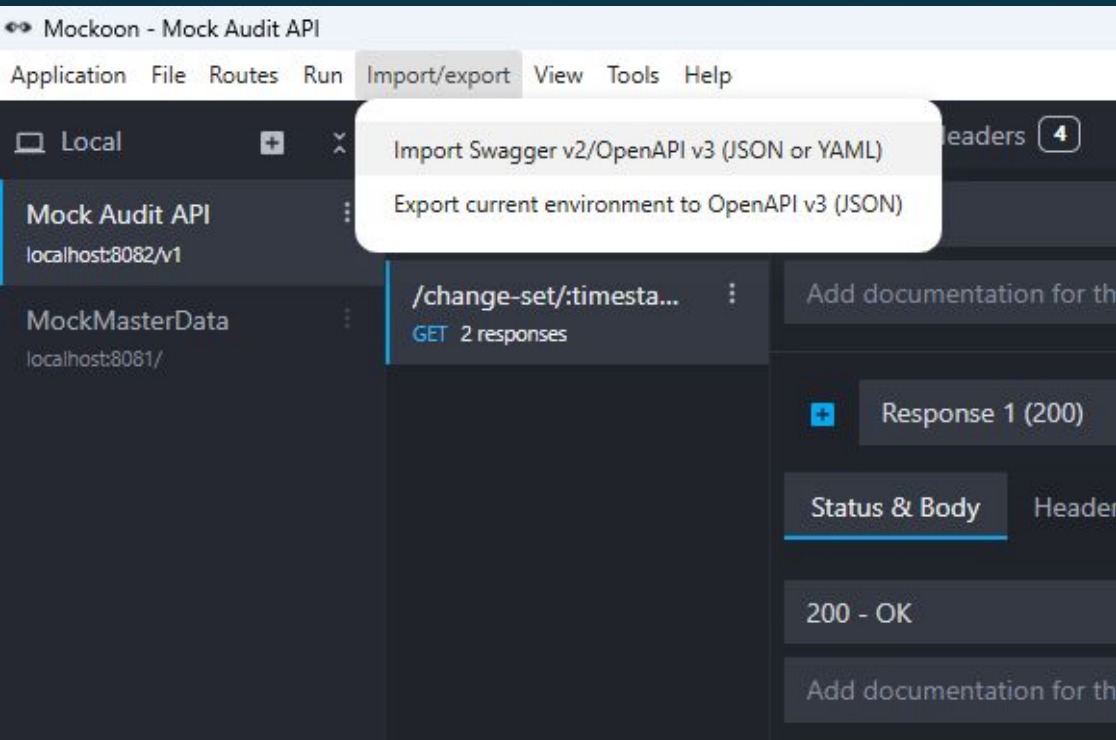

Mockoon - VDO-Admin APIs

ApplicationFileRoutesRunImport/exportViewToolsHelp

Local

Mock Audit API
localhost:8082/v1

MockMasterData
localhost:8081/

VDO-Admin APIs
localhost:8083/

Log in or Subscribe to Mockoon Cloud to create and deploy cloud environments

Routes33

Filter(Ctrl+Shift+F)

/api/v1/user/{user-id}/profile

PUT5 responses

/api/v1/billingrules
PUT4 responses

/api/v1/billingrules
POST5 responses

/api/v1/billingrules/
PUT5 responses

/api/v1/billingrules/
PUT5 responses

/api/v1/billingrules/
PUT5 responses

/api/v1/accounts/{a...
PUT5 responses

/api/v1/accounts/{a...
PUT5 responses

/api/v1/accounts/s...
PUT5 responses

/api/v1/accounts/s...
POST5 responses

/api/v1/accounts/sa...
GET5 responses

/api/v1/accounts/sa...
PUT5 responses

/api/v1/accounts/e...
GET5 responses

/api/v1/accounts/e...
PUT4 responses

/api/v1/users
POST5 responses

/api/v1/users/roles
POST5 responses

/api/v1/billingrules/
POST6 responses

/api/v1/accounts

PUT

/api/v1/user/{user-id}/profile

Environment "VDO-Admin APIs" has been successfully imported

Add documentation for this route

Response 1 (200) OK : User profile updated successfully

Status & BodyHeaders1RulesCallbacksSettings

200 - OK

OK : User profile updated successfully

BodyInlineFileData

1

{

2

"userId": "auth0|66e7c8a20060cd0f22b880b5",

3

"email": "user01@example.com",

4

"displayName": "user01",

5

"loginName": "user01",

6

"language": "en-GB"

7

}

Beautify JSON