
Permutation self-consistency

Averaging both input orders mitigates positional bias.

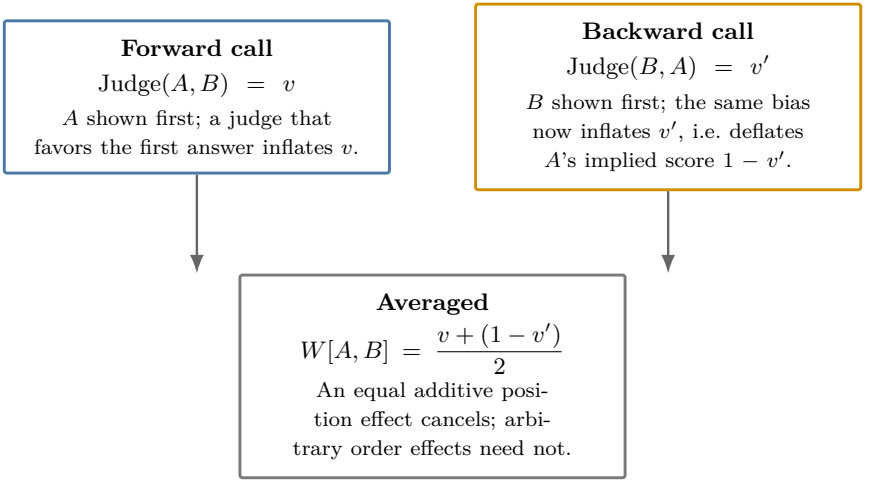

If the two raw scores coincide, $v = v'$, their average is 0.5. Identical input text alone does not ensure identical API outputs. A pilot recorded different scores on identical-text pairs; this does not isolate seed handling as the cause. The implementation skips judge calls when trimmed candidate texts match and assigns $W[A, B] = 0.5$ directly.