Bike Day

Source: bike_day.csv · Target: cnt

Forecast interval total before its outcomes are known.

1. Regression Review Summary

Regression dataset evidence is available for review. Priorities describe investigation needs, not a score or readiness verdict.

731 of 731 targets are finite, with 696 distinct finite values.

Rows	Feature inputs	Review findings	Finite targets
731	15	5	731

No validated scoring policy is defined for regression reliability.

Review priorities are investigation needs, not risk bands or a readiness verdict.

> **Relationship coverage: exhaustive within methods**
> No observed relationship means only none verified in the searched scope; unsearched relationships are unknown.

2. Priority Review Actions

Columns declared unavailable at prediction time · High review priority

2 feature columns are declared unavailable at the intended prediction time.

casual, registered

Consequence: Collection timing can determine whether a proposed feature is usable for the intended outcome.

Action: Verify the intended input set and collection timing. This declaration does not establish actual model use or leakage.

Population: Name: feature columns; Denominator: 15. Feature timing is user-declared or unknown; names alone do not establish availability or leakage.

Evidence type: user declared context · regression_availability.45

Supported target relationships · High review priority

1 distinct target relationship meets the support and coverage requirements.

cnt = casual + registered

Consequence: An outcome-derived field unavailable at the intended prediction time may invalidate the intended feature set.

Action: Verify feature availability and derivation against the intended prediction time; observed algebra alone does not prove leakage.

Population: Name: fully verified relationship overlap scopes; Denominator: Not set; Detail: Each witness reports its own overlap and finite-target coverage.. Observed identities and supplied availability do not establish actual model use, independent provenance, or leakage.

Evidence type: contextual review · regression_relationship_group.43, regression_relationship.42

IQR review candidates · Moderate review priority

Some fields have at least 5% of finite values outside the 1.5-IQR fences.

casual: 44 of 731 finite values (6.02%)

Consequence: Extreme observations can influence some analyses; this check does not establish task suitability.

Action: Review distributions, units, and legitimate rare observations. Skew or an IQR flag does not prove a data error.

Population: Name: finite values by affected feature; Denominator: Not set; Detail: Each referenced column retains its own finite denominator; infinity counts use all parsed rows.. These shared structural observations require context; rarity, repetition, and IQR candidates alone do not prove errors.

Evidence type: review observation · numeric_outliers.30

Near-constant fields · Low review priority

1 column meets the near-constant fields review rule.

holiday: 2 observed values, 97.13% top share

Consequence: Observed distributions need interpretation against the intended data use; rarity or cardinality alone is not a defect.

Action: Review whether rare values are legitimate and important before changing these fields.

Population: Name: feature columns; Denominator: 15. These shared structural observations require context; rarity, repetition, and IQR candidates alone do not prove errors.

Evidence type: review observation · column_variation.2

High-cardinality text or categories · Low review priority

1 column meets the high-cardinality text or categories review rule.

dteday: 731 observed values, 0.14% top share

Consequence: Observed distributions need interpretation against the intended data use; rarity or cardinality alone is not a defect.

Action: Check whether these fields are identifiers, free text, or categories requiring deliberate encoding.

Population: Name: feature columns; Denominator: 15. These shared structural observations require context; rarity, repetition, and IQR candidates alone do not prove errors.

Evidence type: review observation · categorical_cardinality.3

3. Dataset, Target, and Declared Expectations

Target selected explicitly: **cnt**. Target intent: count. Integer-valued observations do not independently establish count semantics.

User-declared expectation	Value
kind	count
minimum	Not set
maximum	Not set
nonnegative	Yes
integer required	Yes
units	rental bikes per interval

Units are display context; no unit conversion or semantic validity is inferred.

Column	Role	Parsed dtype	Observed values
instant	feature	int64	731 / 731
dteday	feature	str	731 / 731
season	feature	int64	731 / 731
yr	feature	int64	731 / 731
mnth	feature	int64	731 / 731
holiday	feature	int64	731 / 731
weekday	feature	int64	731 / 731
workingday	feature	int64	731 / 731
weathersit	feature	int64	731 / 731
temp	feature	float64	731 / 731
atemp	feature	float64	731 / 731

Column	Role	Parsed dtype	Observed values
hum	feature	float64	731 / 731
windspeed	feature	float64	731 / 731
casual	feature	int64	731 / 731
registered	feature	int64	731 / 731
cnt	target	int64	731 / 731

Parsing: Pandas default missing tokens; utf-8. All evidence concerns the parsed interpretation.

4. Target Coverage and Distribution

All-row coverage: 731 finite, 0 missing, 0 positive infinity, 0 negative infinity.

Distribution population: finite targets, including declared constraint violations. Units: rental bikes per interval.

Measurement	Finite-target evidence
min	22
max	8714
mean	4504.3488
sample std	1937.2115
distinct count	696
zero count	0
negative count	0
integer count	731
non integer count	0
iqr	2804
central 90 span	6245
bowley skewness	0.0042796006
modal share	0.27359781


Quantile strip



22 8714

P1 689.6 · P5 1331 · Q1 3152 · Median 4548 · Q3 5956 · P95 7576 · P99 8163.7

Finite target distribution

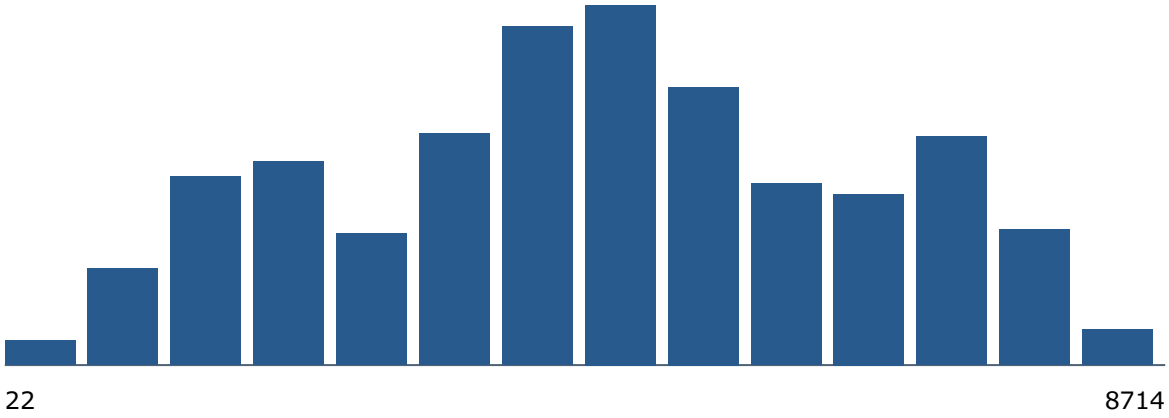

freedman diaconis capped 40; counts total 731 finite observations. Bin counts and interval definitions appear in the appendix.

1.5-IQR candidates: 0 lower, 0 upper, of 731 finite values. These are review candidates, not established errors.

Declared constraints

0 finite targets violate at least one declared requirement; 731 satisfy the declared constraints. No observations were removed.

User-declared rule	Violations / finite population
declared nonnegative: 0	0 / 731
declared integer: True	0 / 731

Concentration and numerical representation

Most-common-value share: 0.27359781% of finite targets. Boundary concentration does not establish clipping or saturation.

Boundary	Value	Count / finite share
observed minimum	22	1 / 0.13679891%
observed maximum	8714	1 / 0.13679891%

Numerical representation: completed. Coarsest observed aligned grid: 1. Ordinary integer or fixed-decimal representation is descriptive and generates no rounding action.

5. Target Relationships and Feature Availability

Small or sparse relationships remain qualified technical evidence. No relationship conclusion covers unsearched candidates.

Actions require at least 30 finite overlapping rows, five distinct targets, 80% finite-target coverage, and complete numerical verification. Availability is user-declared or unknown; observed algebra does not prove leakage or actual model use.

Feature	User-declared availability
instant	unknown
dteday	unknown
season	unknown
yr	unknown
mnth	unknown
holiday	unknown
weekday	unknown
workingday	unknown
weathersit	unknown
temp	unknown
atemp	unknown
hum	unknown
windspeed	unknown
casual	unavailable at prediction
registered	unavailable at prediction

Distinct relationship groups

cnt = casual + registered

Meets action support · unavailable at prediction

Witnesses: relationship.0. Evidence: regression_relationship_group.43, regression_relationship.42.

Qualified technical relationship evidence

Observed relationship	Support and finite-target coverage	Interpretation
cnt = casual + registered relationship.0	731 rows · 100% 696 distinct targets	Support gate met unavailable at prediction Tolerance: 1.0000712e-10

6. Missingness, Repetition, and Feature Evidence

0 parsed cells missing (0.0%). Rows with missing features: 0 / 731. Target coverage is reported separately.

instant · 0 missing (0.0%)

dteday · 0 missing (0.0%)

season · 0 missing (0.0%)

yr · 0 missing (0.0%)

mnth · 0 missing (0.0%)

holiday · 0 missing (0.0%)

weekday · 0 missing (0.0%)

workingday · 0 missing (0.0%)

weathersit · 0 missing (0.0%)

temp · 0 missing (0.0%)

atemp · 0 missing (0.0%)

hum · 0 missing (0.0%)

windspeed · 0 missing (0.0%)

casual · 0 missing (0.0%)

registered · 0 missing (0.0%)

Exact repetition and target variation within repeated inputs require context; automatic deduplication or label-error conclusions are not warranted.

0 repeated rows beyond each first occurrence; 0 exact groups; 0 participating rows.

Repeated-input groups: 0; varying-target groups: 0; varying-target rows: 0.

Example group rows / distinct targets	Target extrema / span

7. Coverage, Methods, Scoring Availability, and Limitations

No validated scoring policy is defined for regression reliability.

Coverage describes these checks, not a percentage of universal reliability.

Numerical shape, rounding, extremes, and repetition can be legitimate. Constraints apply only to declarations. Name cues and algebraic identities do not establish feature availability, causal direction, leakage, or label error. No cleaning, model training, prediction evaluation, or monitoring occurs.

Relationship search: exhaustive within methods. 14 eligible numerical columns; 14 selected for pairs; 119 candidates; 24 fully verified; 0 planned work skips; 0 unfinished candidates after interruption/ failure.

Configured relation limits: Max single comparisons: 20000000; Max pair comparisons: 20000000; Max pair features: 32; Max screen rows: 512. Consumed comparisons: Single: 16813; Pair: 47323.

Selected pair columns: instant, season, yr, mnth, holiday, weekday, workingday, weathersit, temp, atemp, hum, windspeed, casual, registered.

Support thresholds are internally tested interpretation rules, not externally validated reliability cutoffs.

8. Technical Appendix

Parsing, execution, and coverage disclosure

Parser: pandas.read_csv / pandas 3.0.3. Comma delimiter, inferred header, blank lines skipped. Encoding: utf-8. Missing policy: Pandas default missing tokens. Source values were not rewritten.

Custom missing tokens: None configured; explicit column types: None configured.

Source SHA-256: 75c2c56f116c9ebbd9bcb06087c2b7fffc7b8f8225dd37d388aa7e1996cf19dc. Method: tabular_regression_v1.

Token inspection: 56839 bytes, 200 data records, 3200 comparable cells; stopping reason: record limit. Alignment confirmed: Yes.

Interpretation review warnings are separate from data findings and scoring. Counts describe only inspected source tokens and are never extrapolated to the dataset. No warnings observed does not establish losslessness.

inspection_incomplete
Inspection stopped at record_limit; absence of warnings does not establish losslessness.

Observed occurrences: 0; setting: inference. Confirm this interpretation matches the source meaning; use an explicit parsing override where appropriate.

Operational safeguards

Source/header preflight, bounded row read, post-load frame measurement, cooperative stage deadlines; no hard memory or execution guarantee.

Backend: Pandas in memory; frame: 136829 bytes; elapsed: 0.096158 seconds.

Configured safeguard	Limit
Maximum source size	104857600 bytes
Maximum rows	1000000
Maximum columns	1000
Maximum loaded frame size	536870912 bytes

Configured safeguard	Limit
Cooperative elapsed-time limit	Not set

Check applicability and execution

Check / scope	Applicable	Execution	Reason / exclusions
schema · dataset	applicable	completed	No exclusions
missingness · dataset	applicable	completed	No exclusions
column variation · dataset	applicable	completed	No exclusions
categorical cardinality · dataset	applicable	completed	No exclusions
feature missingness · dataset	applicable	completed	No exclusions
exact duplicates · dataset	applicable	completed	No exclusions
numeric summary · instant	applicable	completed	No exclusions
numeric outliers · instant	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · season	applicable	completed	No exclusions
numeric outliers · season	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · yr	applicable	completed	No exclusions
numeric outliers · yr	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · mnth	applicable	completed	No exclusions
numeric outliers · mnth	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · holiday	applicable	completed	No exclusions
numeric outliers · holiday	blocked	not run	The interquartile range is zero
numeric summary · weekday	applicable	completed	No exclusions
numeric outliers · weekday	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · workingday	applicable	completed	No exclusions
numeric outliers · workingday	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0

Check / scope	Applicable	Execution	Reason / exclusions
numeric summary · weathersit	applicable	completed	No exclusions
numeric outliers · weathersit	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · temp	applicable	completed	No exclusions
numeric outliers · temp	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · atemp	applicable	completed	No exclusions
numeric outliers · atemp	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · hum	applicable	completed	No exclusions
numeric outliers · hum	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · windspeed	applicable	completed	No exclusions
numeric outliers · windspeed	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · casual	applicable	completed	No exclusions
numeric outliers · casual	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
numeric summary · registered	applicable	completed	No exclusions
numeric outliers · registered	applicable	completed	Exclusions: Missing values: 0; Non finite values: 0
regression target · cnt	applicable	completed	No exclusions
regression sample std · cnt	applicable	completed	No exclusions
regression extremes · cnt	applicable	completed	No exclusions
regression bowley skewness · cnt	applicable	completed	No exclusions
regression histogram · cnt	applicable	completed	No exclusions
regression rounding · cnt	applicable	completed	No exclusions
regression constraints · cnt	applicable	completed	No exclusions
regression relationships · dataset	applicable	completed	No exclusions
regression names · dataset	applicable	completed	No exclusions

Check / scope	Applicable	Execution	Reason / exclusions
regression relationship · relationship.0	applicable	completed	No exclusions
regression relationship group · relationship_group.0	applicable	completed	No exclusions
regression repeated inputs · dataset	applicable	completed	No exclusions
regression availability · dataset	applicable	completed	No exclusions
classification target · dataset	not applicable	not run	Regression uses numerical target evidence and no classification scores.
label conflicts · dataset	not applicable	not run	Regression uses numerical target evidence and no classification scores.
target leakage · dataset	not applicable	not run	Regression uses numerical target evidence and no classification scores.
classification scoring · dataset	not applicable	not run	Regression uses numerical target evidence and no classification scores.
parsing fidelity · dataset	applicable	completed	No exclusions

Coverage describes these checks, not a percentage of universal reliability.

Unsupported: semantic typing; missingness patterns; split/reference comparisons; model performance; non-tabular modalities.

Deterministic fixtures and corpus regression checks provide internal methodology validation. They do not establish external method validity or customer usefulness. Prediction and model-performance analysis belong to ConfidenceGuard.

Resolved source headers

Source position	Original header	Resolved name
1	instant	instant
2	dteday	dteday
3	season	season
4	yr	yr
5	mnth	mnth
6	holiday	holiday
7	weekday	weekday

Source position	Original header	Resolved name
8	workingday	workingday
9	weathersit	weathersit
10	temp	temp
11	atemp	atemp
12	hum	hum
13	windspeed	windspeed
14	casual	casual
15	registered	registered
16	cnt	cnt

Relationship search ledger

Method / columns	Status / reason	Screened / verified rows
exact copy · instant	verified no relationship	0 / 731
exact copy · season	verified no relationship	0 / 731
exact copy · yr	verified no relationship	0 / 731
exact copy · mnth	verified no relationship	0 / 731
exact copy · holiday	verified no relationship	0 / 731
exact copy · weekday	verified no relationship	0 / 731
exact copy · workingday	verified no relationship	0 / 731
exact copy · weathersit	verified no relationship	0 / 731
exact copy · temp	verified no relationship	0 / 731
exact copy · atemp	verified no relationship	0 / 731
exact copy · hum	verified no relationship	0 / 731
exact copy · windspeed	verified no relationship	0 / 731

Method / columns	Status / reason	Screened / verified rows
exact copy · casual	verified no relationship	0 / 731
exact copy · registered	verified no relationship	0 / 731
affine identity · instant	verified no relationship	0 / 731
affine identity · season	blocked · insufficient support	0 / 0
affine identity · yr	blocked · insufficient support	0 / 0
affine identity · mnth	verified no relationship	0 / 731
affine identity · holiday	blocked · insufficient support	0 / 0
affine identity · weekday	verified no relationship	0 / 731
affine identity · workingday	blocked · insufficient support	0 / 0
affine identity · weathersit	blocked · insufficient support	0 / 0
affine identity · temp	verified no relationship	0 / 731
affine identity · atemp	verified no relationship	0 / 731
affine identity · hum	verified no relationship	0 / 731
affine identity · windspeed	verified no relationship	0 / 731
affine identity · casual	verified no relationship	0 / 731
affine identity · registered	verified no relationship	0 / 731
pair sum · instant, season	screened no candidate	512 / 0
pair sum · instant, yr	screened no candidate	512 / 0
pair sum · instant, mnth	screened no candidate	512 / 0
pair sum · instant, holiday	screened no candidate	512 / 0
pair sum · instant, weekday	screened no candidate	512 / 0
pair sum · instant, workingday	screened no candidate	512 / 0
pair sum · instant, weathersit	screened no candidate	512 / 0
pair sum · instant, temp	screened no candidate	512 / 0

Method / columns	Status / reason	Screened / verified rows
pair sum · instant, atemp	screened no candidate	512 / 0
pair sum · instant, hum	screened no candidate	512 / 0
pair sum · instant, windspeed	screened no candidate	512 / 0
pair sum · instant, casual	screened no candidate	512 / 0
pair sum · instant, registered	screened no candidate	512 / 0
pair sum · season, yr	screened no candidate	512 / 0
pair sum · season, mnth	screened no candidate	512 / 0
pair sum · season, holiday	screened no candidate	512 / 0
pair sum · season, weekday	screened no candidate	512 / 0
pair sum · season, workingday	screened no candidate	512 / 0
pair sum · season, weathersit	screened no candidate	512 / 0
pair sum · season, temp	screened no candidate	512 / 0
pair sum · season, atemp	screened no candidate	512 / 0
pair sum · season, hum	screened no candidate	512 / 0
pair sum · season, windspeed	screened no candidate	512 / 0
pair sum · season, casual	screened no candidate	512 / 0
pair sum · season, registered	screened no candidate	512 / 0
pair sum · yr, mnth	screened no candidate	512 / 0
pair sum · yr, holiday	screened no candidate	512 / 0
pair sum · yr, weekday	screened no candidate	512 / 0
pair sum · yr, workingday	screened no candidate	512 / 0
pair sum · yr, weathersit	screened no candidate	512 / 0
pair sum · yr, temp	screened no candidate	512 / 0
pair sum · yr, atemp	screened no candidate	512 / 0

Method / columns	Status / reason	Screened / verified rows
pair sum · yr, hum	screened no candidate	512 / 0
pair sum · yr, windspeed	screened no candidate	512 / 0
pair sum · yr, casual	screened no candidate	512 / 0
pair sum · yr, registered	screened no candidate	512 / 0
pair sum · mnth, holiday	screened no candidate	512 / 0
pair sum · mnth, weekday	screened no candidate	512 / 0
pair sum · mnth, workingday	screened no candidate	512 / 0
pair sum · mnth, weathersit	screened no candidate	512 / 0
pair sum · mnth, temp	screened no candidate	512 / 0
pair sum · mnth, atemp	screened no candidate	512 / 0
pair sum · mnth, hum	screened no candidate	512 / 0
pair sum · mnth, windspeed	screened no candidate	512 / 0
pair sum · mnth, casual	screened no candidate	512 / 0
pair sum · mnth, registered	screened no candidate	512 / 0
pair sum · holiday, weekday	screened no candidate	512 / 0
pair sum · holiday, workingday	screened no candidate	512 / 0
pair sum · holiday, weathersit	screened no candidate	512 / 0
pair sum · holiday, temp	screened no candidate	512 / 0
pair sum · holiday, atemp	screened no candidate	512 / 0
pair sum · holiday, hum	screened no candidate	512 / 0
pair sum · holiday, windspeed	screened no candidate	512 / 0
pair sum · holiday, casual	screened no candidate	512 / 0
pair sum · holiday, registered	screened no candidate	512 / 0
pair sum · weekday, workingday	screened no candidate	512 / 0

Method / columns	Status / reason	Screened / verified rows
pair sum · weekday, weathersit	screened no candidate	512 / 0
pair sum · weekday, temp	screened no candidate	512 / 0
pair sum · weekday, atemp	screened no candidate	512 / 0
pair sum · weekday, hum	screened no candidate	512 / 0
pair sum · weekday, windspeed	screened no candidate	512 / 0
pair sum · weekday, casual	screened no candidate	512 / 0
pair sum · weekday, registered	screened no candidate	512 / 0
pair sum · workingday, weathersit	screened no candidate	512 / 0
pair sum · workingday, temp	screened no candidate	512 / 0
pair sum · workingday, atemp	screened no candidate	512 / 0
pair sum · workingday, hum	screened no candidate	512 / 0
pair sum · workingday, windspeed	screened no candidate	512 / 0
pair sum · workingday, casual	screened no candidate	512 / 0
pair sum · workingday, registered	screened no candidate	512 / 0
pair sum · weathersit, temp	screened no candidate	512 / 0
pair sum · weathersit, atemp	screened no candidate	512 / 0
pair sum · weathersit, hum	screened no candidate	512 / 0
pair sum · weathersit, windspeed	screened no candidate	512 / 0
pair sum · weathersit, casual	screened no candidate	512 / 0
pair sum · weathersit, registered	screened no candidate	512 / 0
pair sum · temp, atemp	screened no candidate	512 / 0
pair sum · temp, hum	screened no candidate	512 / 0
pair sum · temp, windspeed	screened no candidate	512 / 0
pair sum · temp, casual	screened no candidate	512 / 0

Method / columns	Status / reason	Screened / verified rows
pair sum · temp, registered	screened no candidate	512 / 0
pair sum · atemp, hum	screened no candidate	512 / 0
pair sum · atemp, windspeed	screened no candidate	512 / 0
pair sum · atemp, casual	screened no candidate	512 / 0
pair sum · atemp, registered	screened no candidate	512 / 0
pair sum · hum, windspeed	screened no candidate	512 / 0
pair sum · hum, casual	screened no candidate	512 / 0
pair sum · hum, registered	screened no candidate	512 / 0
pair sum · windspeed, casual	screened no candidate	512 / 0
pair sum · windspeed, registered	screened no candidate	512 / 0
pair sum · casual, registered	verified relationship	512 / 731

Histogram count table

Lower	Upper	Count
22	642.85714	7
642.85714	1263.7143	27
1263.7143	1884.5714	53
1884.5714	2505.4286	57
2505.4286	3126.2857	37
3126.2857	3747.1429	65
3747.1429	4368	95
4368	4988.8571	101
4988.8571	5609.7143	78
5609.7143	6230.5714	51

Lower	Upper	Count
6230.5714	6851.4286	48
6851.4286	7472.2857	64
7472.2857	8093.1429	38
8093.1429	8714	10

left closed, right open; final bin includes maximum

Grid alignment evidence

Step	Status	Aligned / finite share
1.0	completed	731 / 100
0.1	completed	731 / 100
0.01	completed	731 / 100
0.001	completed	731 / 100

Feature numerical evidence

Feature	Finite summary	IQR evidence
instant · 731 distinct	Finite 731; min 1; median 366; max 731	0
dteday · 731 distinct	Nonnumeric or unavailable	0
season · 4 distinct	Finite 731; min 1; median 3; max 4	0
yr · 2 distinct	Finite 731; min 0; median 1; max 1	0
mnth · 12 distinct	Finite 731; min 1; median 7; max 12	0
holiday · 2 distinct	Finite 731; min 0; median 0; max 1	Unavailable · The interquartile range is zero
weekday · 7 distinct	Finite 731; min 0; median 3; max 6	0
workingday · 2 distinct	Finite 731; min 0; median 1; max 1	0
weathersit · 3 distinct	Finite 731; min 1; median 1; max 3	0

Feature	Finite summary	IQR evidence
temp · 499 distinct	Finite 731; min 0.05913; median 0.498333; max 0.861667	0
atemp · 690 distinct	Finite 731; min 0.07907; median 0.486733; max 0.840896	0
hum · 595 distinct	Finite 731; min 0; median 0.626667; max 0.9725	2
windspeed · 650 distinct	Finite 731; min 0.022392; median 0.180975; max 0.507463	13
casual · 606 distinct	Finite 731; min 2; median 713; max 3410	44
registered · 679 distinct	Finite 731; min 20; median 3662; max 6946	0

Evidence references

Evidence ID	Population / denominator	Method / measurements
schema.0	parsed records / 731	deterministic; /parsing/header_mapping, /profile/row_count, /profile/column_count
missingness.1	all parsed cells / 11696	deterministic; /profile/missing_cells, /profile/missing_rate, /profile/missing_feature_row_rate
column_variation.2	all parsed columns / 16	deterministic; /profile/columns
categorical_cardinality.3	nonnumeric parsed columns / 1	deterministic; /profile/columns
feature_missingness.4	parsed feature cells / 10965	deterministic; /profile/missing_feature_cells, /profile/missing_feature_cell_rate, /profile/missing_feature_row_rate
exact_duplicates.5	all parsed rows / 731	deterministic; /profile/duplicate_rows, /profile/duplicate_group_count, /profile/rows_in_duplicate_groups
numeric_summary.6	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/0/numeric_summary, /profile/columns/0/finite_count
numeric_outliers.7	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/0/outlier_count, /profile/columns/0/outlier_rate
numeric_summary.8	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/2/numeric_summary, /profile/columns/2/finite_count
numeric_outliers.9	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/2/outlier_count, /profile/columns/2/outlier_rate

Evidence ID	Population / denominator	Method / measurements
numeric_summary.10	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/3/numeric_summary, /profile/columns/3/finite_count
numeric_outliers.11	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/3/outlier_count, /profile/columns/3/outlier_rate
numeric_summary.12	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/4/numeric_summary, /profile/columns/4/finite_count
numeric_outliers.13	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/4/outlier_count, /profile/columns/4/outlier_rate
numeric_summary.14	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/5/numeric_summary, /profile/columns/5/finite_count
numeric_summary.15	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/6/numeric_summary, /profile/columns/6/finite_count
numeric_outliers.16	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/6/outlier_count, /profile/columns/6/outlier_rate
numeric_summary.17	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/7/numeric_summary, /profile/columns/7/finite_count
numeric_outliers.18	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/7/outlier_count, /profile/columns/7/outlier_rate
numeric_summary.19	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/8/numeric_summary, /profile/columns/8/finite_count
numeric_outliers.20	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/8/outlier_count, /profile/columns/8/outlier_rate
numeric_summary.21	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/9/numeric_summary, /profile/columns/9/finite_count
numeric_outliers.22	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/9/outlier_count, /profile/columns/9/outlier_rate
numeric_summary.23	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/10/numeric_summary, /profile/columns/10/finite_count

Evidence ID	Population / denominator	Method / measurements
numeric_outliers.24	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/10/outlier_count, /profile/columns/10/outlier_rate
numeric_summary.25	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/11/numeric_summary, /profile/columns/11/finite_count
numeric_outliers.26	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/11/outlier_count, /profile/columns/11/outlier_rate
numeric_summary.27	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/12/numeric_summary, /profile/columns/12/finite_count
numeric_outliers.28	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/12/outlier_count, /profile/columns/12/outlier_rate
numeric_summary.29	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/13/numeric_summary, /profile/columns/13/finite_count
numeric_outliers.30	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/13/outlier_count, /profile/columns/13/outlier_rate
numeric_summary.31	finite values; zero/negative/non-finite rates use total rows / 731	Finite-value descriptive statistics; /profile/columns/14/numeric_summary, /profile/columns/14/finite_count
numeric_outliers.32	finite numeric observations / 731	Finite-value 1.5-IQR fences; /profile/columns/14/outlier_count, /profile/columns/14/outlier_rate
regression_target.33	finite targets; coverage uses all parsed rows / 731	finite regression distribution; /profile/regression/target_statistics
regression_sample_std.34	finite targets / 731	deterministic; /profile/regression/target_statistics/sample_std
regression_extremes.35	finite targets / 731	deterministic; /profile/regression/target_statistics/extremes
regression_bowley_skewness.36	finite targets / 731	deterministic; /profile/regression/target_statistics/bowley_skewness
regression_histogram.37	finite targets / 731	deterministic; /profile/regression/target_statistics/histogram
regression_rounding.38	finite targets / 731	deterministic; /profile/regression/target_statistics/rounding
regression_constraints.39	finite targets / 731	deterministic; /profile/regression/constraints

Evidence ID	Population / denominator	Method / measurements
regression_relationships.40	eligible numerical features; explicitly bounded candidate search / not applicable	bounded arithmetic identities; /profile/regression/search
regression_names.41	feature names; contextual cues only / 15	deterministic; /profile/regression/name_candidates
regression_relationship.42	finite overlapping targets and participating features / 731	pair sum; /profile/regression/relationships/0 Bounded parsed-row references: 1, 2, 3, 4, 5
regression_relationship_group.43	verified relationship support scopes / not applicable	deterministic; /profile/regression/relationship_groups/0
regression_repeated_inputs.44	finite targets grouped by exact feature values / 731	deterministic; /profile/regression/repeated_inputs
regression_availability.45	user-declared feature context / 15	deterministic; /profile/regression/feature_availability
parsing_fidelity.46	bounded source prefix / 3200	bounded source token comparison; /parsing/fidelity_inspection, /parsing_warnings