

# Entity Resolution: Measuring and Reporting Quality

Rebecca C. Steorts

Department of Statistical Science, affiliated faculty in  
Computer Science, Biostatistics and Bioinformatics, the  
information initiative at Duke (iiD) and  
the Social Science Research Institute (SSRI)  
Duke University and U.S. Census Bureau



**Human Rights Data Analysis Group**  
everybody counts.

March 31, 2018

*Entity resolution (record linkage or de-duplication)  
joins multiple data sets removes duplicate entities  
often in the absence of a unique identifier.*

# Motivations

In Syria, we have duplicated information regarding individuals who have died in the conflict.


In the census, we have duplicated information of individuals that fill out census forms every 10 years.

Goal: Estimation of the sample size and associated standard errors.




AARIAN MARSHALL TRANSPORTATION 05.11.17 8:30 AM

**BAD NEWS FOR EVERYONE! THE 2020 CENSUS IS ALREADY IN TROUBLE**

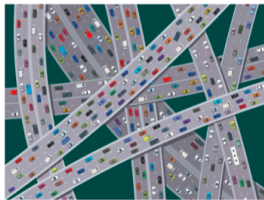


GETTY IMAGES

# A graph with no edges

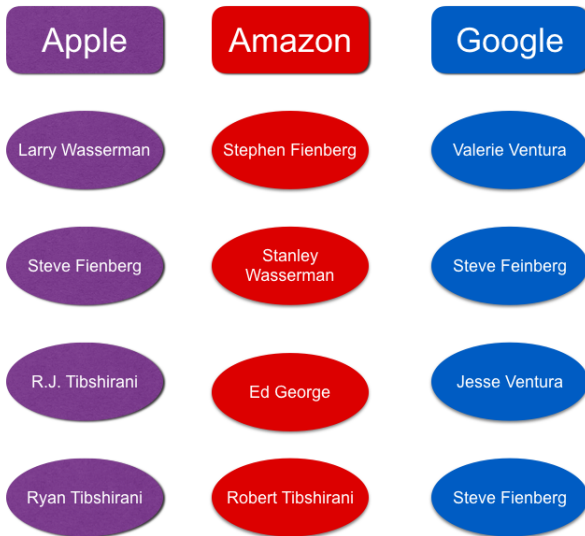

# The record linkage graph

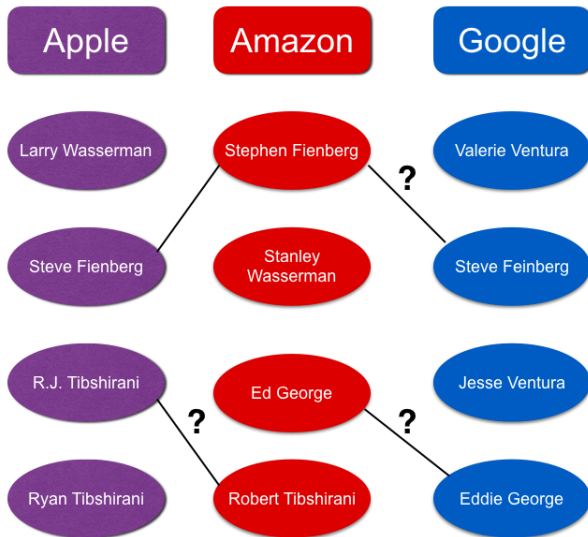


# The node of Larry Wasserman



Larry Wasserman


# The node of Larry Wasserman



Larry Wasserman

1014 Murray Hill Avenue  
Pittsburgh, PA 15217  
412-361-3146

# The record linkage graph

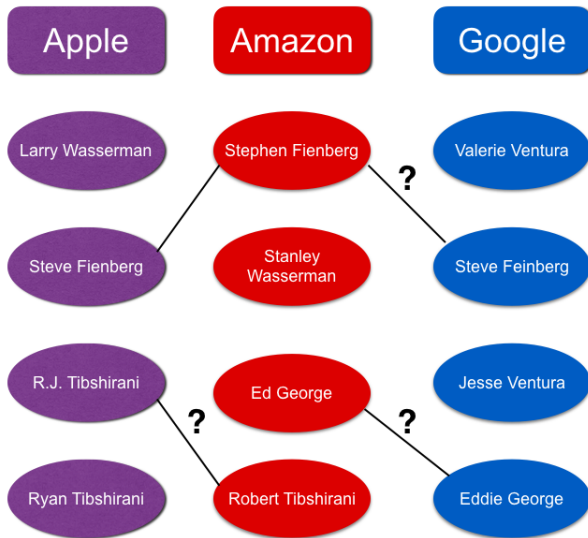



# Who's the real Steve Fienberg?



Steve Feinberg

240 Collins Drive  
Pittsburgh, PA  
50-54  
412-793-3313

# Who's the real Steve Fienberg?

Steve Feinberg


240 Collins Drive  
Pittsburgh, PA  
50-54  
412-793-3313

Stephen Fienberg

537 N Neville Street  
Pittsburgh, PA 15213  
65+  
412-683-5599

These are clearly not the *same* Steve Fienberg!

# Syrian Civil War

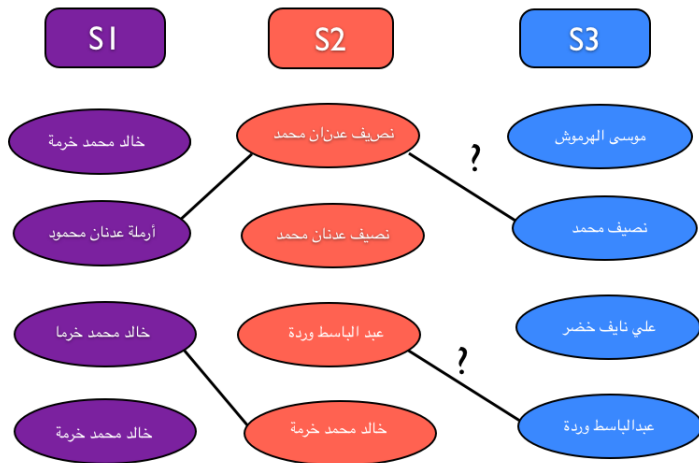

# Entity Resolution

*Why is entity resolution difficult?*

# Goals of Entity Resolution

Suppose that we have a total of  $M$  records in  $D$  data sets.

- ① We seek models that are much less than  $O(M^2)$  (quadratic).
- ② We seek models that are reliable, accurate, fit the data well, and account for the uncertainty of the model.

# Goals of Entity Resolution

Suppose that we have a total of  $M$  records in  $D$  data sets.

- ① We seek models that are much less than  $O(M^2)$  (quadratic).
- ② We seek models that are reliable, accurate, fit the data well, and account for the uncertainty of the model.

These two goals fundamentally go against one another, making record linkage a very challenging problem.

# Goals of Entity Resolution

Suppose that we have a total of  $M$  records in  $D$  data sets.

- ① We seek models that are much less than  $O(M^2)$  (quadratic).
- ② We seek models that are reliable, accurate, fit the data well, and account for the uncertainty of the model.

These two goals fundamentally go against one another, making record linkage a very challenging problem.

Depending on the motivating goal of a record linkage task, we approach it using either 1 or 2.

# Terminology

- ① De-duplication
- ② Record linkage
- ③ Blocking



# De-duplication




# De-duplication

Much of the literature can be grouped into the case of de-duplication.

Common examples from both academia and industry are the following:

logistic regression, random forests, support vector machines, Bayesian adaptive regression trees, and locality sensitive hashing.


# The record linkage graph

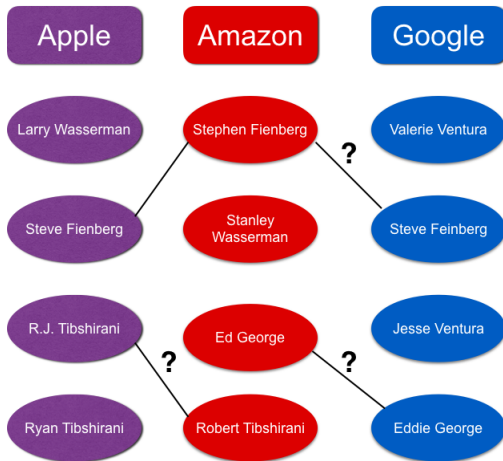

Here, we call this record linkage, since we look at the record linkage uncertainty of the entire graphical structure.

# Blocking

Often one performs blocking due to the fact that record linkage problems require a quadratic number of comparisons.

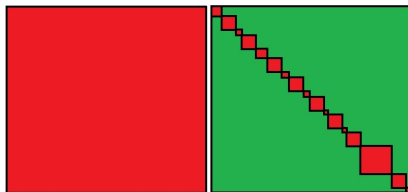

**Figure:** All-to-all record comparisons (left) versus partitioning records into blocks and comparing records only within each partition (right).

We will assume some method of blocking is embedded within a record linkage procedure.

# Blocking

The most common method used for blocking is typically

- ① deterministic blocking method
- ② probabilistic blocking method

Examples include blocking on features (deterministic) or probabilistic types such as locality sensitive hashing.

See Christen (2012); Steorts, Ventura, Sadinle, Fienberg (2014); Chen, Shrivastava, Steorts (2017).

# Common Methods for Entity Resolution

- Match on a unique identifier if it exists.
- Perform exact matching.
- Perform a likelihood ratio or hypothesis test.

[Newcombe (1959), Fellegi and Sunter (1969)].

# Unique Identifier

Suppose that each feature has a unique identifier that we are sure is accurate, like social security number.

Then we can unique match records based on the unique identifier.

Problems occur this unique identifier is missing or has noise in it, etc.

# Exact Matching

In exact matching, we compare all features. We decide if the record is a match if they agree on all features. Otherwise, we decide the record is a non-match.



Steve Feinberg



Stephen Fienberg

240 Collins Drive  
Pittsburgh, PA  
50-54  
412-793-3313

537 N Neville Street  
Pittsburgh, PA 15213  
65+  
412-683-5599

Why would this method be bad for evaluation purposes?




# Fellegi and Sunter Method

- Newcombe (1959), Fellegi and Sunter (1969): two databases, all-to-all comparison of records.
- Neyman Pearson hypothesis test with a threshold  $t$ .
- If record  $i$  and  $j$  are above  $t$ , then we have a match.
- Otherwise, a non-match.

# Fellegi and Sunter Method

- Computationally intractable.
- Transitivity not preserved.
- If 1 matches 2, and 2 matches 3, then 1 does NOT necessarily match 3.

Major limitations and major flaws of this method!



# Evaluation Metrics

How do we evaluate performance of a particular record linkage method?

# Evaluation Metrics

- 1 Recall
- 2 Precision
- 3 Reduction Ratio
- 4 Estimated Sample Size
- 5 Standard Error of Estimated Sample Size
- 6 Run Time
- 7 Robustness to Tuning Parameters
- 8 Do Supervised Methods Overfit the Data

# Evaluation Metrics

- 1 Pairs of data can be linked in both the handmatched training data (which we refer to as “truth”) and under the estimated linked data. We refer to this situation as true positives (TP).
- 2 Pairs of data can be linked under the truth but not linked under the estimate, which are called false negatives (FN).
- 3 Pairs of data can be not linked under the truth but linked under the estimate, which are called false positives (FP).
- 4 Pairs of data can be not linked under the truth and also not linked under the estimate, which we refer to as true negatives (TN).

# Recall, Precision, Reduction Ratio

$$\text{Recall} = \frac{TP}{TP + FN} = 1 - FNR.$$

# Recall, Precision, Reduction Ratio

$$\text{Recall} = \frac{TP}{TP + FN} = 1 - FNR.$$

$$\text{Precision} = \frac{TP}{TP + FP} = 1 - FPR.$$

# Recall, Precision, Reduction Ratio

$$\text{Recall} = \frac{TP}{TP + FN} = 1 - FNR.$$

$$\text{Precision} = \frac{TP}{TP + FP} = 1 - FPR.$$

Reduction ratio (RR) measures the relative reduction of the comparison space from the de-duplication or hashing technique.

See Christen (2012), Steorts, Ventura, Sadinle, Fienberg (2014) for a formal definition.



# Other Evaluation Metrics

- 1 Estimated Sample Size
  - 2 Standard Error of Estimated Sample Size
  - 3 Run Time
  - 4 Robustness to Tuning Parameters
  - 5 Do Supervised Methods Overfit the Data
- 
- 1 The estimated sample size and standard error must be defined for each method, but this is not difficult to do in practice.
  - 2 Any method can be evaluated also for the run time, so one can gauge computationally costs.
  - 3 Robustness of tuning parameters should be explored from a Bayesian and a frequentist perspective.
  - 4 It's also essential to make sure that supervised methods do not overfit the data (see Steorts (2015)).

# RLdata500 dataset

Let's look at an example on data that is available from the Record Linkage package in R, where we compare many different methods according to the evaluation metrics that we have laid out.

We will first describe the data set and then compare the following methods in R:

- ① blink
- ② logistic regression
- ③ random forests
- ④ Bayesian adaptive regression trees

## RLdata500 dataset

|   | fname_c1 | fname_c2 | lname_c1 | lname_c2 | by   | bm | bd |
|---|----------|----------|----------|----------|------|----|----|
| 1 | CARSTEN  | <NA>     | MEIER    | <NA>     | 1949 | 7  | 22 |
| 2 | GERD     | <NA>     | BAUER    | <NA>     | 1968 | 7  | 27 |
| 3 | ROBERT   | <NA>     | HARTMANN | <NA>     | 1930 | 4  | 30 |
| 4 | STEFAN   | <NA>     | WOLFF    | <NA>     | 1957 | 9  | 2  |
| 5 | RALF     | <NA>     | KRUEGER  | <NA>     | 1966 | 1  | 13 |
| 6 | JUERGEN  | <NA>     | FRANKE   | <NA>     | 1929 | 7  | 4  |

The RLdata500 data set consists of 500 records with 10 percent duplication.

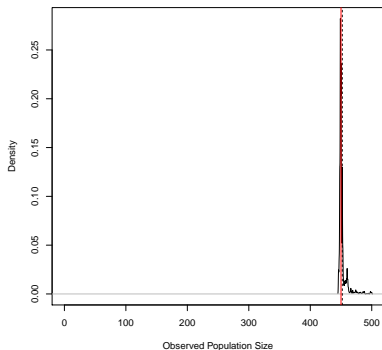


Figure: Posterior density for  $N$  in simulation study. The FNR and FPR: 0.04 and 0.02.




Figure: Shared MPMMS graphical representation of simulation study. Only makes one false positive set.

| Procedure                          | FNR  | FDR  |
|------------------------------------|------|------|
| blink (Steorts (2015))             | 0.02 | 0.08 |
| Exact Matching                     | 1    | 0    |
| Near-Twin                          | 1    | 0    |
| BART (10% training)                | 0.10 | 0.16 |
| BART (20% training)                | 0.07 | 0.11 |
| BART (50% training)                | 0.03 | 0.04 |
| BART (full data)                   | 0.02 | 0    |
| Random Forests (10% training)      | 0.05 | 0.15 |
| Random Forests (20% training)      | 0.04 | 0.09 |
| Random Forests (50% training)      | 0.02 | 0.06 |
| Random Forests (full data)         | 0.04 | 0.06 |
| Logistic Regression (10% training) | 0.09 | 0.16 |
| Logistic Regression (20% training) | 0.06 | 0.07 |
| Logistic Regression (50% training) | 0.02 | 0.01 |
| Logistic Regression (full data)    | 0.02 | 0    |

**Table:** False negative rate (FNR) and false discovery rate (FDR) for the proposed EB methodology and five other record linkage methods. For the supervised methods, we run 100 iterations of each one and average these such that overfitting is not occurring.

# Robustness

How do we make sure a method is robust?

For a semi-supervised method, we want to make sure that it's robust to different choices of the training/test data and any tuning parameter(s).

For probabilistic and Bayesian methods, we want to make sure these methods are robust to choices of hyper-parameters and/or tuning parameters.

Robustness, computational time complexity, and sensitivity analysis can be further explored in Steorts (2015) and Steorts, Hall, Fienberg (2016).

# What Record Linkage Needs

- ① Workshops and Forums
- ② Open Source Software
- ③ Reproducibility and Fairness
- ④ Evaluation Metrics and Comparisons
- ⑤ Transparency
- ⑥ Ethical Use of Data
- ⑦ Proper Privacy Protections of Sensitive Data

## Some Key Papers

- 1 Christen (2012); Steorts, Ventura, Sadinle, Fienberg (2016) [Fair Comparisons]
- 2 Sadinle (2014), Steorts, Hall, Fienberg (2016) [Fair Comparisons]
- 3 Vatsalan, Christen, O'Keefe, Verykios (2014) [Evaluations of Record Linkage and Privacy]
- 4 Victoria Stodden and David Dunson [Reproducibility and Fairness]
- 5 Chen, Shrivastava, Steorts (2018) [Reproducibility, Fairness, and Evaluations]
- 6 David Banks, Megan Price, Patrick Ball [Ethical Use of Data with respect to Human Rights]



# This Short Course

- ① An Introduction to Entity Resolution (Just Completed)
- ② An Introduction to Blocking (Demos)
- ③ An Introduction to Locality Sensitive Hashing (Demos)
- ④ Unique Entity Estimation Applied to the Syrian Conflict
- ⑤ Bayesian Approaches to Graphical Entity Resolution (Demos)

<https://resteorts.github.io/record-linkage-tutorial/>

Thank you! Questions?

Contact: [beka@stat.duke.edu](mailto:beka@stat.duke.edu)