
1. 针对任意网页,调研其不同方式请求,至少包括 get、post 请求,写出或截图其请求及相应数据包


南开大学教育在线的"站内搜索"的请求方式为 post 请求



#### 数据包如下:

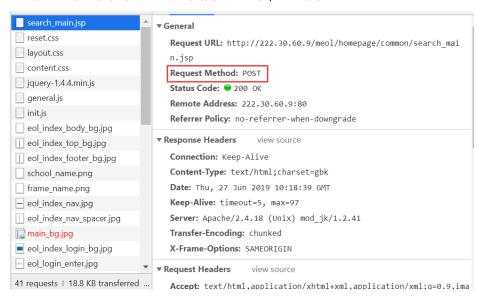

### GET 请求

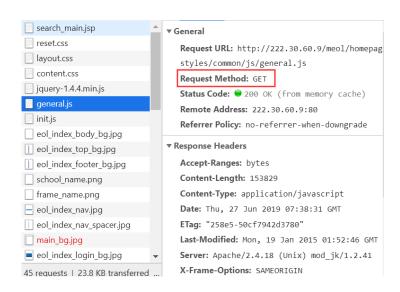

#### 数据包:

```
Name
                 × Headers Preview Response Timing
                   1 var qswhU2GB = ["D2BB", "B6A1", "8140", "C6DF", "8141", "8142", "8143",
search_main.
reset.css
                     var qswhSpell = ["a", 45217, "ai", 45219, "an", 45232, "ang", 45241, "a
                   3
layout.css
                     function UrlEncode(str) {
                   5
content.css
                         var i, c, ret = "", strSpecial = "!\"#$%%'()*+,/:;<=>?@[\]^`{|}~%";
                   6
                         for (i = 0; i < str.length; i++) {
jquery-1.4.4..
                   7
                   8
                             if (str.charCodeAt(i) >= 0x4e00) {
general.js
                  9
                                 c = qswhU2GB[str.charCodeAt(i) - 0x4e00];
                                 ret += "%" + c.slice(0, 2) + "%" + c.slice(-2);
                  10
init.js
                             } else {
                  11
eol_index_bo
                  13
                                 c = str.charAt(i);
                                 if (c == " ")
eol_index_to.
                  14
                                     ret += "+";
                  15
eol_index_fo.
                                 else if (strSpecial.indexOf(c) != -1)
                  16
                                    ret += "%" + str.charCodeAt(i).toString(16);
                  17
school_name
                  18
                                 else
frame_name.
                  19
                                     ret += c;
                  20
                             }
eol_index_na
                  21
eol_index_na
                  22
                         return ret;
                  23 }
main_bg.jpg
                  24
■ eol_index_lo. ▼
                  25
```

2. 针对任意网页,使用 Jquery, 能够出发某一事件,写出至少三条语句,截图响应前后不同的状态。

## 响应前



```
var items=$("form")
var inp=$("input")[5]
inp.value="物理"
items[0].submit()
```

# 响应后

