Drupal 8 Руководство пользователя



Drupal 8 Руководство пользователя

Аннотация

This guide was written mainly for people with minimal knowledge of the Drupal content management system. The topics will help them become skilled at installing, administering, site building, and/or maintaining the content of a Drupal-based website. The guide is also aimed at people who already have some experience with a current or past version of Drupal, and want to expand the range of their skills and knowledge or update them to the current version.

Содержание

i. Предисловие vi
i.1. Copyright vi
i.2. Аудитория и Цель vi
i.3. Структура vii
i.4. Сообщение об ошибке viii
i.5. Условные обозначения Руководства ix
i.6. Основной сценарий xii
1. Основы Drupal 1
1.1. Основы: Drupal как Система Управления Сайтом (CMS) 1
1.2. Основы: Модули 3
1.3. Основы: Темы оформления 4
1.4. Основы: Дистрибутивы 5
1.5. Основы: Типы данных 6
1.6. Связанные темы 7
1.7. Основы: Проект Drupal 7
1.8. Концепция: Лицензирование Drupal 9
2. Проектирование сайта 11
2.1. Concept: Regions in a Theme 11
2.2. Проектирование макетов сайта 12
2.3. Основы: Сущности контента и Поля 14
2.4. Основы: Модульный Контент 17
2.5. Проектирование структуры контента 18
2.6. Concept: Editorial Workflow 21
2.7. Concept: User Interface, Configuration, and Content translation 22
3. Установка Drupal 25
3.1. Concept: Server Requirements 25
3.2. Concept: Additional Tools 26
3.3. Concept: Methods for Downloading and Installing the Core Software 29
3.4. Подготовка в установке 31
3.5. Using Composer to Download and Update Files 32
3.6. Загрузка Drupal вручную 35
3.7. Running the Interactive Installer 36
4. Основные настройки сайта 43
4.1. Concept: Administrative Overview 43
4.2. Editing Basic Site Information 47
4.3. Installing a Module 49
4.4. Uninstalling Unused Modules 50
4.5. Configuring User Account Settings 53
4.6. Configuring the Theme 56
5. Основные настройки страниц 60
5.1. Concept: Paths, Aliases, and URLs 60
5.2. Создане элемента содержания 61
5.3. Предпосылки сайта 61
5.4. Editing a Content Item 63
5.5. Editing with the In-Place Editor 65
5.6. Настройка главной страницы 67

5.7. Concept: Menu 69
5.8. Adding a Page to the Navigation 70
5.9. Changing the Order of Navigation 73
6. Настрока типов материалов 76
6.1. Adding a Content Type 76
6.2. Deleting a Content Type 81
6.3. Adding Basic Fields to a Content Type 82
6.4. Concept: Reference Fields 87
6.5. Concept: Taxonomy 88
6.6. Setting Up a Taxonomy 89
6.7. Adding a Reference Field 96
6.8. Concept: Forms and Widgets 99
6.9. Changing Content Entry Forms 99
6.10. Concept: View Modes and Formatters 103
6.11. Changing Content Display 104
6.12. Concept: Image Styles 107
6.13. Setting Up an Image Style 108
6.14. Concept: Responsive Image Styles 112
6.15. Concept: Text Formats and Editors 113
6.16. Configuring Text Formats and Editors 114
7. Управление аккаунтами пользователей 116
7.1. Concept: Users, Roles, and Permissions 116
7.2. Concept: The User 1 Account 117
7.3. Creating a Role 118
7.4. Creating a User Account 120
7.5. Assigning Permissions to a Role 123
7.6. Changing a User's Roles 125
7.7. Assigning Authors to Content 127
8. Блоки 131
8.1. Concept: Blocks 131
8.2. Creating A Custom Block 131
8.3. Placing a Block in a Region 133
9. Вывод материалов через Views 137
9.1. Concept: Uses of Views 137
9.2. Concept: The Parts of a View 138
9.3. Creating a Content List View 140
9.4. Duplicating a View 144
9.5. Adding a Block Display to a View 148
10. Создание мультиязычного сайта 152
10.1. Adding a Language 152
10.2. Configuring Content Translation 154
10.3. Translating Content 157
10.4. Translating Configuration 159
11. Расширение функционала и настройка оформления сайта 162
11.1. Finding Modules 162
11.2. Enabling and Disabling Maintenance Mode 166
11.3. Downloading and Installing a Module from *Drupal.org* 169
11.4. Finding Themes 171
11.5. Downloading and Installing a Theme from *Drupal.org* 175

11.6. Manually Downloading Module or Theme Files 179
11.7. Concept: Development Sites 182
11.8. Making a Development Site 183
11.9. Развертывание новых функций сайта 185
11.10. Синхронизация Версий Конфигурации 188
11.11. Управление файлами и конфигурационными редакциями с помощью Git 189
12. Предупреждение и решение проблем 194
12.1. Основы: Кэш 194
12.2. Clearing the Cache 195
12.3. Основы: Резервная копия данных 197
12.4. Concept: Log 199
12.5. Concept: Status Report 200
13. Безопасность и обслуживание сайта 202
13.1. Concept: Cron 202
13.2. Configuring Cron Maintenance Tasks 202
13.3. Concept: Security and Regular Updates 205
13.4. Keeping Track of Updates 206
13.5. Updating the Core Software 207
13.6. Updating a Module 209
13.7. Updating a Theme 212
14. Заключение 215
14.1. Connecting with the Community 215
14.2. Getting Support 217
14.3. Learning More 218
Словарь терминов 220
Предметный указатель 226
A. Дополнения 237
A.1. Guide-Wide Attributions 237

Предисловие

i.1. Copyright

This guide was written by contributors to the Drupal open-source project. It is copyright 2015-2017 by the individual contributors, and can be used in accordance with the *Creative Commons License, Attribution-ShareAlike 2.0* (CC BY-SA 2.0). Each page in this document (including this one) has an Attributions statement at the bottom, listing the people who contributed to writing and editing that page. See also *Раздел A.1, «Guide-Wide Attributions»* for guide-wide editing, translating, and project management information.

The CC BY-SA license (very similar to the GPL) allows anyone to copy, modify, and redistribute modifications of all or part of this work, as long as the following is complied with:

- You provide appropriate credit (see the license for more information).
- You provide a link to the license.
- You indicate whether changes have been made.
- You distribute your work under the same license as this original.

Attributions

This page was adapted and edited by *Jennifer Hodgdon*, and *Jojy Alphonso* at *Red Crackle*, from *"Documentation copyright and licensing"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

Copyright notice: Copyright 2015-2017 by the individual contributors; see *Раздел i.1, «Copyright»* for details. Licensed under *CC BY-SA 2.0*.

i.2. Аудитория и Цель

Это руководство написано для людей с минимальными знаниями о Drupal и системах управления контентом. Темы помогут им получить навыки установки, настройки, стротильства стуктуры сайта, и модерации контента в Drupal сайтах. Руководство также нацелено на людей кто уже имел опыт работы с текущей или предыдущими версиями Drupal и расширяет набор их навыков и знаний или обновляет знания для текущей версии Drupal.

Это руководство предполагает что вы решили изучать и использовать Drupal. Если вам неоходимо изучить больше перед началом, посмотрите *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*.

В зависимости от цели для который вы изучаете Drupal, вам потребуются некоторый набор знаний для понимания этого руководства: базовые навыки работы в Интернете и знания как применить найденные в Интернете вещи. Например, в разделе об установке Drupal на веб сервер предполагается, что вы имеете хостинг и знаете как перенести файлы на него. Также, в разделе об управление материала сайта предполагается что вы можете войти на сайт и заполнить веб формы.

После прочтения этого руководства, вы сможете:

- Спланировать архетектуру Drupal сайта
- Собрать сайт так как вам нужно
- Настраивать и управлять своим сайтом
- Понимать документацию и записи в блога для тем, которые не раскрыты в Руководстве, чтобы расширять свои знания и умения
- Присоединиться к мировому сообществу Drupal

Авторы

Оригинал написан *Jennifer Hodgdon*.

Переведено *Абраменко Иван*.

i.3. Структура

Это руководство содержит серии тем, каждая из которых покрывает определенную задачу (как сделать что-то) или основы (базовые знания, терминология). Темы по основам начинаются с "Основы:", тогда как темы по Задачам содержат в название конкретную задачу, например "Редактирование основных настроек сайта".

Темы сгруппированны в Главы в логическом порядке, основы и задачи чередуются так что основы представлены перед относящимися к ним задачами и задачи строятся одна на другой. Если воспользоваться этим правильно, вы будете с воодушевлением читать все руководство в представленном порядке, возможно пропуская темы которые вам не так интересны или вы уже знаете информацию об этой теме. Попробуйте выполнить задачи на вашем сайта, которые вы читаете в руководстве, большинстро людей лучше понимают как это работает практически, чем читая статьи.

Если вам нравится больше другой подход, то вы можете также использовать Предметный указатель для перехода в нужный раздел к теме которую вы хотите изучить, прежде чем читать все руководство целиком. Для облегчения этого подхода, каждая тема имеет список необходимых знаний которые были бы необходимы для понимания темы (с ссылками на темы, которые необходимо знать); необходимые задачи которые указаны в списке *требования к сайту* (вещи которые вам необходимо будет сделать чтобы настроить или привести ваш сайт в порядок для выполнения задачи). Также, большинство тем имеют разделы в конце, где вы можете найти связанную информацию или задачу для лучше понимания и продолжить изучение.

Вы также можете обратиться к разделу *Словарь терминов*, где собраны короткие определенеия большого числа терминов, которые используются в этом руководстве, с ссылками на темы имеющие более детальное объяснение.

Авторы

Написано *Jennifer Hodgdon*.

Переведено *Абраменко Иван*.

i.4. Сообщение об ошибке

Goal

Вы можете сообщить о проблемах в этом руководстве, таких как:

- Информация не достоверная или не следует лучшим практикам
- Некоторые пункты не работают в описание действий
- Скриншоты или текст не совпадает с тем что вы видите на своем сайте
- Неясное описание
- Места где таблица или скриншот помогут разъяснить описание
- Несуразность в использование терминов
- Отсутсвующие необходимые знания в описание темы
- Грамматические, пунктационный или речевые ошибки, а также ошибки форматирования текста
- Поломанные ссылки

Шаги

1. Сделайте пометку о теме или темах с текущей проблемой, которую вы нашли.
2. Авторизируйтесь на сайте *Drupal.org* (вам необходимо будет создать новый аккаунт если у нас еще нет аккаунта).
3. Зайти на сайт *User Guide issues страница на Drupal.org*.
4. Проверьте что проблема которую вы нашли еще не описана в другом тикете:
   - Если там только несколько открытых тикетов, просмотрите *Summary* колонку, может быть решение для проблемы уже найдено. Вы также можете прочитать некоторые тикеты подробно, для этого нажмите на ссылку в колонке *Summary*.
   - Если открытый список открытых тикетов длинный, введите ключевое слово относящиеся к проблемы, которую вы нашли или заголовок темы, где проблема случилась, в *Search for* поле и нажмите *Search*,чтобы сократить список тикетов.

Тогда также просмотрите описания или прочитайте тикеты, может быть там есть тикет похожий на вашу проблему.

5. Если вы уверены, что о вашей проблеме еще никто не сообщил, тогда нажмите *Create a new issue* и заполните сообщение об ошибке как описано ниже:

Имя поля	**Объяснение**	**Примерное значение**
Titlte	Короткое описание проблемы, которую вы обнаружили	Инструкции "Добавление Типа материала" не работает
Category	Тип тикета, который будет создан	Bug report
Version	Версия руководства в котором вы нашли ошибку	8.x-0.x-dev
Issue summary	Подробности как воспроизвести ошибку	В теме "Добавление Типа Материала", на шаге 3, когда я нажимаю *Save*, я получаю следующее сообщение об ошибке: ...

6. Прочитайте еще раз *Title* и *Issue summary*, который вы ввели и проверьте что следующая информация включена в ваше сообщение:
   - Полное описание проблемы
   - Имя темы или тем где есть эта ошибка
   - Язык на котором вы читали Руководство (если это не английский)
   - Если вы читали Руководство на сайте, ссылку на страницу или страницы где возникает проблема
7. Нажмите *Save* чтобы создать тикет.
8. Проверьте еще раз тикет через нескольк дней. Если разработчики проекта спросили разъяснений, ответьте в комментариях к этому тикету.

Авторы

Написано *Jennifer Hodgdon*.

Переведено *Абраменко Иван*.

i.5. Условные обозначения Руководства

Предположения и предпологаемые требования

Это руководство имеет следующие предположения и предполагаемые требования:

- Это руководство организовано с помощью тем; смотрите *Раздел i.3, «Структура»* для больше информации. Многие темы включают свои *Prerequisite knowledge* разделы, в которых есть списки остальных тем для которых необходимые знания располагаются в порядке нужным для понимания темы, которую вы читаете. Некоторые общие знания, которые не описаны в руководстве также предполагаются; смотрите *Раздел i.2, «Аудитория и Цель»* для большей информации.
- Во многих задачах есть *Site prerequisites*, которые также являются задачами необходимые к выполнению на вашем сайте, перед тем как вы сможете выполнить задачу в читаемой теме.
- Специфичные требования к сайту относятся к сценарию использованному во многих темах этого руководства для создания сайта ярмарки города N (смотрите *Раздел i.6, «Основной сценарий»* для большей информации). Вы можете адаптировать таски к своему собственному сценарию, но тогда вы должны помнить, что изменения которые вы сделали должны соответсвовать требованиям к сайту в других задачах.
- Для всех задач после *Раздел 3.7, «Running the Interactive Installer»*, также есть неявное требование: вы должны установить Drupal, и авторизироваться под пользователем имеющим достаточные права для выполнения задачи (таким пользователем является аккаунт созданный при установке сайта, который автоматически имеет все права).
- Если вы прочитали все темы в последовательном порядке и выполнили все шаги из задач , то у вас должны быть все знания и настройки сайта, которые вы получили из предыдущих тем.
- Это руководство показывает как выполнить задачи используя пользовательский интерфейс, и где возможно используя Drush утилиту командной строки (смотрите *Раздел 3.2, «Concept: Additional Tools»*). Вы можете свободно использовать различные утилиты командной строки, такие как Drupal Console (если вы нашли подходящую команду) или используйте пользовательский интерфейс для начала.

Обозначения в тексте

Следующие обозначения использованы в тексте этого руководства:

- URL *example.com* означает базовый URL вашего сайта. Смотрите раздел Навигации ниже для больше информации про внутренние URL вашего сайта.
- Текст который вам следуует искать в пользовательском интерфейсе выделен *italics*, например: Нажмите *Save configuration*. Это касается только текста пользовательского интерфейчас который находится в Drupal и не является текстом, который мы вводим в предыдущей теме. Например, в теме о редактирование, вы можете увидеть такие инструкции: Нажмите *Edit* в строчке О Ярмарке (*Edit* будет выделено курсивом, однако О Ярмарке не будет выделено, потому что страница О Ярмарке была создана в предыдущей теме).
- URL, имена файлов и новые введенные термины также будут выделены *italics*.
- Текст который вам следует ввести в командной строке будет написан моноширином шрифтом, например:

```
drush cr
```


- На протяжение руководства, слово *directory* будет всегда использоваться для указания на папки с файлами (которые некоторые пользователи называют *folders*).

Навигация

Чтобы сделать большинство задач этого руководства, вам будет необходимы указания на одну или несколько страниц в пользовательском интерфейсе вашего сайта. Вы можете посмотреть похожие указания в инструктциях (это будет иметь больше смыслы после того как вы установите Drupal):

В *Manage* меню администратора, перейдите на *Structure* > *Taxonomy* (*admin/structure/taxonomy*).


Иструкции по переходам на подобие вышеуказанных предполагают что вы установили Toolbar модуль из ядра Drupal и этот пример означает что у вас есть верхнее меню администратора на вашем сайте, вы сможете выбрать *Manage*, чтобы раскрыть меню, затем нажмите *Structure*, и выберите *Taxonomy* и в после этого, вы перейдете на страницу с URL *http://example.com/admin/structure/taxonomy* (если адрес вашего сайта *http://example.com*).



Еще один пример:

В *Manage* меню администратора, перейдите на *Configuration* > *System* > *Basic site settings* (*admin/config/system/site-information*).

В этом примере, после нажатия на *Manage* и *Configuration*, вы сможете найти *System* раздел на странице и затем нажать *Basic site settings*. После чего вы попадёте на: *http://example.com/admin/config/system/site-information*.

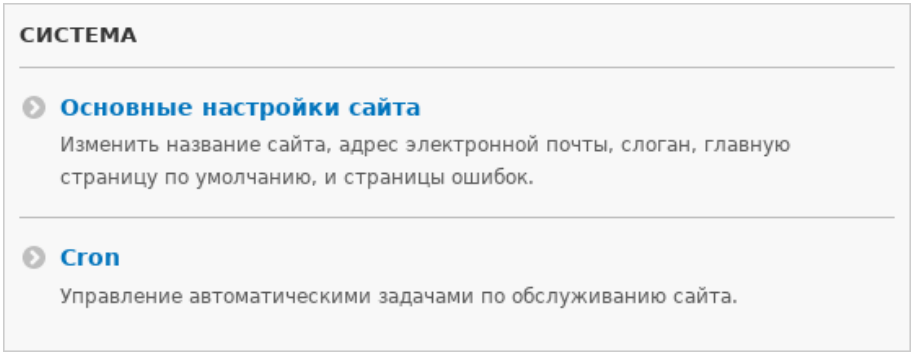

Еще одно замечание: если вы используете стандартную тему администрирования Seven, многие кнопки "Добавить" в пользовательском интерфейсе отображаются со знаком плюс + на них. Например, на admin/content, кнопка Добавить новый контент появляется как + *Add new content*. Однако, это зависит от темы оформления и не

является частью текста кнопки (например, это не обязательно появится на всех устройствах), так что в этом руководстве, мы не заостряем внимание на знаке плюса на кнопках.

Заполнение форм

Многие задачи в этом руководстве включают шаги где вам нужно заполнить форму. В большинстве случаев, скриншоты этих форм будут добавлены в текст, также как и таблицы со значениями, которые вы должны ввести в каждое поле формы. Например, вы можете увидет таблицу которая начинается как показано ниже, в качестве объяснения формы основных настроек сайта, формы которую вы можете увидеть если перейдете на *Configuration* > *System* > *Site information* (*admin/config/system/site-information*):

Имя поля	Объяснение	Примерное значение
Настройки сайта > Имя сайта	Название вашего сайта	Ярмарка города N

Используя эту таблицу, вы можете найти поле *Site name* в форме раздела с названием *Site details* и ввести имя вашего сайта в этом поле. Как пример имя сайта "Ярмарка города N" предложенное в таблице, которое относится к сценарию создания сайта городскоя ярмарки, который мы будет создавать в различных темах этого руководства (смотрите *Раздел i.6, «Основной сценарий»* для больше информации). Также заметьте что в некоторых формах, вы должны будете нажать на заголовок раздела (как например в *Site details*), чтобы раскрыть раздел и найти поле, которое в нем содержится.

Авторы

Написано/отредактировано *Jennifer Hodgdon*.

Переведено *Абраменко Иван*.

i.6. Основной сценарий

Когда читаете это руководство, необходимо держать проект сайт в голове. Следующий сценарий проекта описывает контекст и указывает на примеры этого руководства:

Вы создадите сайт для городской ярмарки. Сайт должен отображать информацию о размещение и часах работы ярмарки и страницу О Ярмарке с истории основания ярмарки. Также потребуется список продавцов. Продавцы должны иметь возможность редактировать их информацию (включая логотип и фотографии), и публиковать рецепты. Посетители сайт должны иметь возможность просматривать рецепты и искать рецепты используя ингредиенты, которые они могут купить на ярмарке.

Некоторые посетители сайта говорят на другом языке, так что главная страница и страницы продавцов должен быть переведены.

Когда вы читаете руководство и пробуете выполнить задачи, которые в нем изложены, вы можете следовать за сценарием точно; вы можете также изменить задачу под набор ваших целей. Если вы хотите следовать за сценарием точно, вам потребуются некоторые изображения файлов, которые находятся в папке *assets* файла *.zip* или *.tgz*, которые доступны для загрузке на странице *User Guide project page*.

Авторы

Написано *Jennifer Hodgdon*.

Переведено *Абраменко Иван*.

Глава 1. Основы Drupal

1.1. Основы: Drupal как Система Управления Сайтом (CMS)

Что такое Система Управления Сайтом?

Система управления сайтом (CMS) это программный инструмент, который позволяет пользователям добавлять, публиковать, редактировать и удалять контент на сайте, испульзуя браузер на телефоне, планшете, ноутбуке или компьютере. Обычно CMS написан на скриптовом языке и эти скрипты запускаются на компьютере, где есть база данных и веб сервер. Контент и настройки для сайта обычно хроняться в базе данных и для каждой запроса страницы, который идет на веб сервер, скрипты собирают информацию из базы данных и дополнительных файлов (JavaScript файлы, CSS файлы, файлы изображений и так далее, которые являются частью CMS или были загружены), чтобы построить страницы сайта.

Комбинация из операционной системы, на которой CMS работает, скриптовый язык на котором CMS написана, база данных в которой храниться информация и веб сервер на котором работают скрипты извлекающие информацию и возвращие эту информацию браузеру посетителя сайта, все это известно как *стэк*, на котором CMS работает. Наиболее часто используемая комбинация операционая систма на Linux, веб сервер Apache, база данных MySQL и скриптовый язык PHP, все это известно как *LAMP стэк*.

Что такое Drupal?

Drupal это гибка CMS основанная на LAMP стэке, с модульной структурой, позволяющей добавлять и удалять функционал через установку и удаление *модулей* и позволяющий сменить внешний вид сайта через установку и удаление *тем оформления*. Основа Drupal, известная как ядро Drupal, содержит PHP скрипты необходимые для запуска основного функционала CMS, нескольких дополнительных модулей и тем, и множества JavaScript, CSS и файлов изображений. Множество дополнительных модулей и тем оформления вы можете загрузить с сайта *Drupal.org*.

Drupal также может быть запущен на других технологических стэках:

- Операционная система может быть Windows или Mac OS вместо Linux.
- Веб сервер может быть Nginx или IIS вместо Apache.
- База данных может быть PostgreSQL или SQLite вместо MySQL или другая MySQL-совместимая замена, такая как MariaDB или Percona.

Операционные системы, веб серверы и базы данных могут также быть другими, но скрипты которые использует Drupal, написанные на PHP, будут одиними и те же.

Какие причины использовать Drupal?

Когда для создания сайта у вас есть выбор использования одной из множеств существующих CMS или сервисов, разрабатывания собственной CMS или создания сайта без использования CMS. Здесь есть несколько причит, которым вы можете выбрать Drupal:

- Создание простого, маленького сайта со статичными HTML страницами не так сложно и вы можете легко получить простой сайт очень быстро. Настройка сайта в CMS главным образом требует больше времени для установки, но это приносит выгоду в онлайн редактирование (проще для менее опытных модераторов контента), унификацию (чем больше сайт, тем сложнее поменять одну и ту жу информацию на множестве статичных HTML страницах) и возможности более сложного функционал требующего базы данных.
- Некоторые CMS являются узконаправленными, например, вы можете создать блог или группу для организации на сайте. Drupal напротив - это CMS для общих целей. Если вы строите узконаправленный сайт, вы можете выбрать специализированную CMS, но, если ваш сайт требует более глобальных вещей, возможно вам лучше использовать CMS для общих целей, нежели пытаться адаптировать узконаправленную CMS.
- Создание свой CMS кажется привлекательным. Но использование CMS для общих целей, такой как Drupal для начала работы идея получше, потому что базовый функционал CMS (такой как аккаунты пользователй и упраление контентом) вобрал в себя тысячи часов разработки, включая многие года тестирования пользователями, правку багов и улучшения безопасности.
- Некоторые CMS дорогие, чтобы покупать их лицензию. Некоторые имеют бесплатную версию, но с ограничениями, которые не позволяются вам вносить изменения и расширять функционал. Вы можете предпочесть использовать CMS (как Drupal), которая имеет меньше ограничений в использование и разработке и поддерживается сообществом по всему миру. Смотрите также *Раздел 1.7, «Основы: Проект Drupal»* для большей информации.

Связанные темы

- *Раздел 1.2, «Основы: Модули»*
- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 1.4, «Основы: Дистрибутивы»*
- *Раздел 1.7, «Основы: Проект Drupal»*

Дополнительные материалы

- *The Drupal overview*

- *Drupal.org page "FAQ" (Frequently Asked Questions)*
- *Drupal.org page "Case Studies"*
- *Wikipedia page "Content management systems"*
- *Wikipedia page "Modular design"*

Авторы

Написано и отредактировано *Kristof van Tomme* в *Pronovix*, *Jennifer Hodgdon*, и *Michael Lenahan* в *erdfisch*.

Переведено *Абраменко Иван*

1.2. Основы: Модули

Необходимые знания

Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»

Что такое модуль?

Модуль - это набор PHP, JavaScript и CSS файлов, которые расширяют возможности сайта и добавляют функциональность. Вы можете включить возможности и функиональность сайта с помощью *установки* модуля, и вы можете отключить их с помощью *удаления* модуля; перед удалением, вам может потребоваться удалить данные и конфигурации, связанные с возможностями и функиональностью. Каждый установленный модуль добавляет время, необходимое для создания страниц на вашем сайте, так что это хорошая идея удалять модули, которые не нужны.

Ядро Drupal предоставляет модули для:

- Управления учетными записями пользователей (модуль ядра User)
- Управления основным содержимым (модуль ядра Node) и полями (модуль Field и Field UI; есть также другие модули ядра, обеспечивающие различные типы полей Email, Phone и т.д.)
- Управления меню (модуль ядра Menu UI)
- Создания списков, таблиц и блоков из существующего контента (модуль ядра Views и Views UI)

Вы можете загрузить *дополнительные модули* на *Drupal.org Module Downloads*, или создать собственный *пользовательский модуль*.

Похожие темы

- *Раздел 1.3, «Основы: Темы оформления»*

- *Раздел 1.4, «Основы: Дистрибутивы»*
- *Раздел 4.4, «Uninstalling Unused Modules»*
- *Раздел 11.1, «Finding Modules»*
- *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»*
- *Раздел 13.3, «Concept: Security and Regular Updates»*
- *Раздел 13.6, «Updating a Module»*

Дополнительные ресурсы

Drupal.org страница документации сообщества "Module developer's guide"

Авторы

Написано *Jennifer Hodgdon*

Переведено *Исмайлов Михаил*.

1.3. Основы: Темы оформления

Необходимые знания

Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»

Что такое Тема оформления?

Тема оформления - это набор файлов, которые определяют внешний вид вашего сайта. Ядро Drupal и модули, которые работают на вашем сайте отвечают за *контент* (включая HTML текст и остальные данные хранимые в базе данных, загруженные изображения, и другие прикрепленные файлы) отображающийся на страницах вашего сайта. Тема оформления определяет как HTML и CSS стили сайта обернут ваш контент.

Ядро Drupal предоставляет несколько базовых темы вместе с установочными файлами. Эти темы упорно разрабатывались сообществом в течении нескольких лет и будут хорошим выбором для создания первого сайта и знакомства как Drupal работает.

Drupal - это широко распространенная CMS, так что рынок сторонних тем оформления для бесплатных и платных тем растет очень быстро.

Если никакая из сторонних тем оформления вам не подходит под ваши нужды, вам будет необходимо создать свою пользовательскую тему оформления. Пользовательская тема оформления может быть просто одним CSS файлом, который стилизует макеты предоставляемые Drupal и его модулями. Руководство по созданию

пользовательских тем оформления для Drupal 8 вы можете найти на этой странице *Drupal.org community documentation page "Theming Drupal"*.

Связанные темы

- *Раздел 11.4, «Finding Themes»*
- *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»*
- *Раздел 1.2, «Основы: Модули»*

Дополнительные материалы

Drupal.org community documentation page "Theming Drupal"

Авторы

Написано и отредактировано *John Grubb* и *Jennifer Hodgdon*

Переведено *Абраменко Иван*.

1.4. Основы: Дистрибутивы

Необходимые знания

- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 1.2, «Основы: Модули»*
- *Раздел 1.3, «Основы: Темы оформления»*

Что такое дистрибутив?

Дистрибутивы предоставляют фунции и возможности для сайта под определенные задачи в виде собранных вместе ядра Drupal, модулей, тем оформления и предопределенных настроек. Дистрибутив делает возможным настройку сложного сайта под определенные задачи в несколько шагов через установку и настройку отдельных элементов сайта.

Дистрибутивы разделяются на два типа:

Полнофункциональные дистрибутивы

> Полнофункциональный дистрибутив - это проект предоставляющий готовое решение для настройки сайта под определенные задачи, в таких сферах как обучение, сайт-визитка, интернет магазин, сайт государственной организации,

некоммерческая организация, медиа, социальные сети и так далее. Например, вы можете использовать существующий дистрибутив для сайта городской ярмарки, чтобы сделать свой собственный сайт или вы можете поделиться своими настройками сайта городской ярмарки как дистрибутивом, чтобы остальные смогли создать подобный сайт.

Остальные дистрибутивы

Дистрибутивы могут также помочь быстро начать разработку для программистов и создателей сайтов.

Связанные темы

Раздел 14.1, «Connecting with the Community»

Дополнительные материалы

Drupal.org Drupal Distribution Downloads

Авторы

Адаптировано и отредактировано *Diána Lakatos* и *Antje Lorch*, из *"Distributions"* и *"Download & Extend — Distributions"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

Переведено *Иван Абраменко*

1.5. Основы: Типы данных

Какие существуют типы данных?

Данные и информация на Вашей странице делятся на четыре типа, которые редактируются, переводятся и хранятся по-разному. Эти четыре типа:

Контент

Информация(текст, изображения и т.д.)предназначена для посетителей сайта. Этот тип информации, как правило, не изменяется, но он может редактироваться.

Конфигурация

Информация о Вашей странице – не основное содержимое, но она не изменяется и может использоваться для определения того, как Ваш сайт ведет себя или отображается. Она иногда отображает на сайте посетителей, но заботится о небольших частях текста(такие, как метки поля, название Вашего сайта и т.д.) быстрее, чем о больших частях, о которых Вы обычно думаете, как о содержимом.

Состояние(state)

Инофрмация временного характера о текущем состоянии Вашего сайта, такая как время, когда задачи крона были запущены в последний раз.

Сессия

Иноформация о взаимодействии отдельных посетителей сайта на странице, такая как: вошли ли они в систему и о их куки. Технически, это подтип иноформации о положении, так как это также временно.

1.6. Связанные темы

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 13.1, «Concept: Cron»*
- *Раздел 7.1, «Concept: Users, Roles, and Permissions»*
- *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»*

Авторы

Написано/отредактировано *Jennifer Hodgdon* from *"Overview of Configuration (vs. other types of information)"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

Переведено *Аземша Дарья*.

1.7. Основы: Проект Drupal

Необходимые знания

Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»

Что такое бесплатное программное обеспечение с открытым исходным кодом?

Бесплатное программное обеспечение с открытым исходным кодом это программное обеспечение, которое разрабатывает сообщество людей и выпускает под некоммерческой лицензией, и чей *исходный код* (программные файлы, составляющие программное обеспечение) в открытом доступе. За дополнительной информацией о некоммерческой лицензии, используемой Drupal, смотрите *Раздел 1.8, «Концепция: Лицензирование Drupal»*.

Что такое проект Drupal?

Проект Drupal это проект Open Source, который нацелен на разработку программного обеспечения системы управления содержимым ядра так же, как и на дополнительные модули, вспомогательные тематики, переводы, документацию, и специально направленные распределения. Люди, которые вкладывают время и деньги в проект Drupal приезжают со всего мира, и являются разносторонним сообществом, которое объединяется для общей цели.

Сообщество охватывает более мелкие группы, которые выполняют различные задания, такие, как разработка определенного программного обеспечения, связанного с Drupal, написание документации, обеспечение безопасности программного обеспечения Drupal, переводы программного обеспечения Drupal на определённый язык, использование Drupal для конкретной цели, и собираются вместе, чтобы встретиться лично на определенной территории.

Побробнее о том, как Вы можете связаться и коммуницировать с мировым сообществом, смотрите *Раздел 14.1, «Connecting with the Community»* и *Раздел 14.2, «Getting Support»*.

Что такое Ассоциация Drupal?

Ассоциация Drupal это некоммерческая организация посвящённая поддержке проекта и сообщества Drupal. Главными функциями являются:

- Проведение крупных съездов по всему миру
- Поддержка *Drupal.org* веб-сайтов и серверов, над которыми идёт работа
- Продвижение Drupal в качестве веб-платформы
- Поддержка Drupal-обучения и подготовки
- Предоставление пособия сообществу Drupal для поддержки цели
- Повышение фондов для этих целей

Связанные темы

- *Раздел 1.8, «Концепция: Лицензирование Drupal»*
- *Раздел 13.3, «Concept: Security and Regular Updates»*
- *Раздел 14.1, «Connecting with the Community»*
- *Раздел 14.2, «Getting Support»*

Дополнительные ресурсы

- *Drupal project governance*
- *Drupal Code of Conduct*

Авторы

Написано *Jennifer Hodgdon*

Переведено *https://www.drupal.org/u/karina-masalova* [Карина Масалова].

1.8. Концепция: Лицензирование Drupal

Необходимые знания

Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»

Что такое Лицензирование Drupal?

Drupal и все вложенные файлы, расположенные на *Drupal.org* , лицензированы Универсальной Общедоступной Лицензией, версии 2 или более поздней. Это значит, что Вы можете бесплатно загрузить, повторно использовать, изменить, и распространить файлы, которые являются частью проекта на *Drupal.org* в соответствии с условиями GPL версии 2 или 3. Вы также можете запустить основное программное обеспечение в сочетании с любым кодом с лицензией, которая совместима с версиями 2 и 3.

Участники Drupal должны следовать данным методическим рекомендациям:

- Все файлы (PHP, JavaScript, изображения, Flash, и т.д.), которые являются частью проекта на *Drupal.org* должны быть лицензированы версией 2 или более поздней.
- Все участники Drupal сохраняют авторские права на свой код, но соглашаются выпустить его на ту же лицензию, что и Drupal.
- Модули и темы Drupal являются производной работой Drupal. Если Вы распространяете их, Вы должны делать это в соответствии с условиями GPL версии 2 или более поздней.
- Все материалы на *Drupal.org* принадлежат его первоначальным вкладчикам, и лицензированы the Creative Commons Attribution-ShareAlike license версии 2.0.
- Пример кода на *Drupal.org* также доступен под лицензией GPL версии 2 или более поздней.

Связанные темы

Раздел 14.1, «Connecting with the Community»

Дополнительные ресурсы

- *Drupal.org page on "Licensing"*
- *"Drupal 8 LICENSE.txt" page on api.drupal.org*

- *GNU General Public License, version 2*
- *GNU General Public License, version 3*
- *Creative Commons Attribution-ShareAlike license 2.0.*
- *"Legal Group" on groups.drupal.org*

Авторы

Написано *Diana Lakatos* на *Pronovix* из *"Licensing"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

Переведено *https://www.drupal.org/u/karina-masalova* [Карина Масалова].

Глава 2. Проектирование сайта

2.1. Concept: Regions in a Theme


Prerequisite knowledge

Раздел 1.3, «Основы: Темы оформления»

What is a region?

Besides its primary content, a web page contains other content such as site branding (site name, slogan, and logo), navigation aids (menus, links, and icons), formatted text, and images. Each theme provides a set of named regions, such as *Header*, *Content*, and *Sidebar*, where site builders may choose to place their content.

The available regions depend on the theme design. Only the Content region, which contains the primary content, is required; others are optional. The core Bartik theme provides the regions highlighted in the following image.

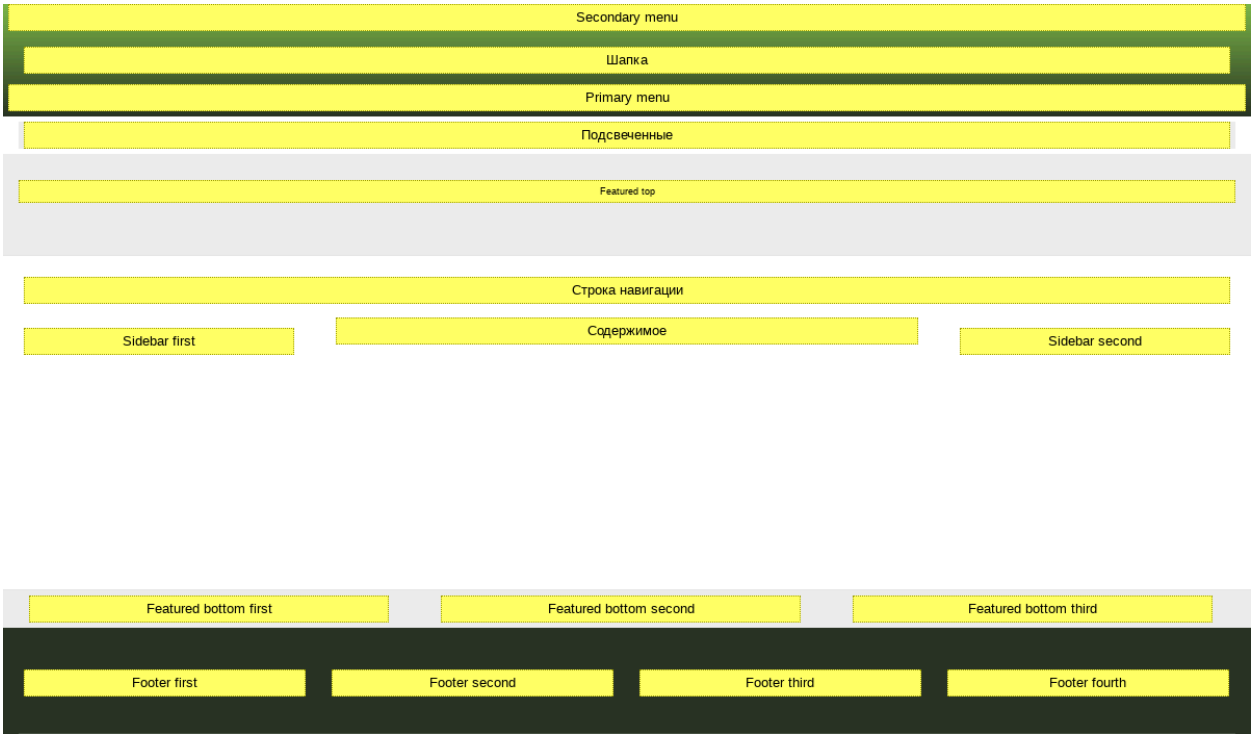

Related topics

- *Раздел 8.1, «Concept: Blocks»*

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 8.3, «Placing a Block in a Region»*

Additional resources

- *Drupal.org community documentation page "Assigning content to regions"*

Attributions

Written and edited by *John MacDonald*, and *Michael Lenahan* at *erdfisch*.

2.2. Проектирование макетов сайта

Цель

Планировать навигацию и макет сайта для мобильных и десктопных браузеров.

Необходимые знания

- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 2.1, «Concept: Regions in a Theme»*
- *Раздел i.6, «Основной сценарий»*

Шаги

Это отличная идея планировать макеты сайта перед тем как начать создание сайта и добавление контента; однако, ваш план может нуждаться в пересмотре также перед вы начали реализовывать сайт или после того как вы уже создали сайт с некоторым неопубликованным контентом, исходя из бюджета вашего проекта или отзыва клиента.

1. Создайте список информации, которую ваш сайт должен представлять посетителям. В сценарии городской ярмарки, это может включать:
   - Адрес ярмарки, с планом проезда и картой
   - Часы и дни работы ярмарки
   - История ярмарки
   - Список продавцов
   - Подробности о каждом из продавцов
   - Поиск по списку рецептов

- Подробности о каждом рецепте
- Список с недавно добавленными рецептами

2. Решить какая информация должна быть на следующих страница или типах страниц на сайте:

   Информация которая должна быть на всех страницах

   Адрес, часы, недавно добавленные рецепты

   Страницы с подробностью о продавце

   Информация о каждом продавце на своей странице

   Страницы с подробностью о рецептах

   Подробности о каждом рецепте на каждой странице

   Главная страница

   Адрес, карта, схема проезда и часы работы

   Страница о ярмарке

   История ярмарке

   Страница со списком продавцов

   Список продавцов с ссылками на страницу продавца с подробностями

   Страница со списком рецептов

   Поиск по списку рецептов с ссылками на страницу рецепта с подробностями

3. Решить какая информация наиболее важная на каждой странице. Посетители сайта, использующие мобильные устройства или небольшое разрешение экрана, будут часто видет только контент, который представлен первым и они могут не проскролить вниз и не посмотреть всю информацию на странице.
4. Решить какие из вышеуказанных страниц должны появится в главном меню сайта. Например, главное меню может состоять из ссылок Главная, О Ярмарке, Продавцы и Рецепты.
5. Сделайте грубый набросок дизацна для каждой страницы, показывая, как это может выглядить просматривая сайт на маленьком экране, таком как телефон, также как и на больших экранах, как например на настольном комьютере. Полагая что большинство посетителей сайта будут использовать маленькие экраны, будет хорошей идеей начать с макета для телефонов и убедиться, что эти пользователи смогут найти информацию, которая им нужна без слишком большой прокрутки.

   В процессе создания планов для ваших страниц, вы возможно найдете, что вам необходимо и пересмотрите ваш план для информации, которая должна быть на страницах. Например, вы можете решить, что адрес, часы работы и недавно добавленные рецепты должны быть вынесены в правую колонку сайта на всех страницах, когда сайт просматривается с настольного компьютера. С другой стороны, вы можете решить, что мобильные браузеры, вы могли бы поместить

адрес и часы работы в более коротком формате в начале каждой странице, однако только отображение списка последних рецептов перенести вниз главной страниц.

Улучшите понимание темы

Раздел 2.5, «Проектирование структуры контента»

Видео

Planning Your Site Layout

Planning Your Site Layout

Авторы

Написано *Jennifer Hodgdon*

Переведено *Иван Абраменко*.

2.3. Основы: Сущности контента и Поля

Необходимые знания

- *Раздел 1.5, «Основы: Типы данных»*
- *Раздел 1.2, «Основы: Модули»*

Что такое контент сущность?

Контент сущность (или обычно просто, *сущность*) - это элементы данных контента, который может состоять из тектса, HMTL текста, изображений, прикрепленных файлов и других типов данных, которые созданы для отображения посетителям сайта. Сущности контента могут быть определены через ядро Drupal или модули.

Контет сущности сгрупированы в *типы сущностей*, которые созданы для одинаковых целей и отображаются в одинаковом направление на сайте. Большинство типов сущностей также разделены на *подтипы сущностей*, которые являются отделением типа сущности и позволяет создавать различные вариации в которых сущности используются и выводятся. Ниже таблаци с некоторыми общими типами контента:

Тип Сущности	Подтип сущности	Определяющий модуль	Главное использование
Элемент контента	Тип контента	Node модуль	Контент создан для вывода в главных регионах сайта на страницах сайта

Тип Сущности	Подтип сущности	Определяющий модуль	Главное использование
	Пример: На сайте примера городской ярмарке, вы можете увидеть контент типы для Основных страниц, страниц продавцов и страниц рецептов.		
Комментарий	Тип комментария	Comment модуль	Комментарий добавляются к контент сущностям (обычно к Материалам)
	Пример: На сайте блоге, записи в блоге могут содеражать комментарии. Они не нужны на сайте примере городской ярмарке.		
Профиль пользователя	(нет)	User модуль	Данные относящиеся к пользователю с аккаунтом (с возможностью авторизации) на сайте
	Пример: Каждый сайт имеет по меньше мере базовый пользователь поьзователя с именем пользователя и емайлом; сайты социальных сетей могут имет более сложные пользовательские профили с гораздо большим количеством информации.		
Пользовательский блок	Тип Блока	Custom Block модуль	Текст и изображения маленькими кусочками, отображены в шапке сайта, подвале или колонках
	Примре: На сайте городской ярмарке, вы можете положить часы работы и адрес в блок в колонке.		
Термин таксономии	Словаь таксономии	Taxonomy модуль	Используется для классификации остальных типов контента
	Пример: На сайте примере городской ярмарке, вы можете классифицировать Рецепт материал с помощью словаря таксономии Игридиенты, терминов таксономии, таких как Морковь и Помидоры. На сайте блоге, записи в блог могут быть классифицированны используя словарь Теги и возможно также словаря Категории.		

Тип Сущности	Подтип сущности	Определяющий модуль	Главное использование
Файл	(нет)	File модуль	Изображение или прикрепленный файл, который отслеживается и управляется через сайт, часто прикладываются к другим типам контента
	Привет: На сайте примера городской ярмарке, обе страницы Рецепт и Продавец могут иметь прикрепленные изображения, которые могли бы (через панель администрирования) управляться как сущности Файлов через сайт.		
Контактная форма	Тип формы	Contact модуль	Форма которая позволяет посетителям сайта связаться с владельцем сайта
	Пример: Контактная форма нужна в сайте примера городской ярмарки.		

Что такое поле?

В пределах сущности, данные храняться как отдельные *поля*, каждое из которых содержит один тип данных, такие как форматированный или обычный текст, изображения или другие файлы или даты. Типы полей могут быть определены через ядро Drupal или модули.

Поля могут быть добавлены администратором для подтипа сущности, так что все сущности этого подтипа имеют одинаковый набор доступных полей. Например, Продавец тип материала на сайте городской ярмарке может иметь поля для Имя продавца, логотипа, URL сайта и описания, в то время как *Основная страница* тип материала может иметь только поля для заголовка и текста. Когда вы создаете или редактируете сущности, вы определяете значения для полей в сущносте.

Связанные темы

- *Раздел 2.5, «Проектирование структуры контента»*
- *Раздел 5.2, «Создане элемента содержания»*
- *Раздел 6.1, «Adding a Content Type»*
- *Раздел 6.5, «Concept: Taxonomy»*
- *Раздел 7.1, «Concept: Users, Roles, and Permissions»*
- *Раздел 8.1, «Concept: Blocks»*

Авторы

Написано и отредактировано *Jennifer Hodgdon* и *Grant Dunham*

Переведено *https://www.drupal.org/u/karina-masalova* [Карина Масалова] и *Иван Абраменко*

2.4. Основы: Модульный Контент

Необходимые знания

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 2.2, «Проектирование макетов сайта»*

Что такое модульный контент?

Учитывая, что контент вашего сайта хранится в базе данных, желательно сделать контент *дискретный*, что означает определенные страницы на вашем сайте, не редактируются как целая страница, вместо этого автоматически генерируются из других элементов контента. Например, в сценарии сайта фермерского рынка вы можете создать отдельные элементы контента для рецептов. Если в элементах содержимого рецепта есть поле, в котором отслеживаются ингредиенты, то на вашем сайте может быть составная страница со списком рецептов, позволяющая посетителям искать рецепт, который содержал какой-то конкретный ингредиент, который они купили на рынке.

Небольшие разделы страниц также могут быть сгенерированы как композиты. Например, элементы содержимого рецепта могут иметь поле, которое отслеживает, какой поставщик отправил рецепт (см. *Раздел 6.4, «Concept: Reference Fields»*), при этом сведения о поставщике редактируются в отдельных элементах содержимого поставщика. Это позволит вам сделать следующее на вашем сайте:

- На каждой странице рецепта может быть область, которая отображает некоторую информацию о продавце, который представил рецепт, например, его имя и номер рыночного прилавка.
- На каждой странице поставщика может быть раздел, в котором перечислены рецепты, которые они отправили.

Основная идея заключается в том, что каждый фрагмент информации редактируется только в одном месте. Когда информация о продавце обновляется, все страницы рецептов, отображающие эту информацию о продавце, автоматически обновляются; когда рецепт отправляется поставщиком, он автоматически отображается на странице поставщика. Основной модуль Views - это обычный способ использования модульного контента для создания составных страниц и разделов страниц; см. *Раздел 9.1, «Concept: Uses of Views»* для получения дополнительной информации. Кроме того, *виды отображений* полезны для определение различных способов отображения

каждого элемента контента; см. *Раздел 6.10, «Concept: View Modes and Formatters»* для получения дополнительной информации.

Похожие темы

- *Раздел 2.5, «Проектирование структуры контента»*
- *Раздел 6.1, «Adding a Content Type»*
- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- *Раздел 6.4, «Concept: Reference Fields»*
- *Раздел 6.10, «Concept: View Modes and Formatters»*
- *Раздел 9.1, «Concept: Uses of Views»*

- Авторы *

Написано *Jennifer Hodgdon*

Переведено *Елена Сысоева*.

2.5. Проектирование структуры контента

Цель

Создайте план для структуры контента вашего сайта (какие типы и подтипы сущностей использовать для контента) и какие страницы будут содержать списки материалов.

Необходимые знания

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 2.4, «Основы: Модульный Контент»*
- *Раздел i.6, «Основной сценарий»*

Шаги

1. Мозговой штурь о том какой контент ваш сайт должен отображать, который будет включать контент, который посетители хотели бы найти, также контент, который вы хотели бы показать посетителям. Результат можно описать также как это сделано на этой странице *Раздел i.6, «Основной сценарий»*.
2. Для каждого определенного кусочка контента, определите какой тип сущности лучше всего подходит для этого. Если вы это сделаете, вы будете должны расчитать, где и как контент будет отображаться и редактироваться на сайте. Например, на сайте городской ярмарке, вы можете отобразить часы работы и адрес городской ярмарки в колонке на каждой странице. Для этого контента,

один пользовательский блок подойдет лучше всего. Как другой пример, вы можете решить что страницы которые должны отображать информацию о каждом продавце лучше всего сделать через материалы управляемые ядром Drupal в Node модуле, потому что вы хотите чтобы продавцы имели возможность редактировать свои собственные списки рецептов. Разрешения модуля ядря Node позволяют легко это сделать.

Эти решения не обязательно имеет всегда один ответ; например, вы могли бы решить, что продавцы должны быть профилями пользователей вместо контента, однако если вы сделали, что контент будет связан с определенным аккаунтом пользователя, то вам будет не легко сменить авторство страныцы продавца на другой аккаунт пользователя.

3. Внутри каждой сущности, которую вы определяете, решите, какие разделы в подтипах сущностей имеют место быть. Напримет, на сайте городской ярмарки вы возможно решите, что Материалы должны быть одним типом для обычных страниц (Главная и О нас), другим типом для страниц продавцов и еще одним подтипом для страниц рецептов.
4. Для каждого подтипа сущности определитесь какие вам поля вам нужны. Например, для типи контента Продавец необходимы поля название продавца, путь URL, изображение и описание.
5. Решите какие списки сущностей вам нужны, которые будут занимать целые страницы или меньшие области на странице. Для каждого списка, вы должны будете определить, какие сущности будут отображены в списках. Тогда вы будуте должны решить, какой порядок и с какими параметрами фильтров они должны будут отображены; например, вы можете захотеть дать возможность посетителям сайта искать по ключевым словам, фильтровать список по параметрам или выбирать параметры сортировки. Вы также должны будете решить какая информация из сущностей будет показана, которые могут выводить в дополнение к списку поля определенные в прошлых шагах. Сайт городской ярмарки, например , должен иметь страницу списка рецептов, которая отображает контент типа Рецепт, с возможностью фильтровать по ингредиентам, это означает, что Рецепт тип материала должен иметь поле Ингредиенты.
6. Для каждого определенного поля в каждом подтипе сущности, определите какой тип данных они должны содержать (например простой текст, форматированный текст, дату, файл изображения, и т.д.), и как много значений поля позволяют хранить. Большинство полей имеют одно значение, однако например, Рецепт может содержать и множественные значения например для поля Ингредиенты.
7. Подумайте над полями, которые лучше всего сделать через связи используя термины таксономии: поля которые имею значения выбранные из списка доступных значений. Доступные значения, которые возможно изменить и добавить через некоторое время, лучшие кандидаты для этого. An Например поле Ингредиенты для типа материалов Рецепт.
8. Подумайте какие поля лучше всего сделать через связи к другим сущностям. Например когда продавцы создают рецепты, поле будет нужно чтобы связать тип материал Рецепт и Продавец, который создает рецепт.

Ниже пример структуры для городской ярмарки из нашего сценария:

Тип сущности	Подтип сущности	Примеры	Поля
Элемент контента	Страница	Главная страница, О нас	Заголовок, содержимое
Элемент контента	Продавец	Страница для каждого продавца на рынке	Имя продавца, содержимое, изображение, URL
Элемент контента	Рецепт	Страница для каждого сохраненного рецепта	Имя рецепта, описание, изображение, связь с продавцом, кто создал рецепт, Ингредиент таксономия
Пользовательский блок	(основной)	Копирайт в футоре, Часы работы и адрес в колонке	Нет специальный полей
Термины таксономии	Ингредиенты	Марковь, помидоры и другие ингредиенты в рецептах	Нет специальный полей
Контактная форма	(основной)	Основная контактная форма	Имя, емайл, название, сообщение
Профиль пользователя	(нет)	Не отображается на сайте	Нет специальный полей

И ниже списки которые нужны на сайте:

Страница и основной контент страницы	Тип сущности и подтип	Фильтры/ сортировка/ пагинация	Отображаемые поля
Страница продавца	Элементы контента продавца	Все продавцы, алфавитный, постраничная	Изображение, имя продавца, сокращенное описание
Страница рецептов	Элементы контента рецепта	Фильтр по ингредиентам, алфавитный, постраничная	Изображение, имя рецепта
Недавние рецепты в колонке	Элементы контента рецепта	Список 5 последних рецептов	Изображение, Имя рецепта

Улучши свое понимание

- *Раздел 6.1, «Adding a Content Type»*

- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- *Раздел 6.6, «Setting Up a Taxonomy»*

Связанные темы

Раздел 6.5, «Concept: Taxonomy»

Видео

Planning Your Content Structure

Planning Your Content Structure

Авторы

Написано и отредактировано *Jennifer Hodgdon* и *Grant Dunham*

Переведено *Иван Абраменко*.

2.6. Concept: Editorial Workflow

Prerequisite knowledge

- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 2.3, «Основы: Сущности контента и Поля»*

What is an editorial workflow?

An *editorial workflow* is the process organizations follow to create, review, edit, and publish content. Multiple people in different roles in the organization can be part of the process. For example, content creators could collect information and write content; editors could review, edit, ask for changes, and publish the content once it's ready to be shared with the audience. Later on, content revisions could go through a simple process for small changes, or a more complex process with reviews for larger changes.

What tools are available for managing workflows?

Published/Unpublished status

> The Content item entity type supports marking each content item as either Published or Unpublished. Viewing permissions are separate for published and unpublished content; for example, all site visitors might be able to see published content items, while only content creators and editors can see unpublished content items.

Revision tracking

Some content entity types support revision tracking, meaning that as content is revised, the software stores the older revisions, so that they can be compared or reverted.

Workflows

The core Workflows module lets you define workflow states and transitions, beyond just having content be published or unpublished. The companion core Content Moderation module lets you assign permissions and roles to the workflow transitions. Both can be used with both Content item and Custom block entity types.

Block placement

The Custom block content entity lets you create a custom block and edit it, but only make it visible on the site once it is ready.

Related topics

- *Раздел 5.2, «Создане элемента содержания»*
- *Раздел 5.4, «Editing a Content Item»*
- *Раздел 8.2, «Creating A Custom Block»*
- *Раздел 8.3, «Placing a Block in a Region»*

Attributions

Written and edited by *Diána Lakatos* at *Pronovix*, *Grant Dunham*, and *Jennifer Hodgdon*.

2.7. Concept: User Interface, Configuration, and Content translation

Prerequisite knowledge

- *Раздел 1.5, «Основы: Типы данных»*
- *Раздел 1.2, «Основы: Модули»*
- *Раздел 2.3, «Основы: Сущности контента и Поля»*

What languages does the software support?

The base language for the software that your site runs (core software, modules, and themes) is English. However, using this software you can create a site whose default language is not English, in which case anyone viewing the site should see only that language (assuming that the site is fully translated). You can also use this software to create a multi-lingual site, with a language switcher that site visitors can use to switch to their preferred language. You need

to have the core Language module installed in order to use a language other than English on the site.

What can be translated on your site?

There are three types of information that you can translate, each with its own method for translating:

User interface text

Built-in text present in the core software, modules, and themes. This can be translated from the base English language of the software into the language(s) of your site. Typically, rather than needing to translate this text yourself, you can download translations. You need to have the core Interface Translation module installed in order to translate this text, and the core Update Manager module installed in order to automatically download translations.

Configuration text

Text whose structure and initial values are defined by the core software, modules, and themes, but that you can edit. Examples include the labels for fields in your content types, header text in views, your site name, and the content of automatic email messages that your site sends out. After creating configuration text in the default language of your site, you can translate it into other languages. For default configuration supplied by the core software, modules, and themes, translation is included with the downloads of user interface text translations. You need to have the core Configuration Translation module installed in order to translate this text.

Content text and files

If your site is multilingual, you can configure the content fields on your site to be translatable. After creating content in one language, you can translate it into other languages. Fields can contain textual information or uploaded files, and for each field on each content type, you can configure it to be translatable or non-translatable. You need to have the core Content Translation module installed in order to translate this text.

What information will remain in English on my site?

Even if the default language of your site is not English, you will still see English text on certain administrative pages used to manage configuration. The reason is that when you edit configuration, you are editing the base, untranslated configuration values; translating configuration is a separate operation. For example, if you visit the *Menus* administration page, you will see menu names in English (for the menus that were set up when you installed your site), and if you click an *Edit menu* link, you will be editing the English name and description of the menu. To edit the menu name in a different language, you would need to have the core Configuration Translation module installed, and use the *Translate* link to edit the translated menu information.

Related topics

- *Раздел 10.1, «Adding a Language»*

- *Раздел 10.2, «Configuring Content Translation»*
- *Раздел 10.3, «Translating Content»*
- *Раздел 10.4, «Translating Configuration»*

Attributions

Written by *Jennifer Hodgdon*.

Глава 3. Установка Drupal

3.1. Concept: Server Requirements

What are the requirements for running the core software?

Disk space

The total amount of disk space needed for your site is not a fixed amount, as it depends on your site. The base files for the core software take up about 100 MB on the web server. You will need more space if you install additional modules or themes, and you'll also need space for media, backups, and other files generated by and uploaded to your site. The database also uses disk space, although that is typically not in the same area (and in some cases, not even on the same server) as that used by the site files.

PHP

PHP 7.2 or higher. PHP must be set up with a minimum memory size of 64MB; if you are running multiple modules on your site or using memory-intensive PHP-based command-line tools (such as Composer), considerably more memory than that may be needed.

Certain PHP extensions are also required; the exact list of required PHP extensions depends on how you install the core software and which modules you are using on your site. Generally, hosting service providers have installed all the PHP extensions you will need. If you are self-hosting or running your site on your local computer, you will get error messages during installation if any required PHP extensions are missing, and should be able to install them and continue.

Web server

Apache (Recommended)

: Apache is the most commonly used web server. The core software will work on Apache 2.x hosted on UNIX/Linux, OS X, or Windows that have the Apache mod_rewrite module installed and enabled. The Apache VirtualHost configuration must contain the directive *AllowOverride All* to allow the *.htaccess* file to be used.

PHP Local Server

: You can temporarily run a local demo site on your computer using just PHP, without installing web server software.

Nginx

: Nginx is a commonly used web server that focuses on high concurrency, performance and low memory usage. The core software will work on Nginx 1.1 or greater hosted on UNIX/Linux, OS X, or Windows. The ngx_http_rewrite_module must be installed and enabled.

Hiawatha

Hiawatha is a web server with a strong focus on security. It also aims at being easy to use and lightweight. Research performed by independent researchers proves that Hiawatha offers a performance comparable to other web servers under normal conditions, but much better while under attack. URL Toolkit must be installed and configured to rewrite URLs.

Microsoft IIS

Microsoft IIS is a web server and set of feature extension modules for use with Microsoft Windows. The core software will work with IIS 5, IIS 6, or IIS 7 if PHP is configured correctly. Because clean URLs are required, you may need to use a third party product. For IIS 7, you can use the Microsoft URL Rewrite module or a third party solution.

Database

Use one of the following databases:

- MySQL - 5.5.3 (MariaDB 5.5.20, Percona 5.5.8) or higher with an InnoDB-compatible primary storage engine
- PostgreSQL - 9.1.2 or higher
- SQLite - 3.4.2 or higher. Temporary local demo sites use SQLite, which is distributed as part of PHP and doesn't require installing separate database software.

Additional resources

- *Drupal.org community documentation page "System requirements"*
- *PHP Runtime Configuration (PHP memory limit and other settings)*

Attributions

Adapted by *Karl Kedrovsky*, *Brian Emery*, and *Jennifer Hodgdon* from *"System requirements"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

3.2. Concept: Additional Tools

What tools are available for site builders?

There are several additional tools available that help you create sites faster, more accurately and with less effort.

Drush and Drupal Console

See below for more about command-line tools.

Git

See below for more about version control tools.

Composer

See below for more about Composer.

Devel

The *contributed Devel module* helps with development tasks such as debugging and inspecting code, analyzing database queries, and generating dummy content.

What are command-line tools?

Command-line tools provide an alternative to using the administrative interface for various operations on your site. Many site builders and maintainers have invested the time to install and learn a command-line tool, because:

- Administrative tasks are typically faster and less tedious when performed at the command line than in the user interface.
- You can write scripts that combine site-related commands with other commands on the server, to automate more complicated tasks.
- Command-line tools provide additional functionality not available via the administrative interface; for example, running database queries.

The most popular tools are *Drush* and *Drupal Console*. Drush has been available longer, and has commands for both the core software and contributed modules; this guide documents the Drush commands for many tasks. Drupal Console started as a tool for module programmers, but has a growing list of commands for site builders; this guide does not document Drupal Console commands, but you can look them up in the Drupal Console documentation.

To use these tools, you will need to have command-line terminal access to the server where your website will be hosted, and you will need to install Composer first in order to install either the Drush or Drupal Console tool.

What is a version control system?

A version control system is software that keeps copies of files and revision history in a *repository*, and allows you to add, delete, and update files. For a web site project, revision control software can help you:

- Test locally before deploying files on the live site
- Look at, compare with, and revert to previous versions of files
- Look at the added, changed, or deleted files before you *commit* the changes (update the repository)
- Merge changes from different team members together
- Keep files and configuration synchronized between local and live sites

There are many proprietary and open-source version control systems to choose from; a popular choice is *Git*, which is open-source software that runs on most computer platforms.

Git is a *distributed* version control system that allows you to have one or more copies of your repository, which allows you to commit changes to a copy and then only *push* them to the repository you've designated as *canonical* when you're ready to share them with others. The canonical git repository can be hosted on your local computer or a server at your company, but many software projects and individuals host their Git repositories on the *GitHub* site.

What is Composer used for?

Composer is a tool for managing PHP dependencies, where the developer specifies what version of each external library is needed, and Composer manages the process of downloading and installing the libraries.

The core software is a primary user of Composer, because it makes use of several externally-developed software libraries, which must be downloaded and installed in order for the core software to work. When you install the core software, you either need to download an archive that contains compatible versions of the external libraries, or you need to run Composer to download the external libraries after the initial download. The Drush and Drupal Console command-line tools are also downloaded using Composer.

Some contributed modules also make use of externally-developed software libraries; for example, a Facebook integration module might require Facebook's integration library to be installed for the module to work, and a geographical module might make use of a standard library of geographical functions. To install a module with external dependencies, you will need to run Composer.

What tools are available for module and theme developers?

In addition to the site builder tools mentioned above, the following tools are useful for module and theme developers.

Drupal Console

: *Drupal Console* is a command-line tool that generates boilerplate code and interacts with a Drupal site. It can generate, for example, block or form code, install modules and themes, and create dummy content. Drupal Console makes use of the Symfony Console.

Coder

: *Coder* is a command-line tool that checks if your modules and themes comply with coding standards and other best practices. It can also fix coding standard violations.

Browser debugging tools

: Web browsers such as Firefox and Chrome include tools that allow viewing, editing, debugging, and monitoring CSS, HTML, and JavaScript. You can open the debugging pane or window by right-clicking the mouse in an area of your window, and choosing "Inspect" or "Inspect element".

Related topics

Раздел 3.5, «Using Composer to Download and Update Files»

Additional resources

- *Drupal.org community documentation page "Development tools"*
- *Drupal.org community documentation page "Using Composer with Drupal"*
- *Wikipedia article "Distributed version control"*

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*. Some text adapted from *"Introduction to Git"*, copyright 2000-2019 by the individual contributors to the *Drupal Community Documentation*.

3.3. Concept: Methods for Downloading and Installing the Core Software

Prerequisite knowledge

- *Раздел 3.2, «Concept: Additional Tools»*
- *Раздел 3.1, «Concept: Server Requirements»*
- *Раздел 1.4, «Основы: Дистрибутивы»*

What methods are available for downloading the core software?

Before you can build a site, you will need to first download the core software. Depending on your plans, there are several ways that you can download the core software:

Try a free online demo

: If you are evaluating whether or not to use Drupal to build a site, you can use an online provider to get a demo installation of the core software in 20 minutes or less. See the *Drupal.org page "Try Drupal"*.

Use a one-click installer from your hosting provider

: If you choose to install the core software at your hosting provider, your hosting provider may have specific documentation and/or a one-click install that you can use. See *Drupal.org's list of hosting providers that support Drupal*.

Use a pre-configured environment

: Use a pre-configured environment or virtual machine that contains Drupal and all the required supporting software to install Drupal locally. See the section for your operating system under *Drupal.org's Local server setup guide* for possible options.

Download manually from the web site

If you plan to build a site without add-on modules that have complicated dependencies, you can download the core software, or a distribution that contains the core software and additional modules or themes, from the web site. See *Раздел 3.6, «Загрузка Drupal вручную»* for instructions.

Use Composer

If you plan to use the Drush tool (see *Раздел 3.2, «Concept: Additional Tools»*), or if you are building a site that might use modules with complicated dependencies, you should use Composer to download the core software, because Composer will manage the dependencies properly. If you start your site by downloading manually, however, you can convert to using Composer to manage dependencies later. See *Раздел 3.5, «Using Composer to Download and Update Files»* for downloading and conversion instructions.

What happens when I install the core software?

Installing the core software means setting up some database tables, configuration, and an administrative user account, so that you can build and use your site.

What methods are available for installing the core software?

There are several ways to install the core software:

Behind-the-scenes installer

If you choose to use an online demo or one-click installer from a hosting provider, the core software may be installed for you automatically.

Interactive installer

The core software has an interactive installer that presents you with several on-line forms, and then completes the installation using the information you provide in the forms. See *Раздел 3.4, «Подготовка в установке»* and *Раздел 3.7, «Running the Interactive Installer»*.

Demo site installer

If you download the core software to your local computer, you can quickly create a temporary demo site that uses the built-in web server and SQLite database that are part of PHP. The command to set up a demo site is given at the end of *Раздел 3.6, «Загрузка Drupal вручную»*. In this case, you will not run the interactive installer.

Command-line tool

Command-line tools (see *Раздел 3.2, «Concept: Additional Tools»*) can also be used to perform the installation steps.

Attributions

Written and edited by *Drew Gorton*, *Michael Lenahan* at *erdfisch*, *Jennifer Hodgdon*, and *Jojy Alphonso* at *Red Crackle*.

3.4. Подготовка в установке

Цель

Загрузить основное программное обеспечение, и обработать все необходимые условия.

Необходимые знания

- *Раздел 3.1, «Concept: Server Requirements»*
- *Раздел 3.2, «Concept: Additional Tools»*
- *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*
- Как установить и настроить серверное программное обеспечение (при установке на Ваш личный компьютер)
- Как настроить хостинг для стандартного веб-сайта
- Как создать базу данных

Требования сайта

Серверное программное обеспечение должно быть установлено на компьютер, где вы планируете развернуть свой сайт. Смотрите *Раздел 3.1, «Concept: Server Requirements»*.

В зависимости от того, как Вы планируете загрузить основное программное обеспечение, возможно потребуется сперва установить дополнительные инструменты к программному обеспечению. Смотрите *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»* и *Раздел 3.2, «Concept: Additional Tools»*.

Этапы

1. Выбрать методы загрузки и установки основного программного обеспечения, из перечисленных в *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*. Остальные инструкции относятся к параметрам загрузки Composer и интерактивной программе установке; если Вы выбрали другие опции, программное обеспечение должно быть установлено для Вас.
2. Настройка URL и хостинга для Вашего сайта на сервере. Подтвердите, что хостинг работает, помещая простой HTML-файл в веб-корневой каталог хостинга, и посещая URL для Вашего сайта.
3. Создайте базу данных, вместе с учётной записью пользователя базы данных с полным доступом.
4. Загрузите файлы основного программного обеспечения в корневой католог, используя метод, который Вы выбрали. Смотрите *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»* для ссылок на инструкции.

Расширьте своё понимание

Смотрите *Раздел 3.7, «Running the Interactive Installer»*, чтобы запустить интерактивную программу установки.

Кроме того, Вы можете использовать следующую Drush-команду, из каталога, в который Вы загрузили программное обеспечение, где *DB_NAME*, *DB_USER* и *DB_PASS* являются учебными данными Вашей базы данных:

```
drush site-install standard --db-url='mysql://DB_USER:DB_PASS@localhost/DB_NAME' -
```

Видео

Preparing to Install

Preparing to Install

Дополнительные ресурсы

Drush

Авторы

Написано и отредактировано *Drew Gorton*, *Michael Lenahan* на *erdfisch*, *Jennifer Hodgdon*, и *Jojy Alphonso* на *Red Crackle*.

Переведено *https://www.drupal.org/u/karina-masalova* [Карина Масалова]

3.5. Using Composer to Download and Update Files

Goal

Use Composer to download or update files and dependencies in the core software, or in add-on modules and themes. Skip this topic if you are not using Composer.

Prerequisite knowledge

Раздел 3.2, «Concept: Additional Tools»

Site prerequisites

If you want to use Composer, it must be installed either on a local development server or your live site. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

If you are unable to install the Composer tool on your live server, you can follow the steps in any of the sections below on your local server, and then transfer any updated or added files to your live server. The recommended procedure is to make an archive or zip file of the new and changed directories, transfer the archive to your live server, delete the directories that have changed, and extract the archive. Make sure to check for updates and additions to the following files, in the root of your installation:

- *vendor* directory
- *autoload.php*
- *composer.json*
- *composer.lock*

Using Composer to download the core software

Follow these steps if you have not yet downloaded or installed the core software, and you want to use Composer to download both the core software and its external dependencies:

1. At the command line, change to one level above the directory where you want the software to reside.
2. Enter this command, where *mydir* is the directory you want to create:

   ```
   composer create-project drupal-composer/drupal-project:8.x-dev mydir --no-inter
   ```

3. The latest release of the core software will be downloaded to the *mydir/web* sub-directory; you'll also get some extra tools such as Drush and Drupal Console in the *mydir/vendor* directory.

Converting a previously-downloaded site to use Composer

If you previously downloaded the core software without using Composer, you may find later that you want or need to use Composer to manage and update dependencies. To convert your existing site to using Composer, enter the following commands at the root of your site:

```
composer global require grasmash/composerize-drupal
composer composerize-drupal --composer-root=. --drupal-root=.
```

Note that this will also make modules, themes, and profiles that you previously downloaded without using Composer available to Composer, if they were placed in the *modules/contrib*, *themes/contrib*, and *profiles/contrib* directories. If you placed them in another location, you might consider deleting previously-downloaded modules and themes, and then following the instructions below to re-download them using Composer.

Using Composer to download a module or theme

Follow these steps if you are already using Composer to manage the core software, and you want to use Composer to add a contributed module or theme with its dependencies.

1. Each time you want to add a contributed module or theme, determine the project's short name. This is the last part of the URL of the project page; for example, the Geofield module, at *https://www.drupal.org/project/geofield*, has short name `geofield`.
2. To download the contributed module or theme, along with its external dependencies, enter the following command at the root of your site (substituting the short name of the module or theme for `geofield`):

   ```
   composer require drupal/geofield
   ```

Using Composer to update previously-downloaded files

Follow these steps to update the files for the core software or a contributed module or theme, after having already started to manage dependencies with Composer:

1. Determine the short name of the project you want to update. For the core software, it is *core*. For contributed modules and themes, it is the last part of the URL of the project page; for example, the Geofield module, at *https://www.drupal.org/project/geofield*, has short name `geofield`.
2. If you want to update to the latest stable release, use the following command, substituting the short name of the project to be updated for `geofield`:

   ```
   composer update drupal/geofield --with-dependencies
   ```

3. If you need a specific version, determine how to enter the version number you want to update to. For example, for version 8.x-1.7 of a contributed module, you would enter just the 1.7, and for the core software version 8.3.1, you would enter 8.3.1. Then enter the following command at the root of your site (substituting the short name of the project for `geofield` and the correct version number):

   ```
   composer require drupal/geofield:1.7
   ```

Expand your understanding

You can learn more about Composer commands by using Composer's built-in help system. For example, to learn more about the `create-project` command, enter `composer help create-project` in your command window.

Videos

Using Composer and Git to Download Files

Using Composer and Git to Download Files

Additional resources

- *"Using Composer to manage Drupal site dependencies"*
- *"Update core via Composer"*
- *Composerize Drupal project for converting a previously-downloaded site to using Composer*

Attributions

Adapted by *Jennifer Hodgdon*, *Hans Fredrik Nordhaug*, and *Joe Shindelar* at *Drupalize.Me* from *"Using Composer to manage Drupal site dependencies"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

3.6. Загрузка Drupal вручную

Цель

Скачать ядро Drupal или дистрибутив вручную. Пропустите эту тему если вы используете другой метод загрузки.

Необходимые знания

- *Раздел 1.4, «Основы: Дистрибутивы»*
- *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*

Шаги

1. Зайдите на *https://www.drupal.org* и перейдите к *Build* > *Download & Extend* в верхнем меню.

   изображение:images/install-prepare-downloads.png["Страница загрузки *Drupal.org*",width="100%"]
2. Если вы хотите просто скачать Drupal ядро, нажмите на *Download Drupal zip* или *download tar.gz* ссылку, и сохраните файл на вашем компьютере.
3. Если вы хотите скачать дистрибутив, нажмите на *Distributions* иконку или ссылку, выберите дистрибутив из списка, перейдите на страницу проекта, и нажмите на ссылку загрузки zip или tar.gz файла на ваш компьютер. Ссылка выглядит так:

   изображение:images/extend-module-install-download.png["Поиск URL для загрузки"]
4. Загрузите загруженный файл в учетную запись хостинга. Войдите в управление панелью и перейдите в *HTML* директорию. Сохраните файл тут.
5. Распакуйте tar.gz или zip файл, который создаст новую директорию. Если у вас нет доступа к терминалу или ваш сервер хостинга не работет на Linux, ваш файловый менеджер панели управления хостингом должен предоставить способ извлечения файлов. Если у вас есть терминальный доступ к вашему хостинг-серверу (работает на Linux), вы можете использовать команду как:

   ```
   tar -xzf drupal-8.3.2.tar.gz
   ```
6. Удалите сжатый файл на сервере, если только ваш метод распаковки уже не удалил его.

7. Переименуйте директорию или измените конфигурацию веб-хостинга так, чтобы имя директории соответствовало директории вашего веб-хостинга, которая настроена для использования вашего сайта.

Расширьте свое понимание

Как только вы загрузили ядро Drupal, вы можете установить временный демонстрационный сайт (смотрите *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*) запустив следующую команду из вашей верхней директории ядра Drupal:

```
php core/scripts/drupal quick-start standard
```

Демо сайт будет установлен, и ваш веб браузер должен открыть вход на на новый сайт, который будет работать только до тех пор, пока команда PHP активна. Чтобы узнать больше о этой функиональности, используйте команду:

```
php core/scripts/drupal quick-start --help
```

Авторы

Написано и отредактировано *Drew Gorton*, *Michael Lenahan* в *erdfisch*, *Jennifer Hodgdon*, и *Jojy Alphonso* в *Red Crackle*.

Переведено *Михаил Исмайлов*

3.7. Running the Interactive Installer

Goal

Install the core software and create the admin account by running the included installer.


Site prerequisites

Раздел 3.4, «Подготовка в установке»


Steps

1. If you are using a 1-click install from a hosting provider or demo site, you will most likely see some or all of the following screens as part of the installation process. If you uploaded the core files manually or using Composer, to start the installer, open a browser and visit the URL that you set up for your hosting.
2. Select a language on the first page of the installer; for example, English. You could optionally choose from any of the other listed languages. The language files for the chosen language will be downloaded and installed so that the rest of the installation

process can be finished in the chosen language. After choosing a language, click *Save and continue*.

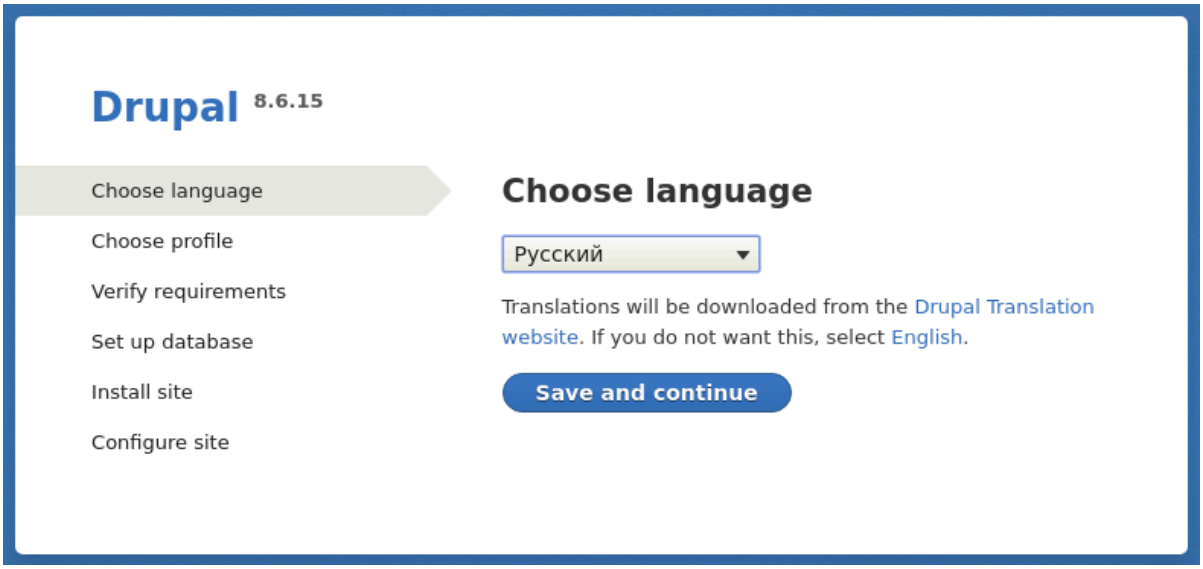

3. Select an installation profile. Installation profiles provide site features and functions for a specific type of site as a single download containing the core software, contributed modules, themes, and pre-defined configuration. Core contains two installation profiles. Select the core Standard installation profile. Click *Save and continue*.

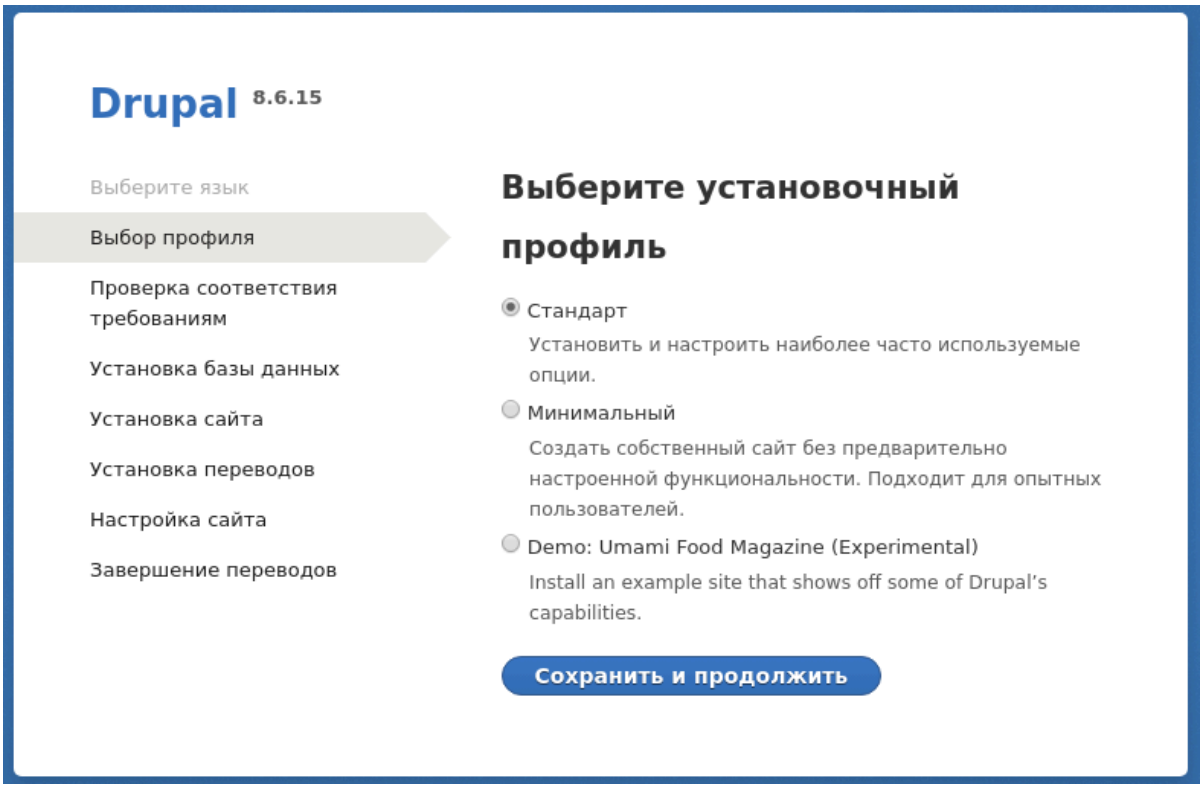


4. The next step in the installer will verify that your system meets the minimum requirements. If it does not, you'll be presented with an outline of what needs to be


corrected in order to proceed. If it does, the installer will automatically advance to the next step.

5. Provide details of the database you created in the *Раздел 3.4, «Подготовка в установке»* chapter. Then click *Save and continue*.

Field name	Explanation	Value
Database name	The custom name given to the database	drupal8
Database username	Username created	databaseUsername
Database password	Password chosen	

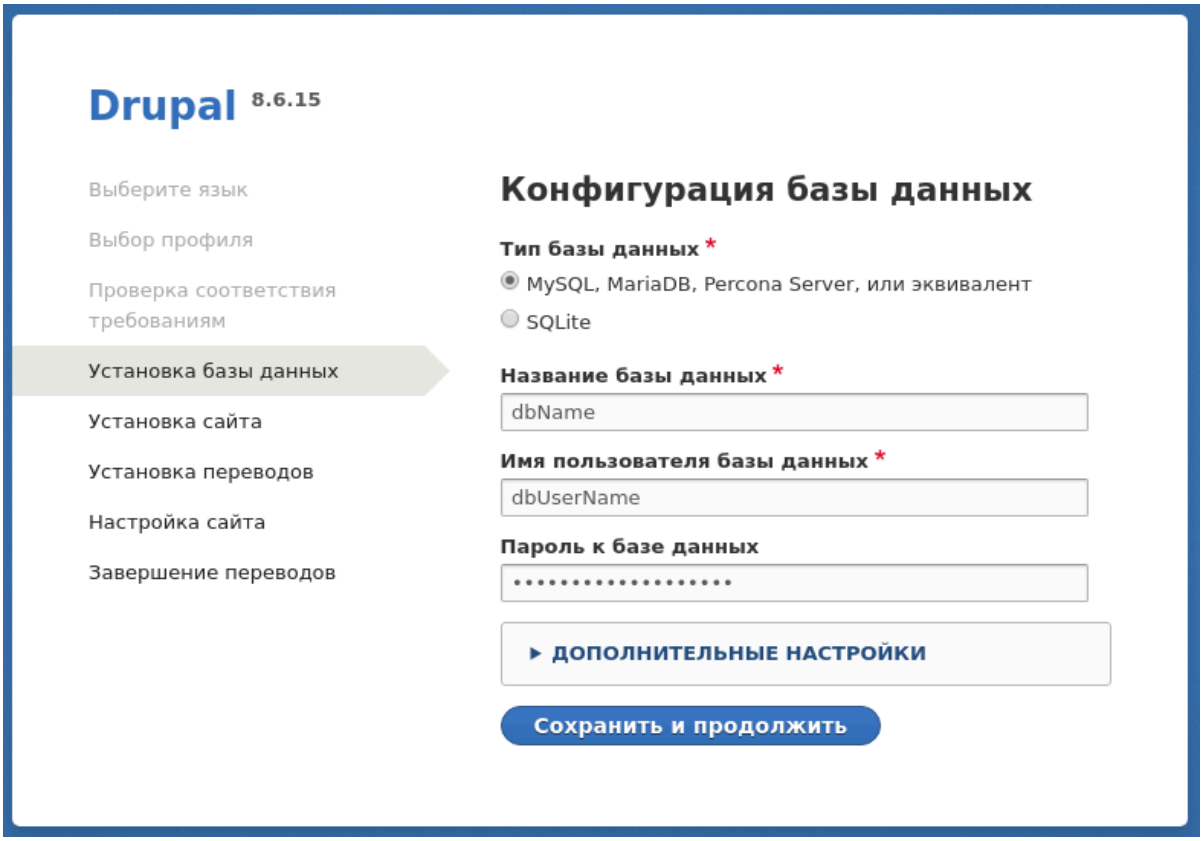

6. The next step will display a progress bar under the heading *Installing Drupal*. After the installer has completed, it will automatically advance to the next step.

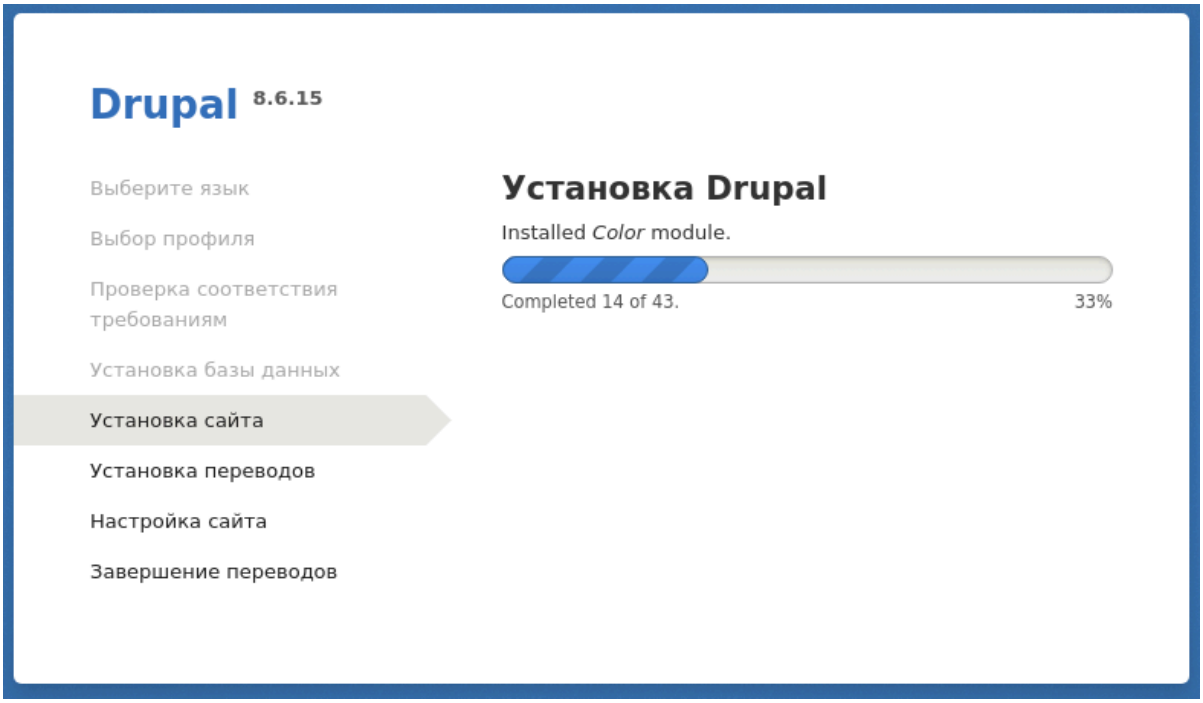


7. The final step is to configure some basic information about your new site. Note that the user account you create in this step is the site's admin account. See *Раздел 7.2, «Concept: The User 1 Account»* for important information about this unique account. You can safely name this account "admin", and make sure to choose a secure and unique password.

   Fill in the form with the following information:

Field name	Explanation	Value
Site name	The name chosen for the site	Anytown Farmers Market
Site email address	The email associated with the site	*info@example.com*
Username	The designated user's credentials	admin
Password	The password chosen	
Confirm password	Repeat the password	
Email address	The user's email	*admin@example.com*

   The remaining fields can likely be left at their default values.

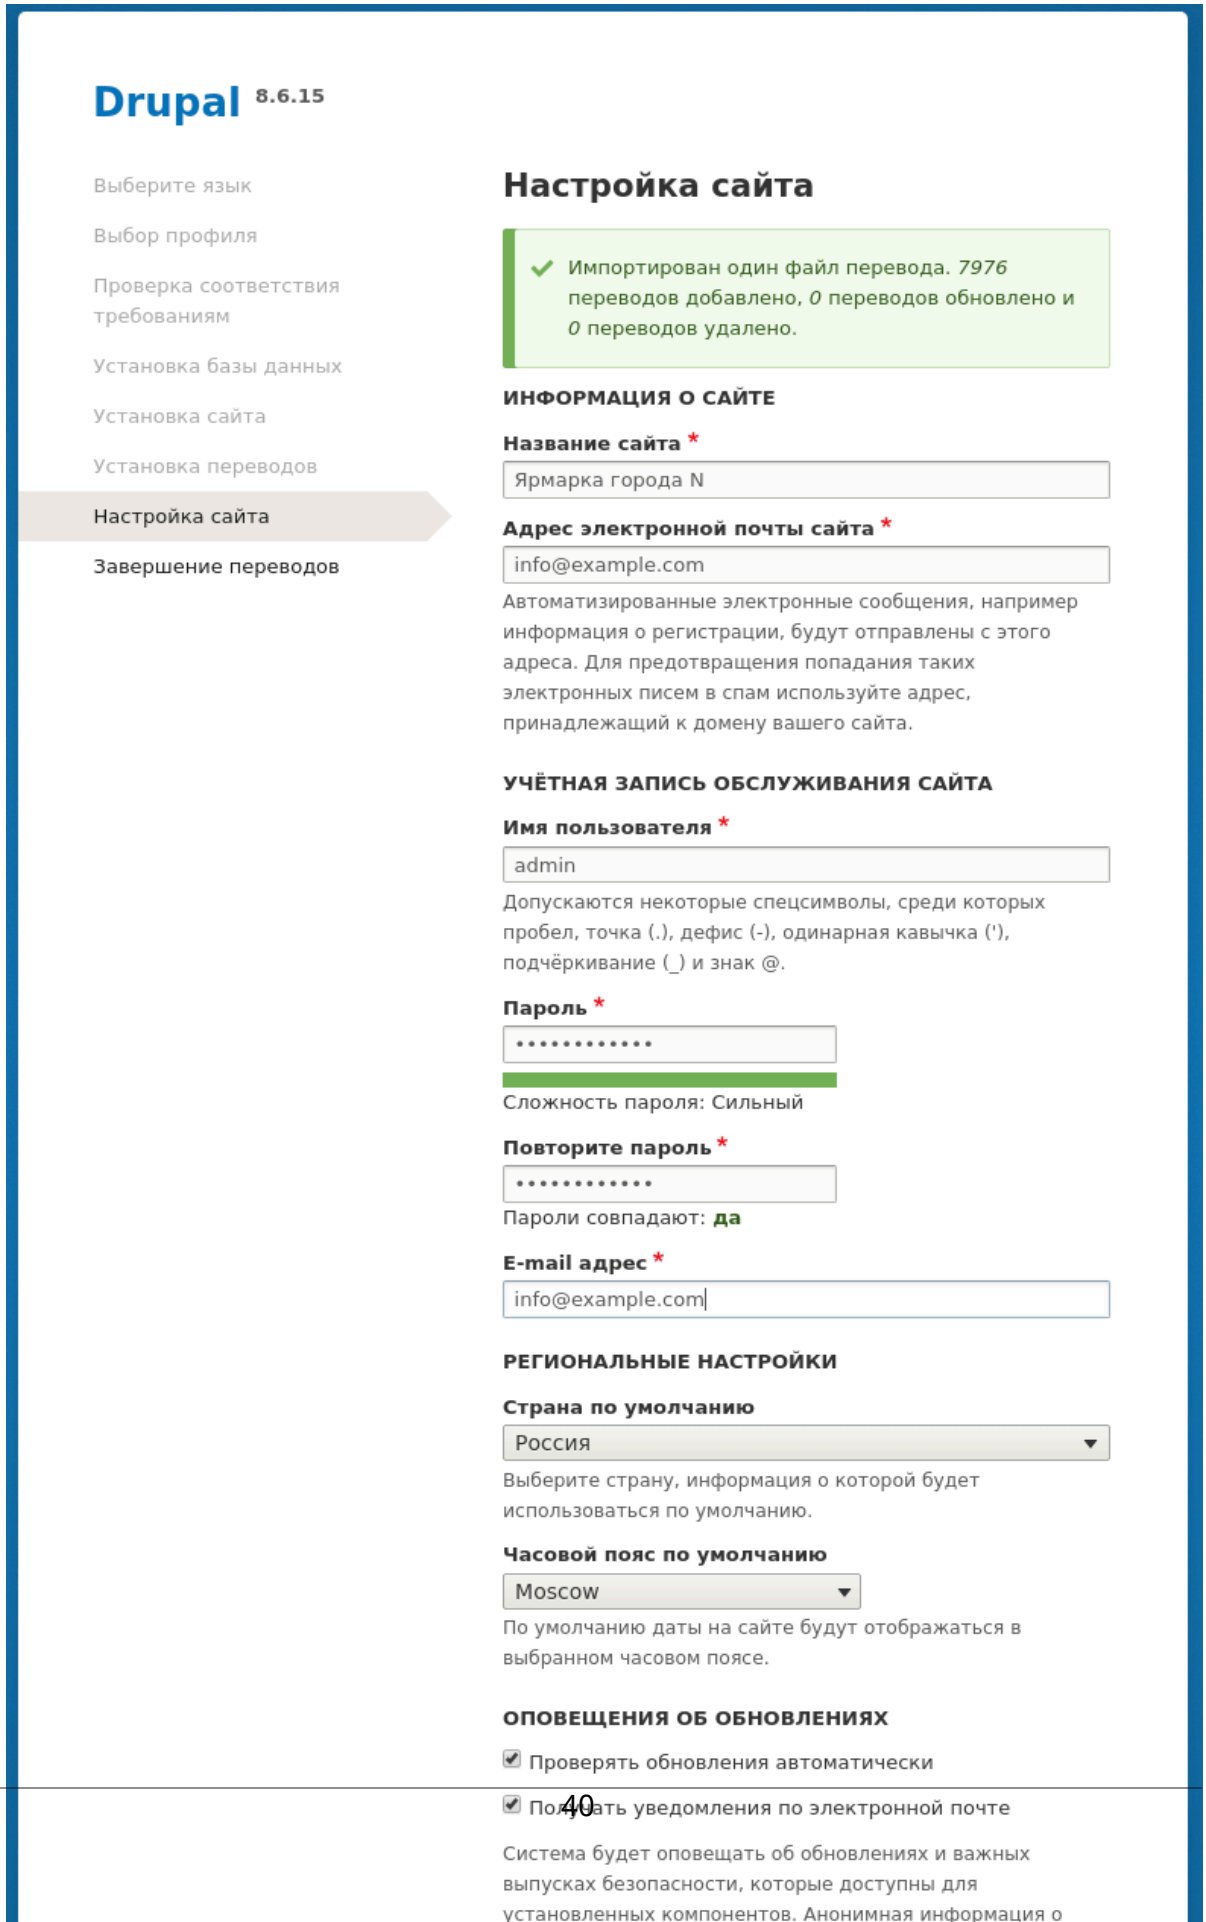
Drupal 8.6.15
Выберите язык
Выбор профиля
Проверка соответствия требованиям
Установка базы данных
Установка сайта
Установка переводов
Настройка сайта
Завершение переводов
Настройка сайта
Импортирован один файл перевода. 7976 переводов добавлено, 0 переводов обновлено и 0 переводов удалено.
ИНФОРМАЦИЯ О САЙТЕ
Название сайта *
Ярмарка города N
Адрес электронной почты сайта *
info@example.com
Автоматизированные электронные сообщения, например информация о регистрации, будут отправлены с этого адреса. Для предотвращения попадания таких электронных писем в спам используйте адрес, принадлежащий к домену вашего сайта.
УЧЁТНАЯ ЗАПИСЬ ОБСЛУЖИВАНИЯ САЙТА
Имя пользователя *
admin
Допускаются некоторые спецсимволы, среди которых пробел, точка (.), дефис (-), одинарная кавычка ('), подчёркивание (_) и знак @.
Пароль *
Сложность пароля: Сильный
Повторите пароль *
Пароли совпадают: да
E-mail адрес *
info@example.com
РЕГИОНАЛЬНЫЕ НАСТРОЙКИ
Страна по умолчанию
Россия
Выберите страну, информация о которой будет использоваться по умолчанию.
Часовой пояс по умолчанию
Moscow
По умолчанию даты на сайте будут отображаться в выбранном часовом поясе.
ОПОВЕЩЕНИЯ ОБ ОБНОВЛЕНИЯХ
Проверять обновления автоматически
Получать уведомления по электронной почте
Система будет оповещать об обновлениях и важных выпусках безопасности, которые доступны для установленных компонентов. Анонимная информация о

8. Click *Save and continue*.
9. You will be redirected to the front page of your new site and you should see the message *Congratulations, you installed Drupal!* displayed at the top of the page.



Expand your understanding

Check the Status Report to see if there are any problems with the installation. See *Раздел 12.5, «Concept: Status Report»*.

Related concepts

- *Раздел 11.7, «Concept: Development Sites»*
- *Раздел 3.2, «Concept: Additional Tools»*

Videos

Running the Installer

Running the Installer

Additional resources

Drupal.org community documentation page "Create A Database"

Attributions

Written and edited by *Joe Shindelar* at *Drupalize.Me*, and *Jojy Alphonso* at *Red Crackle*.

Глава 4. Основные настройки сайта


4.1. Concept: Administrative Overview

Prerequisite knowledge

- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 1.2, «Основы: Модули»*

What is the administrative menu?

The toolbar provided by the core Toolbar module displays the *Manage* administrative menu at the top or left side of the site, for users with permission to see it. This menu provides access to all of the administrative areas of the site. The menu entries will vary depending on which modules are active on your site and the permissions of the person viewing the menu; if you install using the core Standard installation profile and have full administrative permissions, the top-level entries are as follows:



Content

: Lists and manages existing content, and allows creation of new content.

Structure

: Contains a list of links for managing structural elements of the site, such as blocks, content types, menus, and taxonomy.

Appearance

: Manages themes and appearance-related settings.

Extend

: Manages the installation and uninstallation of modules.

Configuration

: Contains links to settings pages for various site features.

People

Manages users, roles, and permissions.


Reports

Contains links to logs, update information, search information, and other information about the site’s status.

Help

Lists help topics for installed modules that provide them.

The arrow button on the far right side of the second line of the toolbar (or far left side, if the site is being viewed using a right-to-left-reading language like Arabic) can be used to switch the menu from appearing horizontally at the top of the page, to a vertical format on the left side (or right side, in right-to-left languages). When viewed vertically, the menu becomes an interactive tree.

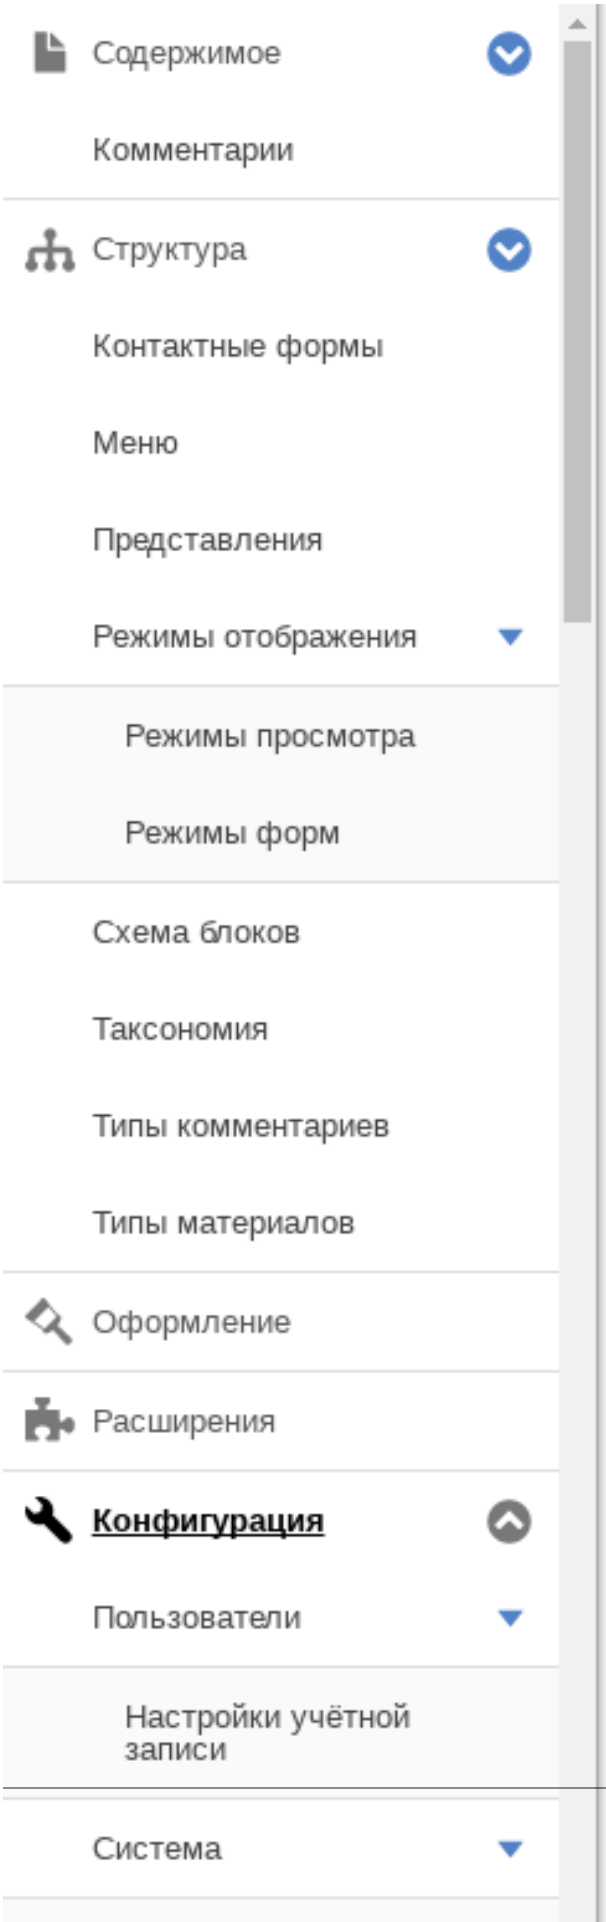
Содержимое
Комментарии
Структура
Контактные формы
Меню
Представления
Режимы отображения
Режимы просмотра
Режимы форм
Схема блоков
Таксономия
Типы комментариев
Типы материалов
Оформление
Расширения
Конфигурация
Пользователи
Настройки учётной записи
Система


This guide has a standard way to describe navigation to administrative pages using the administrative toolbar. See *Раздел i.5, «Условные обозначения Руководства»* for more information.

What are contextual links?

Some administrative and editing functionality on the site can be accessed through the *contextual links* displayed by the core Contextual Links module. Contextual links take you to some of the same pages that you can access through the administrative menu, but instead of having to navigate through the menu hierarchy, these links are provided near where the related content is displayed on your site.

Contextual links have to be activated to be visible. If your site's theme uses the default styling for contextual links, a pencil icon is used to indicate that contextual links are present and activated, and if you click the icon, you will see the contextual links. There are two ways to activate the pencil icons that provide access to the contextual links:

- If you are using a mouse in a browser, the icon will temporarily appear when you hover over an area that has related contextual links.
- You can click the master pencil icon (or its *Edit* link) at the right end of the top bar in the toolbar, which will activate all of the contextual links on the current page. This icon is only visible on pages with contextual links.

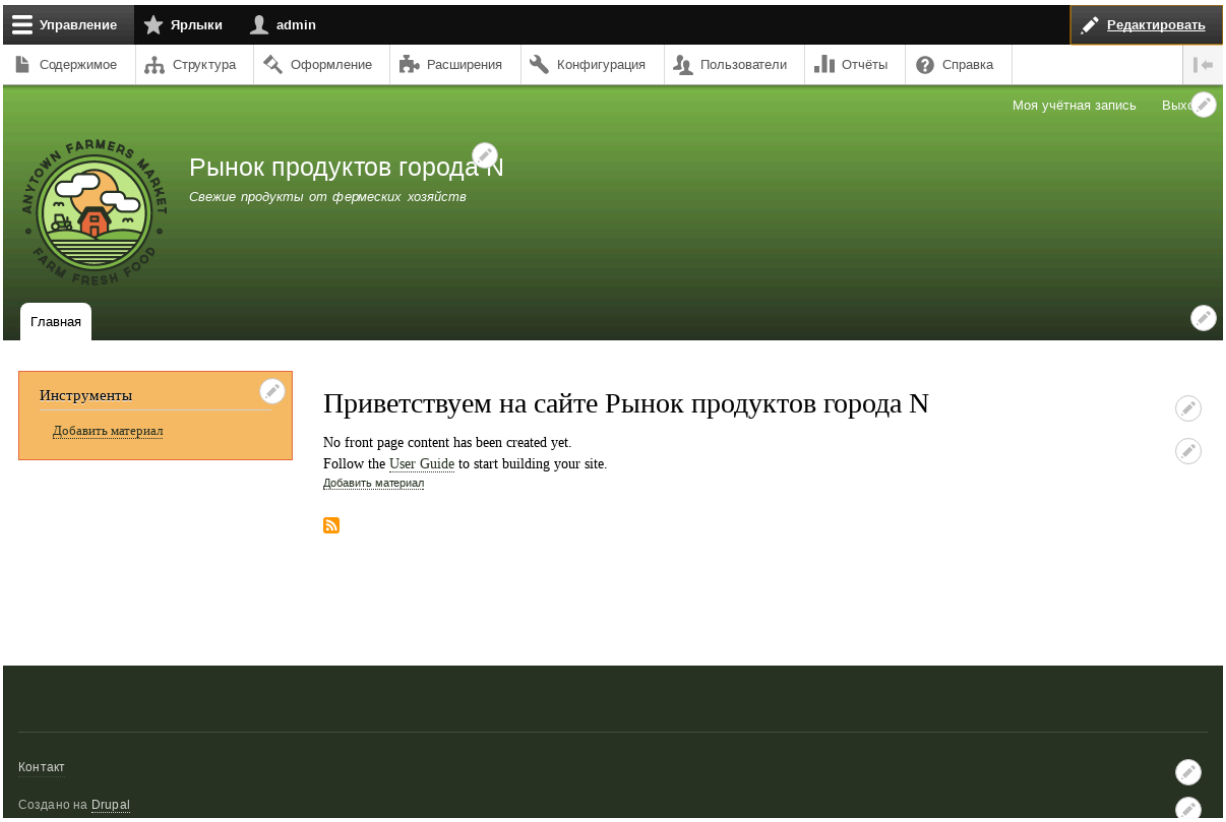

Attributions

Written by *Scott Wilkinson* and *Jennifer Hodgdon*.

4.2. Editing Basic Site Information

Goal

Change basic site information such as *Site name*, *Slogan*, *Default time zone*.

Prerequisite knowledge


Раздел 4.1, «Concept: Administrative Overview»

Steps

Configuring the basic site information

1. In the *Manage* administrative menu, navigate to *Configuration* > *System* > *Basic site settings* (*admin/config/system/site-information*) to change the *Site name*, *Slogan*, administrative *Email address*, or the *Default front page* path.
2. Fill in the available fields as appropriate for your site.

Field name	Explanation	Example value
Site details > Site name	Used to identify the site and displayed in browsers	Anytown Farmers Market
Site details > Slogan	Usually displayed sitewide	Farm Fresh Food
Site details > Email address	Used as *From* address in automated email messages (registrations, password resets, etc)	*info@example.com*

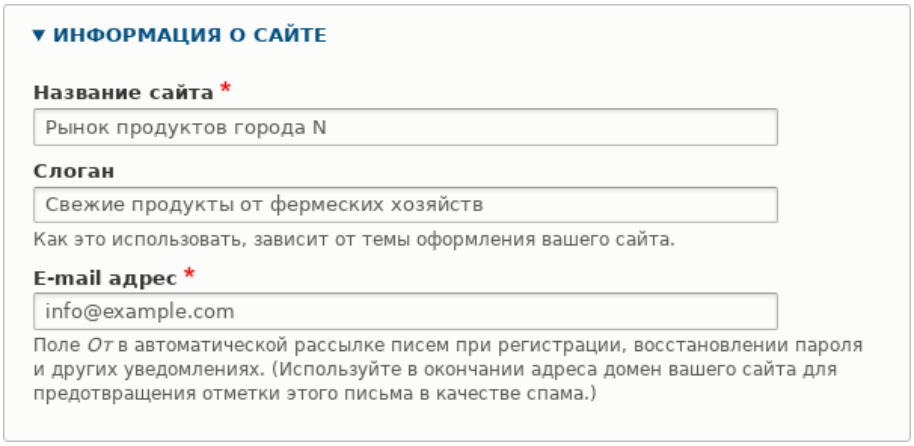


3. After editing the fields, click *Save configuration* to see the changes applied to the site.

Configuring default Regional settings

1. In the *Manage* administrative menu, navigate to *Configuration* > *Regional and language* > *Regional settings* (*admin/config/regional/settings*).
2. Fill in the form as follows:

Field name	Explanation	Example value
Locale > Default country	The primary country for your site	United States
Locale > First day of week	The day when the week starts on calendars	Sunday
Time zones > Default time zone	The primary time zone for your site	America > Los Angeles
Time zones > Users may set their own time zone	Whether logged-in users can choose a different time zone for display of dates and times on the site	Unchecked

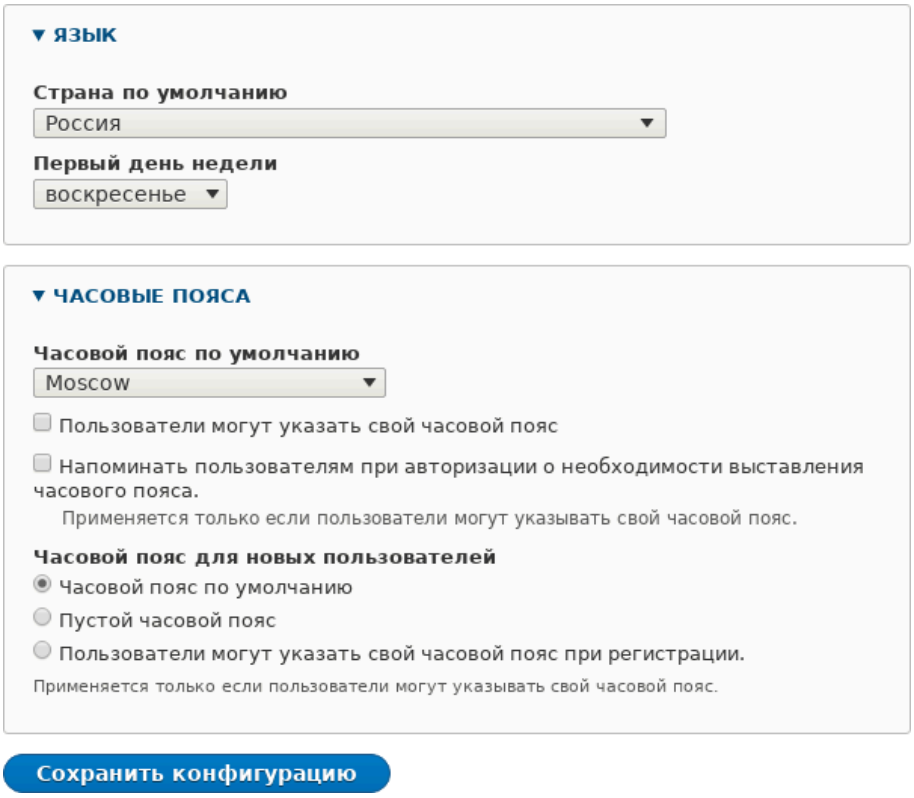

3. After editing the fields, click *Save configuration* to see the changes applied to the site.

Videos

Editing Basic Site Information

Editing Basic Site Information

Additional resources

Drupal.org community documentation page "Getting started with Drupal 8 administration"

Attributions

Written and edited by *Sree Veturi*, *Michael Lenahan* at *erdfisch*, *Antje Lorch*, and *Jennifer Hodgdon*.

4.3. Installing a Module

Goal

Install a core module, or a contributed module whose files have already been uploaded to the site, through the administrative interface or using Drush.

Prerequisite knowledge

Раздел 1.2, «Основы: Модули»

Site prerequisites

If you want to use Drush to install modules, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

You can use the administrative interface or Drush to install modules.

Using the administrative interface

1. In the *Manage* administrative menu, navigate to *Extend* (*admin/modules*). The *Extend* page appears showing all the available modules in your site.
2. Check the boxes for the module or modules you want to install. For example, check the box for the core Activity Tracker module.



3. Click *Install*. The checked modules will be installed.

Using Drush

1. In the *Manage* administrative menu, navigate to *Extend* (*admin/modules*). The *Extend* page appears showing all the available modules in your site.
2. Find the machine name of the module you want to install, by expanding the information area for the module. For instance, the core Activity Tracker module's machine name is *tracker*.
3. Run the following Drush command to install the module:

```
drush en tracker
```

Expand your understanding

If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Installing a Module

Installing a Module

Additional resources

Drush

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

4.4. Uninstalling Unused Modules

Goal

Uninstall the core Search and History modules, as well as the core Activity Tracker module if you installed it in *Раздел 4.3, «Installing a Module»*, to reduce overhead.

Prerequisite knowledge

Раздел 1.2, «Основы: Модули»

Site prerequisites


- You must have at least one unused module on your site that you want to uninstall, such as the core Search module.
- If you want to use Drush to uninstall modules, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

You can use the administrative interface or Drush to uninstall modules.

Using the administrative interface

1. In the *Manage* administrative menu, navigate to *Extend* > *Uninstall* (*admin/modules/uninstall*) where you will find the list of modules that are ready to be uninstalled.
2. Check the boxes for the modules you are uninstalling (*Search*, *History*, and *Activity Tracker*). Click *Uninstall* at the bottom of the page.

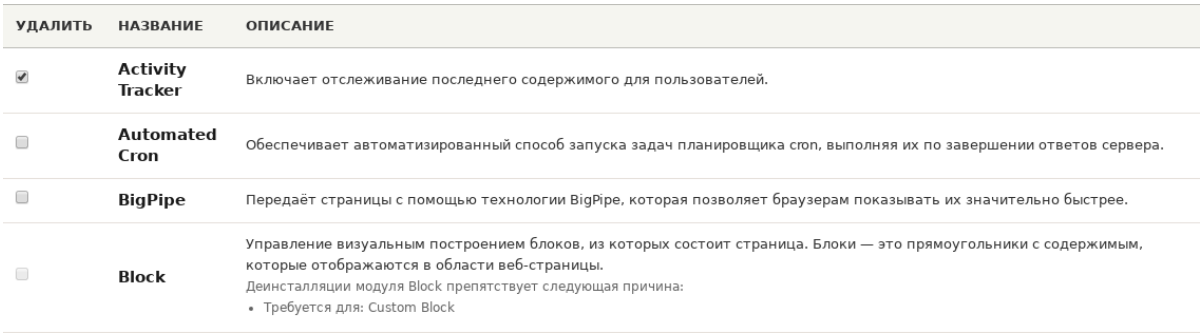


УДАЛИТЬ	НАЗВАНИЕ	ОПИСАНИЕ
☑	**Activity Tracker**	Включает отслеживание последнего содержимого для пользователей.
☐	**Automated Cron**	Обеспечивает автоматизированный способ запуска задач планировщика cron, выполняя их по завершении ответов сервера.
☐	**BigPipe**	Передаёт страницы с помощью технологии BigPipe, которая позволяет браузерам показывать их значительно быстрее.
☐	**Block**	Управление визуальным построением блоков, из которых состоит страница. Блоки — это прямоугольники с содержимым, которые отображаются в области веб-страницы. Деинсталляции модуля Block препятствует следующая причина: • Требуется для: Custom Block

Примечание

You cannot uninstall a module if it is required by some other module(s) and/or functionality. For example, the core File module is required by the core Text Editor, CKEditor, and Image modules. It can't be uninstalled unless you uninstall its dependent module(s) and functionality first. A module that cannot be uninstalled yet will have a disabled checkbox, restricting you from uninstalling it.

3. Step 2 will prompt you to confirm the module uninstall request. Click *Uninstall*.

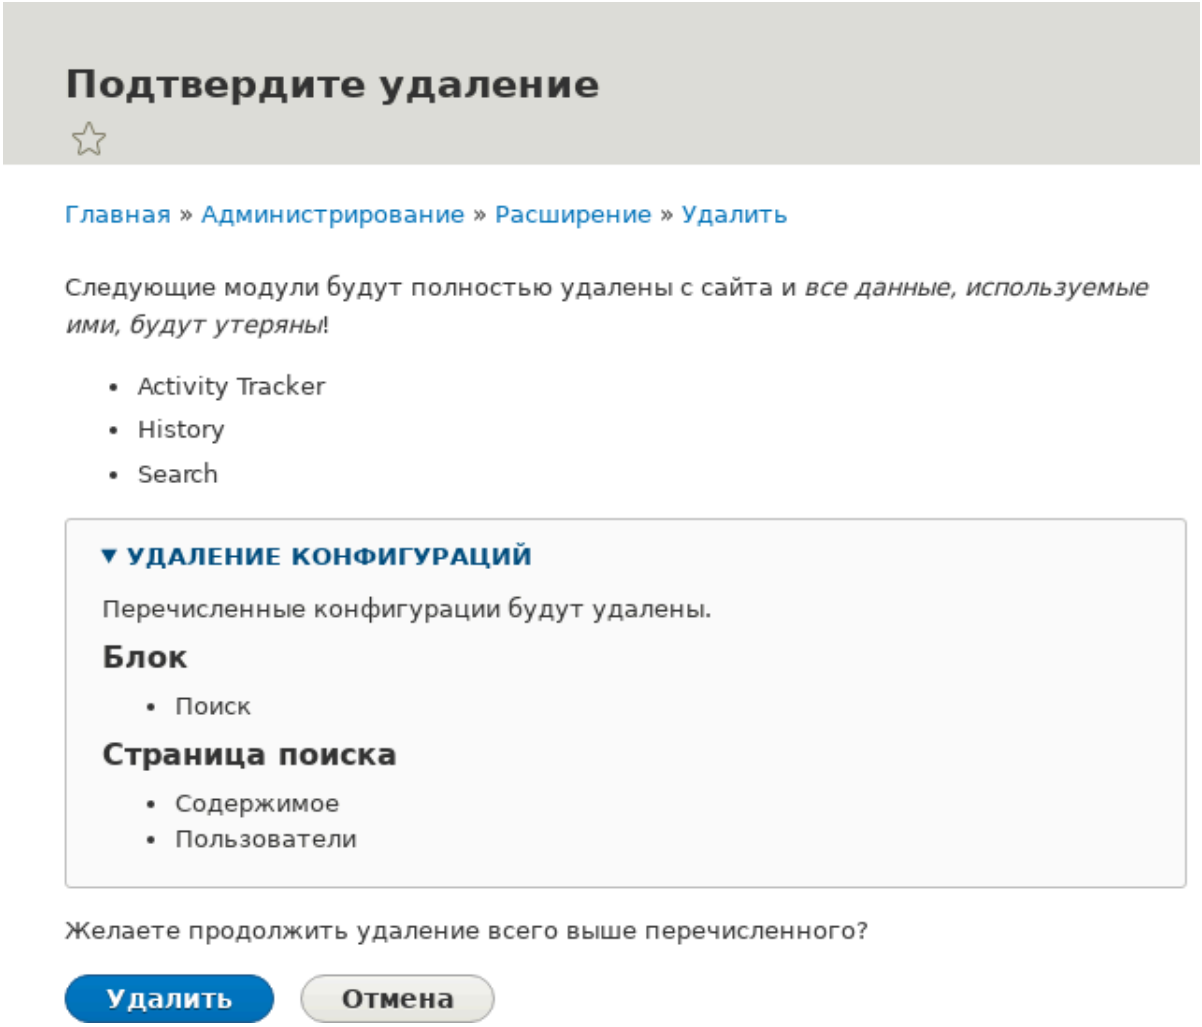

Using Drush

1. In the *Manage* administrative menu, navigate to *Extend* (*admin/modules*). The *Extend* page appears showing all the available modules in your site.
2. Find the machine name of the module you want to uninstall, by expanding the information area for the module. For instance, the core Activity Tracker module's machine name is *tracker*.
3. Run the following Drush command to uninstall the module:

   ```
   drush pm-uninstall tracker
   ```

Expand your understanding

- *Раздел 3.2, «Concept: Additional Tools»*
- *Раздел 12.2, «Clearing the Cache»*

- You can also uninstall the core Comment module by following these steps, but only after comment fields have been removed, which is a side effect of *Раздел 6.2, «Deleting a Content Type»*.

Videos

Uninstalling Unused Modules

Uninstalling Unused Modules

Attributions

Written and edited by *Surendra Mohan*, and *Jojy Alphonso* at *Red Crackle*.

4.5. Configuring User Account Settings

Goal


Turn off the ability for people to register user accounts on the site. Also, review and/or edit the email messages generated by the site for events related to user accounts.

Prerequisite knowledge


Раздел 4.1, «Concept: Administrative Overview»

Steps

1. In the *Manage* administrative menu, navigate to *Configuration* > *People* > *Account settings* (*admin/config/people/accounts*).
2. Under *Registration and cancellation*, select *Administrators only* as the people with permissions to register user accounts. You can check *Require email verification when a visitor creates an account* in case you want to change the settings for account registration later on.

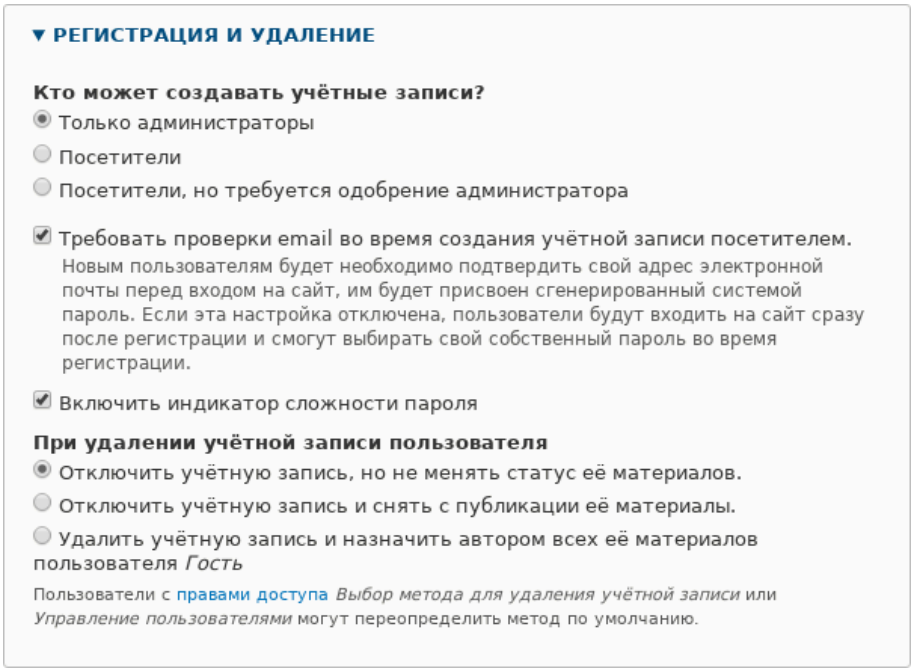


3. Optionally, change the default email address from which user account notifications from the farmers market website will be sent. This will help you maintain a separate email address from the one used for the website in general. For example, this email address for user account notifications will be useful for a staff member(s) communicating with vendors.

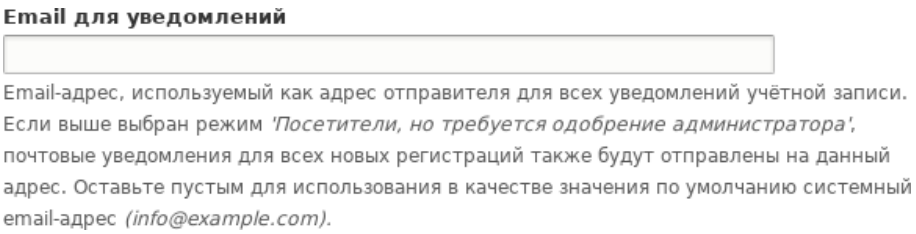

4. Optionally, edit the email templates under *Emails* to customize automated emails. There are several email templates provided by the core software. They are meant for different user-specific occasions. All of them can be personalized and three can be disabled via checkboxes: activation, blocking, and cancellation.

   You can send out your own text (for example, welcoming the new vendors for whom accounts were just created) by editing the *Welcome (new user created by administrator)* template.

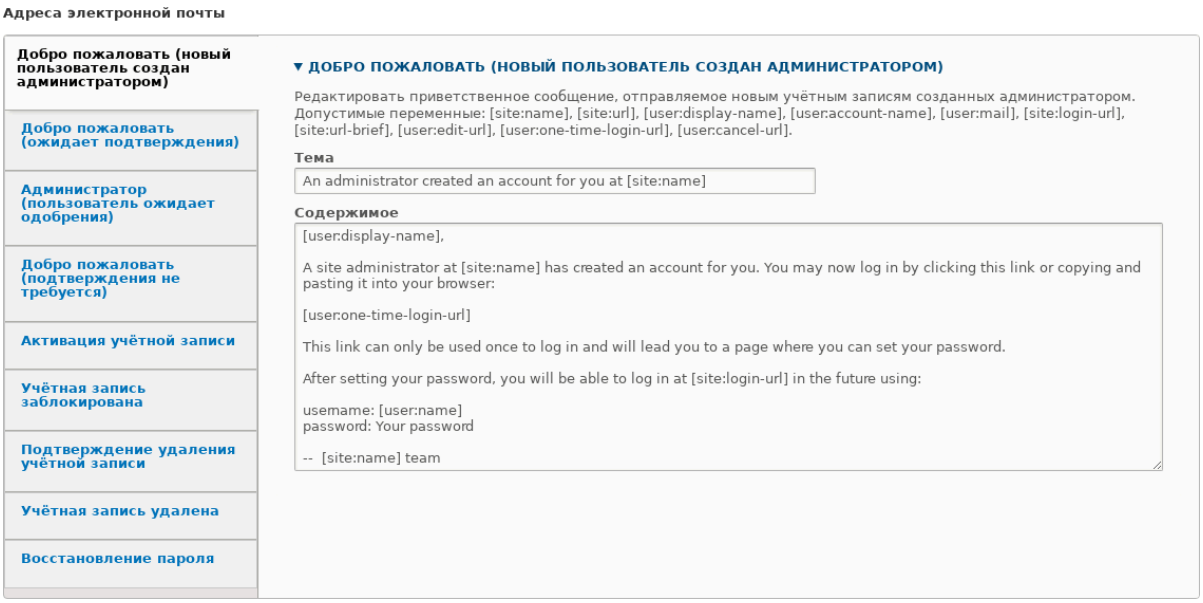

5. Click *Save configuration* to save the changes.

Expand your understanding

- *Раздел 12.2, «Clearing the Cache»*
- *Раздел 7.4, «Creating a User Account»*

Related concepts

See *Глава 7, Управление аккаунтами пользователей* for more information about user accounts and permissions.

Videos

Configuring User Account Settings

Configuring User Account Settings

Additional resources

Security Guide can help you with a more safety-focused approach to configuration.

Attributions

Written and edited by *Laura Vass* at *Pronovix*, and *Jojy Alphonso* at *Red Crackle*.

4.6. Configuring the Theme

Goal


Edit the settings of the default core Bartik theme to change the color scheme and to add a logo.

Prerequisite knowledge

Раздел 1.3, «Основы: Темы оформления»

Steps


1. In the *Manage* administrative menu, navigate to *Appearance* (*admin/appearance*).
2. Under *Installed themes*, you will find Bartik listed as your default theme. Under *Bartik (default theme)*, click *Settings*.

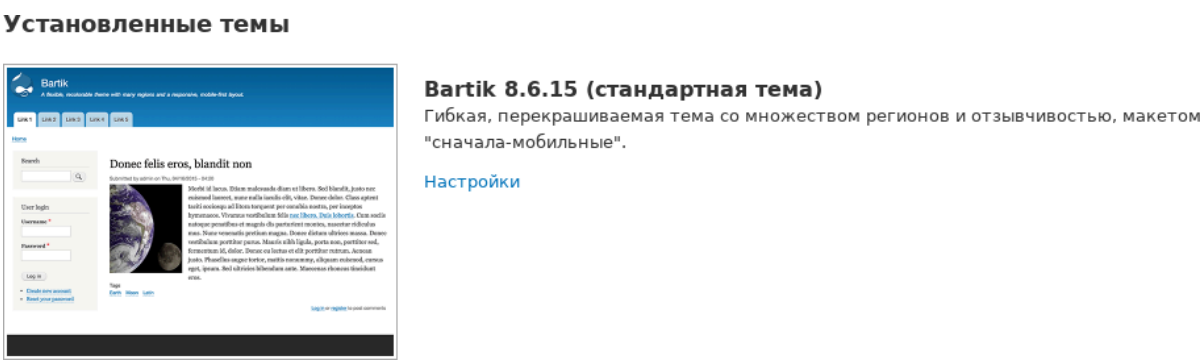


3. Under *Color scheme*, click inside each color build box and type the proper color codes you would like to add. For example, use the following colors:

Area	Color
Header background top	#7db84a (green)
Header background bottom	#2a3524 (dark green)
Main background	#ffffff (white)
Sidebar background	#f8bc65 (light orange)
Sidebar borders	#e96b3c (orange)
Footer background	#2a3524 (dark green)
Title and slogan	#ffffff (white)
Text color	#000000 (black)
Link color	#2a3524 (dark green)

Note: You can also use the color wheel on the right to select colors of your choice. The web color codes will be added for you.

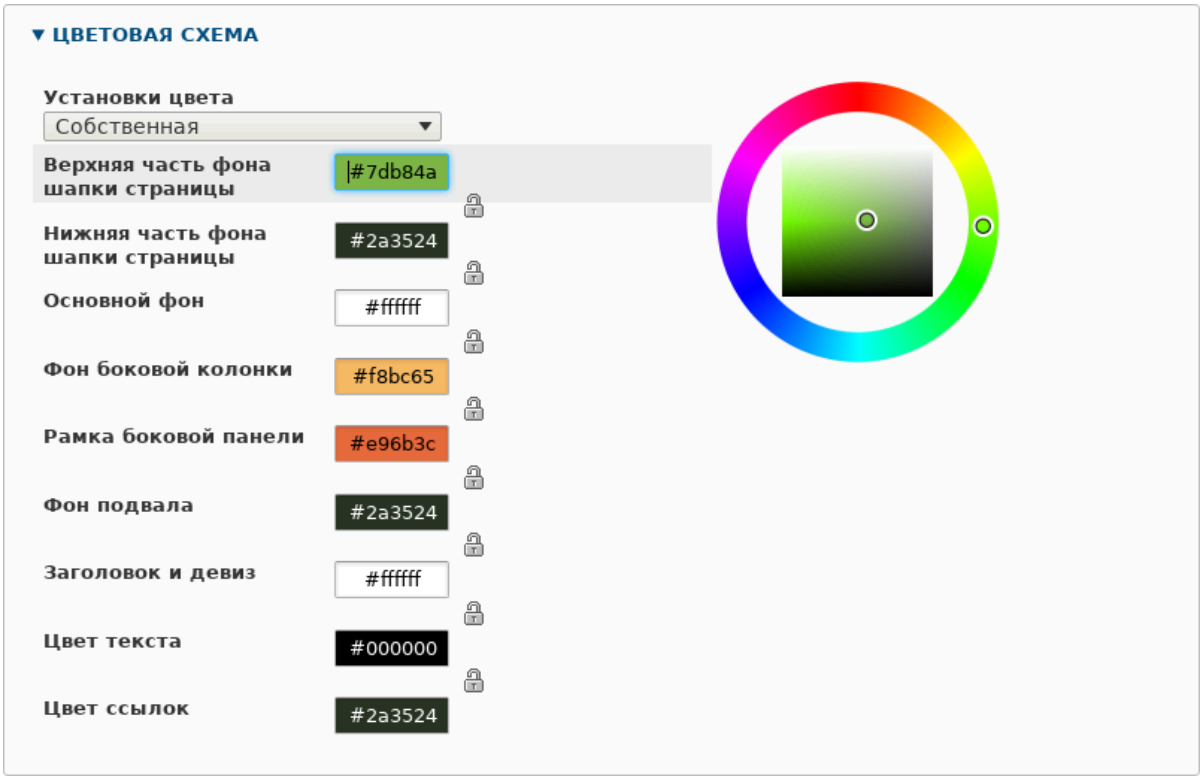

4. Under *Logo image*, uncheck *Use the logo supplied by the theme*.

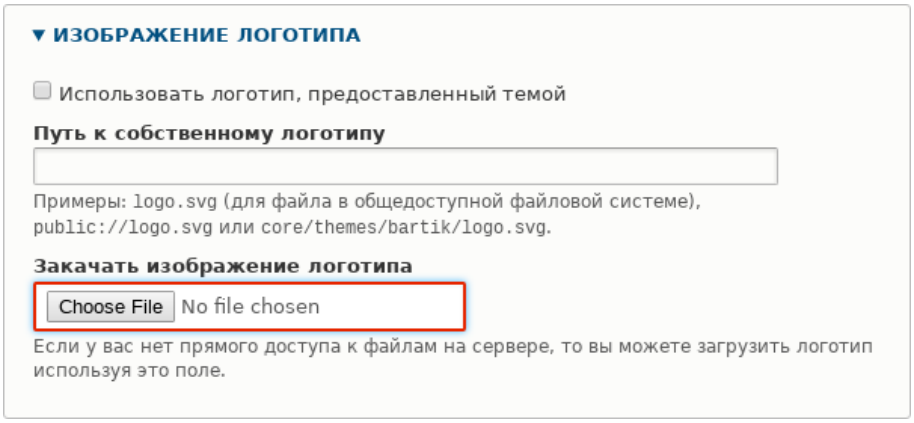


5. Under *Upload logo image*, locate a logo file and upload it to your site. Note: You can also set a universal logo for all themes under *Appearance* > *Settings* (*admin/appearance/settings*). A custom logo for your theme will override the universal logo.


   Once you have selected the file you would like to upload, you will see its filename next to the *Choose File* or *Browse* button in your browser.

6. In order to save your changes and see the updated colors and logo on your site, click *Save configuration* at the bottom of the page.

   Note: Under *Color scheme*, there is a *Preview* section that displays a sample of how your website will look with the new settings.

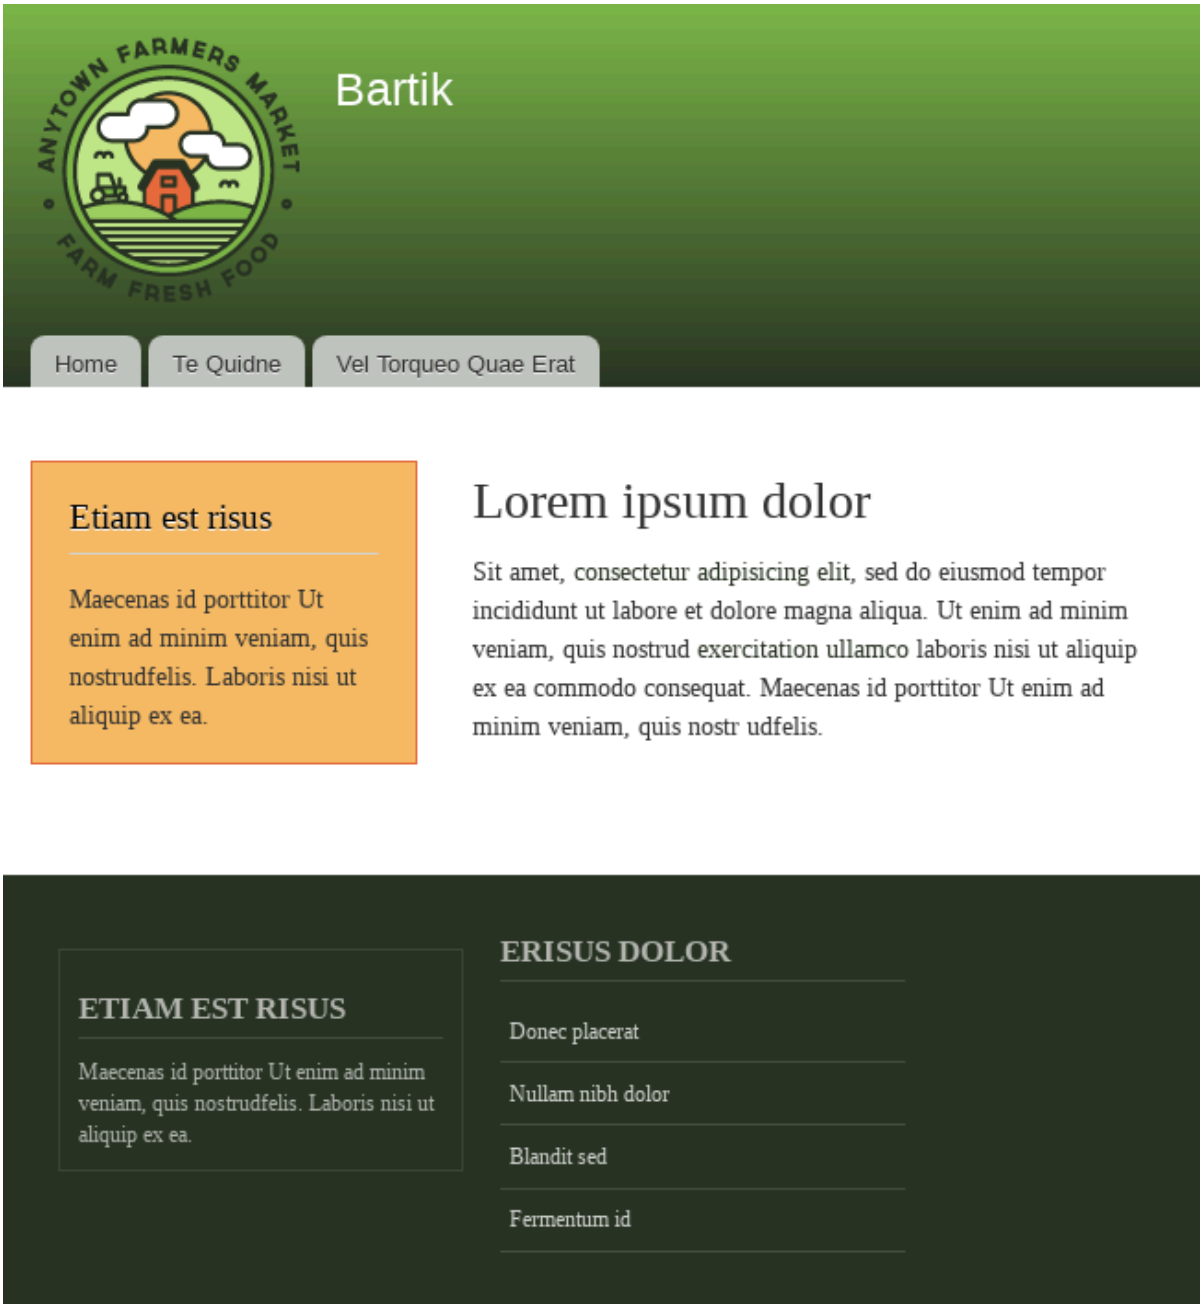

7. Click *Return to site* or *Home* in the toolbar to verify that you have updated the core Bartik theme settings for your website.

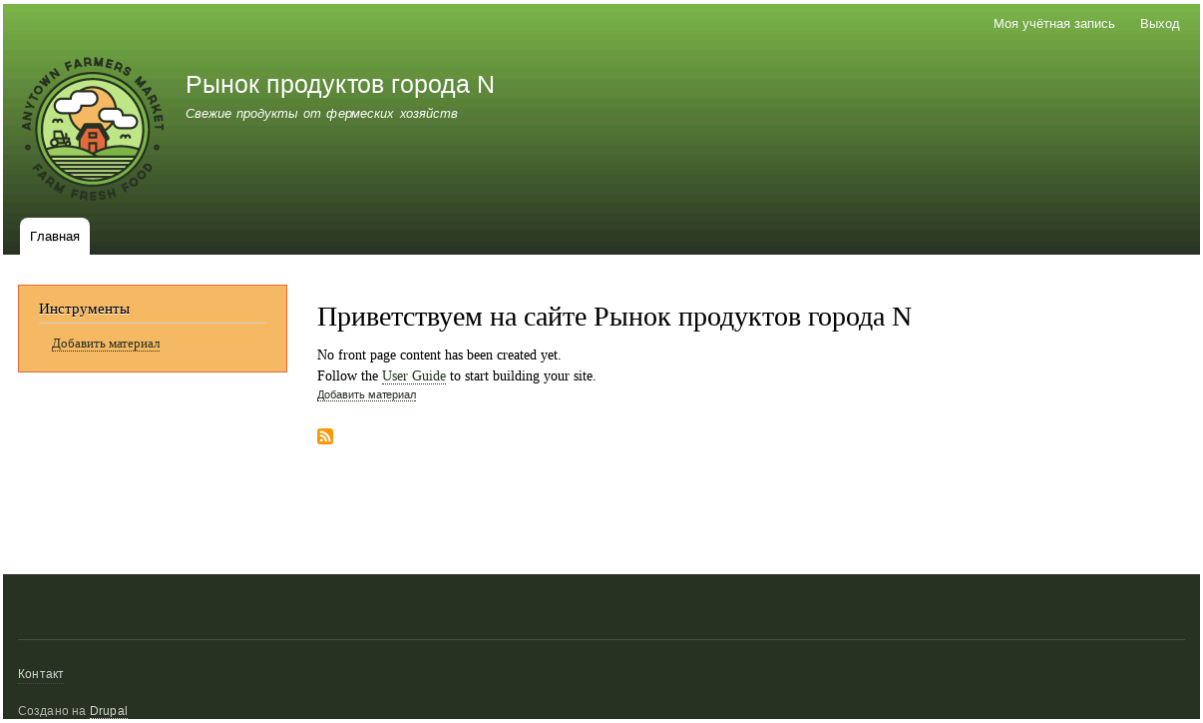

Expand your understanding

- *Раздел 11.4, «Finding Themes»*
- *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»*
- If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Configuring the Theme

Configuring the Theme

Attributions

Written and edited by *Ann Greazel*, *Amanda Luker* at *Advomatic*, and *Jack Haas*.

Глава 5. Основные настройки страниц

5.1. Concept: Paths, Aliases, and URLs

What is a URL?

URL is the abbreviation for "Uniform Resource Locator", which is the page's address on the web. It is the "name" by which a browser identifies a page to display. In the example "Visit us at *example.com*.", *example.com* is the URL for the home page of your website. Users use URLs to locate content on the web.

What is a Path?

A path is the unique, last part of the URL for a specific function or piece of content. For example, for a page whose full URL is *http://example.com/node/7*, the path is *node/7*.

Here are some examples of paths you might find in your site:

- *node/7*
- *taxonomy/term/6*
- *admin/content/comment*
- *user/login*
- *user/3*

What is an Alias?

The core software has a feature called "URL Alias" that allows you to provide a more understandable name to the content. So, if you have an "About Us" page with the path *node/7*, you can set up an alias so that your visitors will see it as *http://www.example.com/AboutUs*. The core Path module, which supports URL aliasing, provides this functionality.

Related topics

- *Раздел 5.2, «Создане элемента содержания»*
- *Раздел 5.4, «Editing a Content Item»*

Attributions

Adapted by *Diána Lakatos* at *Pronovix* from *"URL aliases"*, and *"Understanding Drupal paths"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

5.2. Создане элемента содержания

Цель

Создание и публикаия элемента содержания, который будет использоваться как домашняя страница сайта.

Необходимые знания

Раздел 5.1, «Concept: Paths, Aliases, and URLs»

5.3. Предпосылки сайта

Должен существовать тип содержания *Страница*. Он создается на Вашей странице, когда Вы устанавливаете на ядре Стандарт.

Шаги

1. В *Управлении* выбрать административное меню, перейти к *Содержание* > *Добавить содержимое* > *Главная страница* (*материал/добавление/страница*). Появится форма *Создание Главной страницы*.
2. Нажмите *Редактировать краткое описание*


Заполните поля как показанно ниже. +

Название поля	Объяснение	Значение
Заголовок	Заголовок страницы. Будет использоваться как мета-тег в ресуре кода, URL путь и как метка элемента содержимого в администрационном окне	Домашняя страница
Краткое описание	Краткое описание значений поля текста. Может использоваться как анонс при кратком обзоре страницы	Время открытия и местоположение городской ярмарки

Название поля	Объяснение	Значение
Текст	Полное содержание страницы	Добро пожаловать на городскую ярмарку - ваш район фермерского рынка! Открыто: воскресенье, с 9.00 до 14.00, с апреля по сентябрь Местоположение: автостоянка Траст Банка, ул. Пушкина, в центре города
Издано	Является ли содержимое видимым для публичного просмотра или нет	Проверено
URL путь > URL путь	Альтернативный относительный путь для содержания	/домашняя страница

+ При нажатии кнопки *Ресурсы* в панели инструментов форматирования текста, вы можете увидеть исходный код HTML в тексте, который вы редактируете.

+

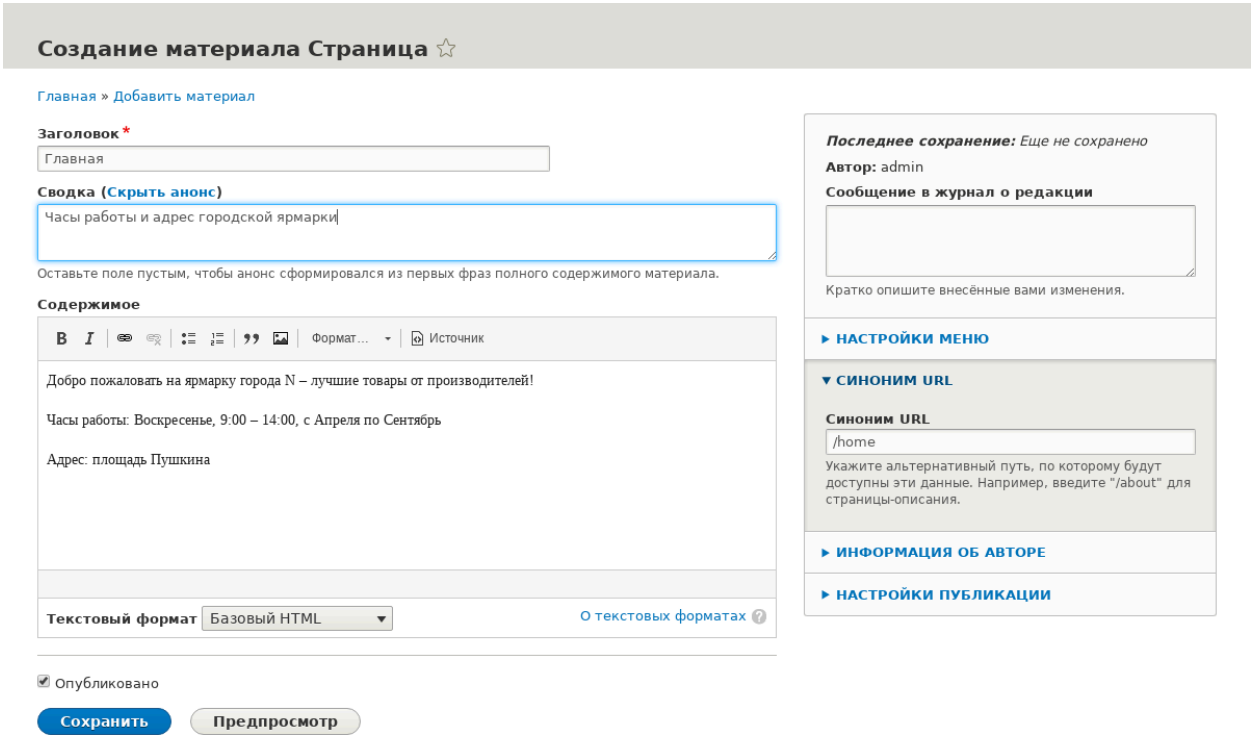

1. Нажмите *Предварительный просмотр*, чтобы убедиться, что все выгдядит, как ожидалось.

Нажмите *Вернуться к редактированию содержимого*.

1. Нажмите *Сохранить*. Содержимое сохраняется и может быть найдено на странице *Содержание*.
2. Следуйте тем же шагам, чтобы создать станицу "О нас", с заголовком "О нас", и текстом, рассказывающим о истории фермерского рынка.

Узнать больше

- *Раздел 5.6, «Настройка главной страницы»*
- *Раздел 5.8, «Adding a Page to the Navigation»*
- *Раздел 10.3, «Translating Content»*

Связанные понятия

- *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»*
- *Раздел 5.1, «Concept: Paths, Aliases, and URLs»*
- *Раздел 5.4, «Editing a Content Item»*

Видео

Creating a Content Item

Creating a Content Item

Дополнительные ресурсы

Drupal.org community documentation page "About nodes"

Авторы

Написано: *Agnes Kiss* and *Boris Doesborg*. Переведено: *Аземша Дарья*

5.4. Editing a Content Item

Goal

Update the hours on the Home page content item.

Prerequisite knowledge


Раздел 5.2, «Создане элемента содержания»

Site prerequisites


A content item for the Home page must exist. See *Раздел 5.2, «Создане элемента содержания»*.

Steps


1. In the *Manage* administrative menu, navigate to *Content* (*admin/content*).
2. If the content item you want to edit was updated or created recently, it should appear near the top of the content list on that page. If not, you can use the *Content type*, *Title*, or other filters to locate the content item.

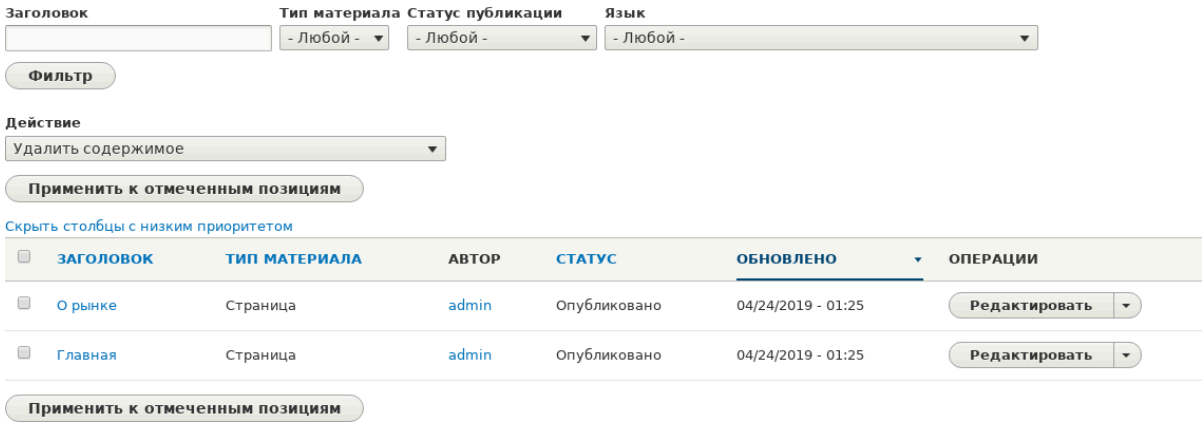

3. Click *Edit* in the row of the content item you want to edit (Home), to open the content editing form. Update the opening hours in the *Body* field. See *Раздел 5.2, «Создане элемента содержания»* for an explanation of the fields and a screenshot.
4. Check *Create new revision* under *Published*, if it is not already checked, and enter a *Revision log message* explaining what changes you are making (for example, you might enter "Updated opening hours"). This text will appear in the revision log for the page.

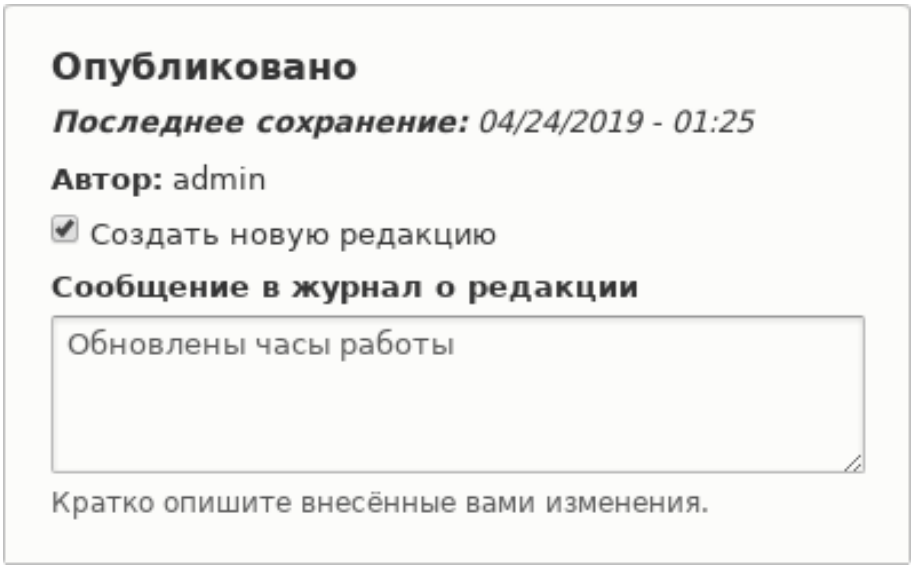

5. Click *Save* to save your changes.
6. You will be redirected back to the *Content* administrative page, and there should be a message showing that the content item was updated.



Expand your understanding

As an alternative to the first two steps above, you can also reach the content edit form as follows:

1. Starting from your site's home page, use the site's navigation menus to locate the page where the content you want to edit is displayed to visitors.
2. Most themes will display an *Edit* link or tab near the top of that page to people with permission to edit the page; clicking the link will take you to the full content edit form.
3. You could also use the in-place editor (refer to *Раздел 5.5, «Editing with the In-Place Editor»*) from this page.

Videos

Editing a Content Item

Editing a Content Item

Attributions

Written by *Chris Dart* and *Jennifer Hodgdon*.

5.5. Editing with the In-Place Editor

Goal

Use the in-place editor to add information to the About page without opening the full editor page.

Prerequisite knowledge

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 5.2, «Создане элемента содержания»*

- *Раздел 5.4, «Editing a Content Item»*
- *Раздел 4.1, «Concept: Administrative Overview»*

Site prerequisites

The About page you want to edit must exist. See *Раздел 5.2, «Создане элемента содержания»*.


Steps

Navigate to the About page to edit content with the in-place editor. If the page has not yet been added to a navigation menu, you can find and open it by following these steps:


1. In the *Manage* administrative menu, navigate to *Content* (*admin/content*).
2. If the content item you want to edit was updated or created recently, it should appear near the top of the content list on that page. If not, you can use *Type*, *Title*, or other filters to locate the content item.
3. Find the About page and click it.

Once the content you want to edit is being viewed in your browser, follow these steps to use the quick editor:

1. Find the section of the page that displays the content you want to edit, and turn on quick editing mode using the *Quick edit* contextual link (see *Раздел 4.1, «Concept: Administrative Overview»* for instructions on how to access contextual links). You will see each editable field on this content item outlined in blue; also, a hovering dialog box will appear.

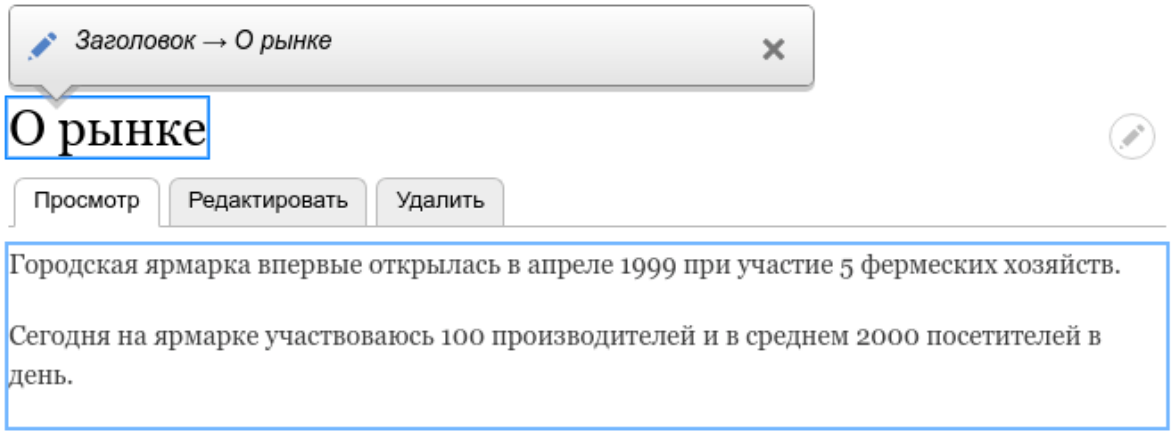

2. Click the *Body* text area to begin editing. The *Body* field supports a rich text editor. The editing toolbar will be displayed in a hovering dialog box.
3. Add some information about City Market. A *Save* button will appear in the hovering dialog box, and the field outline will change color.

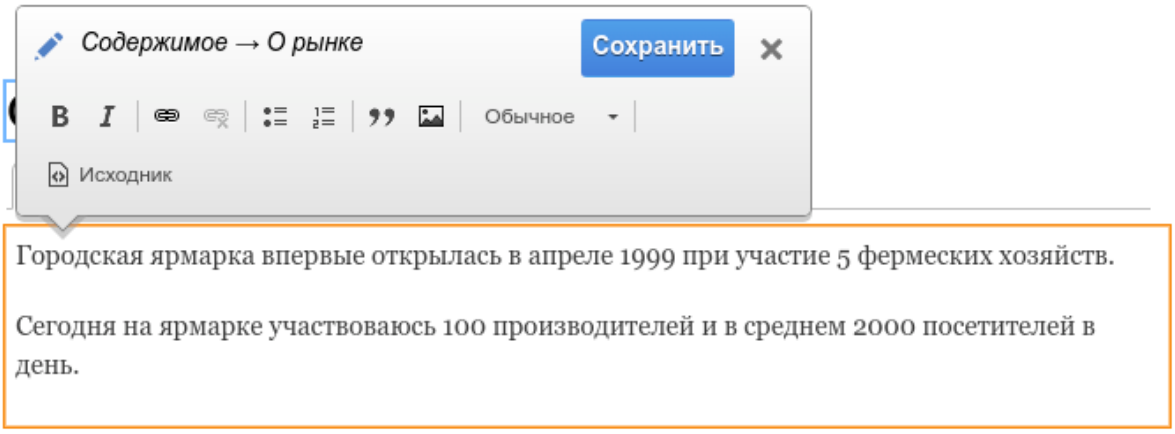

4. If you are satisfied with your edits, click *Save* in the hovering dialog box. If not, click "x" to discard your edits, and confirm. Either way, quick editing mode will be turned off.

Expand your understanding

Try using the full editor on the same content (see *Раздел 5.4, «Editing a Content Item»*) and note that there is much more information that can be edited that is not available in the quick editor.

Videos

Editing with the In-Place Editor

Editing with the In-Place Editor

Attributions

Written and edited by *David Lee* and *Jennifer Hodgdon*.

5.6. Настройка главной страницы

Цель


Конфигурация Конфигурация, которая отображает часть содержимого как Начальную страницу вашего Web-сайта

Необходимые компоненты сайта


Часть содержимого, которую вы хотите определить как Начальную страницу на Вашем сайте, должна существовать. Посмотрите *Раздел 5.2, «Создане элемента содержания»*.

Шаги

1. В *Управление* административным меню перейдите к *Содержание* > *Сиситема* > *Основные настройки сайта* (*_admin/config/system/site-information*).
2. Под *Начальной страницей*, замените */node* на имя страницы, которую Вы бы хотели сделать Главной страницей. Чтобы использовать Главную страницу, которая была ранее создана, укажите ее путь */home*. Нажмите *Сохранить настройки*.

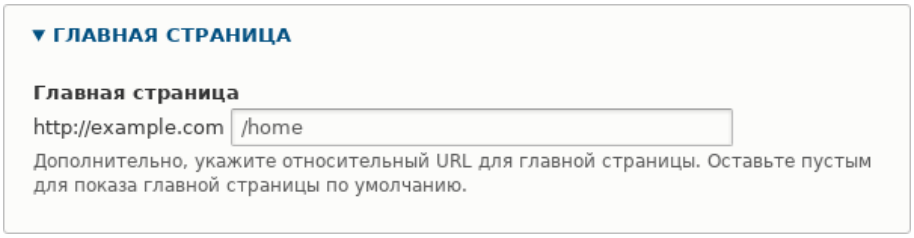

3. Перейдите на Главную страницу, чтобы проверить, что она отображает содержание, настроенное на Вас.

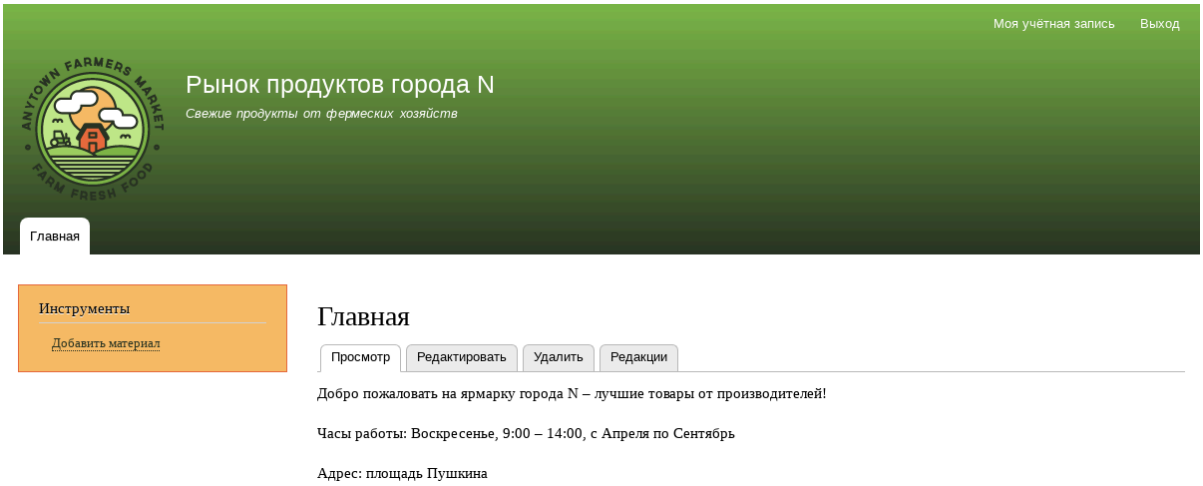

Узнать больше

- *Раздел 5.8, «Adding a Page to the Navigation»*
- Перейдите на *Раздел 5.2, «Создане элемента содержания»*, чтобы создать страницу ошибок, которая может использоваться как 404 (страница не найдена) или 403 (не авторизовано) ответ на Вашем сайте. После, следуя шагам здесь, вы можете назначать ее как ответ на ошибку в *Странице ошибки*, раздел конфигурации.

Связанные понятия

Раздел 5.7, «Concept: Menu»

Видео

Designating a Front Page for Your Site

Designating a Front Page for Your Site

Авторы

Написано и отредактировано: *Ann Greazel*, *Jack Haas*, and *Jojy Alphonso* at *Red Crackle*

Переведено: *Аземша Дарья*.

5.7. Concept: Menu

What is a menu?

Menus are a collection of links (menu items) used to navigate a website. The core Menu UI module provides an interface to control and customize the menu system. Menus are primarily displayed as a hierarchical list of links. By default, new menu items are placed inside a built-in menu labeled *Main navigation*, but administrators can also create custom menus.

The core Standard installation profile contains five menus:

Main navigation

Links to sections intended for site visitors. They are usually created by site administrators.

Administration

Links to administrative tasks. This menu mainly contains links supplied by modules on your site.

User account menu

Links to tasks associated with the user account such as *My account* and *Log out*.

Footer

Links to important pages within the site intended for the footer. They are usually created by site administrators.

Tools

Links to tasks necessary for site visitors. Some modules feature their links here.

You can customize menus in the following ways, using the menu administration functionality:

- Creating new custom menus.
- Adding new menu items.
- Reordering menu items by setting their "weight" or by dragging them into place.

- Renaming menu items.
- Changing the link title (the tooltip that appears when you mouse over a menu item).
- Moving a menu item into a different menu by editing its *Parent* property.

A menu item will only be shown to a visitor if they have the rights to view the page it links to. For example, the admin menu item is not shown to visitors who are not logged in.

Related topics

- *Раздел 5.8, «Adding a Page to the Navigation»*
- *Раздел 5.9, «Changing the Order of Navigation»*
- To display a menu, you will need to place the block that corresponds to the menu in a region of your theme; see *Раздел 8.1, «Concept: Blocks»*, *Раздел 2.1, «Concept: Regions in a Theme»*, and *Раздел 8.3, «Placing a Block in a Region»*. The core Standard installation profile places all of the menus it defines except Administration in regions of the core Bartik theme. The core Toolbar module, which is installed by the core Standard installation profile, displays the Administration menu; it is also displayed by the contributed Admin Toolbar module.

Attributions

Written and edited by *Ajay Viswambharan*, *Jojy Alphonso* at *Red Crackle*, and *Jennifer Hodgdon*.

5.8. Adding a Page to the Navigation

Goal

Add a page to the navigation. For example, the About page.

Prerequisite knowledge

- *Раздел 5.7, «Concept: Menu»*
- *Раздел 5.4, «Editing a Content Item»*


Site prerequisites

The About page content item must exist. See *Раздел 5.2, «Создане элемента содержания»*.

Steps


1. In the *Manage* administrative menu, navigate to *Content* (*admin/content*).

2. Find the About page, and click *Edit* in that row. The content editing form appears.

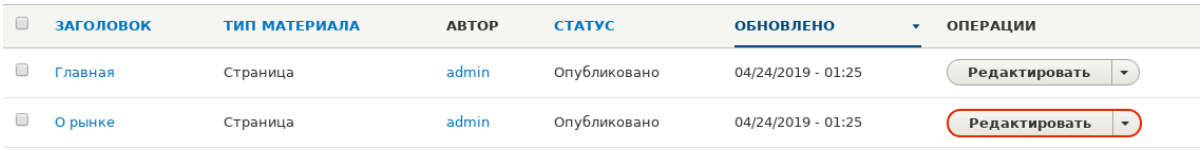


3. Click *Menu settings* on the right to expand it.
4. Check *Provide a menu link* for the menu options to appear.
5. Enter values from the table below:

Field name	**Explanation**	**Example value**
Menu link title	Title that will be displayed in the menu	About
Description	Text that will be displayed when a visitor hovers over the link	History of the market
Parent item	Location of the page in the menu hierarchy. For example, if you choose <*Main navigation*>, the page will appear in the highest level of the navigation. By choosing another menu item as parent, you can create a menu hierarchy of multiple levels.	<Main navigation>
Weight	The order in which the page should appear in the menu (lower-weighted menu items will be shown before higher-weighted menu items)	-2

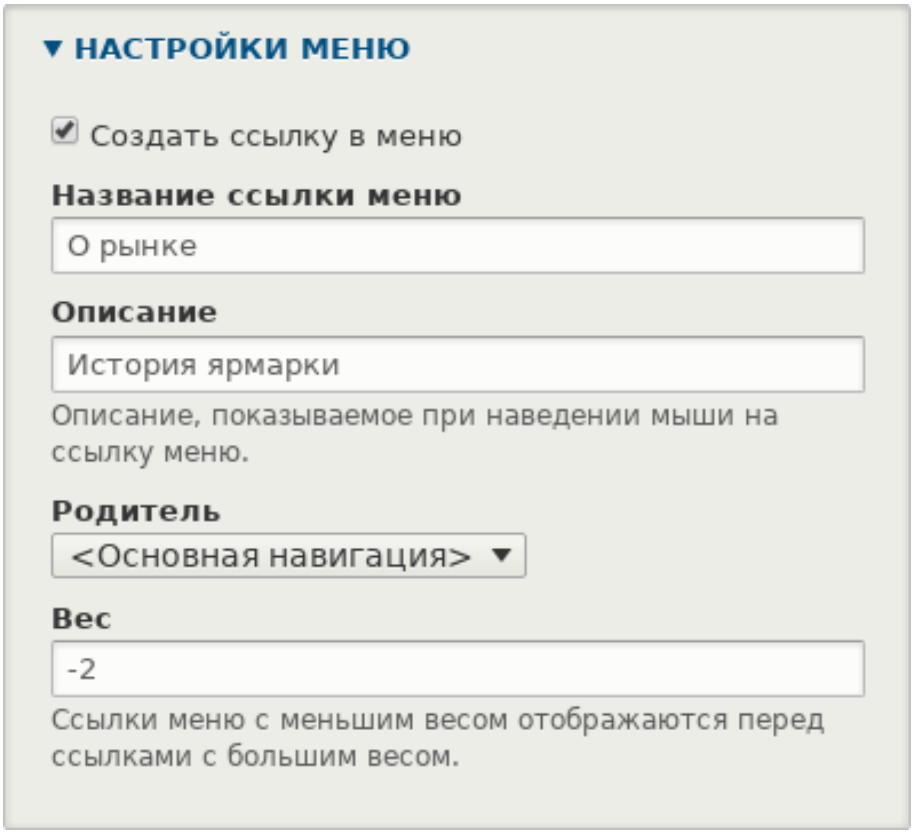

6. Click *Save* to save the changes. Click *Home* or *Return to site* in the navigation bar to see the result, which could look like the picture below.

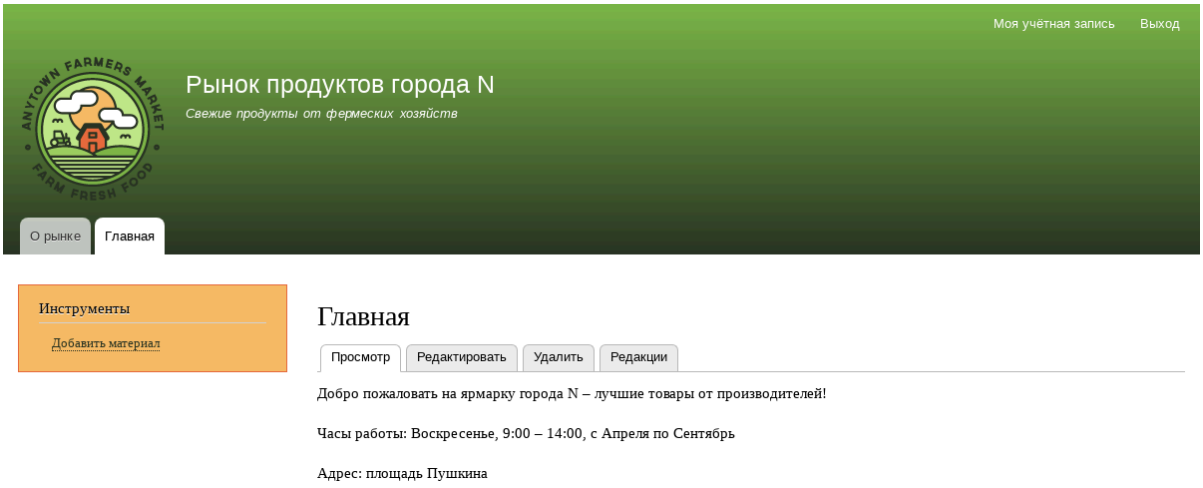

Expand your understanding

Раздел 5.9, «Changing the Order of Navigation»

Videos

Adding a Page to the Navigation

Adding a Page to the Navigation

Additional resources

Drupal.org community documentation page "Working with menus"

Attributions

Adapted by *Boris Doesborg* from *"Working with Menus"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*; edited by *Jack Haas*.

5.9. Changing the Order of Navigation

Goal

Reorder the items in a menu.

Prerequisite knowledge


- *Раздел 5.7, «Concept: Menu»*
- *Раздел 5.8, «Adding a Page to the Navigation»*

Site prerequisites


Home and About pages must exist in the main navigation menu. See *Раздел 5.8, «Adding a Page to the Navigation»*.

Steps


1. In the *Manage* administrative menu, navigate to *Structure* > *Menus* (*admin/structure/menu*) where all menus on your site are listed. Click *Edit Menu* from the *Operations* dropdown for *Main navigation*. You can also reach this page using contextual links (refer to *Раздел 4.1, «Concept: Administrative Overview»*) for the menu. Note that the names and descriptions of the menus that were provided by your installation profile are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.

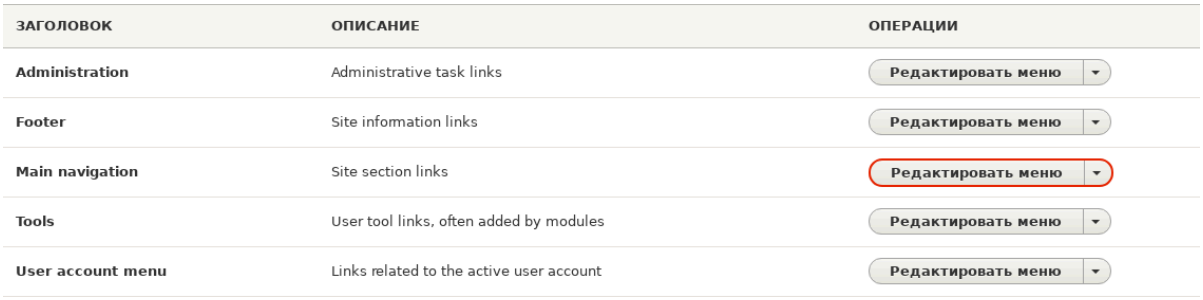


2. The *Edit menu* page will display a list of each item in the menu you chose (*Main navigation*).

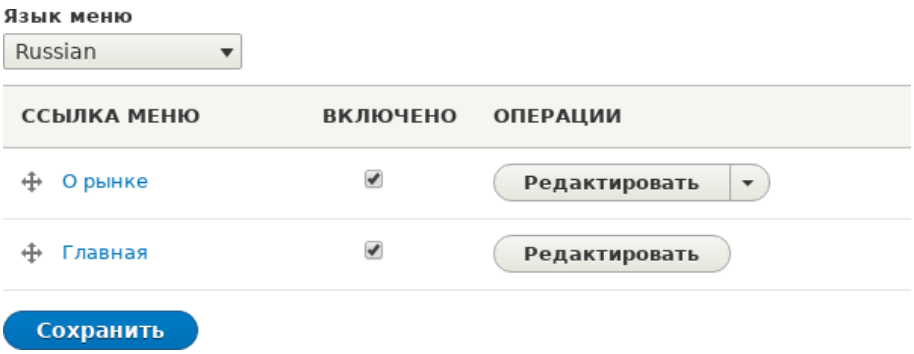

3. Drag the cross bar handles of menu items to change their order: Home, then About. As an alternative to dragging, you can click the *Show row weights* link at the top of the table and select numerical weights (menu items with lower or more negative weights will be shown first).

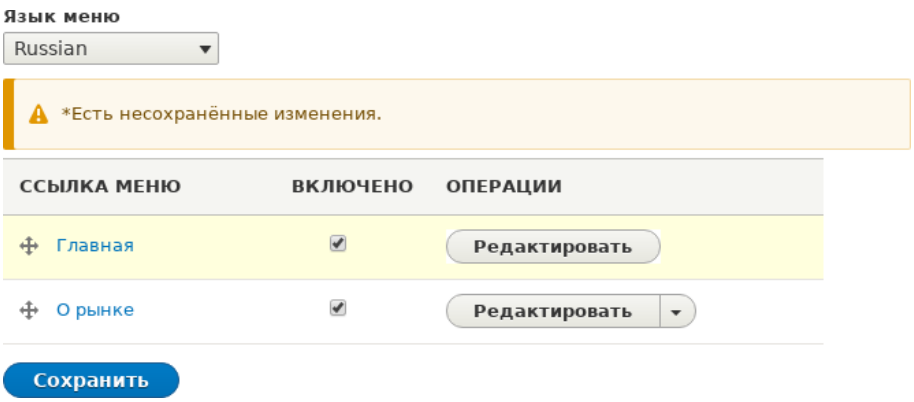

4. Click *Save*.
5. The home page now displays the main navigation with the Home menu item displayed first.

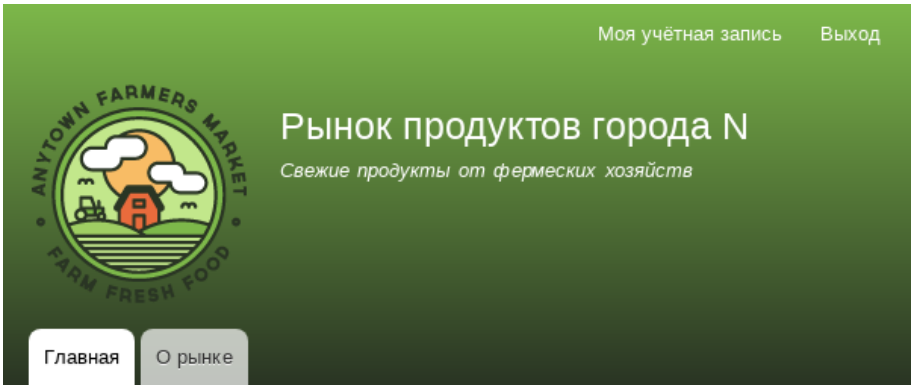

Expand your understanding

Add a menu item called *Contact*, leading to the */contact* page, to your Main navigation menu. The contact page is provided by the core Contact module; you may want to edit its layout and fields (see *Раздел 6.9, «Changing Content Entry Forms»*).

Related concepts

Раздел 5.7, «Concept: Menu»

Videos

Changing the Order of Navigation

Changing the Order of Navigation

Attributions

Written by *Ann Greazel*.

Глава 6. Настрока типов материалов

6.1. Adding a Content Type

Goal

Add and configure a new content type Vendor.

Prerequisite knowledge

Раздел 2.3, «Основы: Сущности контента и Поля»


Site prerequisites

You need to have a plan in place for your content structure. See *Раздел 2.5, «Проектирование структуры контента»*.

Steps


1. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). The *Content types* page appears showing all the available types of content. Note that the names and descriptions of the content types that were provided by your installation profile are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.
2. Click *Add content type*. The *Add content type* page appears. Fill in the fields as shown below.

Field name	Explanation	Example value
Name	Name of the content type	Vendor
Description	Explain the use of the content type	Information about a vendor

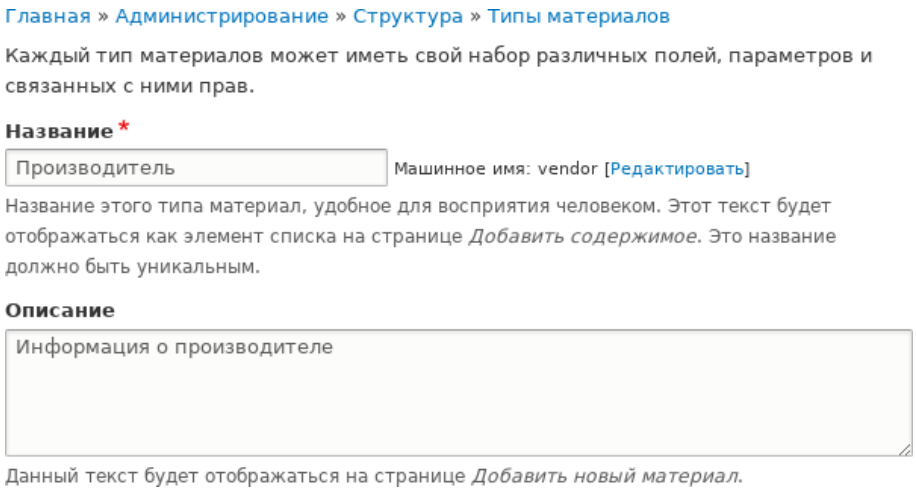

3. Under *Submission form settings*, configure the form that is used for creating and editing content of this type. Fill in the fields as shown below.


Field name	Explanation	Example value
Title field label	Label of the Title field that is shown when editing or creating content of this type.	Vendor name
Preview before submitting	Option to choose whether you should preview the content before submitting.	Optional
Explanation or submission guidelines	Instructions for creating or editing content.	(Leave blank)

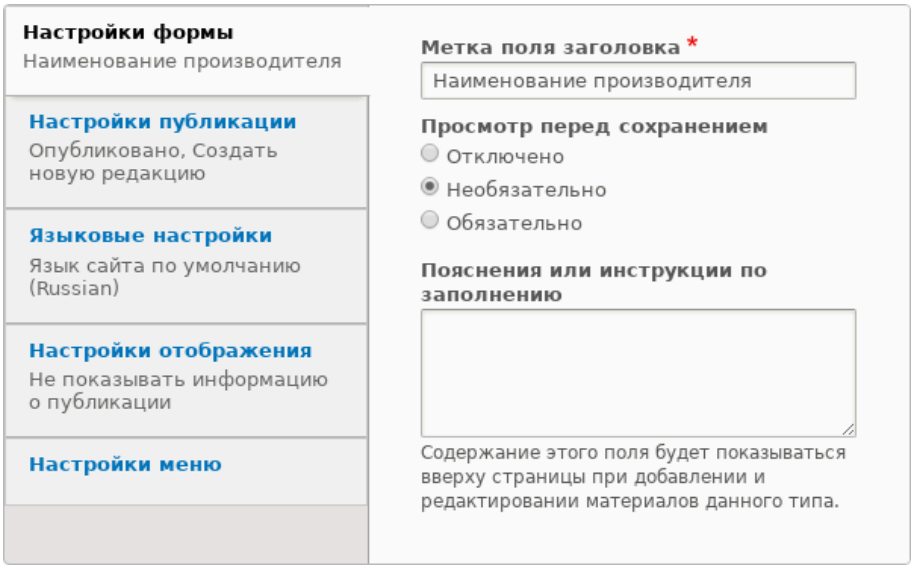

4. Under *Publishing options*, decide on default options for new content of this type. Fill in the fields as shown below.


Field name	Explanation	Example value
Published	Make the content item published by default.	Checked
Promoted to front page	In a default website, this setting can be used to show content on the homepage.	Unchecked
Sticky at top of lists	In a default website, this setting can be used to keep content on top of a list.	Unchecked
Create new revision	Create a new revision each time the vendor is being edited.	Checked

Changing these settings does not affect the content items that have already been created.

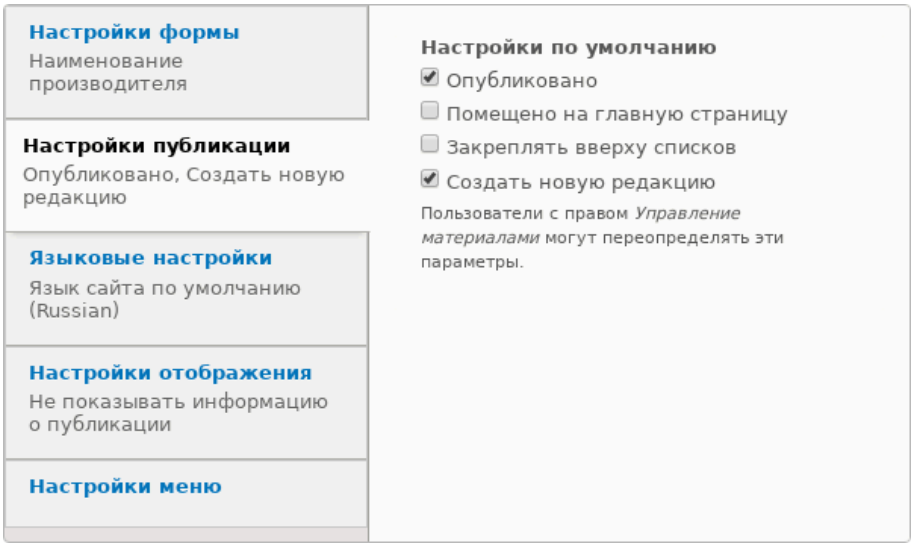


5. Under *Display settings*, decide if the author and publication date will be visible in the content item. Fill in the fields as shown below.

Field name	Explanation	Example value
Display author and date information	Display the author username and publication date on each vendor page.	Unchecked

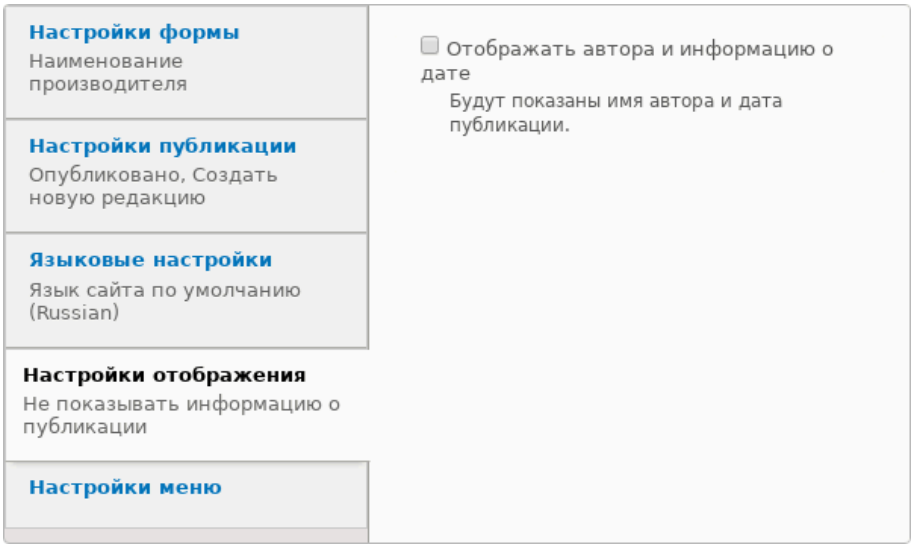


6. Under *Menu settings*, fill in the fields as shown below.

Field name	Explanation	Example value
Available menus	Menus that this type of content can be added to. Vendors do not need to appear in menus, so uncheck all menu options.	Unchecked

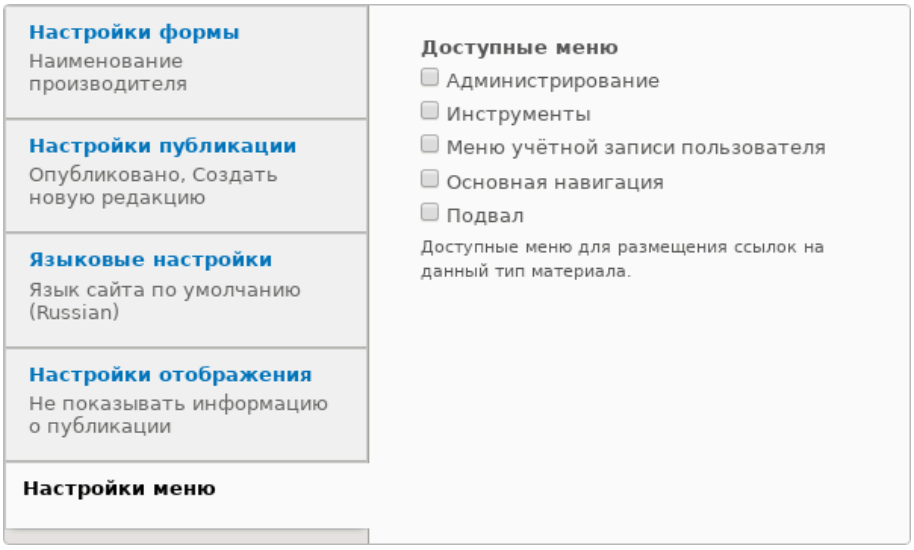

7. Click *Save and manage fields* to save the content type. The *Manage fields* page appears that allows you to add fields to the content type. See *Раздел 6.3, «Adding Basic Fields to a Content Type»*

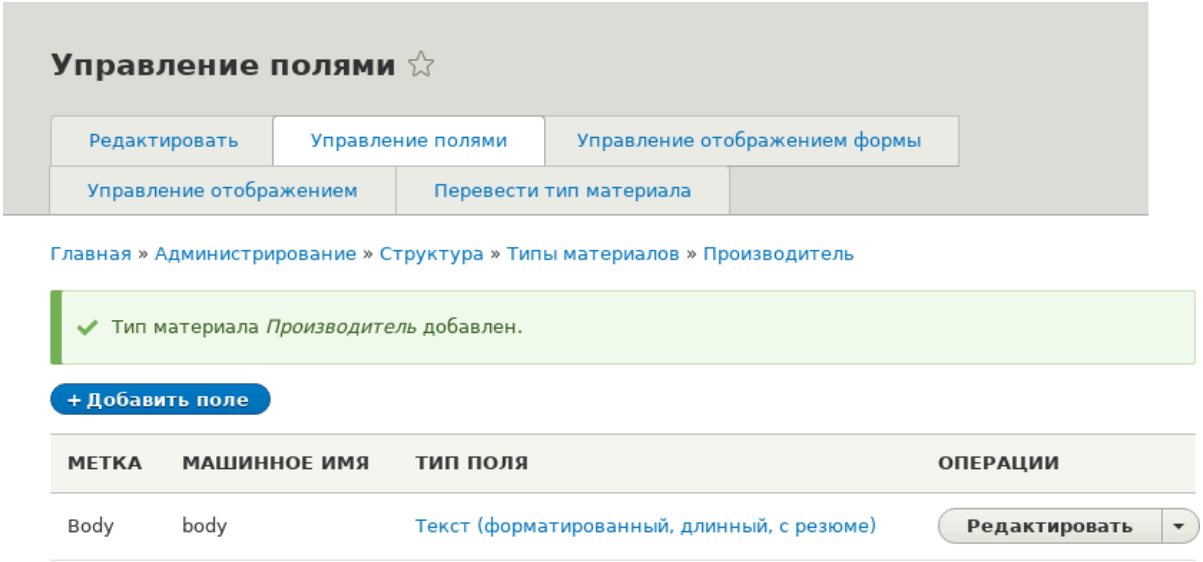

8. Follow the same steps to create a content type for recipes. Example values for the fields in the forms, where they are different from the steps above:

Field name	Example value
Name	Recipe
Description	A recipe submitted by a vendor
Submission form settings - Title	Recipe name

Expand your understanding

- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- Install and configure the *contributed Pathauto module* so that content items get automatically generated URLs/path aliases. See *Раздел 5.1, «Concept: Paths, Aliases, and URLs»* for more on URLs within your site, *Раздел 11.1, «Finding Modules»* for instructions on finding contributed modules, and *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»* for instructions on downloading and installing contributed modules.

Videos

Adding a Content Type

Adding a Content Type

Attributions

Written and edited by *Sree Veturi*, *Boris Doesborg*, and *Jennifer Hodgdon*.

6.2. Deleting a Content Type

Goal

Delete the unneeded content type *Article*.

Prerequisite knowledge


Раздел 4.1, «Concept: Administrative Overview»

Site prerequisites


The *Article* content type must exist. It is created on your site when you install with the core Standard installation profile.

Steps


1. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). The *Content types* page appears.
2. Click *Delete* in the *Operations* dropdown button for the *Article* content type. Note that the name of this content type is in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.

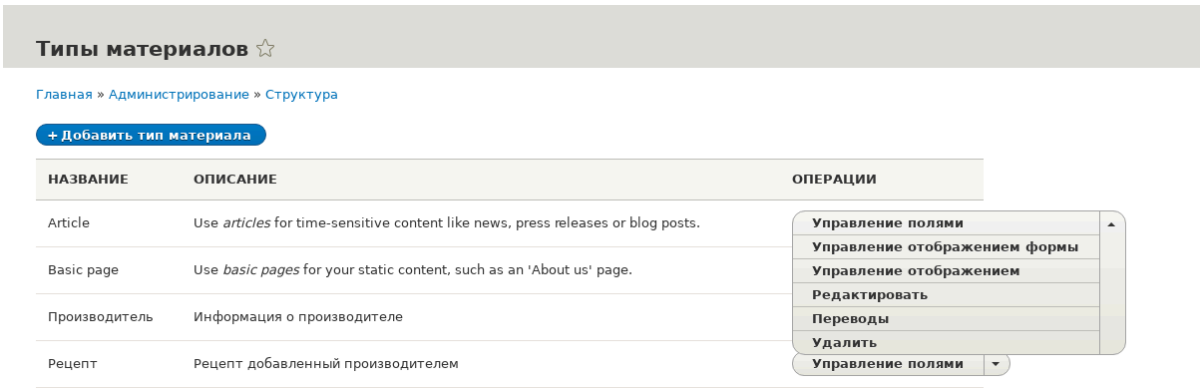

3. A confirmation page is displayed. Click *Delete*.

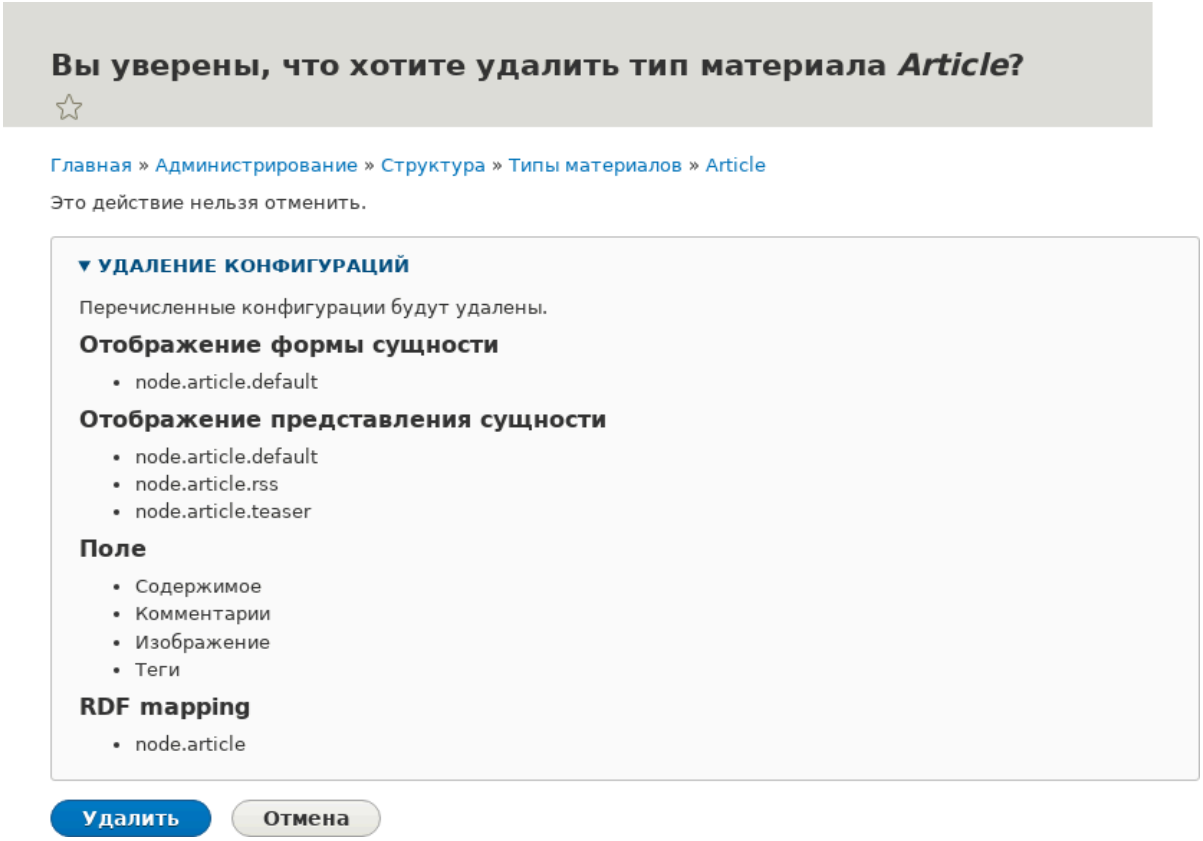

4. The *Content types* page appears with a confirmation message saying that the content type has been deleted:



Videos

Deleting a Content Type

Deleting a Content Type

Attributions

Written and edited by *Sree Veturi* and *Boris Doesborg*.

6.3. Adding Basic Fields to a Content Type

Goal

Add a link field and an image field to the Vendor content type.

Prerequisite knowledge

Раздел 2.3, «Основы: Сущности контента и Поля»

Site prerequisites

The Vendor content type must exist. See *Раздел 6.1, «Adding a Content Type»*.


Steps

Add the fields Vendor URL and Main image to the Vendor content type.

1. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). Then click *Manage fields* in the dropdown button for the Vendor content type. The *Manage fields* page appears. Note that the names and descriptions of the content types and fields that were provided by your installation profile are shown in English on these pages; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.
2. Click *Add field*. The *Add field* page appears. You can either create a new field for the content type or re-use an existing field.
3. Fill in the fields as shown below.

Field name	Explanation	Value
Add a new field	Field type	Link
Label	Label that is visible in administration pages	Vendor URL

A machine name is automatically generated, based on the *Label* value. Click *Edit* if you want to override the default name.

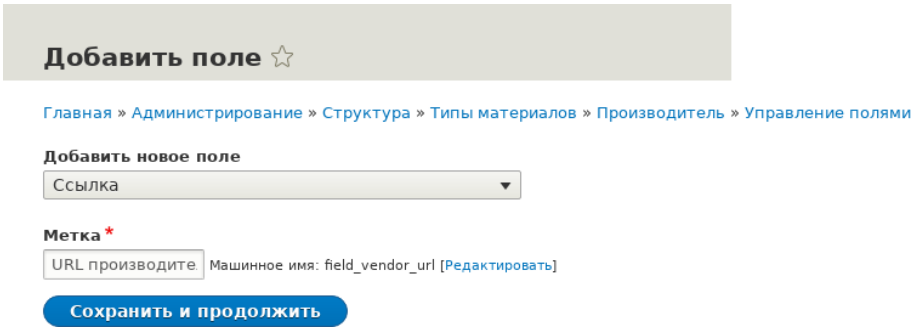


4. Click *Save and continue*. The page Vendor URL appears which lets you set the allowed number of values. Fill in the fields as shown below.

Field name	Explanation	Value
Allowed number of values	The number of values that can be entered	Limited, 1

5. Click *Save field settings*. The page *Vendor URL settings for Vendor* appears which allows you to configure the field. Fill in the fields as shown below.

Field name	Explanation	Value
Label	Label that is visible in the content form	Vendor URL
Help text	The instruction that is shown below the field	(leave blank)
Required field	Whether the field is required or not	Unchecked
Allowed link type	The kind of links that can be entered	External links only
Allow link text	Whether a link text can be entered	Disabled

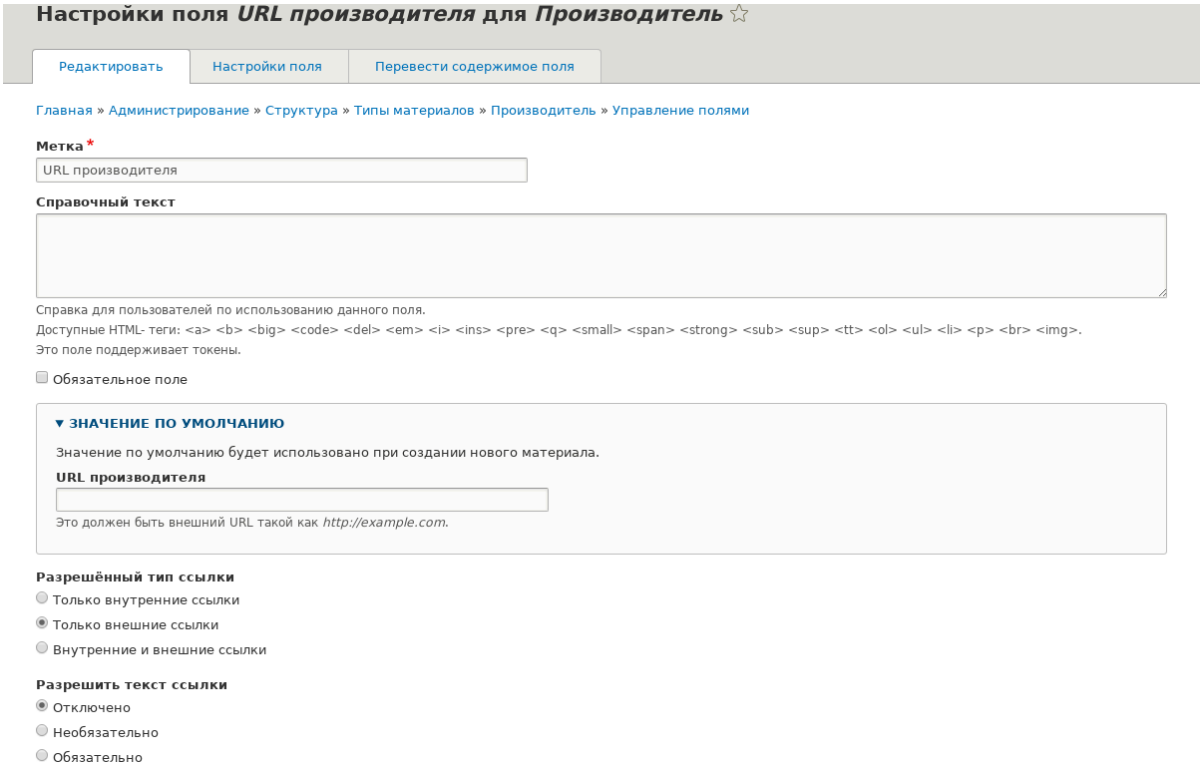

6. Click *Save settings*. The Vendor URL has been added to the content type. Continue creating the Main image field.

7. Click *Add field*. The *Add field* page appears. Fill in the fields as shown below.

Field name	Explanation	Value
Add a new field	Field type	Image
Label	Label that is visible in administration pages	Main image


8. Click *Save and continue*. The page Main image appears. Fill in the fields as shown below.

Field name	Explanation	Value
Allowed number of values	The number of values that can be entered	Limited, 1


You can set a default image here. This will be used when you do not provide an image when creating a Vendor content item.

9. Click *Save field settings*. The page *Main image settings for Vendor* appears. Fill in the fields as shown below.

Field name	Explanation	Value
Label	Label that is visible in the content form	Main image
Help text	The instruction that is shown below the field	(leave blank)
Required field	Whether the field is required or not	Checked
Allowed file extensions	The type of images that can be uploaded	png, gif, jpg, jpeg
File directory	The directory where the files will be stored. By providing a file directory value, you ensure that all images uploaded via the Main image field will be located in the same directory.	vendors
Minimum image resolution	The minimum resolution of the uploaded image	600 x 600
Maximum upload size	The maximum file size of the uploaded image	5 MB
Enable Alt field	Whether an alternative text can be entered	Checked
Alt field required	Whether an alternative text is required	Checked

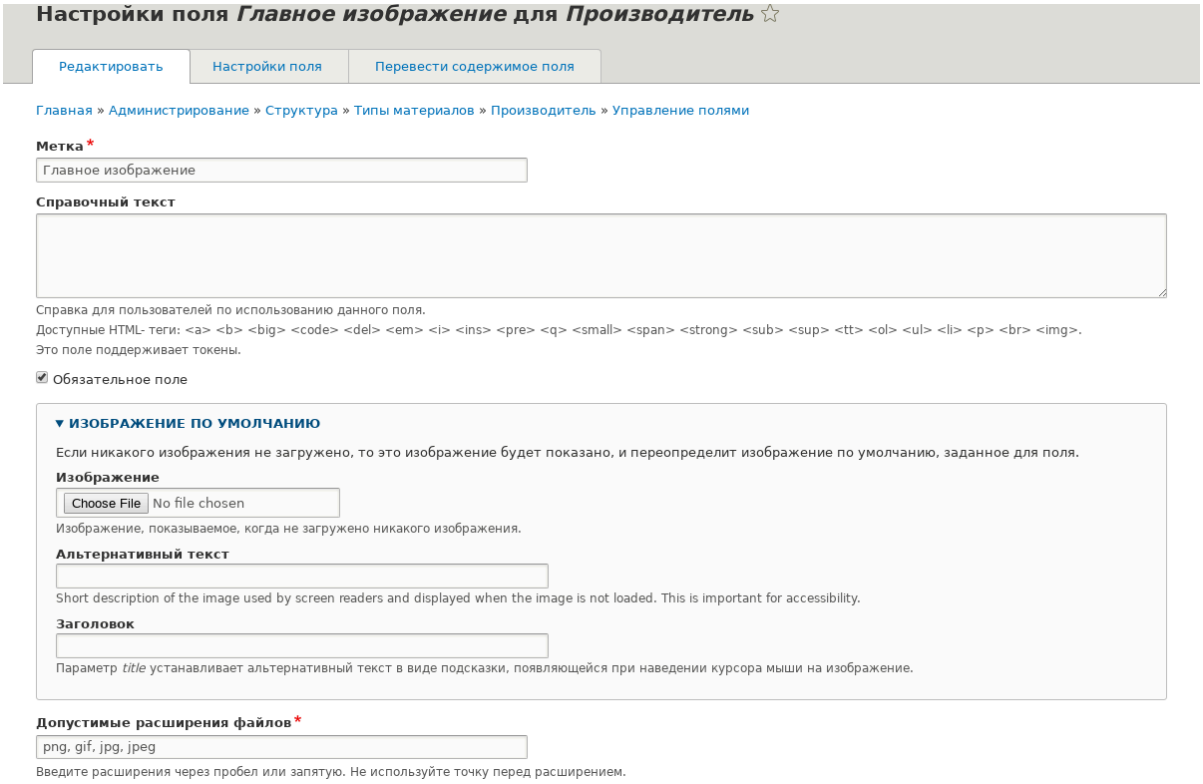

10. Click *Save settings*. Main image has been added to the content type.

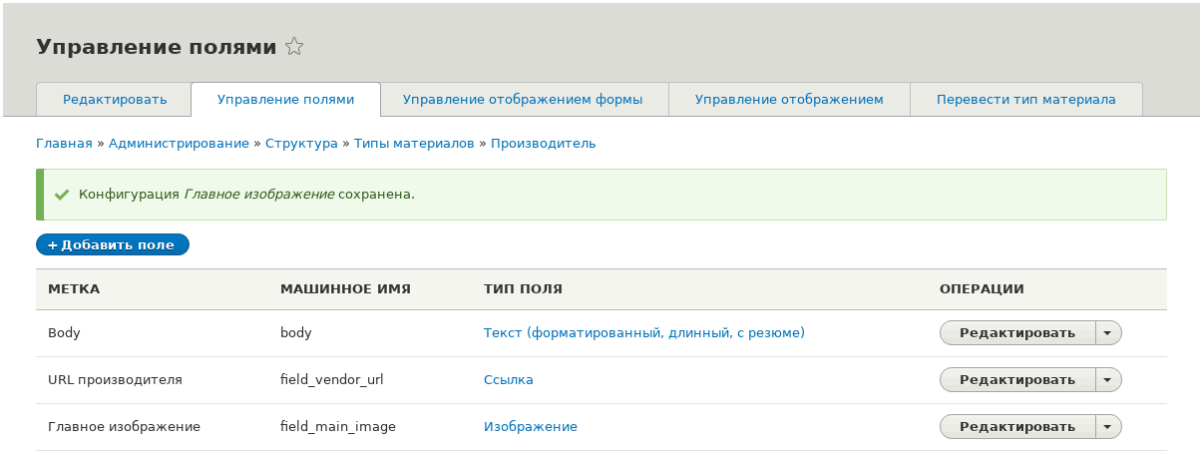

11. Add a Main image field to the Recipe content type, using similar steps. Start by navigating to the Recipe content type's *Manage Fields* page in step 1. Then skip to step 7 and follow the remaining steps, but reuse the existing Main image field you created for the Vendor content type rather than creating a new field. In subsequent steps, some of the configuration screens will not be available, because of the field reuse.
12. Create two Vendor content items (see *Раздел 5.2, «Создане элемента содержания»*) called "Happy Farm" and "Sweet Honey". Make sure that they include images and URLs.

Expand your understanding

- *Раздел 6.12, «Concept: Image Styles»*
- *Раздел 6.11, «Changing Content Display»*
- *Раздел 6.9, «Changing Content Entry Forms»*

Videos

Adding Basic Fields to a Content Type

Adding Basic Fields to a Content Type

Additional resources

Drupal.org community documentation page "Add a field to a content type"

Attributions

Written by *Sree Veturi* and *Boris Doesborg*.

6.4. Concept: Reference Fields

Prerequisite knowledge

Раздел 2.3, «Основы: Сущности контента и Поля»

What is a reference field?

A *reference field* is a field that represents a relationship between an entity and one or more other entities, which may belong to the same or different entity type. The three most commonly-used reference fields are:

Content reference

> A reference to a content item. For example, you might want to connect recipes to the vendors who submitted them. You would set up a content reference field called Submitted by referencing Vendor content items on the Recipe content type.

Taxonomy term reference

> A reference to a taxonomy term. For example, you might want to connect recipes to their ingredients. You would set up a taxonomy term reference field called Ingredients on the Recipe content type. This reference field will point to the vocabulary Ingredients.

User reference

A reference to a user account. For example, you might want to connect recipes with their chefs. You would set up a user reference field called Chefs on the Recipe content type.

Related topics

Раздел 6.5, «Concept: Taxonomy»

Attributions

Written and edited by *Surendra Mohan*, and *Jojy Alphonso* at *Red Crackle*.

6.5. Concept: Taxonomy

Prerequisite knowledge

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 6.4, «Concept: Reference Fields»*

What is Taxonomy?

Taxonomy is used to classify website content. One common example of taxonomy is the tags used to classify or categorize posts in a blog website; the farmers market website could use an ingredients taxonomy to classify recipes. Individual taxonomy items are known as *terms* (the blog tags or recipe ingredients in these examples); and a set of terms is known as a *vocabulary* (the set of all blog post tags, or the set of all recipe ingredients in these examples). Technically, taxonomy terms are an entity type and the entity subtypes are the vocabularies. Like other entities, taxonomy terms can have fields attached; for instance, you could set up an image field to contain an icon for each term.

An individual vocabulary can organize its terms in a hierarchy, or it could be flat. For example, blog tags normally have a flat structure, while a recipe ingredients vocabulary could be hierarchical (for example, tomatoes could be a sub-term of vegetables, and under tomatoes, you could have green and red tomatoes).

Taxonomy terms are normally attached as reference fields to other content entities, which is how you can use them to classify content. When you set up a taxonomy reference field, you can let users enter terms in two ways:


Free tagging

New terms can be created right on the content editing form.

Fixed list of terms

> The list of terms is curated and managed outside the content editing form, and users can only choose from the existing list when editing content.

Taxonomy reference fields can be added to any entity, such as user accounts, custom blocks, or regular content items. If you use them to classify regular content items, your site will automatically be set up with taxonomy listing pages for each term; each of these pages lists all of the content items that are classified with that term. For example, if you created several recipes that all had carrots as an ingredient, you might see something like this on the Carrots taxonomy listing page:

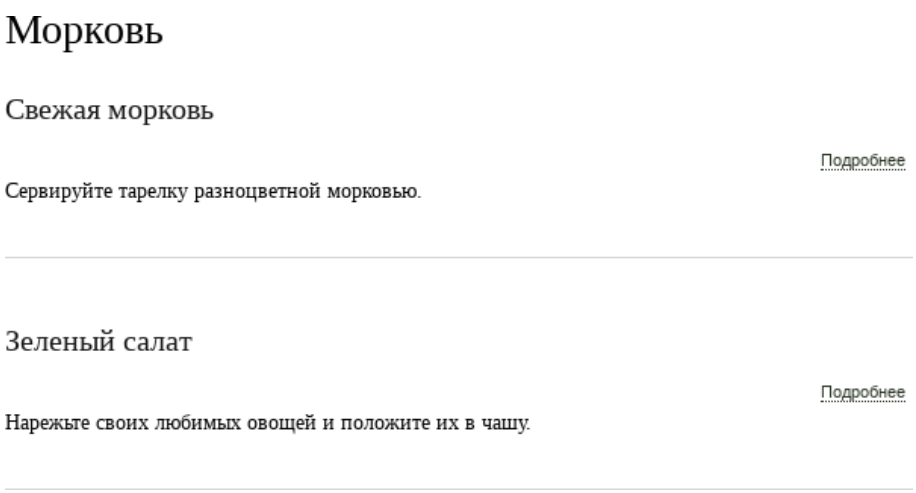

Related topics

- *Раздел 6.6, «Setting Up a Taxonomy»*.
- The listing pages are views, which are covered in *Глава 9, Вывод материалов через Views*.

Attributions

Adapted and edited by *Surendra Mohan*, *Jennifer Hodgdon*, and *Jojy Alphonso* at *Red Crackle* from *"Organizing content with taxonomies"* and *"About taxonomies"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

6.6. Setting Up a Taxonomy

Goal

Create an Ingredients vocabulary and add it to the Recipe content type as a field that can contain an unlimited number of values and that allows adding new terms to the vocabulary.

Prerequisite knowledge


- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 6.5, «Concept: Taxonomy»*
- *Раздел 6.3, «Adding Basic Fields to a Content Type»*

Site prerequisites

The Recipe content type must exist. See *Раздел 6.1, «Adding a Content Type»*.


Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Taxonomy* (*admin/structure/taxonomy*). You will see the *Tags* vocabulary that was created with the core Standard installation profile. (Note that the name and description of this vocabulary are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.)

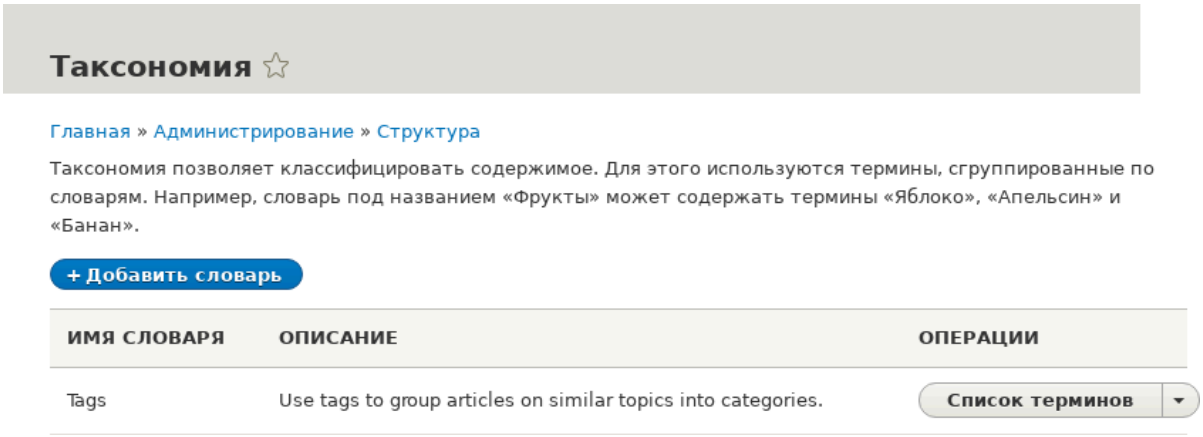


2. Click *Add vocabulary*, and fill in the values below.


Field name	Explanation	Example value
Name	The name of the vocabulary	Ingredients
Description	A brief note about the vocabulary	(Leave blank)

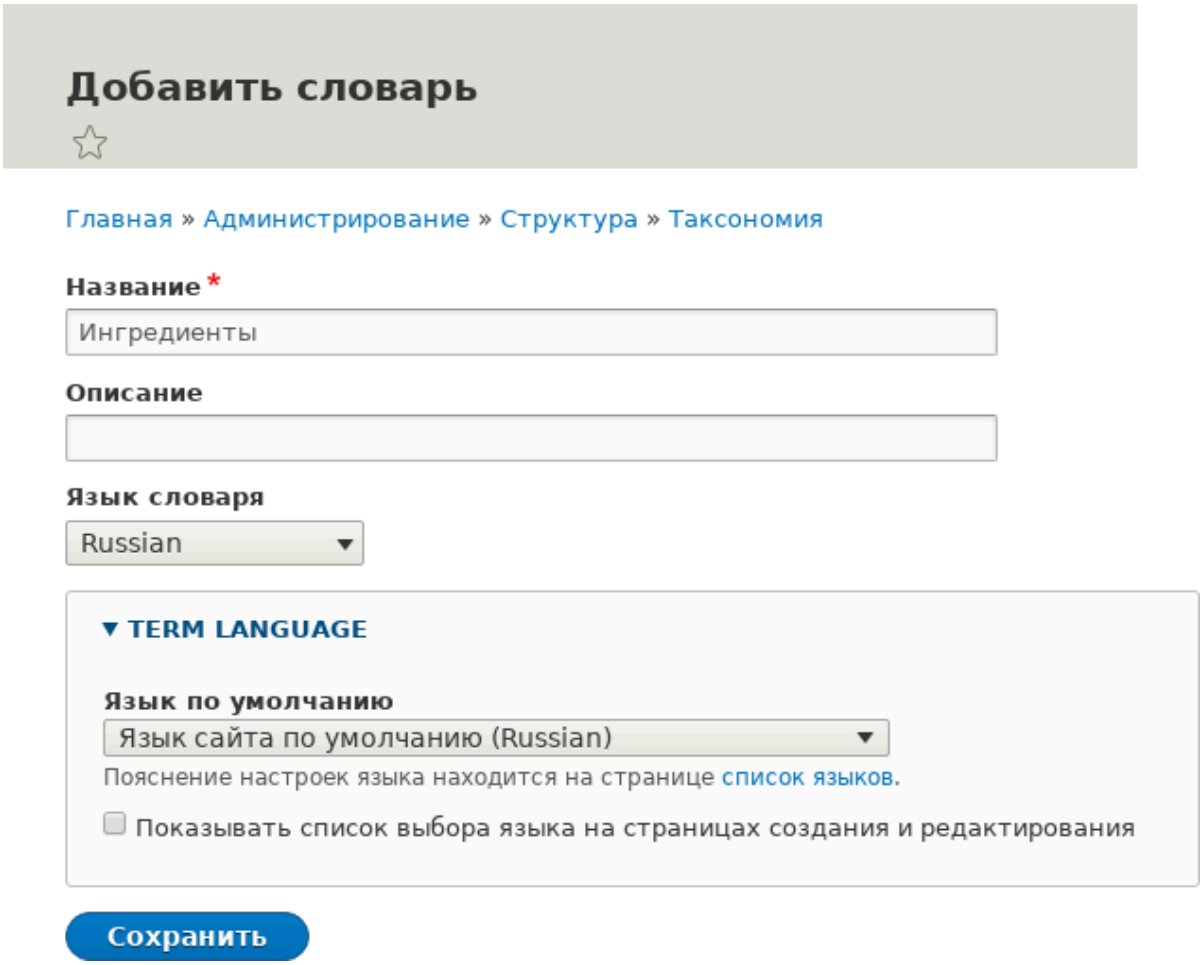

3. Click *Save*. You will be taken to the Ingredients page, which shows a list of all the terms in this vocabulary.

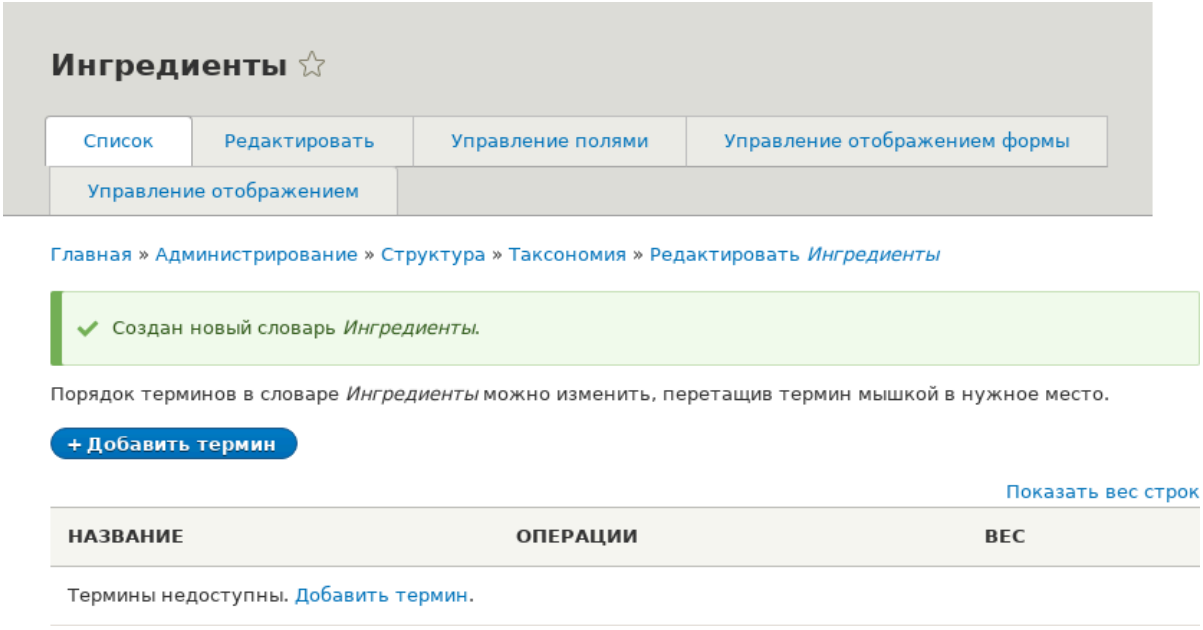


4. Click *Add term*. Enter "Butter" in the *Name* field. Click *Save*.

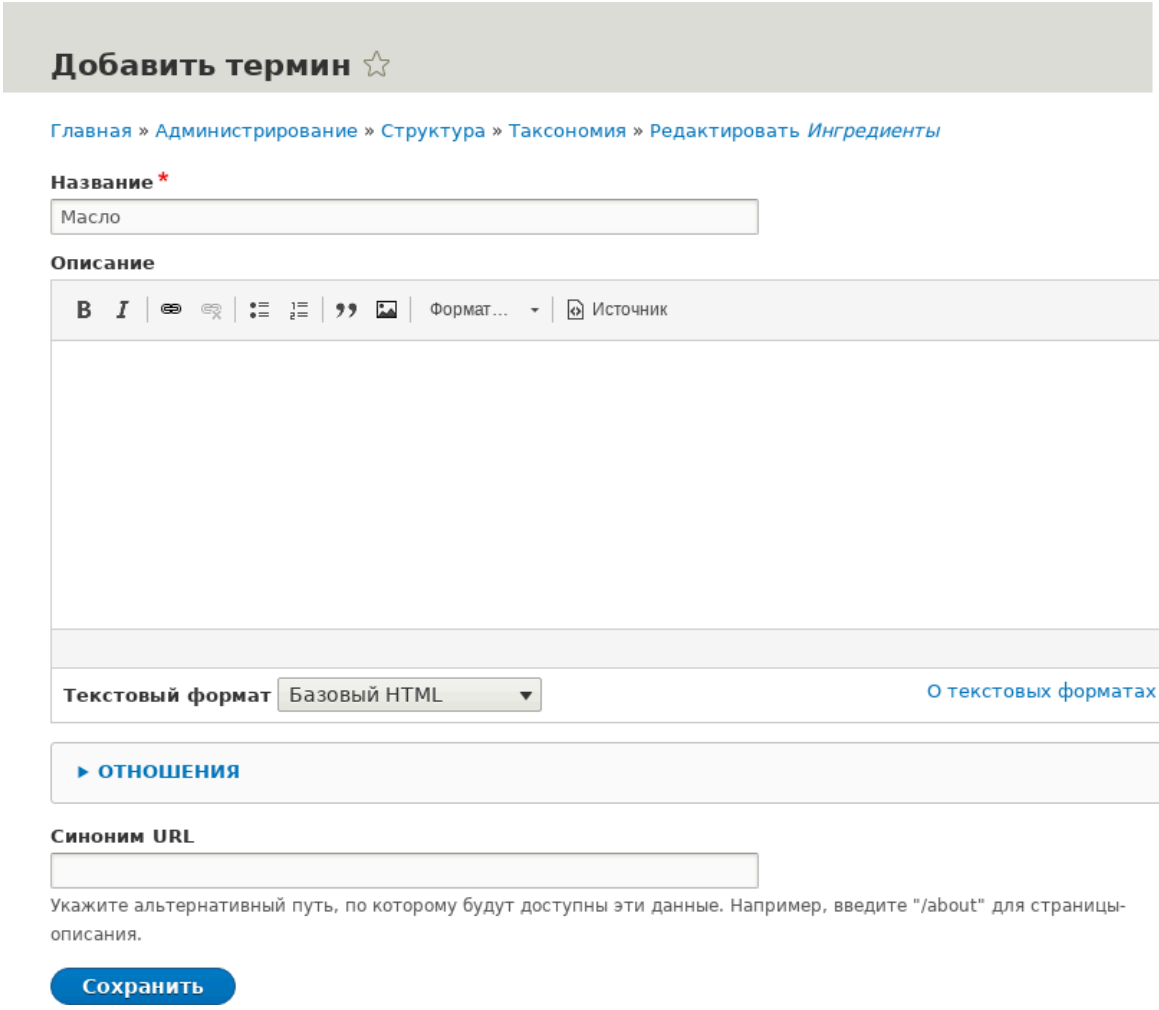


5. You will receive a confirmation about the term you created. Add more terms. For example, "Eggs" and "Milk".
6. In the *Manage* administrative menu, navigate to *Structure* > *Content Types* (*admin/structure/types*). Click *Manage fields* for your Recipe content type.
7. Click *Add field*, and enter values from the table below. Click *Save and continue*.

Field name	Explanation	Value
Add a new field	Select the field type	Reference > Taxonomy term
Label	The title to give the field	Ingredients

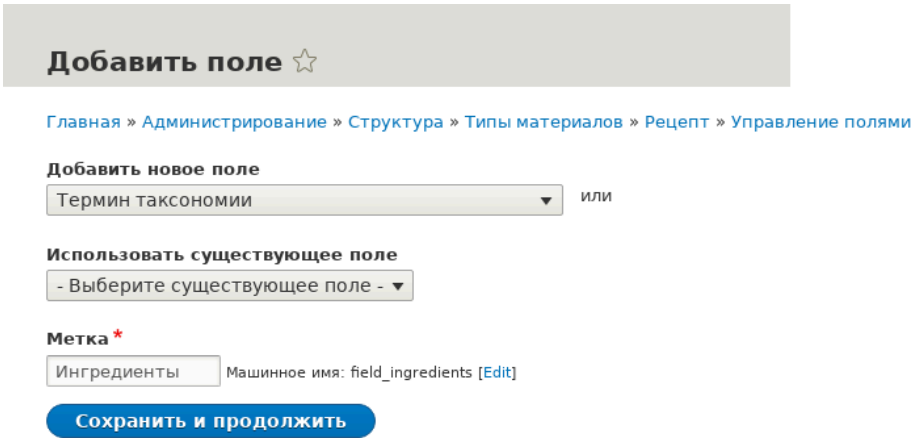

8. On the following configuration screen, enter the values from the table below. Click *Save field settings*.


Field name	Explanation	Value
Type of item to reference	The type of entity that is referenced by the field	Taxonomy term
Allowed number of values	The number of values a user can enter	Unlimited

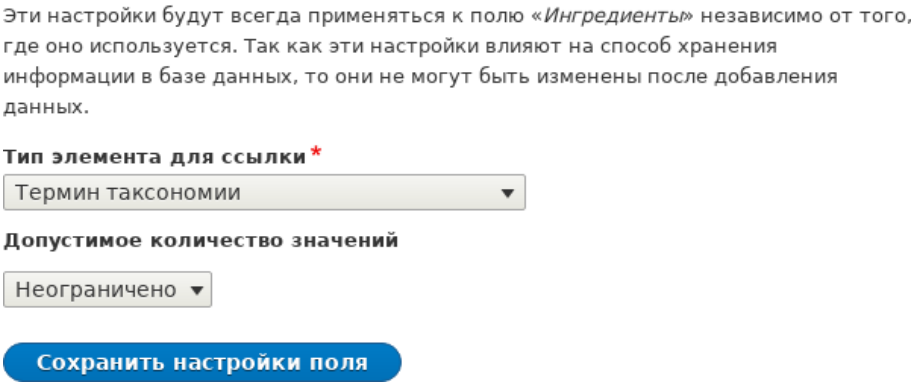


9. On the following configuration screen, enter the values from the table below. Click *Save settings*.

Field name	Explanation	Value
Help text	Help shown to users creating content	Enter ingredients that site visitors might want to search for
Reference type > Reference method	Select the method used to choose allowed values	Default
Reference type > Vocabulary	Select the vocabulary to choose allowed values from	Ingredients

Field name	Explanation	Value
Reference type > Create referenced entities if they don't already exist	Whether new ingredient terms can be created from the content editing form	Checked

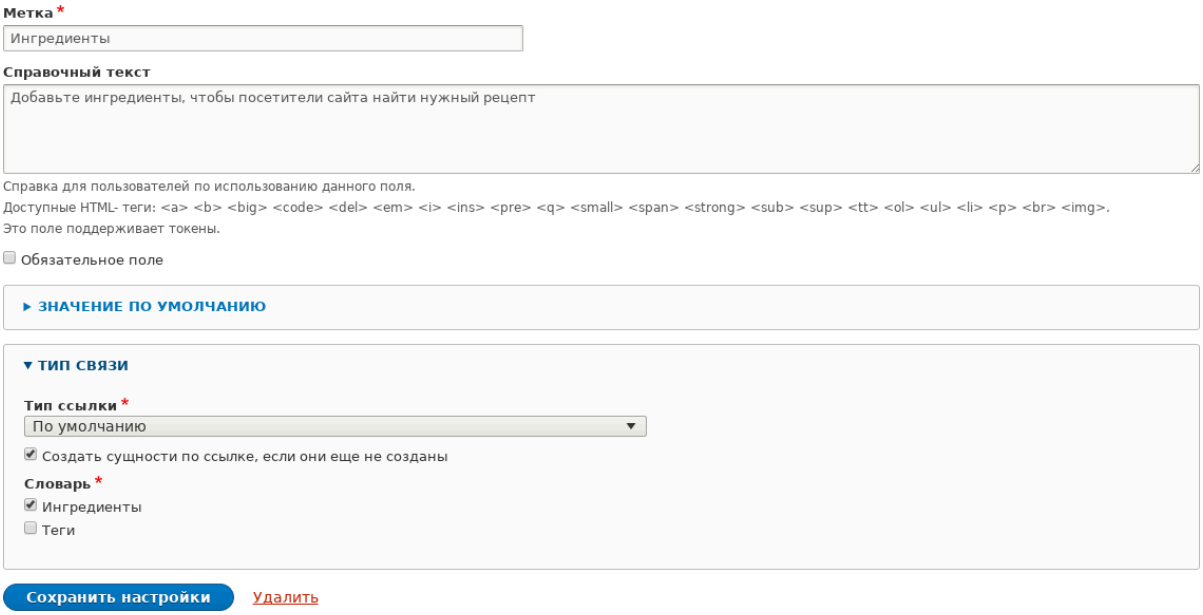

10. Click *Save settings*. You will be taken back to the *Manage Fields* page. A message will be displayed saying that the configuration for Ingredients is complete.

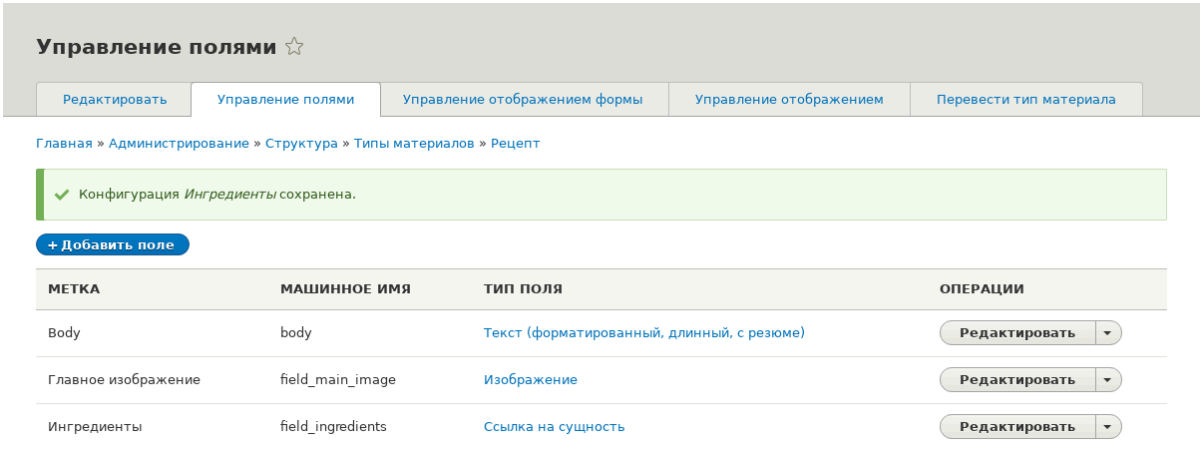

Videos

Setting up a Taxonomy

Setting up a Taxonomy

Attributions

Written and edited by *Bob Snodgrass*, and *Jojy Alphonso* at *Red Crackle*.

6.7. Adding a Reference Field

Goal

Add a reference field so that recipes can be linked to the vendor that has submitted it.

Prerequisite knowledge

- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- *Раздел 6.4, «Concept: Reference Fields»*
- *Раздел 6.1, «Adding a Content Type»*


Site prerequisites

The Recipe and Vendor content types must exist. See *Раздел 6.1, «Adding a Content Type»*.

Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). Then click *Manage fields* in the dropdown button for the Recipe content type. The *Manage fields* page appears.
2. Click *Add field*. The *Add field* page appears. Fill in the fields as shown below. Click *Save and continue*.


Field name	Explanation	Value
Add a new field	Option to specify the field type	Reference > Content
Label	The title you want to give the field	Submitted by

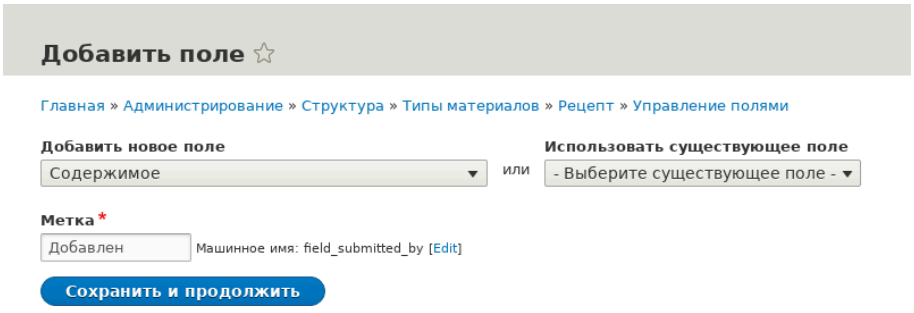

3. The page Submitted by appears which lets you set the allowed number of values. Fill in the fields as shown below. Click *Save field settings*.


Field name	Explanation	Value
Type of item to reference	Option to select the type of referenced item	Content

Field name	Explanation	Value
Allowed number of values	Specify the count of values associated with the field	Limited, 1

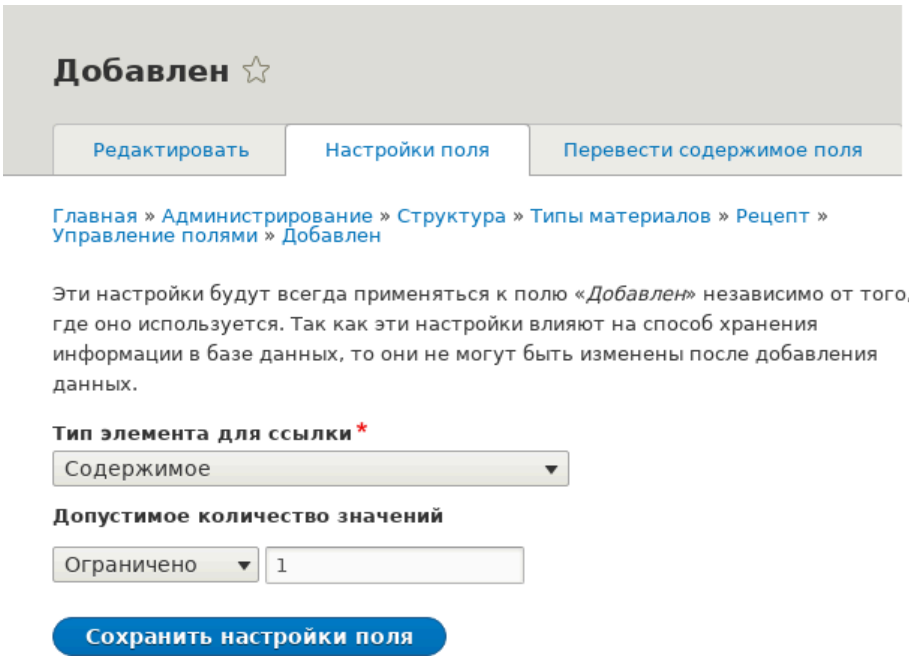


4. The page *Submitted by settings for Recipe* appears which allows you to configure the field. Fill in the fields as shown below. Click *Save settings*.

Field name	Explanation	Value
Label	Title shown for this field on the page	Submitted by
Help text	Brief text aiding the person creating content	Choose the vendor that submitted this recipe
Required field	Whether a value has to be provided or not	Checked
Reference type > Reference method	Option to select reference method	Default
Reference type > Content types	Specify the content type	Vendor
Reference type > Sort by	Sorting field	Title
Reference type > Sort direction	Sorting order	Ascending

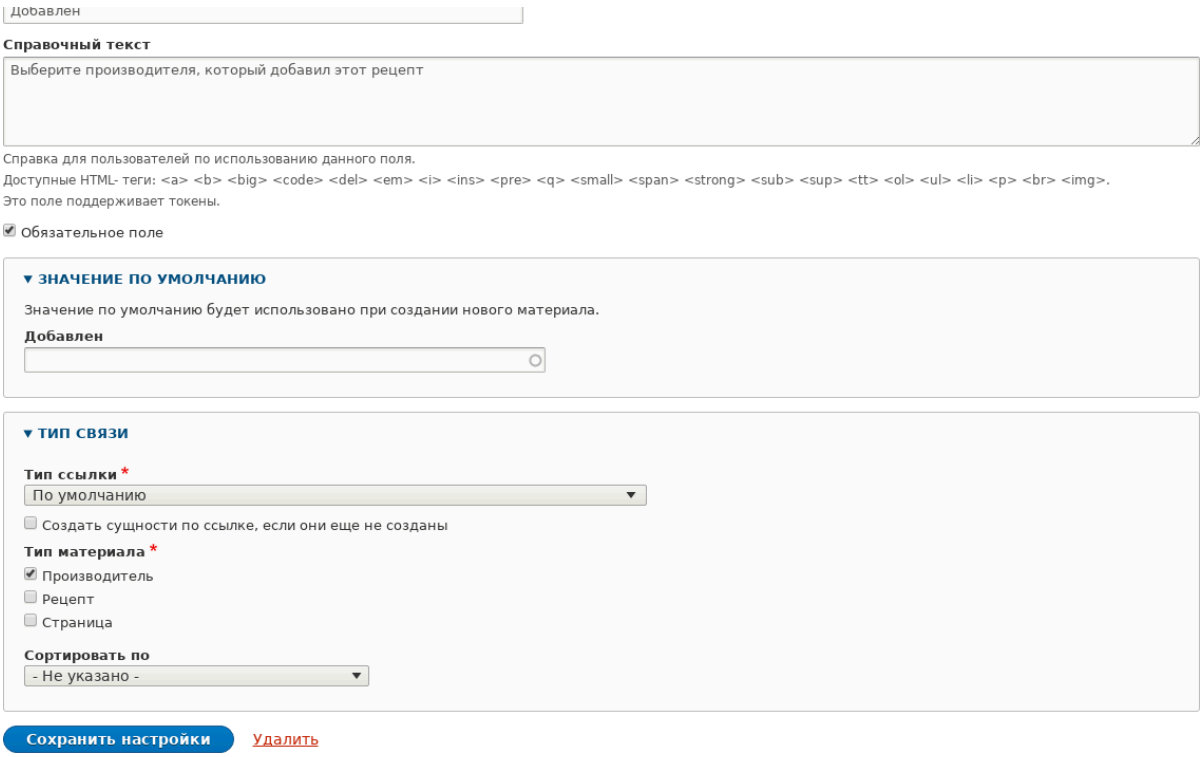

5. The Submitted by field has been added to the content type.

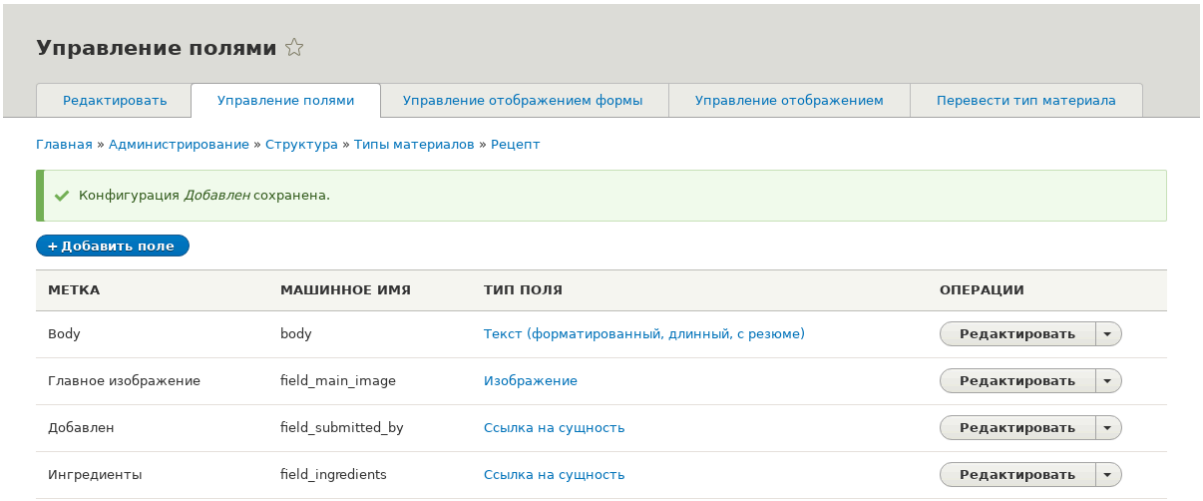

Videos

Adding a Reference Field

Adding a Reference Field

Attributions

Written and edited by *Boris Doesborg*, and *Jojy Alphonso* at *Red Crackle*.

6.8. Concept: Forms and Widgets

Prerequisite knowledge

Раздел 2.3, «Основы: Сущности контента и Поля»

What are forms and widgets?

The content management system software that your site is running allows administrators to edit content and configure settings online, using various web *forms*. In particular, *content editing forms* are used to edit your site's content, and they are configurable by administrators; settings configuration forms are provided by modules and cannot themselves be configured.

The data in your site's content is stored in one or more fields that are attached to the content type and/or sub-type. When you configure the content editing form for each content sub-type, you can:

- Select a *widget* for each field. A widget defines the method used to enter the data for the field. For example, a taxonomy term can be chosen using an autocomplete field, a select list, or a tags-style field that lets editors add new tags automatically.
- Configure widget settings. For example, you can choose the size of a plain-text entry field.
- Hide one or more fields from the editing form.
- Reorder the fields.

In principle, you can also have multiple content editing forms available for each content sub-type. This feature is rarely used, however; the only exception in common use is for the user profile fields: you can use different forms for user registration and user editing. For example, you might have a limited set of fields shown when users first register on the site, and more fields shown later on when they edit their profiles.

Related topics

- *Раздел 6.9, «Changing Content Entry Forms»*
- *Раздел 6.10, «Concept: View Modes and Formatters»*

Attributions

Written by *Jennifer Hodgdon*.

6.9. Changing Content Entry Forms

Goal

Change the Recipe form to use a different widget to enter terms in the Ingredients field.

Prerequisite knowledge

- *Раздел 6.1, «Adding a Content Type»*
- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- *Раздел 6.5, «Concept: Taxonomy»*
- *Раздел 6.8, «Concept: Forms and Widgets»*

Site prerequisites


The Recipe content type must exist, and it must have an Ingredients taxonomy term reference field. See *Раздел 6.1, «Adding a Content Type»* and *Раздел 6.6, «Setting Up a Taxonomy»*.

Steps

1. In the *Manage* administrative menu, navigate to *Content* > *Add content* > *Recipe* (*node/add/recipe*) to look at the content entry form that is set up by default. Notice how you have to enter ingredients one by one, instead of having a more compact format.
2. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). Then click *Manage form display* on the dropdown button for the Recipe content type. The *Manage form display* page appears.
3. For the Ingredients field, select *Autocomplete (Tags style)* in the *Widget* column.

ПОЛЕ	ВИДЖЕТ	
Название рецепта	Текстовое поле	Размер текстового поля: 60
Язык	Выбор языка	
Автор	Автодополнение	Автодополнение совпадает: Содержит Размер текстового поля: 60 Нет заполнителя
Время создания	Дата и время	
Помещено на главную страницу	Одиночный флаг вкл./выкл.	Использовать метку поля: Да
Закреплять вверху списков	Одиночный флаг вкл./выкл.	Использовать метку поля: Да
Синоним URL	Синоним URL	
Опубликовано	Одиночный флаг вкл./выкл.	Использовать метку поля: Да
Body	Текстовая область с анонсом	Количество строк: 9 Количество строк анонса: 3
Главное изображение	Изображение	Предварительный просмотр стиля изображения: Миниатюра (100×100) Индикатор прогресса: throbber
Ингредиенты	Автодополнение (в стиле тегов)	Автодополнение совпадает: Содержит Размер текстового поля: 60 Нет заполнителя
Добавлен	Автодополнение	Автодополнение совпадает: Содержит Размер текстового поля: 60 Нет заполнителя
Отключены		
Скрытых полей нет.		

4. Click *Save*.
5. In the *Manage* administrative menu, navigate to *Content* > *Add content* > Recipe (*node/add/recipe*) to verify the changed behavior of the content form. The Ingredients field is now a single text field that accepts multiple values.

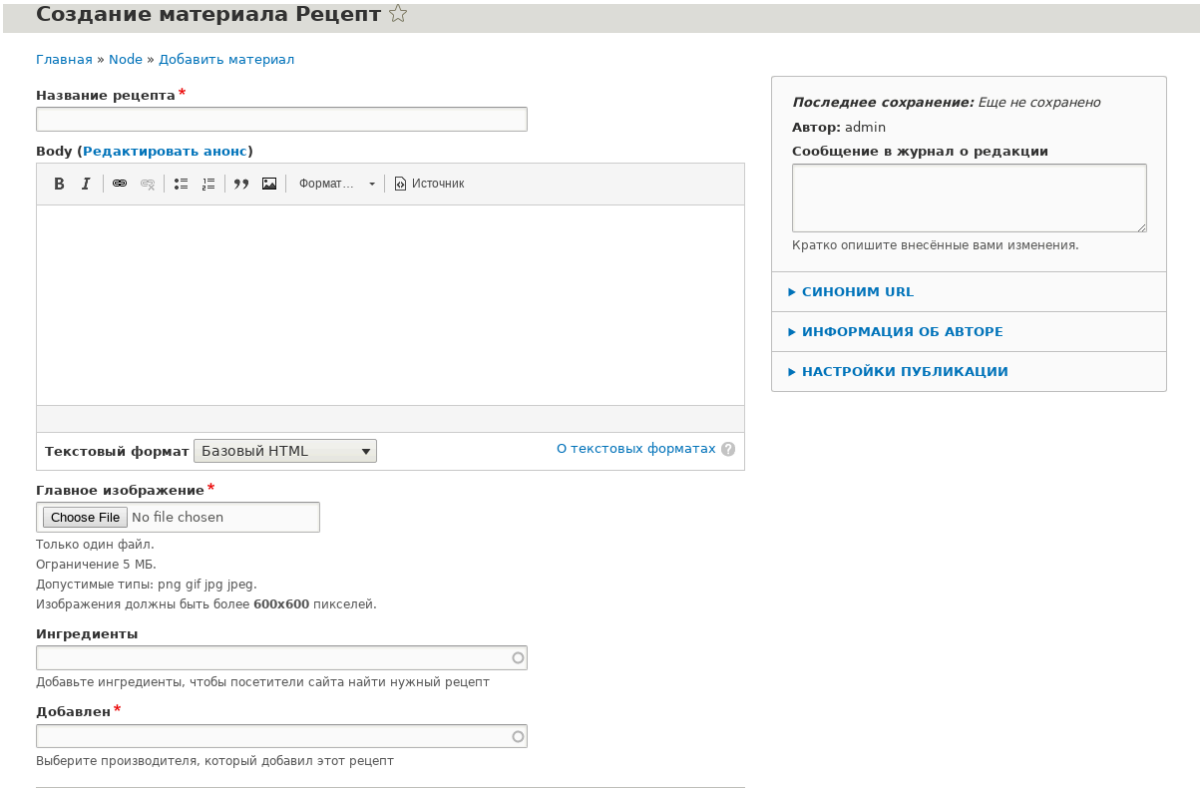

6. Create two Recipe content items (see *Раздел 5.2, «Создане элемента содержания»*), such as recipes for "Green Salad" and "Fresh Carrots". Make sure all the fields have values, including images, ingredients, and submitted by (set this to one of the Vendor content items you created in *Раздел 6.3, «Adding Basic Fields to a Content Type»*).

Expand your understanding

Change the main site Contact form by navigating in the *Manage* administrative menu to *Structure* > *Contact forms*. For instance, you may want to hide the *Send yourself a copy* or *Language* fields.

Videos

Changing Content Entry Forms

Changing Content Entry Forms

Attributions

Written by *Boris Doesborg*.

6.10. Concept: View Modes and Formatters

Prerequisite knowledge

Раздел 6.1, «Adding a Content Type»

What is a View mode?

How an entity (such as content, a user or a comment) is displayed, depends on the context in which it is shown. This context is known as a *view mode*. Examples of view modes are:

- a full page of the content with all the field values
- a teaser of the content with a thumbnail image and a *Read more* link
- a full user profile with a zoomable portrait photo
- a user avatar with username and a link to the profile

Every view mode can be configured through the administration pages. To see the configuration options for the view modes of the Recipe content type, navigate in the *Manage* administrative menu to *Structure* > *Content types* (*admin/structure/types*) and click *Manage display* from the dropdown button. In each view mode, all fields can be hidden or displayed, and if they are displayed, you can choose and configure the field formatter.

What is a field formatter?

A field formatter is a setting for displaying the field values. For example, long text fields can be displayed trimmed or full-length, and taxonomy term reference fields can be displayed in plain text or linked to the taxonomy term page. Consult the *Manage display* page to see the field formatters for the fields of the Recipe content type.

Related topics

- *Раздел 6.1, «Adding a Content Type»*
- *Раздел 6.11, «Changing Content Display»*

Additional resources

Drupal.org community documentation page "View modes"

Attributions

Adapted by *Boris Doesborg* from *"View modes"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

6.11. Changing Content Display

Goal

Make the content items more readable, accessible, and visibly attractive by reordering the fields, hiding labels, and tuning the output of the fields.

Prerequisite knowledge


- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 6.10, «Concept: View Modes and Formatters»*

Site prerequisites


The Vendor content type must exist, it must have Main Image and Vendor URL fields, and your site must have at least one Vendor content item. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, and *Раздел 5.2, «Создане элемента содержания»*.

Steps

1. Find and view a Vendor content item you created in *Раздел 6.3, «Adding Basic Fields to a Content Type»*. Notice that there are several things that could be done to improve how the page looks:
   - The Main Image and Vendor URL fields should not have labels.
   - The order of the fields should be changed so that the image comes first.
   - The image should be smaller.
2. To fix the first two problems, and update some additional settings, in the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*). Then click *Manage display* in the dropdown button for the Vendor content type.

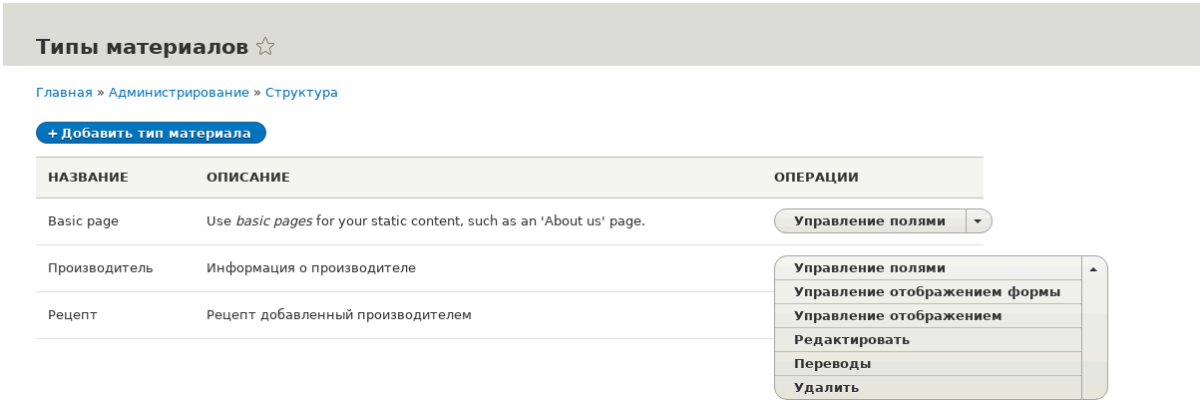


3. Under the *Label* column, select *Hidden* for Main image. Do the same for Vendor URL.

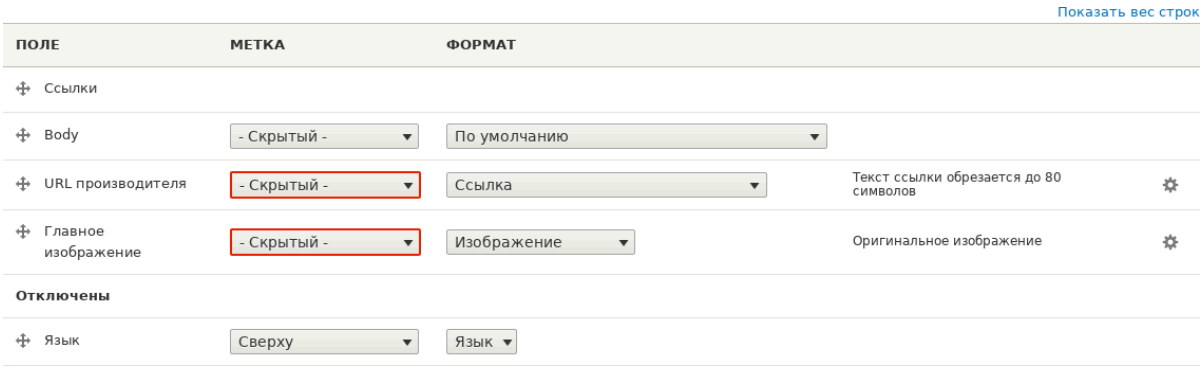


4. Click the gear wheel for the Vendor URL field, to open the configuration options.
5. Fill in the fields as shown below.

Field name	Explanation	Example value
Trim link text length	Maximum displayed length for link text	Blank (no trimming)
Open link in new window	Whether links should open in a new window or the same window	Checked

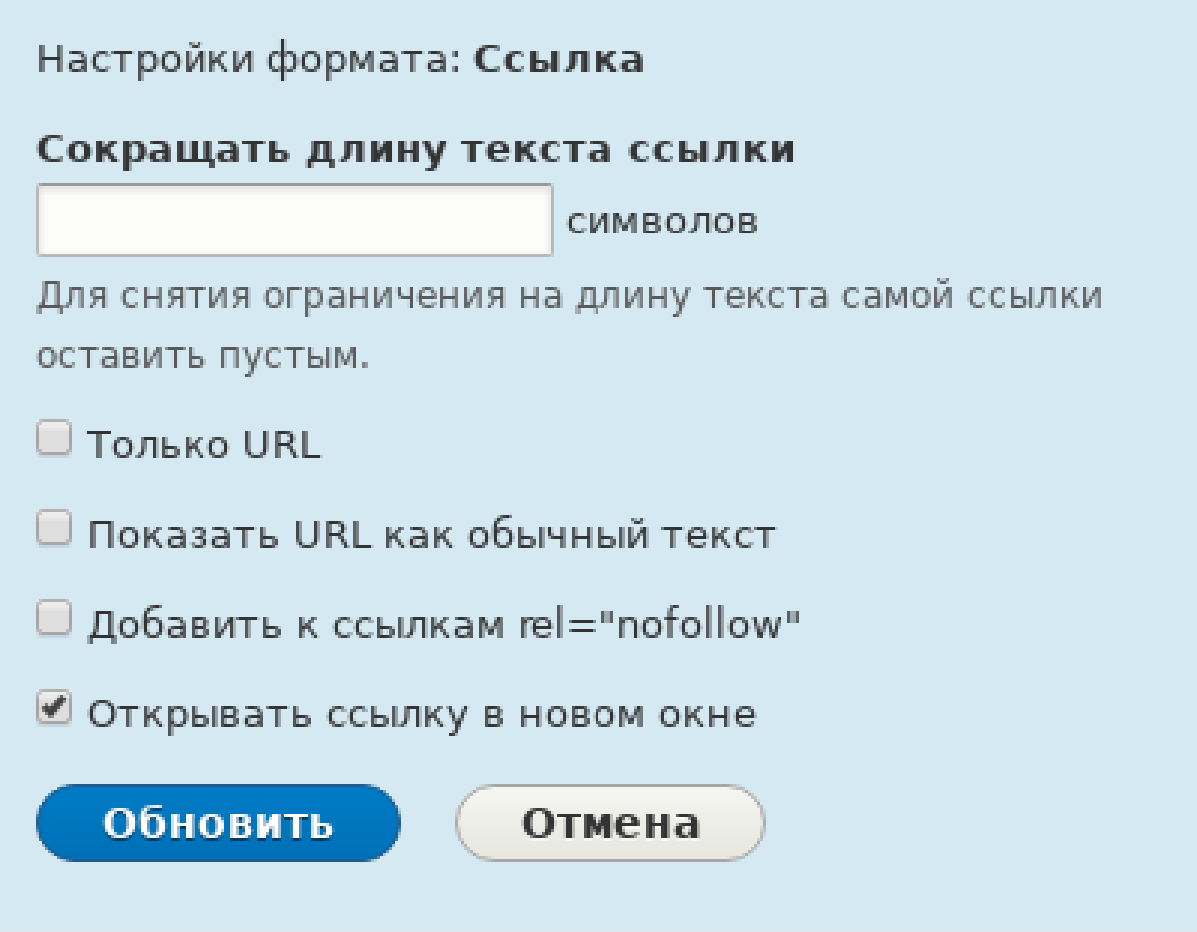

6. Click *Update*.
7. Drag the cross bar handles of the fields to reorder as Main image, *Body*, Vendor URL, and *Links*. As an alternative to dragging, you can click the *Show row weights* link at the top of the table and enter numerical weights (fields with lower or more negative weights will be shown first).

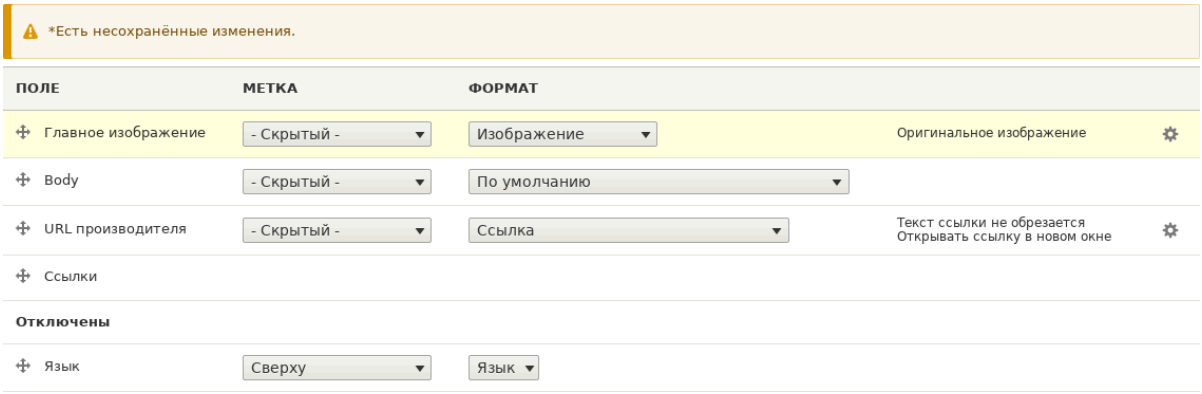

8. Click *Save*.

9. Find the Vendor content item from step 1 again, and verify that the updates have been made.
10. Repeat similar steps to manage the display of the Recipe content type fields.

Expand your understanding

- Make the main image smaller. See *Раздел 6.13, «Setting Up an Image Style»*.
- If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Related concepts

Раздел 6.12, «Concept: Image Styles»

Videos

Changing Content Display

Changing Content Display

Additional resources

- *Drupal.org community documentation page "Specify how fields are displayed"*
- *Drupal.org community documentation page "Rearrange the order of fields"*
- *Drupal.org community documentation page "View modes"*

Attributions

Written by *Ann Greazel* and *Boris Doesborg*.

6.12. Concept: Image Styles

Prerequisite knowledge

Раздел 6.3, «Adding Basic Fields to a Content Type»

What are image styles?

Image styles allow you to upload a single image but display it in several ways; each display variation, or *image style*, is the result of applying one or more *effects* to the original image.

As an example, you might upload a high-resolution image with a 4:3 aspect ratio, and display it scaled down, square cropped, or black-and-white (or any combination of these effects). The core software provides a way to do this efficiently:

1. Configure an image style with the desired effects on the *Image styles* page (*admin/config/media/image-styles*).
2. The effects will be applied the first time a particular image is requested in that style.
3. The resulting image is saved.
4. The next time that same style is requested, the saved image is retrieved without the need to recalculate the effects.

The core software provides several effects that you can use to define styles; others may be provided by contributed modules.

Visit the *Image styles* page via the *Manage* administrative menu, navigate to *Configuration* > *Media* > *Image styles* (*admin/config/media/image-styles*) to see the image styles that are defined by default.

Related topics

- *Раздел 6.13, «Setting Up an Image Style»*
- *Раздел 6.14, «Concept: Responsive Image Styles»*
- *Раздел 6.3, «Adding Basic Fields to a Content Type»*

Additional resources

Drupal.org community documentation page "Working with images in Drupal 7 and 8"

Attributions

Adapted and edited by *Boris Doesborg*, and *Jojy Alphonso* at *Red Crackle*, from *"Working with images in Drupal 7 and 8"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

6.13. Setting Up an Image Style

Goal

Add an image style and use it to display images on Vendor pages.

Prerequisite knowledge

- *Раздел 6.3, «Adding Basic Fields to a Content Type»*

- *Раздел 6.11, «Changing Content Display»*
- *Раздел 6.12, «Concept: Image Styles»*

Site prerequisites


- Vendor and Recipe content types must exist. See *Раздел 6.1, «Adding a Content Type»*.
- Main image fields must exist for both content types. See *Раздел 6.3, «Adding Basic Fields to a Content Type»*.
- Content items must exist for both content types. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, and *Раздел 5.2, «Создане элемента содержания»*.

Steps

1. In the *Manage* administrative menu, navigate to *Configuration* > *Media* > *Image styles* (*admin/config/media/image-styles*).
2. Click *Add image style*.
3. Enter the name *Extra medium (300x200)*
4. Click *Create new style*. The page *Edit style Extra medium (300x200)* appears.
5. In the *Effect* table, select *Scale and crop*. Click *Add*.
6. Fill in the fields as shown below.


Field name	Value
Width	300
Height	200

7. Click *Add effect*. The image style is saved with the chosen effects.

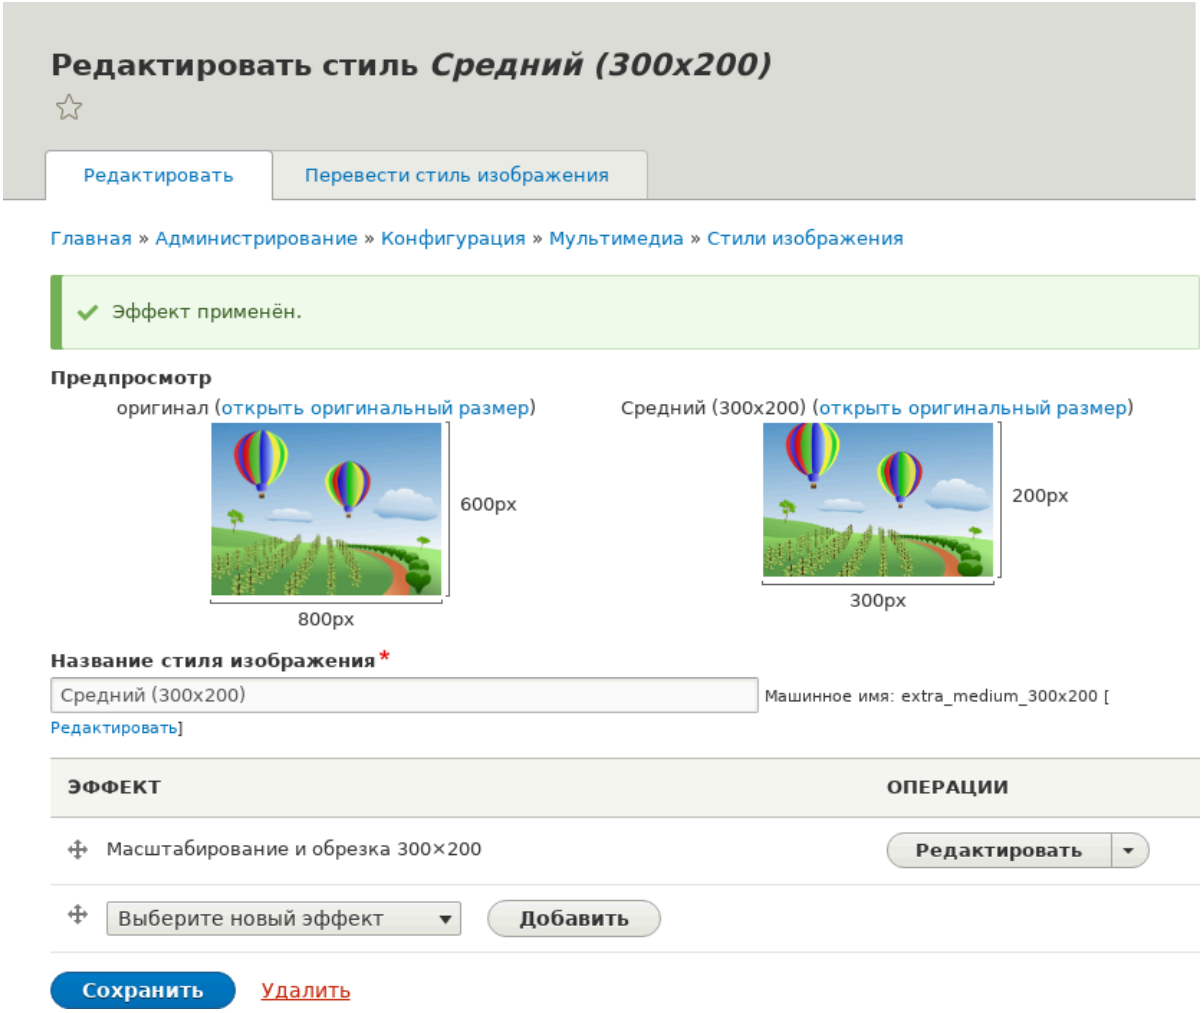

8. In the *Manage* administrative menu, navigate to *Structure* > *Content types* (*admin/structure/types*).
9. Click *Manage display* in the *Operations* dropdown for the Vendor content type. The *Manage display* page (*admin/structure/types/manage/vendor/display*) appears.
10. Ensure that the secondary tab *Default* is selected.
11. Click the gear wheel for the *Main image* field, to open the configuration options.
12. Fill in the fields as shown below.

Field name	Explanation	Example value
Image style	Which image style to use	Extra medium (300x200)
Link image to	Page to visit if image is clicked	Nothing

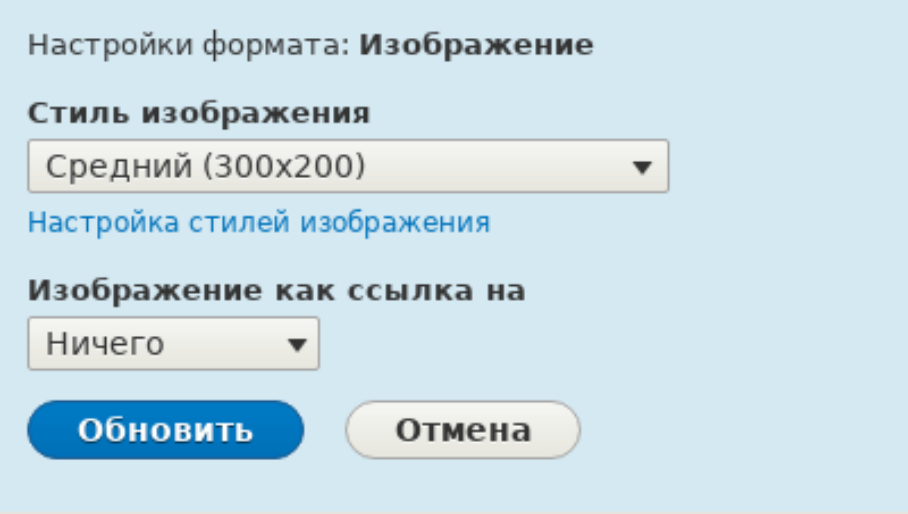

13. Click *Update*.
14. Click *Save*. The new image style will be used while displaying Vendor content.
15. Open a Vendor content item and verify that it now shows up with the scaled-down image. See *Раздел 5.4, «Editing a Content Item»* for information on how to locate an existing content item.
16. Repeat steps 8-15 for the Recipe content type.

Related concepts

- *Раздел 6.3, «Adding Basic Fields to a Content Type»*
- *Раздел 6.12, «Concept: Image Styles»*
- *Раздел 6.14, «Concept: Responsive Image Styles»*

Videos

Setting up an Image Style

Setting up an Image Style

Additional resources

Drupal.org community documentation page "Working with images in Drupal 7 and 8"

Attributions

Adapted and edited by *Boris Doesborg*, and *Jojy Alphonso* at *Red Crackle* from *"Working with images in Drupal 7 and 8"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

6.14. Concept: Responsive Image Styles

Prerequisite knowledge

- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 6.11, «Changing Content Display»*
- *Раздел 6.12, «Concept: Image Styles»*

What are responsive image styles?

The core Responsive Image module provides responsive image styles. This allows you to have images in your website that are specifically sized for different screen sizes. This is useful, for example, to make your site load faster on mobile devices because image sizes are optimized for smaller screens.

A responsive image style is a mapping between image styles and breakpoints. Breakpoints are the points where a responsive design needs to change in order to respond to different screen sizes. Responsive image styles can either work with breakpoints defined in your theme or with breakpoints defined in the responsive image style settings.

When a responsive image style is defined, it can be used in the display settings for Image fields. This allows the site to display responsive images using the HTML5 *picture* tag, or using the *srcset* and *sizes* attributes in an *img* tag, depending on how the responsive image style is set up.

Related topics

Раздел 6.3, «Adding Basic Fields to a Content Type»

Additional resources

- *Drupal.org community documentation page "Responsive web design"*
- *Drupal.org community documentation page "Responsive images in Drupal 8"*
- *Drupal.org community documentation page "Working with breakpoints in Drupal 8"*
- *Blog post "Responsive Images in Drupal 8 using srcset"*

Attributions

Adapted by *Boris Doesborg* from *Responsive images in Drupal 8*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

6.15. Concept: Text Formats and Editors

What are text formats and filters?

Text formats change how HTML tags and other text are processed and displayed on your site. Text formats are composed of a series of *filters*, each of which transforms text. When users create content, a text format is associated with the content, and the full, original text is stored in the database. The content is then passed through the filters in the text format before it becomes output on the site.

The core Filter module provides text format functionality, and the core Standard installation profile sets up *Basic HTML*, *Restricted HTML*, and *Full HTML* text formats. Each text format has an associated permission, so that you can allow only trusted users to use permissive text formats. This restricts untrusted users to text formats like *Basic HTML*, which filters out dangerous HTML tags.

What are the editors associated with text formats?

Each text format can be associated with an editor, such as a visual WYSIWYG (What You See Is What You Get) HTML editor. The core Text Editor module provides the ability to associate editors with text formats, and to configure the editors (such as adding and removing buttons from their toolbars). The core CKEditor module provides the industry-standard editor known as CKEditor, so that it can be used to edit HTML content on your site.

What is cross-site scripting?

Cross-site scripting (XSS) is a security vulnerability typically found in websites. In a site that is not well protected, malicious users can enter script into web pages that are viewed by other users (for example, in a comment or in the body of a page). A cross-site scripting vulnerability may be used by attackers to login as another user. It is important to configure the text formats of your website to prevent such abuse.

Related topics

Раздел 13.3, «Concept: Security and Regular Updates»

Additional resources

- *Drupal.org community documentation page "Filter module: text formats that filter user input"*
- *Wikipedia page "Cross-site scripting"*

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

6.16. Configuring Text Formats and Editors

Goal

Add a horizontal rule tag to the *Basic HTML* text format, and a corresponding button to its editor configuration.

Prerequisite knowledge


Раздел 6.15, «Concept: Text Formats and Editors»

Site prerequisites


- The core Filter, Editor, and CKEditor modules must be installed. They are installed on your site when you install with the core Standard installation profile.
- The *Basic HTML* text format must exist. This is created on your site when you install with the core Standard installation profile.

Steps

1. In the *Manage* administrative menu, navigate to *Configuration* > *Content authoring* > *Text formats and editors* (*admin/config/content/formats*). The *Text formats and editors* page appears. Note that the names of the text formats that came with your installation profile are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.
2. Click *Configure* for the *Basic HTML* text format. The *Basic HTML* page appears.
3. Note that *CKEditor* is selected in the *Text editor* field. This allows you to configure the editor's toolbar.
4. Drag the *horizontal rule* button from *Available buttons* to *Tools* under *Active toolbar*. You may need to click the *Show group names* link to see the *Tools* group name. As an alternative to dragging, you can tab to select buttons and then move them using keyboard arrow keys.

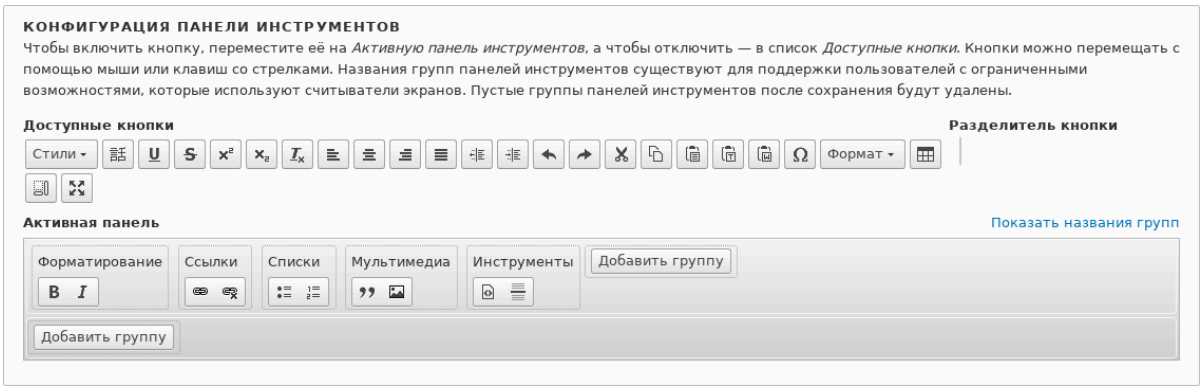

5. Note that you can change the *Filter processing order*.
6. Under *Filter settings* > *Limit allowed HTML tags and correct faulty HTML*, in the field *Allowed HTML tags*, verify that <hr> is present (adding its editor button will automatically update the allowed tags).

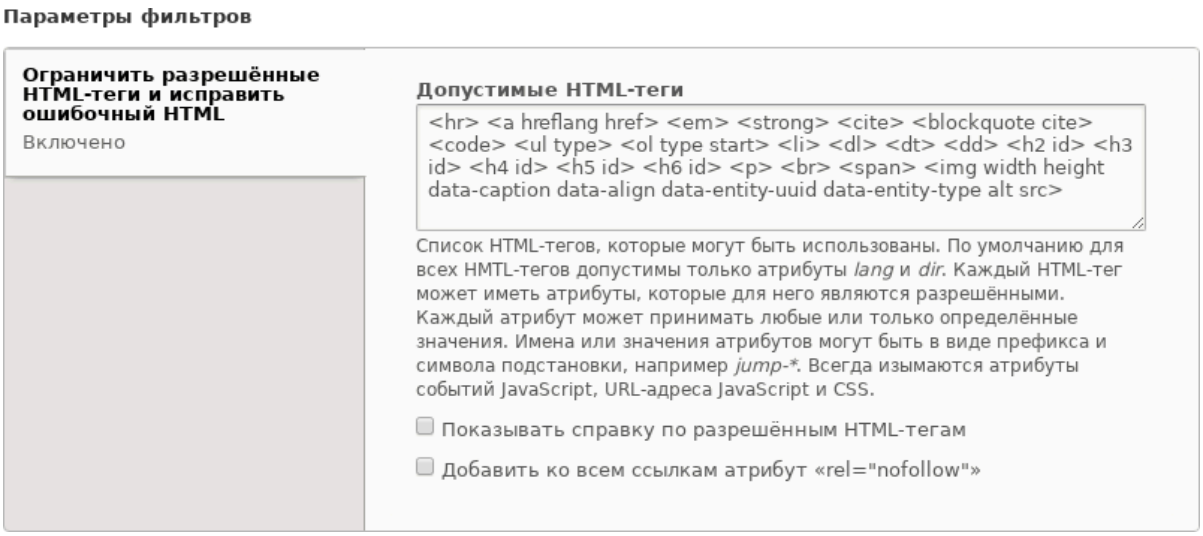

7. Click *Save configuration*. You will be taken back to the *Text formats and editors* page. A message will be displayed saying that the text format has been updated.



Expand your understanding

If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Configuring Text Formats and Editors

Configuring Text Formats and Editors

Attributions

Written by *Boris Doesborg*.

Глава 7. Управление аккаунтами пользователей

7.1. Concept: Users, Roles, and Permissions

What are Users?

Anyone who visits your website is a *user*, including you. There are three groups of users:

- Users who are not logged in, or *anonymous users*
- Users who are logged in, or *authenticated users*
- The administrative user account that was automatically created when you installed your site, or User 1. See *Раздел 7.2, «Concept: The User 1 Account»*.

What are Permissions?

The ability to do actions on your site (including viewing content, editing content, and changing configuration) is governed by *permissions*. Each permission has a name (such as *View published content*) and covers one action or a small subset of actions. A user must be granted a permission in order to do the corresponding action on the site; permissions are defined by the modules that provide the actions.

What are Roles?

Rather than assigning individual permissions directly to each user, permissions are grouped into *roles*. You can define one or more roles on your site, and then grant permissions to each role. The permissions granted to authenticated and anonymous users are contained in the *Authenticated user* and *Anonymous user* roles, and depending on the installation profile you used when you installed your site, there may also be an *Administrator* role that is automatically assigned all permissions on your site.

Each user account on your site is automatically given the *Authenticated user* role, and may optionally be assigned one or more additional roles. When you assign a role to a user account, the user will have all the permissions of the role when logged in.

It is a good practice to make several roles on your site. In the farmers market site example, you might want the following roles:

- A Vendor role that allows vendors to edit their own vendor listing page
- A Content editor role for editing the general farmers market pages
- A User manager role for managing the vendor accounts

- The *Administrator* role that was installed with your site, for expert users to manage the site configuration

Related topics

- *Раздел 7.3, «Creating a Role»*
- *Раздел 7.5, «Assigning Permissions to a Role»*
- *Раздел 7.6, «Changing a User's Roles»*
- *Раздел 7.4, «Creating a User Account»*
- *Раздел 7.2, «Concept: The User 1 Account»*
- *Раздел 7.7, «Assigning Authors to Content»*

Additional resources

- *Drupal.org community documentation page "Users, roles and permissions"*
- *Drupal.org community documentation page "Managing Users"*
- *Drupal.org community documentation page "User Roles"*

Attributions

Adapted by *Mark LaCroix*, *Boris Doesborg*, and *Jennifer Hodgdon* from *"User Roles"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

7.2. Concept: The User 1 Account

Prerequisite knowledge

Раздел 7.1, «Concept: Users, Roles, and Permissions»

What is the user 1 account?

During the installation of your site, you created the first user account. Each user account internally has a numeric user ID, and since the ID of this user is one, it is commonly referred to as the *user 1* account. This user account is special, because independent of what roles it is assigned, someone logged in as user 1 has permission to do all actions on the site, including viewing and editing all content, editing any user account, changing site configuration, installing and uninstalling modules, and running the update script.

Because of this level of permission, some people refer to this account as the *root user*, similar to the "root" user account that has full administrative permissions in Linux and other operating systems.

It is usually better to make separate accounts for each administrative user, giving them the *Administrator* role, rather than having all administrative users log in using the user 1 account. There are several reasons for this:

- Some actions and updates on the site are logged, and if everyone uses the same account, it is difficult to know who did them if you have questions.
- The *Administrator* role permissions can be modified to be safer than the full permissions of the user 1 account, so that people do not inadvertently change site features that shouldn't be changed.
- People's responsibilities on a site may change over time. With ordinary user accounts, this can be mirrored in permissions by assigning or unassigning roles to their user accounts. If they are all using the user 1 account, this is more difficult.
- On some sites, the author of content or comments is displayed or tracked, and if everyone uses the same account to create content, it is difficult to know who created the content.

It is not possible to delete the user 1 account from the administrative user interface. It would be possible to do with a database query, but it could cause problems in your site and is not advisable.

Additional resources

Drupal.org community documentation page "Accounts and roles"

Attributions

Written and edited by *Mark LaCroix* and *Jennifer Hodgdon*.

7.3. Creating a Role

Goal


Create a Vendor role to allow some - but not all - users to perform specific tasks.

Prerequisite knowledge


Раздел 7.1, «Concept: Users, Roles, and Permissions»

Steps


1. In the *Manage* administrative menu, navigate to *People* > *Roles* (*admin/people/roles*).
2. You will find default roles *Anonymous user*, *Authenticated user*, and *Administrator* already present.

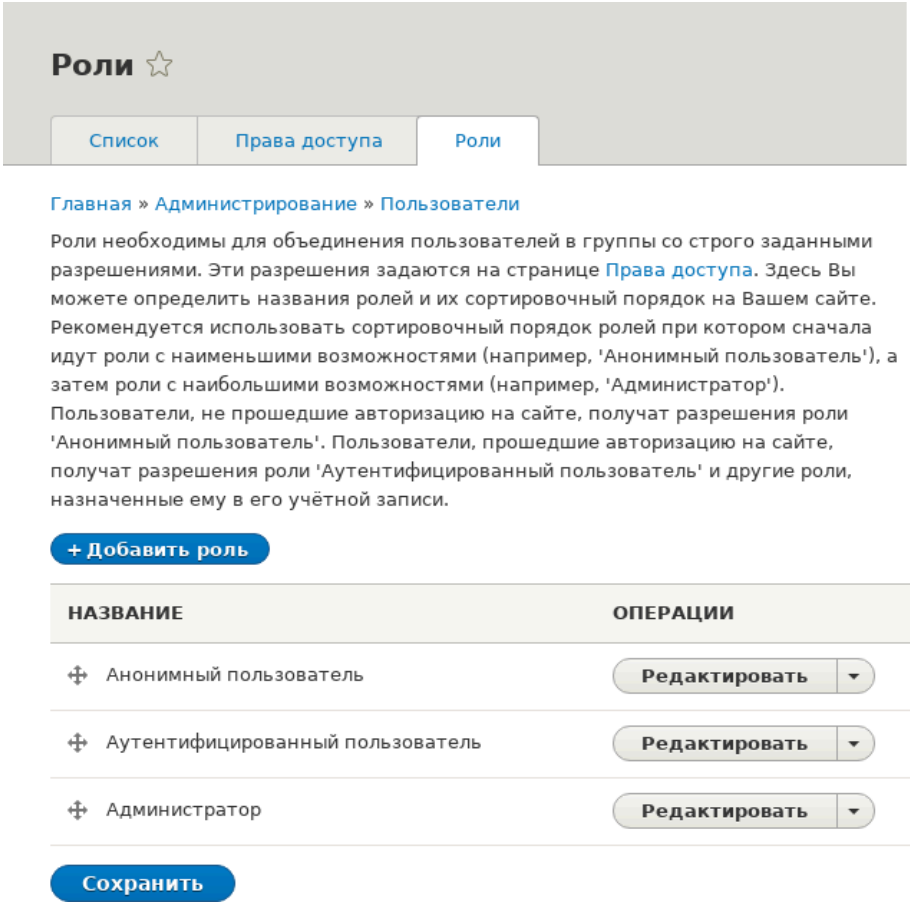

3. Click *Add Role* to add a custom role.
4. Type Vendor in the *Role name* field. Click *Save*.

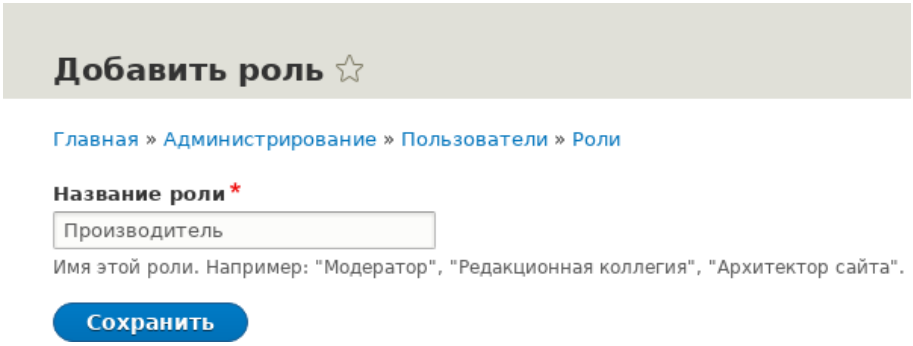

5. You will see the message "Role Vendor has been added." displayed at the top of the page.



Expand your understanding

- *Раздел 7.5, «Assigning Permissions to a Role»*

- *Раздел 7.6, «Changing a User's Roles»*

Videos

Creating a Role

Creating a Role

Additional resources

Drupal.org community documentation page "User Roles"

Attributions

Adapted and edited by *Jack Probst*, *Boris Doesborg*, and *Joe Shindelar* from *"User Roles"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

7.4. Creating a User Account

Goal

Create Vendor user accounts for Sweet Honey and Happy Farm vendors.

Prerequisite knowledge


- *Раздел 7.1, «Concept: Users, Roles, and Permissions»*
- *Раздел 7.2, «Concept: The User 1 Account»*
- *Раздел 7.3, «Creating a Role»*

Site prerequisites

The Vendor role must exist on your site. See *Раздел 7.3, «Creating a Role»*.

Steps

1. In the *Manage* administrative menu, navigate to *People* (*admin/people*).
2. Click *Add user*.

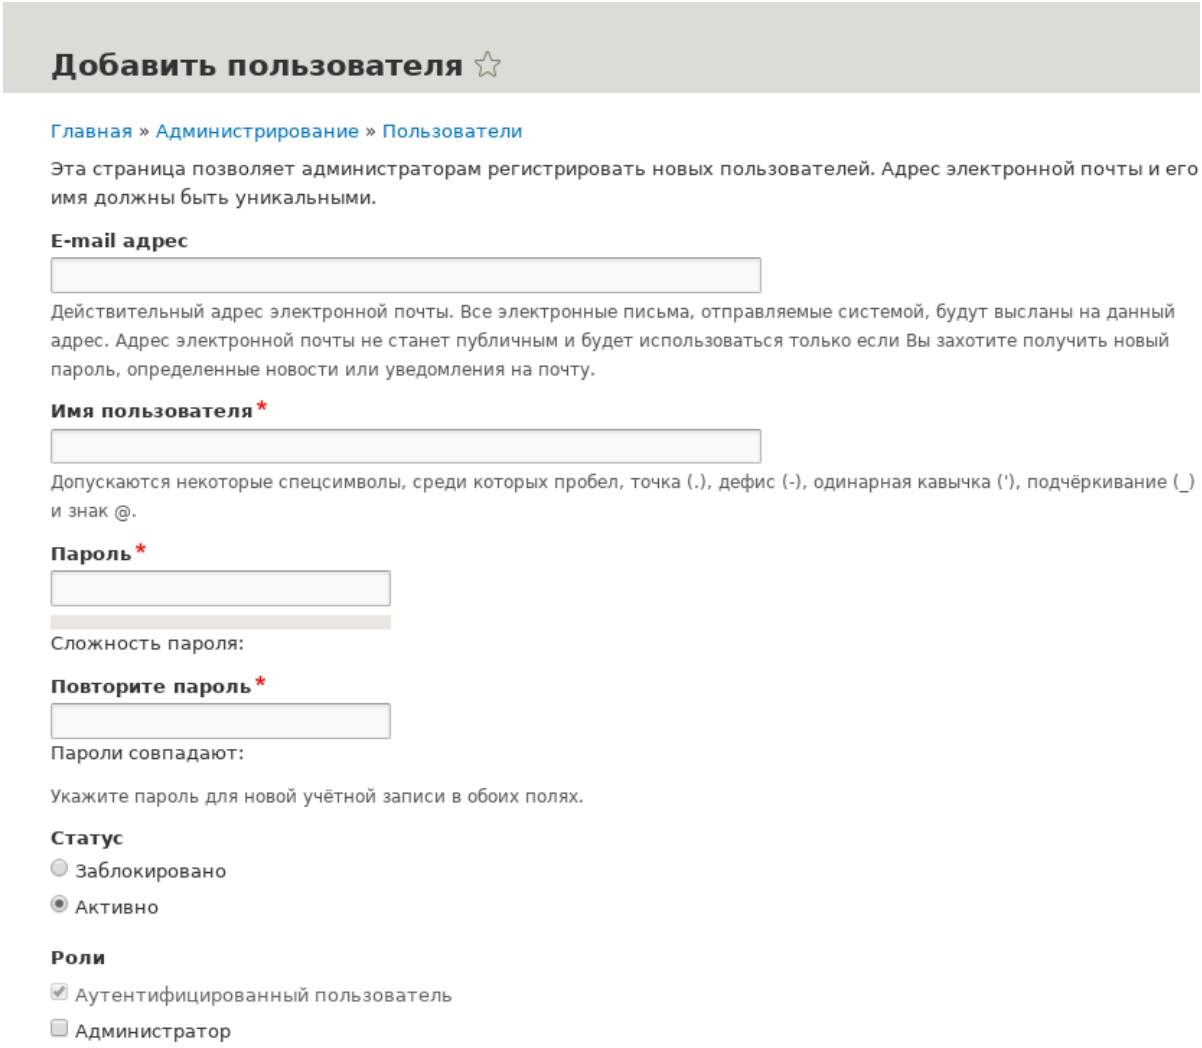


3. Fill in the form fields. See the table below.

Field name	Explanation	Example value
Email address	A valid email address for the vendor. All emails from the system will be sent to this address. The email address is not made public.	honey@example.com
Username	A username for the vendor that they will use to sign in or author content items. Spaces are allowed; punctuation is not allowed except for periods, hyphens, apostrophes, and underscores.	Sweet Honey

Field name	Explanation	Example value
Password	A password the vendor will use to sign in to the site. You can see how safe the password is on the *Password strength* gauge. You also get tips on how to make it safer.	(Make a secure password)
Confirm password	Type the same password to avoid any typing mistakes.	(Repeat password)
Status	Set the status of the user account. *Blocked* users will not be able to sign in.	Active
Roles	Set the role of the user account.	Vendor
Notify user of new account	Whether or not to send a notification to the vendor's email address.	Checked
Picture	Click *Browse* and select a picture to upload. Pay attention to size restrictions.	Photo of the vendor
Contact settings	Enable or disable the display of a contact form for the account.	Checked

4. Click *Create new account*. You will get a notification about the user account creation.



5. Create a second Vendor account for Happy Farm by following the steps above.

Expand your understanding

Create a user account for yourself.

Videos

Creating a User Account

Creating a User Account

Attributions

Written by *Diána Lakatos* at *Pronovix*.

7.5. Assigning Permissions to a Role

Goal

Change the permissions for the Vendor role so that users can create, edit, and delete Recipe and Vendor content, format the content, and contact each other.

Prerequisite knowledge

- *Раздел 7.1, «Concept: Users, Roles, and Permissions»*

Site prerequisites

The Vendor role must exist on your site. See *Раздел 7.3, «Creating a Role»*.


Steps

1. In the *Manage* administrative menu, navigate to *People* > *Roles* (*admin/people/roles*). The *Roles* page appears.
2. Click *Edit permissions* in the dropdown for the Vendor role. The *Edit role* page appears where you can see all the available actions for the website such as, for example, *Post comments* or *Administer blocks*. The available permissions depend on the modules that are installed in the site. Note: Some permissions may have security implications. Be cautious while assigning permissions to roles.
3. Check the boxes for the following permissions, listed by module:

Module	Permission
Contact	Use users' personal contact forms
Filter	Use the Restricted HTML text format
Node	Recipe: Create new content
Node	Recipe: Edit own content
Node	Recipe: Delete own content
Node	Vendor: Edit own content
Quick Edit	Access in-place editing

ПРАВО ДОСТУПА	ПРОИЗВОДИТЕЛЬ
Управление стилями изображений	☐
Interface Translation	
Перевести текст интерфейса *Предупреждение: это право связано с безопасностью сайта. Предоставляйте это право только пользователям той роли, которым вы доверяете.* Перевод любого текста интерфейса включая конфигурацю, в которую входят модули и темы.	☐
Language	
Управление языками	☐
Node	
Производитель: Создание новых материалов	☐
Рецепт: Создание новых материалов	☑
Страница: Создание новых материалов	☐
Производитель: Удаление любых материалов	☐
Рецепт: Удаление любых материалов	☐
Страница: Удаление любых материалов	☐
Производитель: Удаление собственных материалов	☐
Рецепт: Удаление собственных материалов	☑
Страница: Удаление собственных материалов	☐
Производитель: Удаление редакций To delete a revision, you also need permission to delete the content item.	☐

4. Click *Save permissions*. You will get a message saying your changes have been saved.



Expand your understanding

- Log in as one of the new users you created in *Раздел 7.4, «Creating a User Account»*. Verify whether you have the correct permissions.
- *Раздел 7.6, «Changing a User's Roles»*

Related concepts

Раздел 7.2, «Concept: The User 1 Account»

Videos

Assigning Permissions to a Role

Assigning Permissions to a Role

Additional resources

Drupal.org community documentation page "Managing Users"

Attributions

Adapted and edited by *Boris Doesborg*, *Brian Emery*, and *Jojy Alphonso* at *Red Crackle*, from *"User Roles"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

7.6. Changing a User's Roles

Goal

Change or add roles to a given user, either by editing a single-user or by applying a bulk operation.

Prerequisite knowledge

Раздел 7.1, «Concept: Users, Roles, and Permissions»


Site prerequisites

The user account that you want to update, and the role you want it to have, must already exist. See *Раздел 7.4, «Creating a User Account»*, *Раздел 7.3, «Creating a Role»*, and *Раздел 7.5, «Assigning Permissions to a Role»*.


Steps

Updating the roles using single-user editing method


1. In the *Manage* administrative menu, navigate to *People* (*admin/people*).
2. Locate the user 1 account (named "admin") to assign it the *Administrator* role. If it is not immediately visible, use the *Name or email contains* filter, or other filters, to narrow down the list.
3. Click *Edit* to update the user account.

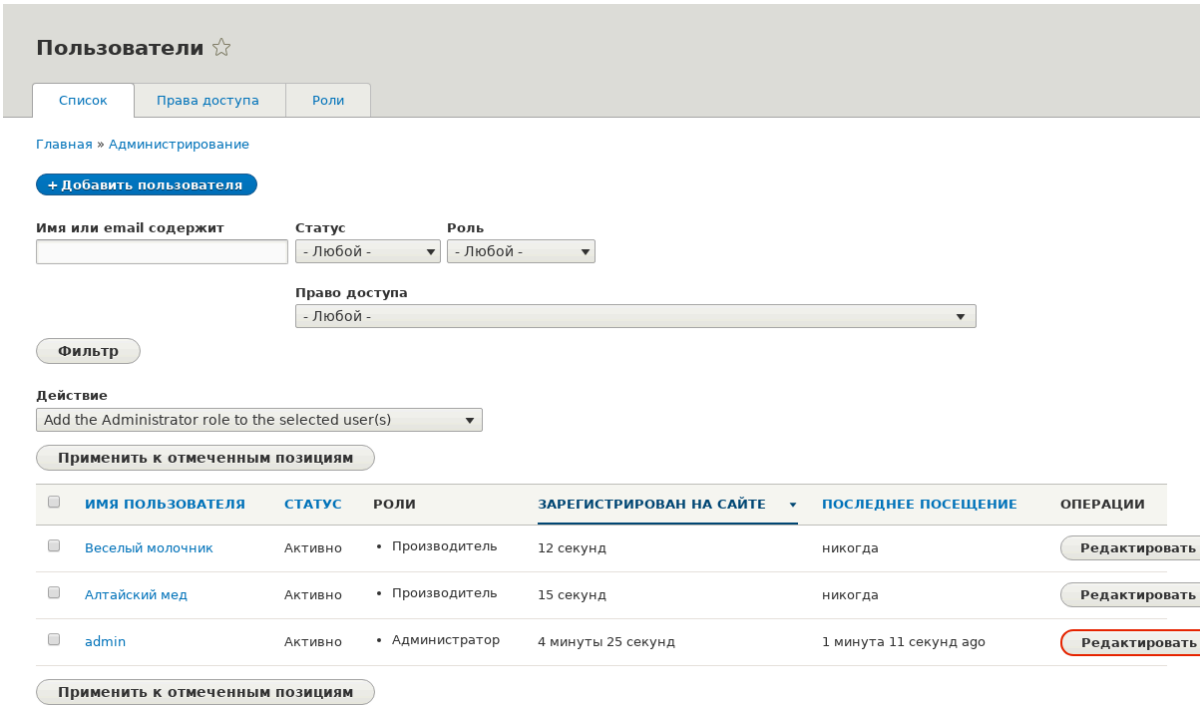

4. On the *Edit* page, scroll down to *Roles* section. Check the *Administrator* role for the user account.



5. Click *Save* to update the user account. You should be returned to the *People* page and see a message saying that the changes have been saved.




Updating the roles using bulk editing method

1. If the users Happy Farm and Sweet Honey did not already have the Vendor role, here is how you would add it. In the *Manage* administrative menu, navigate to *People* (*admin/people*).
2. Locate Vendor user accounts *Sweet Honey* and *Happy Farm* and check them. If they are not immediately visible, use the *Name or email contains* filter, or other filters, to narrow down the list.
3. Select *Add the Vendor role to the selected user(s)* from the *Action* select list.



4. Click *Apply to selected items*. You should see a message indicating that the desired changes were made.



Videos

Changing a User's Roles

Changing a User's Roles

Attributions

Written by *Chris Dart* and *Jennifer Hodgdon*

7.7. Assigning Authors to Content

Goal

Assign Vendor content items Happy Farm and Sweet Honey to the corresponding Vendor user accounts, so they can edit their own Vendor profiles on the site.

Prerequisite knowledge


- *Раздел 7.1, «Concept: Users, Roles, and Permissions»*

Site prerequisites


- The Vendor content type must exist, and your site must have at least two Vendor content items. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, and *Раздел 5.2, «Создане элемента содержания»*.
- User accounts for at least two vendors must exist. See *Раздел 7.4, «Creating a User Account»*.

Steps

1. In the *Manage* administrative menu, navigate to *Content* (*admin/content*).
2. Find Vendor content item Happy Farm in the list. If it is not immediately visible, you can filter the list by *Published status*, *Content type* (Vendor), *Title*, or *Language*. Click *Edit* for the Vendor content item you would like to assign an author to.
3. Under *Authoring information*, start typing the Vendor's user name Happy Farm in the *Authored by* field. The field lists matching user names. Select the Vendor's user name from the list.

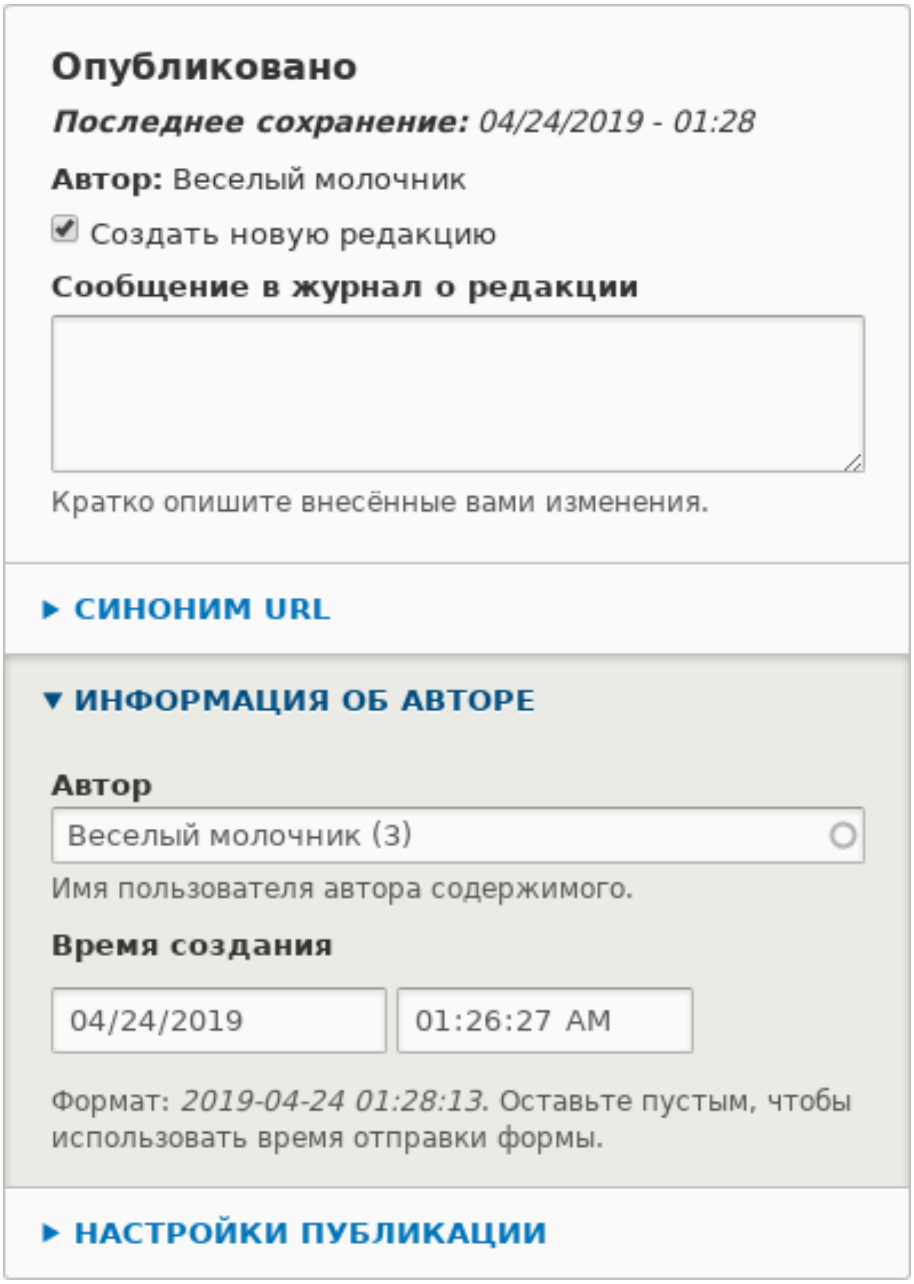

4. Click *Save*.
5. You will get a notification that the Vendor content item has been updated.



6. Follow these steps again to assign Vendor content item Sweet Honey to the Vendor user account Sweet Honey.

Videos

Assigning Authors to Content

Assigning Authors to Content

Attributions

Written by *Diána Lakatos* at *Pronovix*.

Глава 8. Блоки

8.1. Concept: Blocks

What is a block?

Blocks are individual pieces of your site's web page layout. They are placed inside the regions (see *Раздел 2.1, «Concept: Regions in a Theme»*) of your theme, and can be created, removed, and rearranged in the *Block layout* (*admin/structure/block*) administration page. Examples of blocks include the *Who's online* listing, the main navigation menu, and the breadcrumb trail. The main page content is also a block.

Some modules make new blocks available for placement on your site. For example, when the core Search module is installed and configured, it provides a block that contains a search form. You may also create and place your own custom blocks.

Each block has its own configuration settings, which allow you to select which pages of your site will display the block. It is even possible to place multiple copies of a block, each with its own separate configuration and visibility rules.

Related topics

- *Раздел 2.1, «Concept: Regions in a Theme»*
- *Раздел 8.2, «Creating A Custom Block»*
- *Раздел 8.3, «Placing a Block in a Region»*

Attributions

Adapted by *Les Lim* from *"Working with blocks (content in regions)"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

8.2. Creating A Custom Block

Goal

Create a block showing the hours and location of the farmers market.


Prerequisite knowledge

- *Раздел 8.1, «Concept: Blocks»*
- *Раздел 2.1, «Concept: Regions in a Theme»*

Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Block layout* > *Custom block library* (*admin/structure/block/block-content*).
2. Click *Add custom block*. The *Add custom block* page appears.
3. Fill in the fields as shown below.

Field name	Explanation	Example value
Block description	Name of the block shown to administrators	Hours and location block
Body	Content of the block when it is displayed	Open: Sundays, 9 AM to 2 PM, April to September >Location: Parking lot of Trust Bank, 1st & Union, downtown Anytown.

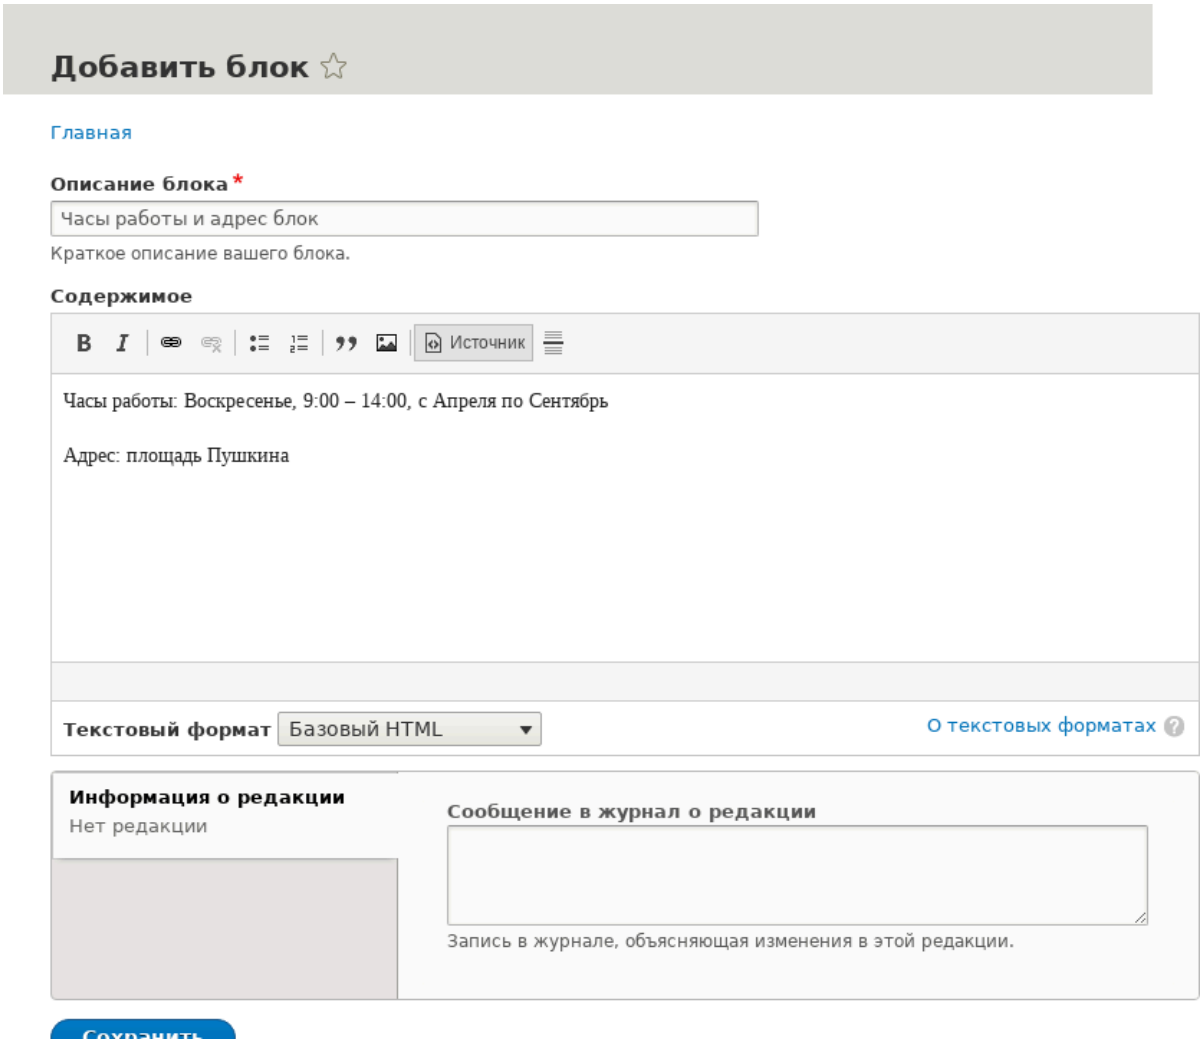

4. Click *Save*. A message appears indicating the block has been saved.

Expand your understanding

- Edit the content of your custom block. In the *Manage* administrative menu, navigate to *Structure* > *Block layout* > *Custom block library* (*admin/structure/block/block-content*). Find your block in the list and click *Edit* to make changes.
- Place the block you created in the sidebar. See *Раздел 8.3, «Placing a Block in a Region»* for details.

Videos

Creating a Custom Block

Creating a Custom Block

Additional resources

Drupal.org community documentation page "Working with blocks (content in regions)"

Attributions

Adapted by *Jacob Redding* and *Boris Doesborg* from *Working with blocks (content in regions)*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

8.3. Placing a Block in a Region

Goal

Place the Opening hours and location block in the website's sidebar.

Prerequisite knowledge

Раздел 8.1, «Concept: Blocks»

Site prerequisites

- The core Bartik theme must be installed and set as default. See *Раздел 4.6, «Configuring the Theme»*.
- The Opening hours and location block must exist. See *Раздел 8.2, «Creating A Custom Block»*.


Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Block layout* (*admin/structure/block*). The *Block layout* page appears, listing the theme's regions.

2. Ensure that in the secondary tab the core Bartik theme is selected. Block placement is defined per theme.
3. Locate the region *Sidebar second* in the list and click *Place block* next to it. The *Place block* window appears, listing all the blocks.
4. Locate the block Opening hours and location and click *Place block* next to it. The *Configure block* window appears. Fill in the fields as shown below.

Field name	Explanation	Example value
Title	Title to be displayed for the block	Hours and location
Display title	Whether or not to display the title with the block	Checked
Region	Which theme region to display it in	Sidebar second

You can also hide or display the block on specific pages. In the case of the Farmer's market website you do not set any of these configuration options because you want to show the block everywhere.

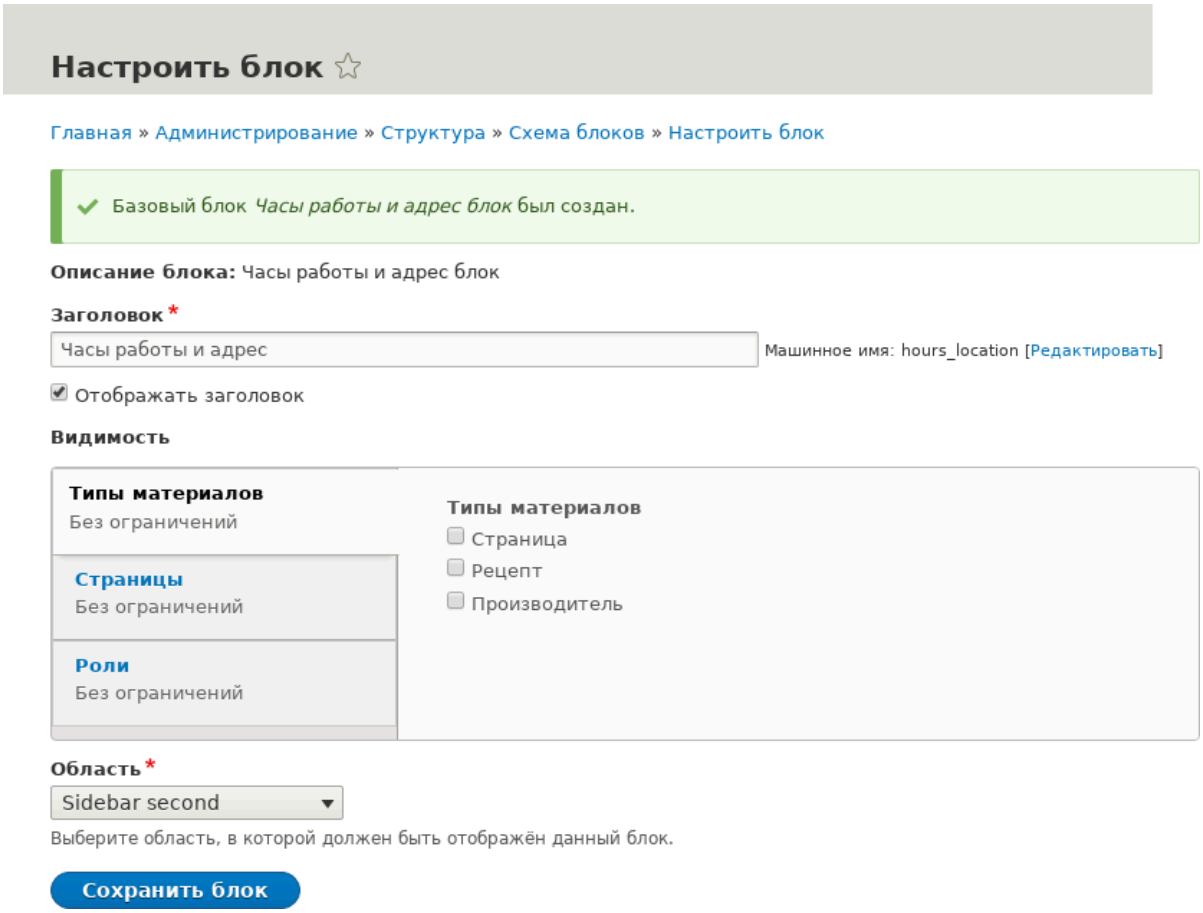


5. Click *Save block*. The *Block layout* page appears. You can drag the cross bar handles of blocks to change their order within each region. As an alternative to dragging, you can

click the *Show row weights* link at the top of the table and select numerical weights (blocks with lower or more negative weights will be shown first).

6. Verify that the Opening hours and location block is listed in the *Sidebar second* region, and click *Save blocks*.

   The block has been placed on the sidebar of all pages that use the core Bartik theme.

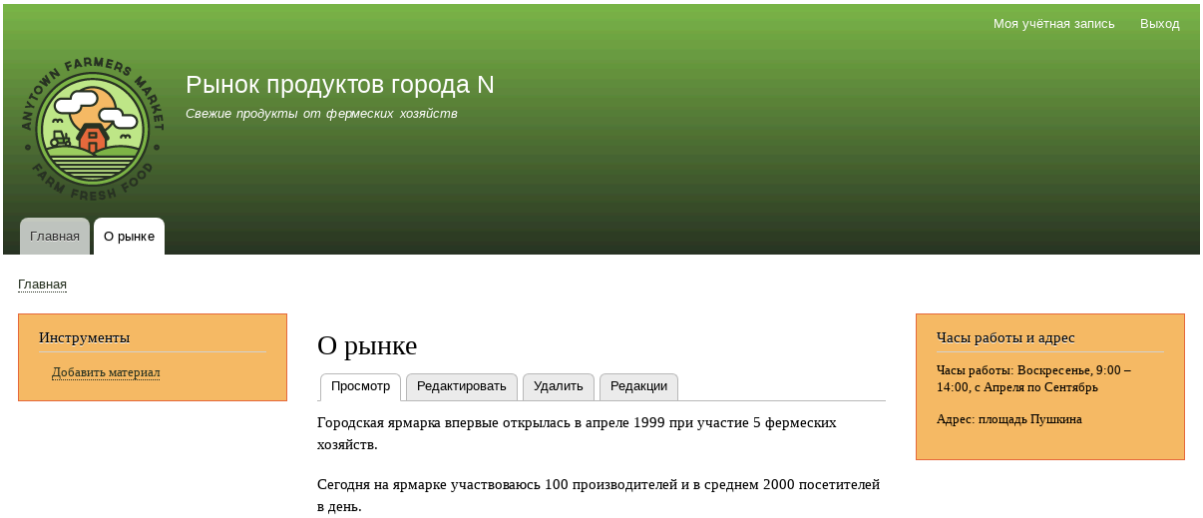

Expand your understanding

- Remove the *Powered by Drupal* block from the *Footer fifth* region by clicking *Disable* or *Remove* in the *Operations* dropdown button. Clicking *Disable* will let you enable the block easily later with the same configuration; if you click *Remove* and you want the block back, you would need to go through the steps in this topic to place it in a region again. Note that the names of the blocks that are provided by the core software, such as *Powered by Drupal* and *User login*, are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.
- Remove the *Tools* block from the *Sidebar first* region. This block is only visible to logged-in users.
- Place the *User login* block in a region.
- If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Placing a Block in a Region

Placing a Block in a Region

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

Глава 9. Вывод материалов через Views

9.1. Concept: Uses of Views

Prerequisite knowledge

- *Раздел 2.4, «Основы: Модульный Контент»*
- *Раздел 2.3, «Основы: Сущности контента и Поля»*

What is a view?

A *view* is a listing of content on a website. The core Views module handles the display of views, and the core Views UI module allows you to create and edit them in the administrative interface. When you define views, you are interested in taking data from your website and displaying it to the user.

What types of data can be displayed using views?

You can create views to output practically any content entity that is stored in the system. For example, you can create the following lists for the farmers market site:

- Lists of vendors
- Lists of recipes
- Lists of the most recent content on the site
- Lists of users on the site

What are the ways data can be output using views?

A listing created by a view can be in any of the following forms:

- Table with sortable fields
- Grid layouts
- Teasers or pictures that link to articles
- Blocks
- JSON output

- RSS feeds
- Calendars
- On-screen slideshows

Related topics

- *Раздел 9.2, «Concept: The Parts of a View»*
- *Раздел 9.3, «Creating a Content List View»*

Attributions

Written and edited by *Michael Lenahan* at *erdfisch*, and *Jojy Alphonso* at *Red Crackle*.

9.2. Concept: The Parts of a View

Prerequisite knowledge

- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 2.4, «Основы: Модульный Контент»*
- *Раздел 9.1, «Concept: Uses of Views»*
- *Раздел 5.1, «Concept: Paths, Aliases, and URLs»*
- *Раздел 8.1, «Concept: Blocks»*

What are the parts of a view?

When you are editing a view in the administrative interface, you will see the following parts (or sections), which allow you to specify what data to output, in what order, and in what format:

Display

Each view can have one or more displays, each of which produces one type of output. Options for display types include:

Page

Makes output at a particular URL, for the main page content at that URL.

Block

Makes output in a block, which can be placed on pages.

Feed

Makes an RSS or another type of feed.

Attachment

Makes output that you can attach to another display.

Format

Depending on the display type, you can choose to output your data in a table, grid, HTML list, or another format. Some formats also give you a second choice that lets you output either rendered entities or fields; other formats do not give you this choice (for example, if you use a table format, you must always use fields).

Fields

Depending on the format choice, you may be able to choose which content fields are output. For example, if you were making a view of recipe content items, in a block display you might show only the recipe names, while in a full page display you might also show an image field because you have more space.

Filter criteria

Filters limit the data to be output, based on criteria such as whether the content has been published or not, the type of content, or a field value. For instance, to make a view of recipe content items, you would need to filter to the Recipe content type, and to published recipes. Filters can also be *exposed*, which means that users will have a form where they can choose their own filter values. You might use this on a Recipe page to let users filter for recipes with certain ingredients.

Sort criteria

Defines the order to present the output, which can be based on any content field.

Contextual filters

Contextual filters are like regular filters, except that the values come from the *context* of the view display, such as the full URL of the page being displayed, the current date or time, or some other value that can be detected by the view calculation.

Relationships

Relationships allow you to expand what is displayed in your view, by relating the base content being displayed to other content entities. Relationships are created using fields on the base content that relate it to the other content; one example is that all regular content items have an author field, which references the user account of the person who authored the content. Once you have created a relationship, you can display fields from the referenced entity in the view.

Related topics

Раздел 9.3, «Creating a Content List View»

Attributions

Written and edited by *Surendra Mohan* and *Jennifer Hodgdon*.

9.3. Creating a Content List View

Goal

Create a page listing vendors that will be automatically updated whenever a vendor is added, deleted, or updated on the site.

Prerequisite knowledge

- *Раздел 9.1, «Concept: Uses of Views»*
- *Раздел 9.2, «Concept: The Parts of a View»*

Site prerequisites


- The core Views and Views UI modules must be installed. These are installed for you when you install with the core Standard installation profile.
- The Vendor content type must exist, with URL and Main image fields. Your site must have a couple of Vendor content items. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, and *Раздел 5.2, «Создане элемента содержания»*.
- The *Medium (220x220)* image style must be defined. This is created on your site when you install the core Image module (installed with the core Standard installation profile) but can be recreated if deleted. See *Раздел 6.13, «Setting Up an Image Style»*.

Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Views* > *Add view* (*admin/structure/views/add*). The *Add view* wizard appears.
2. Fill in the fields as shown below.

Field name	Explanation	Example value
View basic information > View name	Name of the view that will be visible in the administration pages	Vendors
View settings > Show	Type of information listed in the view	Content
View settings > of type	Specify content type	Vendor
View settings > sorted by	List order	Title
Page settings > Create a page	Create a page that displays the view	Checked
Page settings > Page title	Title show above the view	Vendors

Field name	Explanation	Example value
Page settings > Path	Address of the page	vendors
Page settings > Page display settings > Display format	Type of list	Table
Page settings > Items to display	Number of items visible on the page	10
Page settings > Use a pager	Split up the list in several pages if there are more items	Checked
Page settings > Create a menu link	Add the view page to the menu	Checked
Page settings > Menu	Menu in which to add the link	Main navigation
Page settings > Link text	Label of the link in the menu	Vendors

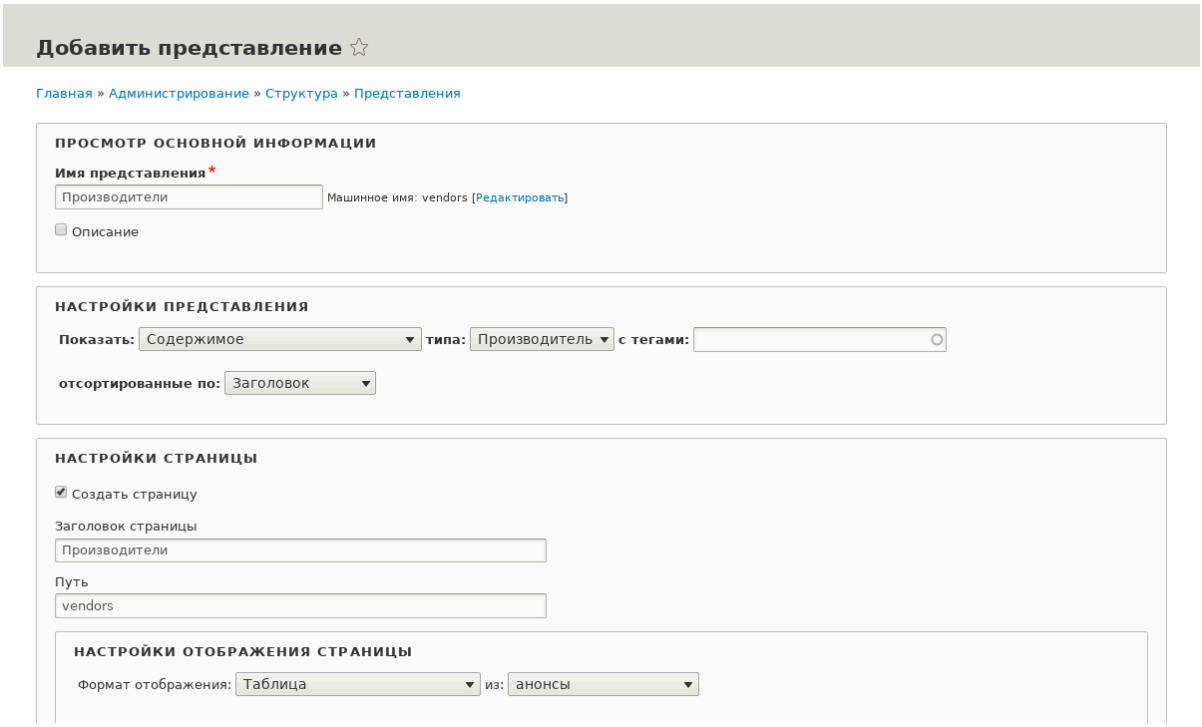


3. Click *Save and edit*. The view configuration page appears.
4. Under *Fields*, click *Add* from the dropdown button. The *Add fields* pop-up appears.
5. Enter the word "image" in the search field.
6. Check Main image in the table.
7. Click *Apply*. The *Configure field: Content: Main Image* pop-up appears.
8. Fill in the fields as shown below.

Field name	Explanation	Example value
Create a label	Add a label before the field value	Unchecked
Image style	The format of the image	Medium (220x220)
Link image to	Add a link to the content item	Content


9. Click *Apply*. The view configuration page appears.
10. Under *Fields*, click *Add* from the dropdown button. The *Add fields* pop-up appears.
11. Enter the word "body" in the search field.
12. Select *Body* in the table.
13. Click *Apply*. The *Configure field: Content: Body* pop-up appears.
14. Fill in the fields as shown below.

Field name	Explanation	Example value
Create a label	Add a label before the field value	Unchecked
Formatter	The presentation of the field value	Summary or trimmed
Trimmed limit:	The number of maximum characters shown	120

15. Click *Apply*. The view configuration page appears.
16. Under *Fields*, click *Content: Title (Title)*. The *Configure field: Content: Title* pop-up appears.
17. Uncheck *Create a label*. This will remove the label that was created by the wizard.
18. Click *Apply*. The view configuration page appears.
19. Under *Fields*, click *Rearrange* in the dropdown button. The *Rearrange fields* pop-up appears.
20. Drag the cross bar handles of fields to put them into the right order: Image, Title, Body. As an alternative to dragging, you can click the *Show row weights* link at the top of the table and enter numerical weights (fields with lower or more negative weights will be shown first).
21. Click *Apply*. The view configuration page appears.
22. Optionally, click *Update preview* for a preview.
23. Click *Save*.

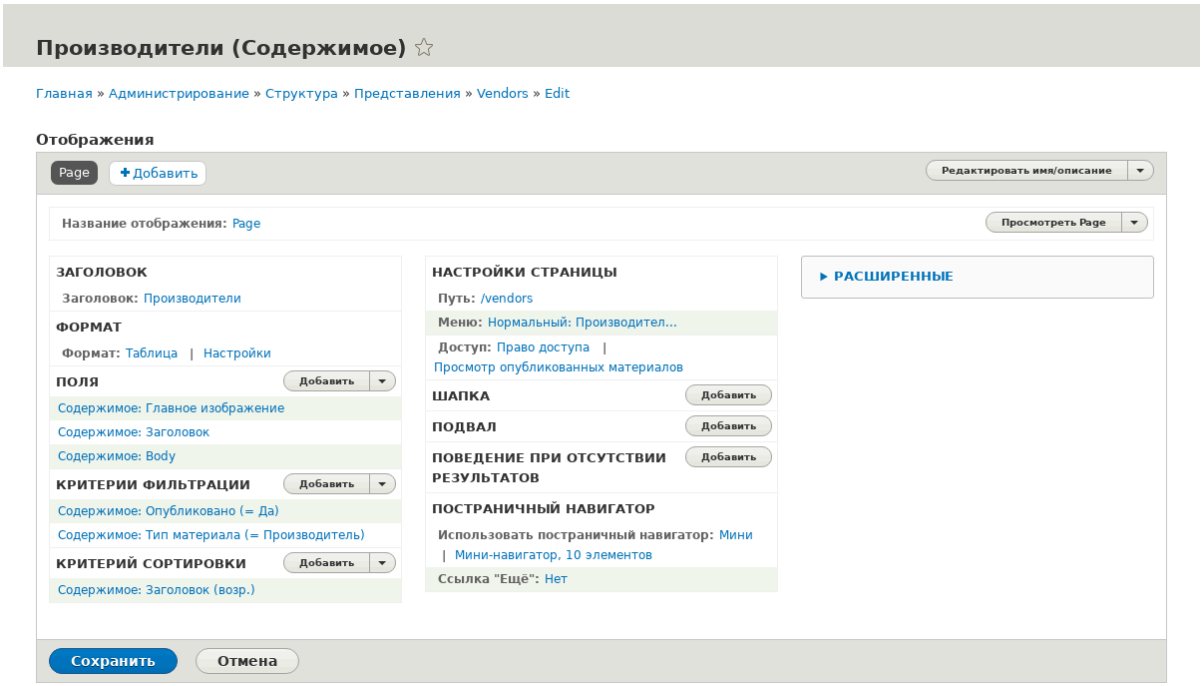

24. Navigate to the homepage and click Vendors from the main navigation to see the result.

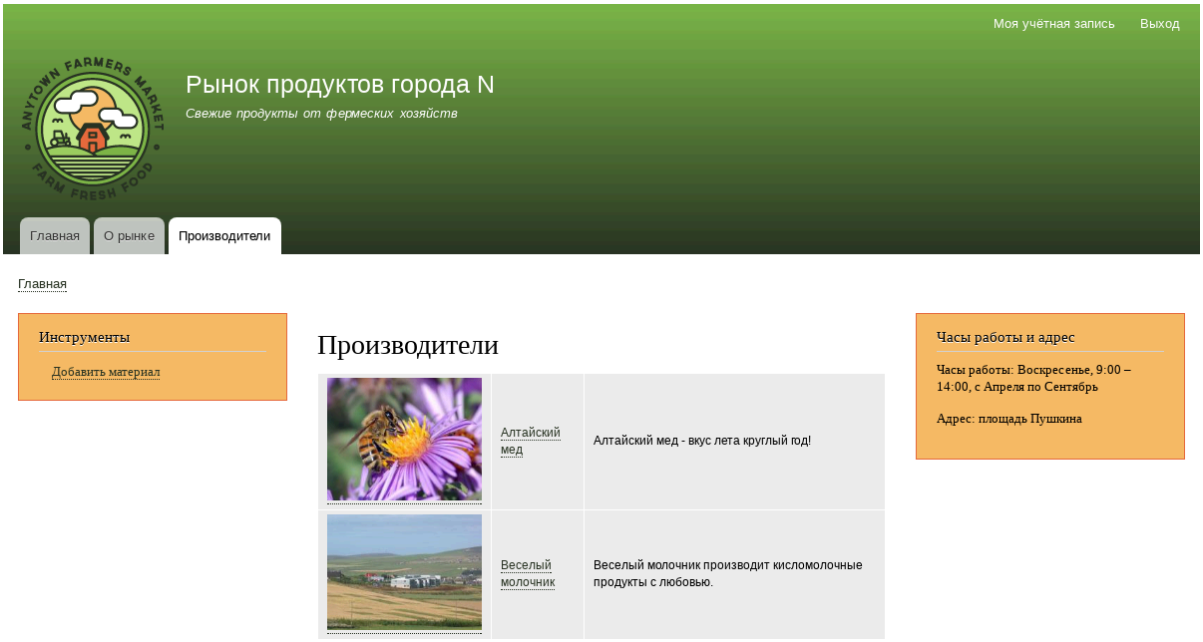

Expand your understanding

The link to the view in the main navigation will probably not be in the right place. Change the order of the menu items in the main navigation. See *Раздел 5.9, «Changing the Order of Navigation»*.

Videos

Creating a Content List View

Creating a Content List View

Attributions

Written/edited by *Boris Doesborg* and *Jennifer Hodgdon*.

9.4. Duplicating a View

Goal

Create a page listing recipes by duplicating the existing Vendors view. Modify the page so that the recipes are displayed in a grid and can by filtered by ingredients.

Prerequisite knowledge


- *Раздел 9.1, «Concept: Uses of Views»*
- *Раздел 9.2, «Concept: The Parts of a View»*
- *Раздел 9.3, «Creating a Content List View»*

Site prerequisites


- The Vendor and Recipe content types must exist; both must have Main image fields, and the Recipe content type must have an Ingredients field. Your site must also have a couple of Recipe content items. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, *Раздел 6.6, «Setting Up a Taxonomy»*, *Раздел 6.9, «Changing Content Entry Forms»*, and *Раздел 5.2, «Создане элемента содержания»*.
- The Vendors view must exist. See *Раздел 9.3, «Creating a Content List View»*.

Steps

1. In the *Manage* administrative menu, navigate to *Structure* > *Views* (*admin/structure/views*). Find the view "Vendors" and click *Duplicate* in its dropdown button. (Note that the names of views that came with your installation profile are shown in English on this page; see *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»* for an explanation.)

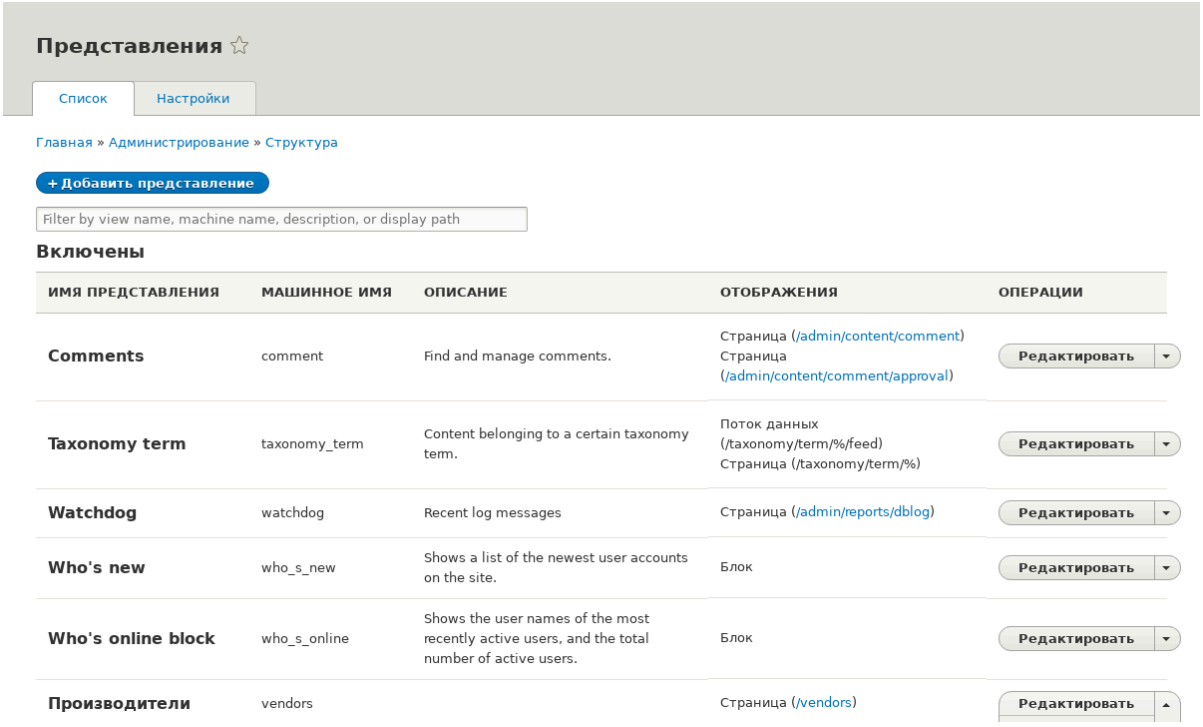


2. Name the duplicate "Recipes" and click *Duplicate*. The view configuration page appears.
3. To change the title of the view page to "Recipes", click Vendors in the *Title* field under *Title*. The *Page: The title of this view* pop-up appears. Enter "Recipes". Click *Apply*.

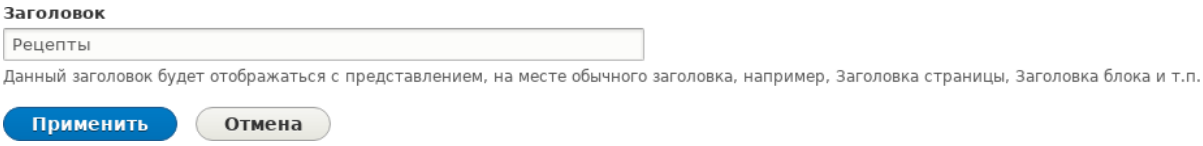

4. To change from a table to a grid format, click *Table* in the *Format* field under *Format*. The *Page: How should this view be styled* pop-up appears. Check *Grid* and click *Apply*. The *Page: Style options* pop-up appears. Retain the default values and click *Apply*.
5. To retain only the title and image fields for the Recipes view, click *Content: Body* under *Fields*. Click *Remove* in the pop-up that appears.
6. To change the content type filter to use the Recipe content type, click *Content: Type (=Vendor)* under *Filter criteria*. In the *Configure filter criterion: Content: Type* pop-up, check Recipe and uncheck Vendor. Click *Apply*.
7. To add a further filter that is exposed to visitors, click *Add* in the dropdown button under *Filter criteria*. Search for "ingredients" and check "Ingredients (field_ingredients)". Click *Add and configure filter criteria*.
8. The appearing pop-up offers extra settings on vocabulary and selection type. Click *Apply and continue*. The next pop-up allows you to expose this filter to visitors. Fill in the fields as shown below, and click *Apply*.


Field name	Explanation	Example value
Expose this filter to visitors, to allow them to change it	Allow visitors to filter and search	Checked
Required	Whether a value has to be provided or not	Unchecked
Label	Label shown for this filter on the view page	Find recipes using...

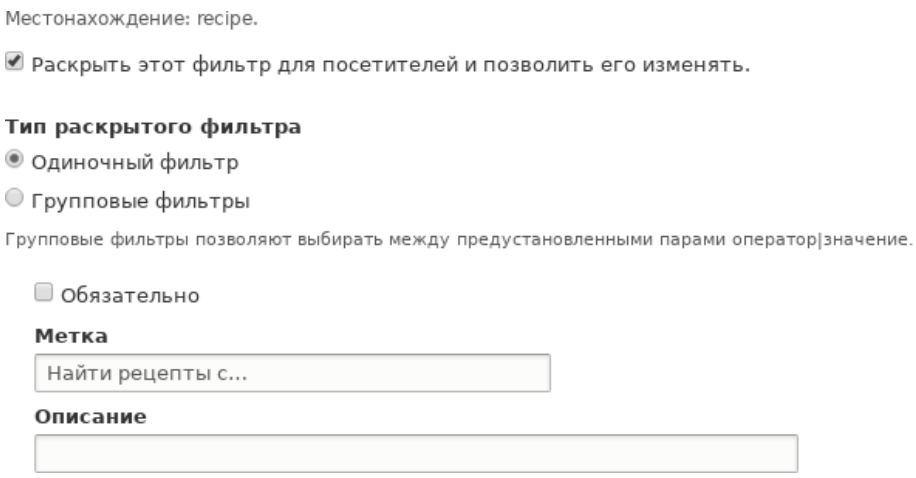

9. To change the *Path* label field to "Recipes", click "/vendors" in the *Path* field under *Page settings*. In the pop-up that appears, enter the path "recipes" and click *Apply*.

   Note that when editing a view, you enter paths without the leading "/", unlike on other administrative pages (such as when providing a path to a content item page).

10. To change the menu link title, click "Normal: Vendors" in the *Menu* field under *Page settings*. In the pop-up that appears, change the title to "Recipes" and click *Apply*.
11. In order to use Ajax (see *Ajax entry in the Glossary*) to make filtering and paging faster for users, under *Advanced* > *Other*, click *No* in the *Use AJAX* field. Check *Use AJAX* in the pop-up that appears, and click *Apply*.
12. Click *Save* to save the view.
13. Go back to the home page and click Recipes in the navigation to view the new Recipes page.

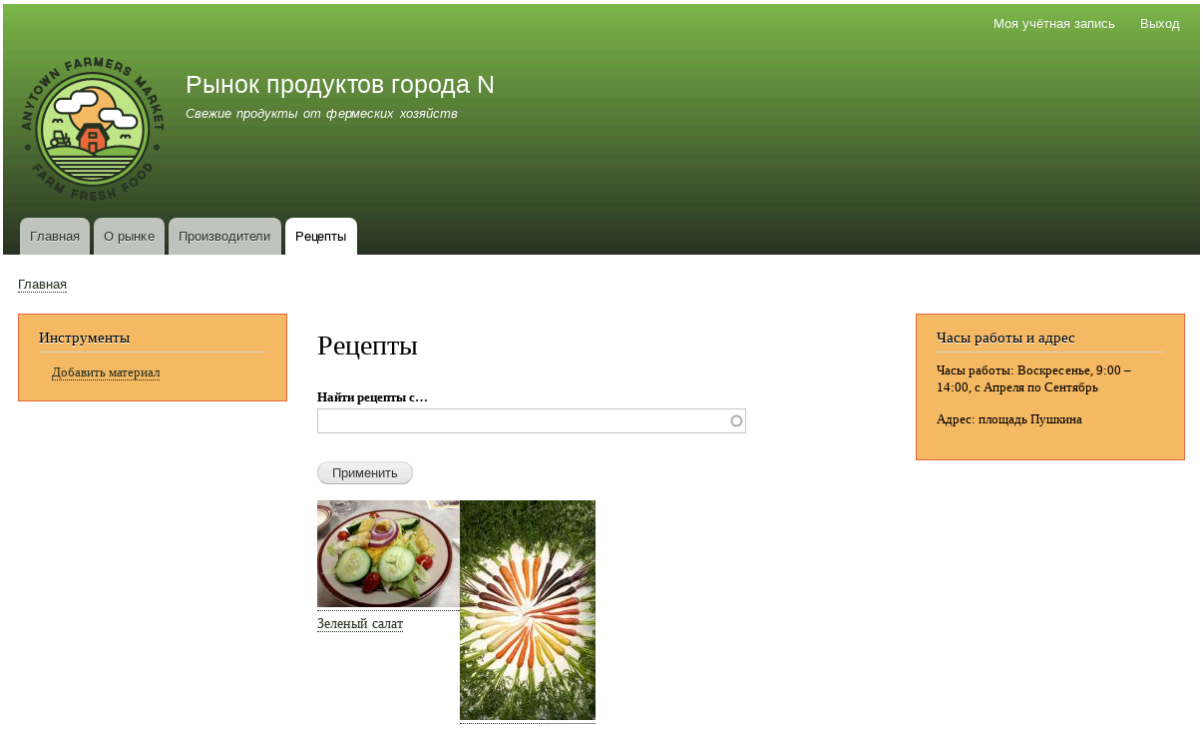

Expand your understanding

The link to the view in the main navigation will probably not be in the right place. Change the order of the menu items in the main navigation. See *Раздел 5.9, «Changing the Order of Navigation»*.

Related concepts

- *Раздел 2.5, «Проектирование структуры контента»*
- *Ajax entry in the Glossary*

Videos

Duplicating a View

Duplicating a View

Attributions

Written and edited by *Laura Vass* at *Pronovix*, and *Jojy Alphonso* at *Red Crackle*.

9.5. Adding a Block Display to a View

Goal

Add a block display to the Recipes view to display the most recent recipes in a sidebar, and change its configuration without changing the existing Recipes page view.

Prerequisite knowledge


- *Раздел 9.1, «Concept: Uses of Views»*
- *Раздел 9.2, «Concept: The Parts of a View»*
- *Раздел 9.3, «Creating a Content List View»*

Site prerequisites


- The Recipe content type must exist, it must have a Main image field, and your site must have a couple of Recipe content items. See *Раздел 6.1, «Adding a Content Type»*, *Раздел 6.3, «Adding Basic Fields to a Content Type»*, *Раздел 6.9, «Changing Content Entry Forms»*, and *Раздел 5.2, «Создане элемента содержания»*.
- The *Thumbnail (100x100)* image style must be defined. This is created on your site when you install the core Image module (installed with the core Standard installation profile) but can be recreated if deleted. See *Раздел 6.13, «Setting Up an Image Style»*.
- The Recipes view must exist. See *Раздел 9.3, «Creating a Content List View»* and *Раздел 9.4, «Duplicating a View»*.

Steps


1. In the *Manage* administrative menu, navigate to *Structure* > *Views* (*admin/structure/views*). Find the view "Recipes" and click *Edit* from its dropdown button. Alternatively, navigate to the Recipes page in the main site navigation, and click the *Edit view* contextual link in the main area of the page. See *Раздел 4.1, «Concept: Administrative Overview»* for information about contextual links.
2. Create a new block display by clicking *Add* under *Displays*. Click *Block* from the list of links that appears. The new display is created, and the focus is automatically switched to its configuration.

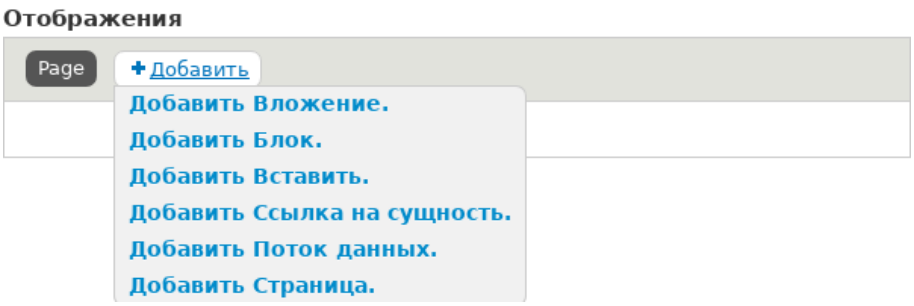

3. To change the title of this display, click *Block* in the *Display name* field. The *Block: The name and the description of this display* pop-up appears. Change the *Administrative name* to "Recent recipes". Click *Apply*.
4. To change the title of the block, click Recipes in the *Title* field under *Title*. In the pop-up that appears, select *This block (override)* from the *For* select list. Change the *Title* field to "New recipes" and click *Apply (this display)*.

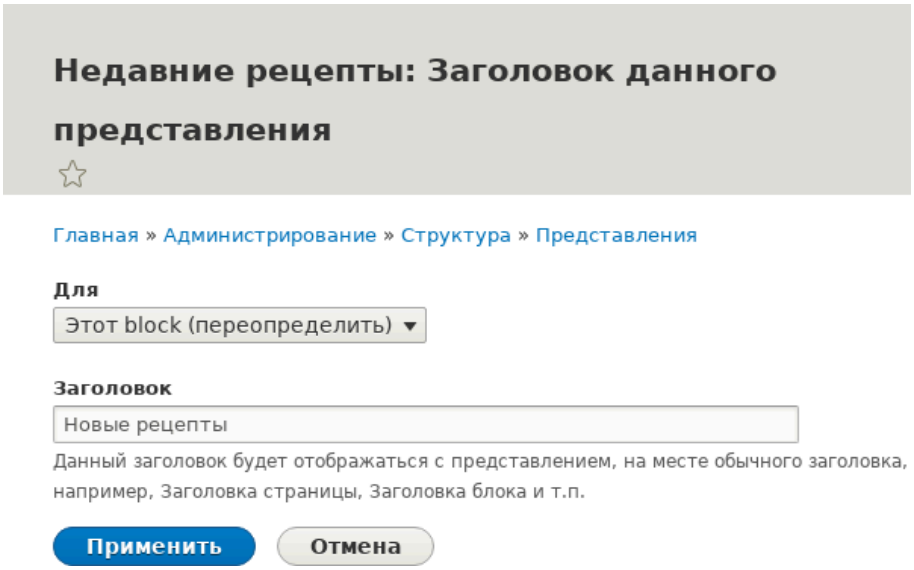


5. To change the block's style, click *Grid* in the *Format* field under *Format*. In the pop-up that appears, select *This block (override)* from the *For* select list. Select *Unformatted list* and Click *Apply (this display)*. You can further configure the style options in the next pop-up that appears. Then click *Apply*.
6. To configure the image field, click *Content: Main image* under *Fields*. In the pop-up that appears, select *This block (override)* from the *For* select list. Select *Image style Thumbnail (100x100)*. Click *Apply (this display)*.

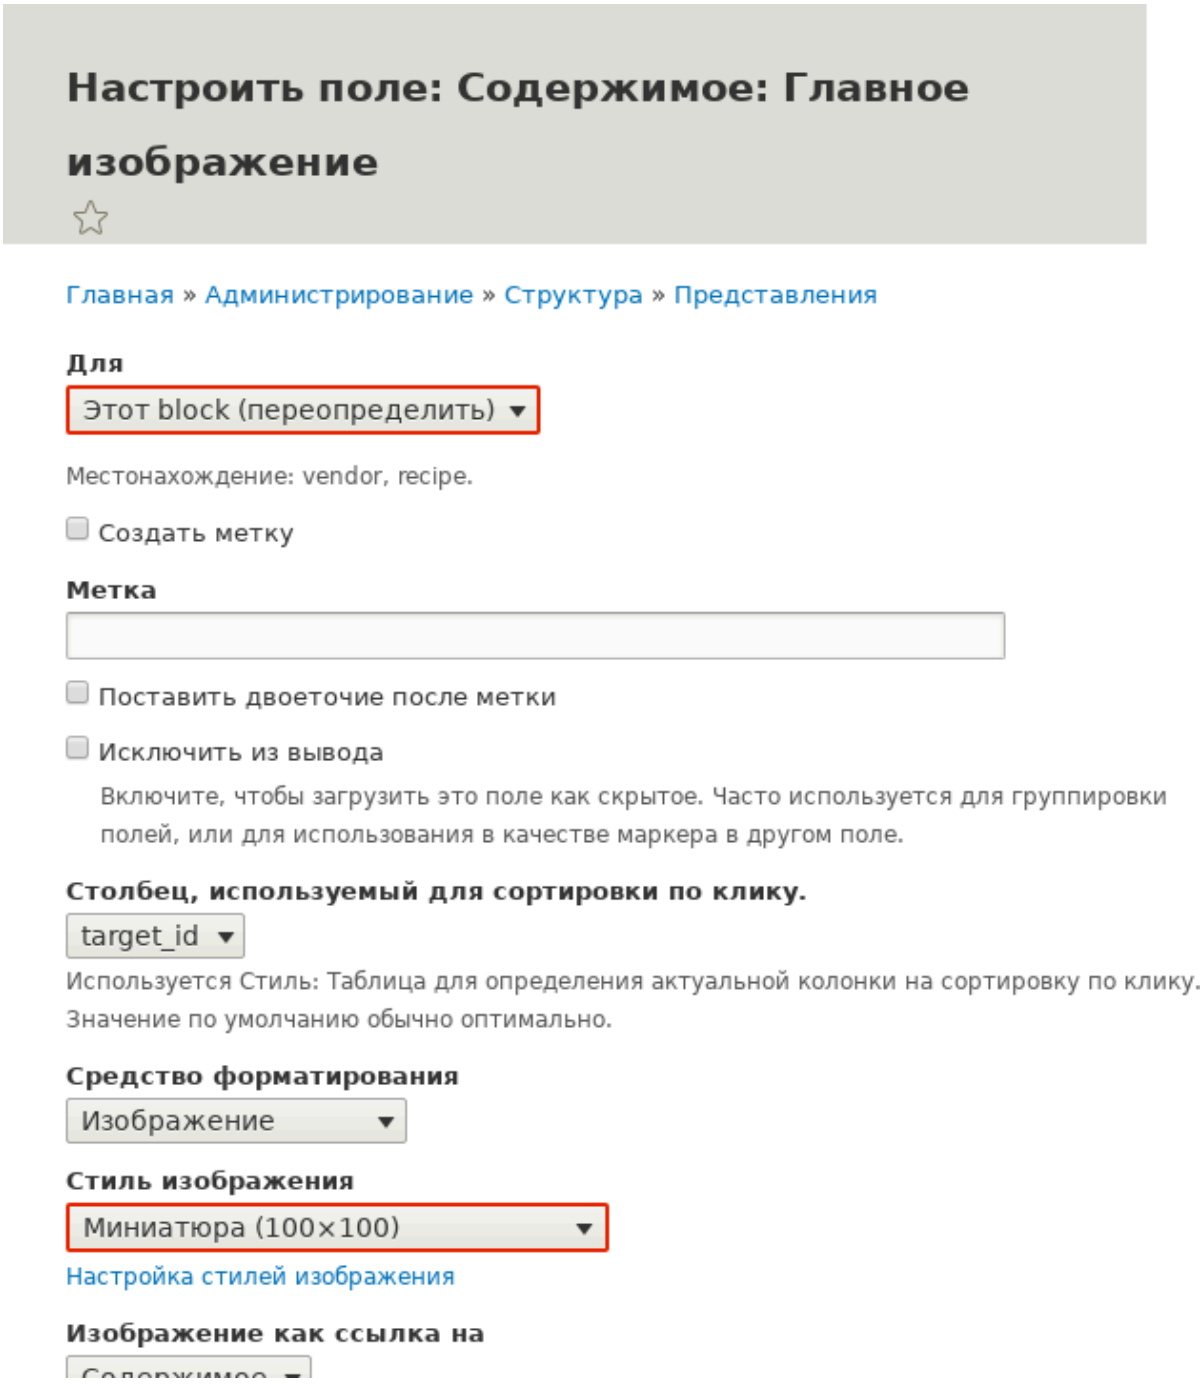


7. To remove ingredients as a filter, click *Content: Ingredients (exposed)* under *Filter criteria*. In the pop-up that appears, select *This block (override)* from the *For* select list. Click *Remove* at the bottom.
8. To configure how you want the content to be sorted in the view, click *Add* from the dropdown button under *Sort criteria*. In the pop-up that appears, select *This block (override)* from the *For* select list. Check *Authored on* (in the *Content* category), and then click *Add and configure sort criteria*.

9. In the appearing configuration pop-up, select *Sort descending* to have the most recent recipes appear first. Click *Apply*.
10. To specify the number of items to be displayed, click *Mini* in the *Use pager* field under *Pager*. In the pop-up that appears, select *This block (override)* from the *For* select list. Under *Pager*, select *Display a specified number of items*. Click *Apply (this display)*. In the *Block: Pager options* pop-up, provide "5" as the value for *Items to display*. Click *Apply*.
11. Click *Save*. You will either see the view editing page again, or the Recipes page, depending on what you did in step 1. You should also see a message saying that the view has been saved.



12. Place the "Recipes: Recent Recipes" block in the *Sidebar second* region. See *Раздел 8.3, «Placing a Block in a Region»*. Navigate to the site's home page to see the block.

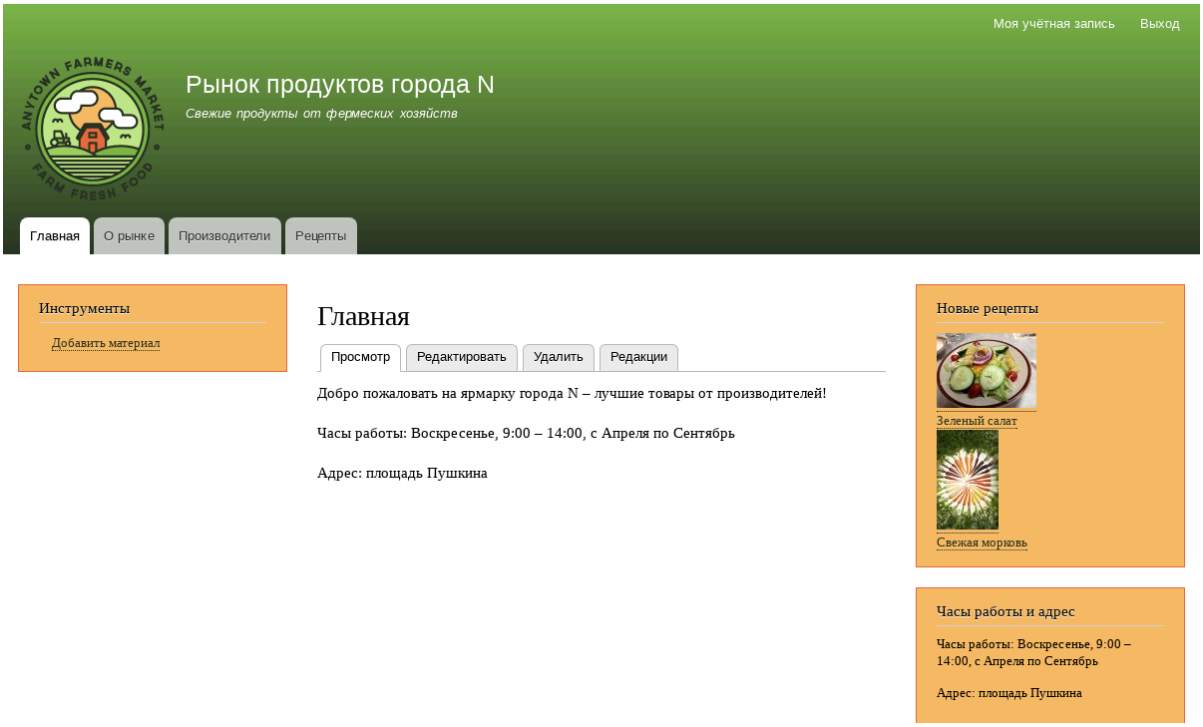

Videos

Adding a Block Display to a View

Adding a Block Display to a View

Attributions

Written and edited by *Laura Vass* at *Pronovix*, *Jennifer Hodgdon*, and *Jojy Alphonso* at *Red Crackle*.

Глава 10. Создание мультиязычного сайта

10.1. Adding a Language

Goal


Add one or more languages to your site and define which one is used by default.

Prerequisite knowledge

Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»

Steps

1. Install the four core multilingual modules (Language, Interface Translation, Content Translation, and Configuration Translation), by following the steps in *Раздел 4.3, «Installing a Module»*.
2. In the *Manage* administrative menu, navigate to *Configuration* > *Regional and language* > *Languages* (*admin/config/regional/language*).
3. Click *Add language*.
4. Select *Spanish* (or your preferred language) from the *Language name* select list. Click *Add language*. After waiting for translations to finish downloading, you will be returned to the *Languages* page, with a confirmation message and the new language shown.

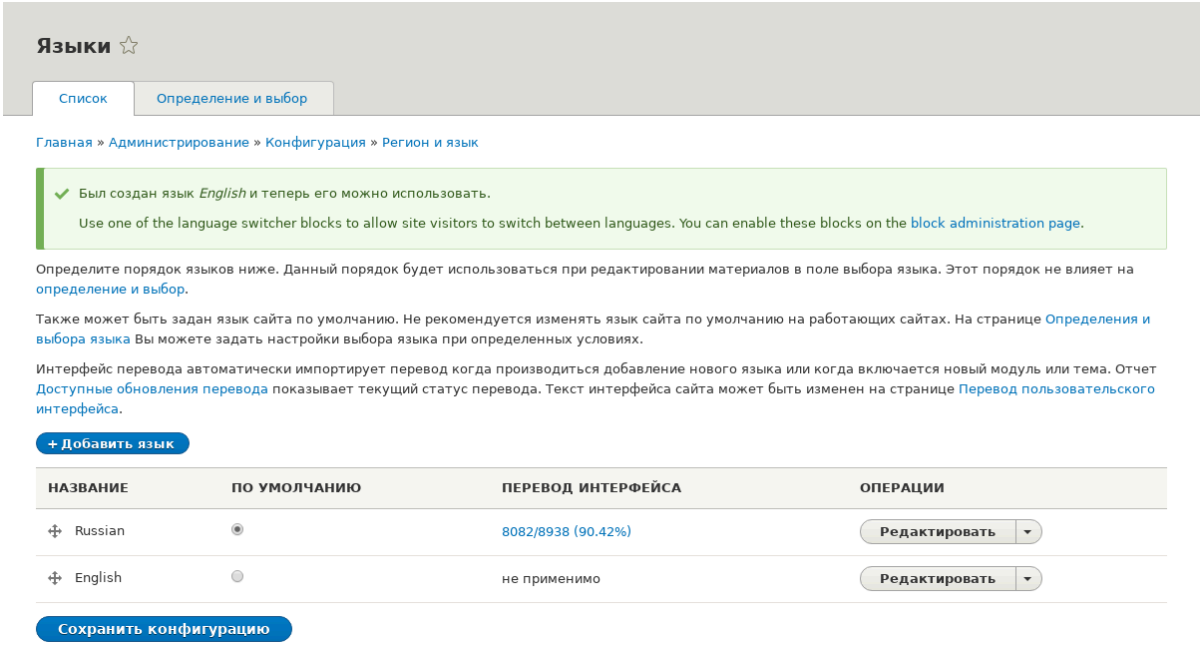

5. Follow the steps in *Раздел 8.3, «Placing a Block in a Region»* to place the *Language switcher* block in the *Sidebar second* region. This will enable site visitors to switch between languages, once the site has been translated.

Expand your understanding

- *Раздел 10.2, «Configuring Content Translation»*
- *Раздел 10.3, «Translating Content»*

Videos

Adding a Language

Adding a Language

Additional resources

Drupal.org page "Resource Guide: Configuring a Multilingual Site"

Attributions

Written and edited by *Leila Tite*, *Jennifer Hodgdon*, and *Boris Doesborg*.

10.2. Configuring Content Translation

Goal

Make *Custom block*, *Custom menu link*, and *Content* entity types translatable. Select specific subtypes and set which fields of these can be translated.

Prerequisite knowledge


- *Раздел 2.3, «Основы: Сущности контента и Поля»*
- *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»*

Site prerequisites

The core Content Translation module must be installed, and your site must have at least two languages. See *Раздел 10.1, «Adding a Language»*.

Steps


1. In the *Manage* administrative menu, navigate to *Configuration* > *Regional and language* > *Content language and translation* (*admin/config/regional/content-language*).
2. Under *Custom language settings*, check *Content*, *Custom block* and *Custom menu link* to make these entity types translatable.

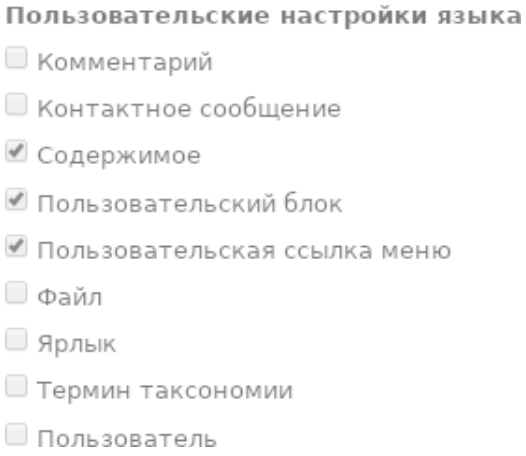

3. Configuration options appear for *Content*, *Custom block* and *Custom menu link*. Choose the subtypes you want to translate for each entity type. Check *Basic page* for *Content*, *Basic block* for *Custom block* and *Custom menu link* for *Custom menu link*.
4. Verify the settings for the entity types as shown below:


Field name	Explanation	Example value
Default language	The default language for the entity subtype	Site's default language (English)

Field name	Explanation	Example value
Show language selector on create and edit pages	Whether or not the language selector should be shown while editing and creating content	Checked

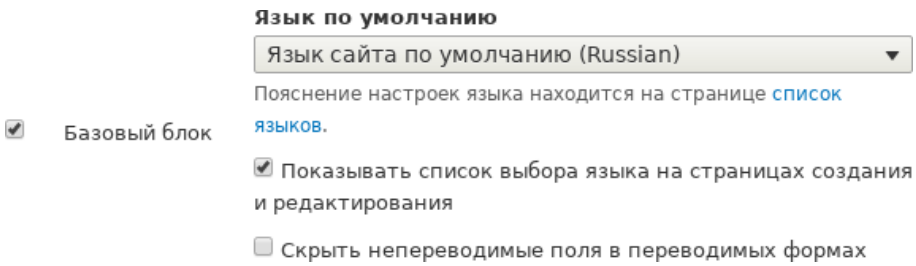

5. Choose the fields that should be translatable for *Basic page* as shown in the table below. If a field is not translation-dependent, leave it unchecked.

Field name	Explanation	Example value
Title	The title of the content	Checked
Authored by	The author	Unchecked
Published	Whether the content has been published or not	Checked
Authored on	Date of publishing	Unchecked
Changed	Date of last update	Unchecked
Promoted to front page	Whether the content will be included in some content views	Unchecked
Sticky at top of lists	Whether the content will be displayed first in some content views	Unchecked
URL alias	Nicer URL for the content	Checked
Body	The main content of the page	Checked

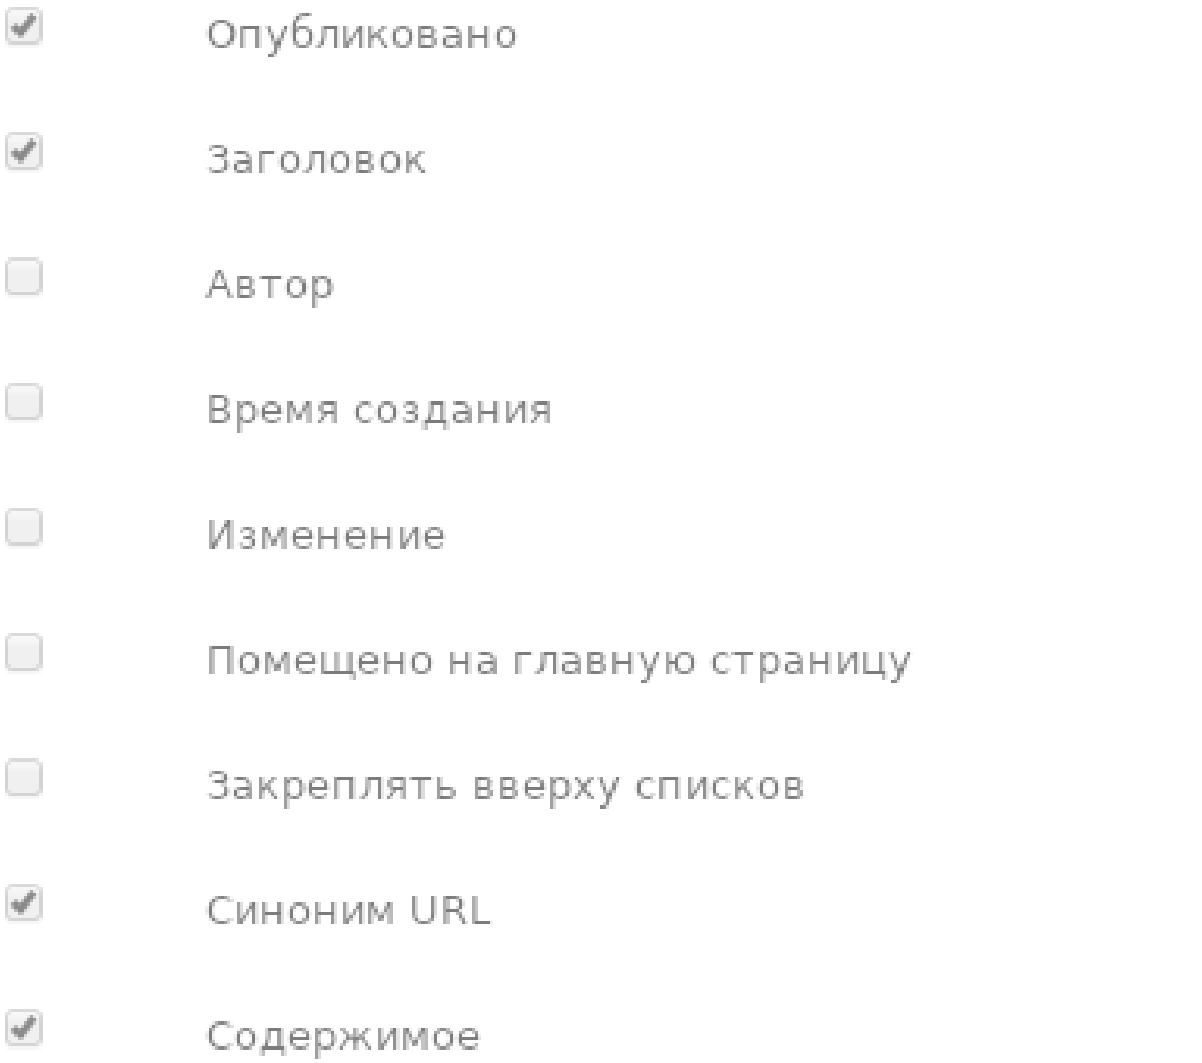

6. Similarly, check the appropriate boxes for translatable fields belonging to *Basic block* and *Custom menu link*.
7. Click *Save configuration*.

Expand your understanding

- *Раздел 10.4, «Translating Configuration»*
- *Раздел 10.3, «Translating Content»*

Videos

Configuring Content Translation

Configuring Content Translation

Additional resources

- *Blog post "Multilingual Drupal 8 tidbits, part 5"*
- *Blog post "Multilingual Drupal 8 tidbits, part 17"*

Attributions

Written and edited by *Laura Vass* at *Pronovix*, *Jojy Alphonso* at *Red Crackle*, and *Jennifer Hodgdon*.

10.3. Translating Content

Goal

Translate the home page to Spanish.

Prerequisite knowledge


Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»

Site prerequisites

- The Home content item must exist. See *Раздел 5.2, «Создане элемента содержания»*.
- The core Content Translation module must be installed, and your site must have at least two languages. See *Раздел 10.1, «Adding a Language»*.
- The *Basic page* content type must be configured to be translatable. See *Раздел 10.2, «Configuring Content Translation»*.

Steps

1. In the *Manage* administrative menu, navigate to *Content* (*admin/content*).
2. Locate the home page. You can search for it by entering "Home" in the title field.
3. Select *Translate* from the dropdown button in the row of the Home content item. The page *Translations of Home* appears.
4. Click *Add* in the row *Spanish*.

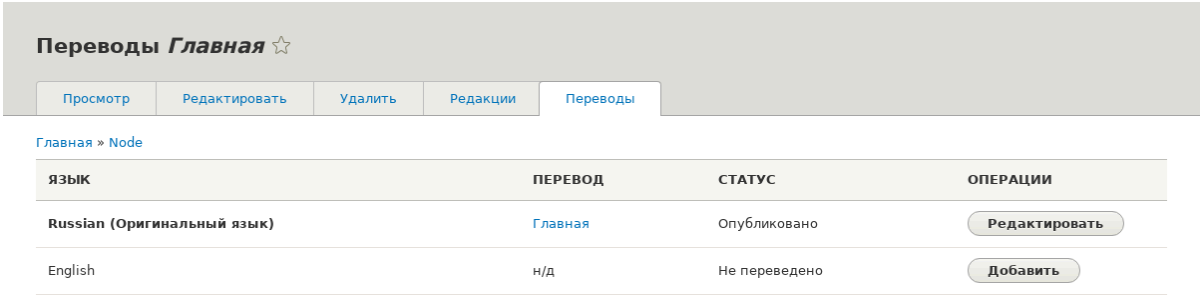

5. Note that the user interface has switched to Spanish. To switch it back to English, remove the first instance of *es* in the browser's URL. For example, if your URL looks like *example.com/es/node/5/translations/add/en/es*, remove the *es* that comes immediately after *example.com*.
6. Fill in the fields as shown below.

Field name	Explanation	Value
Title	Translated title of the page	Página principal
Body	Translated body of the page	Bienvenido al mercado de la ciudad - ¡el mercado de agricultores de tu barrio! Horario: Domingos de 9:00 a 14:00. Desde Abril a Septiembre Lugar: parking del Banco Trust número 1. En el centro de la ciudad
URL alias > URL alias	Translated address of the webpage	pagina-principal

7. Click *Save (this translation)*.
8. Go to your site's home page to view the newly translated page.

Expand your understanding

- Follow the steps above to translate more content on your site.
- *Раздел 10.4, «Translating Configuration»*

Videos

Translating Content

Translating Content

Attributions

Written by *Boris Doesborg*.

10.4. Translating Configuration

Goal

Translate the labels on the Recipes view page into Spanish.

Prerequisite knowledge

- *Раздел 2.7, «Concept: User Interface, Configuration, and Content translation»*
- *Раздел 9.3, «Creating a Content List View»*

Site prerequisites

- The core Configuration Translation module must be installed, and your site must have at least two languages. See *Раздел 10.1, «Adding a Language»*.
- The Recipes view must exist. See *Раздел 9.3, «Creating a Content List View»* and *Раздел 9.4, «Duplicating a View»*.

Steps


The basic steps for translating any configuration on your site are:

1. Locate the page where the configuration you want to translate is created or edited in the site's primary language. For example, to translate the site name, you need to find the page where you would edit the site name (see *Раздел 4.2, «Editing Basic Site Information»*).
2. Find a link, tab, or button on the page that says "Translate" or something similar. Click this link, tab, or button.
3. Find a button that will let you add a translation in the desired language, and click this button.
4. Enter the translation in the form, and save.

Most configuration is fairly straightforward and intuitive to edit in this manner. Views configuration is an exception, because the translation editing form is nothing like the view editing form, and it is complex and hierarchical rather than being a simple form with just a few fields. As an example of how to translate a view, here are the steps to translate the labels in the Recipes view to Spanish:

1. In the *Manage* administrative menu, navigate to *Structure* > *Views* (*admin/structure/views*).
2. Locate the Recipes view and click *Translate* from the dropdown button.
3. Click *Add* in the row *Spanish*. The page *Add Spanish translation for Recipes view* appears.
4. Under *Displays* > *Master Display settings* > *Recipes default display Options*, translate *Display title* from "Recipes" to "Recetas".
5. Under *Displays* > *Master display settings* > *Recipes default display options* > *Exposed form* > *Reset options*, translate *Submit button text* from "Apply" to "Applicar". The other buttons

and labels in this section do not appear on the Recipes page or block, and do not need to be translated.

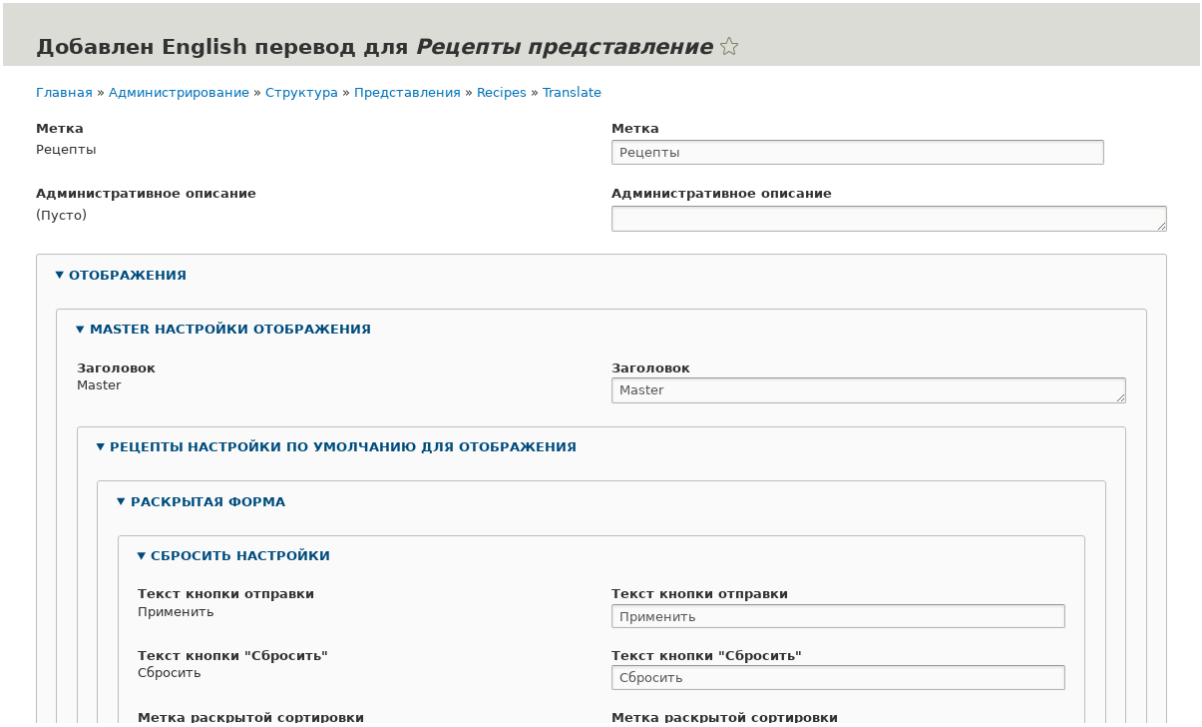

6. Under *Displays* > *Master display settings* > *Recipes default display options* > *Filters* > *(Empty) taxonomy term ID* > *Find recipes using... Expose*, translate *Label* from "Find recipes using..." to "Encontrar recetas usando...".
7. Click *Save translation*.
8. Navigate to the Recipes page and switch to Spanish using the Language switcher block. Verify that the labels have been translated.

Expand your understanding

- Translate the block display title in the Recent recipes display settings section of the Recipes view.
- Translate the page title in the Vendors view.
- Translate other configuration. Some examples of where to find the translation pages:
  - To translate the site name, navigate in the *Manage* administrative menu to *Configuration* > *System* > *Basic site settings* > *Translate system information* (*admin/config/system/site-information/translate*).
  - To translate the contact form, navigate in the *Manage* administrative menu to *Structure* > *Contact forms* (*admin/structure/contact*). Click *Translate* in the dropdown button in the *Website feedback* row.
  - To translate the name of a menu, navigate in the *Manage* administrative menu to *Structure* > *Menus* (*admin/structure/menu*). Click *Translate* in the dropdown button for the menu whose name you want to translate.

- Menu items within a menu are considered to be content (not configuration); see *Раздел 10.2, «Configuring Content Translation»* to enable translation. Once translation is enabled, navigate in the *Manage* administrative menu to *Structure* > *Menus* (*admin/structure/menu*). Click *Edit menu* in the dropdown button for the menu whose links you want to translate. Click *Translate* in the dropdown button for the link you want to translate.
- To translate field labels on a content type, navigate in the *Manage* administrative menu to *Structure* > *Content types* (*admin/structure/types*). Click *Manage fields* in the dropdown button for the content type whose field labels you want to edit. Click *Translate* in the dropdown button for the field whose label you want to edit.

- Translate content. See *Раздел 10.3, «Translating Content»*.

Videos

Translating Configuration

Translating Configuration

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

Глава 11. Расширение функционала и настройка оформления сайта

11.1. Finding Modules

Goal

Find and evaluate modules on *Drupal.org*.

Prerequisite knowledge


- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 1.2, «Основы: Модули»*

Steps


1. Go to *Drupal.org*, and navigate to *Download & Extend* > *Modules* (*https://www.drupal.org/project/project_module*).
2. Filter your search using the categories on the module search page. Fill in the fields as shown below.

Field name	Explanation	Example value
Maintenance status	How actively should the module be maintained?	Actively maintained
Development status	What kind of development should the module undergo?	Any
Module categories	The module's topic area.	Administration
Core compatibility	The version of the core software the module is compatible with.	8.x
Status	Project status: *Sandbox projects* are experimental projects. *Full projects* have already gone through an approval process, but they can still be in development.	Full projects

Field name	Explanation	Example value
Stability	Whether or not the project maintainer has created a production-ready version.	Has a supported stable release
Security advisory coverage	Whether or not the project maintainer has agreed to follow Drupal Security Team procedures.	Has security advisory coverage
Search modules	Search for *Admin Toolbar*, a module that will be covered in detail later. Alternatively, you can also leave the field blank if you are not sure which module to search for.	Admin Toolbar
Sort by	Order your search results by criteria like *Most installed* (popular modules that many sites use) or *Last release* (date of latest version released).	Most installed

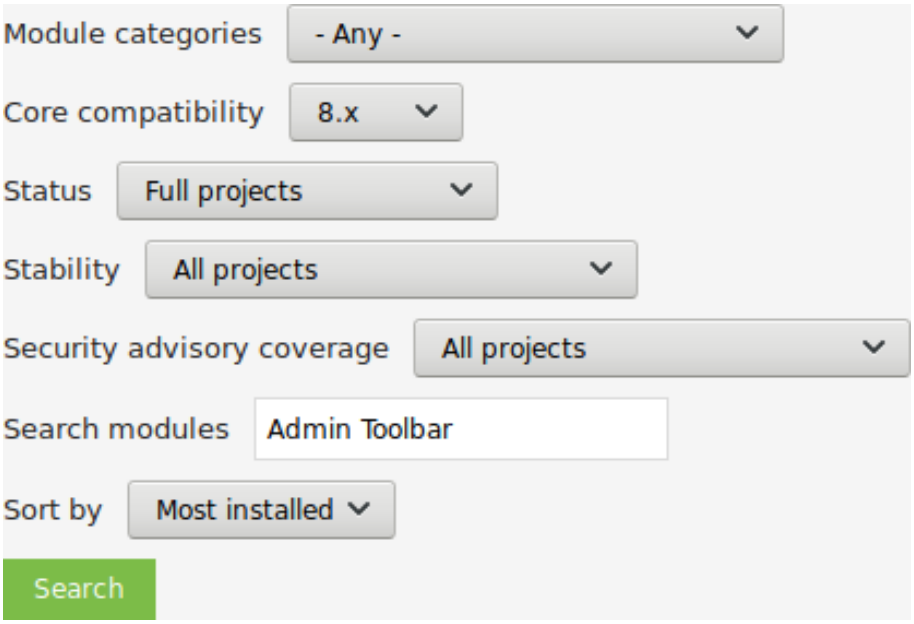

3. Click *Search*. Search results will appear.

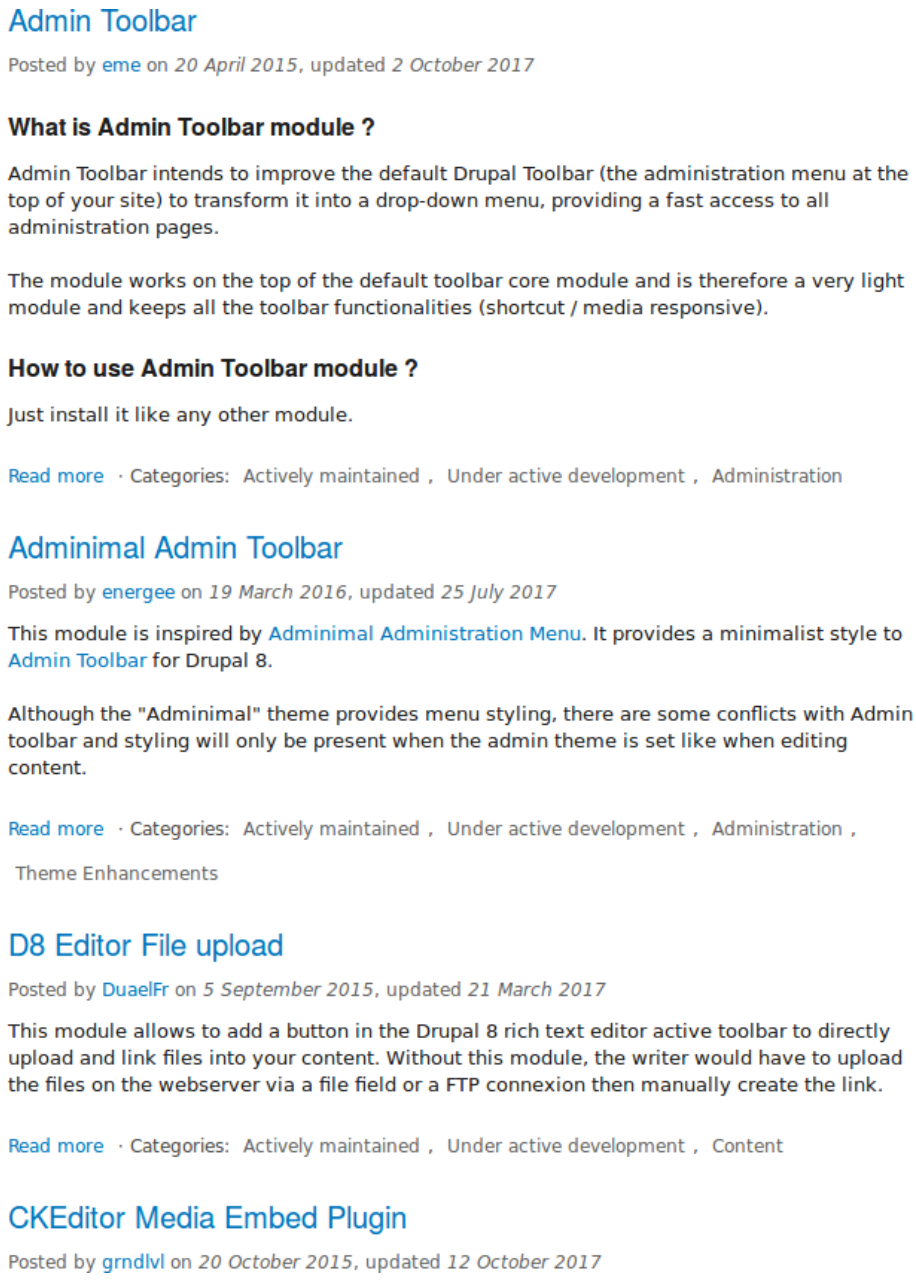

Admin Toolbar

Posted by eme on *20 April 2015*, updated *2 October 2017*

What is Admin Toolbar module ?

Admin Toolbar intends to improve the default Drupal Toolbar (the administration menu at the top of your site) to transform it into a drop-down menu, providing a fast access to all administration pages.

The module works on the top of the default toolbar core module and is therefore a very light module and keeps all the toolbar functionalities (shortcut / media responsive).

How to use Admin Toolbar module ?

Just install it like any other module.

Read more · Categories: Actively maintained , Under active development , Administration

Adminimal Admin Toolbar

Posted by energee on *19 March 2016*, updated *25 July 2017*

This module is inspired by Adminimal Administration Menu. It provides a minimalist style to Admin Toolbar for Drupal 8.

Although the "Adminimal" theme provides menu styling, there are some conflicts with Admin toolbar and styling will only be present when the admin theme is set like when editing content.

Read more · Categories: Actively maintained , Under active development , Administration , Theme Enhancements

D8 Editor File upload

Posted by DuaelFr on *5 September 2015*, updated *21 March 2017*

This module allows to add a button in the Drupal 8 rich text editor active toolbar to directly upload and link files into your content. Without this module, the writer would have to upload the files on the webserver via a file field or a FTP connexion then manually create the link.

Read more · Categories: Actively maintained , Under active development , Content

CKEditor Media Embed Plugin

Posted by grndlvl on *20 October 2015*, updated *12 October 2017*


4. To further evaluate a module, click its title in the list of search results to visit its project page.

Some aspects to pay attention to when evaluating modules:

- Project description: The description of the module on its project page should be clear and useful. You should get an idea of its features and requirements.
- Project information: There may be warnings in this area of the page, such as if a module is no longer being developed, or is not covered by the security advisory policy.
- Project information > Reported installs, downloads: You can see how many people have downloaded and how many sites use the module. If it’s only used by a few sites, it might

be a unique solution that not many people need, or it might be a warning sign that you shouldn't use it either.

- Maintainers: When was the last commit (the last time someone updated something on the module) or last release (new version)? If the project has few open issues, a long time since commits/releases might be appropriate, but if it has a lot of open issues and there are no commits/releases, that would be a clue that it might be abandoned.
- Issues: See if there are any open issues, potential problems with the module. Check the Statistics to see how regularly issues are responded to.
- Documentation, Resources: Check if the module has documentation or a README file, that can help you install, configure, explore, and test it.

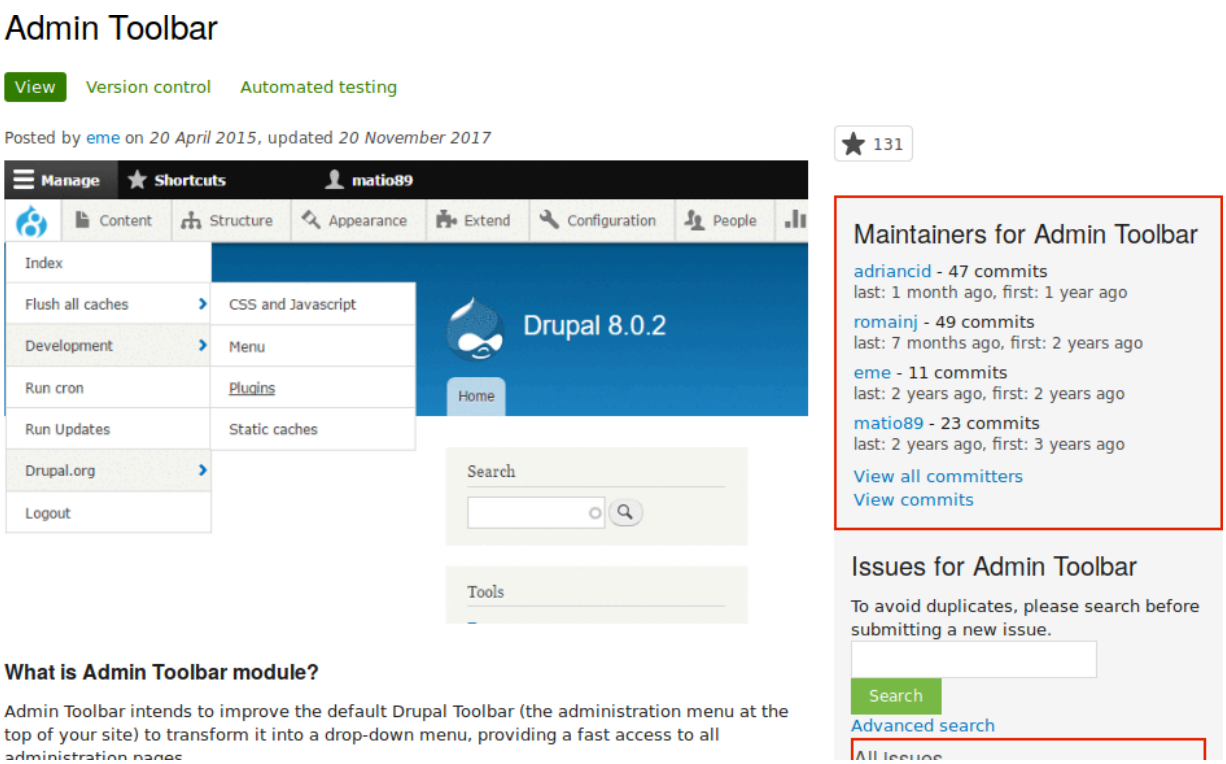

Expand your understanding

Раздел 11.3, «Downloading and Installing a Module from Drupal.org»

Videos

Finding Modules

Finding Modules

Attributions

Written by *Diána Lakatos* at *Pronovix*.

11.2. Enabling and Disabling Maintenance Mode

Goal

Put your site in maintenance mode to allow users with the right permissions to use the site while users without this permission are presented with a message that the site is under maintenance.

Prerequisite knowledge

Раздел 13.3, «Concept: Security and Regular Updates»

Site prerequisites

If you want to use Drush to enable or disable maintenance mode, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps


You can use the administrative interface or Drush to enable or disable maintenance mode.

Enabling maintenance mode using the administrative interface

1. In the *Manage* administrative menu, navigate to *Configuration* > *Development* > *Maintenance mode* (*admin/config/development/maintenance*). The *Maintenance mode* page appears.
2. Fill in the fields as shown below.

Field name	Explanation	Value
Put site into maintenance mode	Enable the maintenance mode	Checked
Message to display when in maintenance mode	The information that is shown to website visitors when the mode is enabled. Variables such as @site can be used in the message	@site is currently under maintenance but should be back shortly. Thank you for your patience.

3. Click *Save configuration*.
4. Verify that the site is in maintenance mode by accessing it from another browser where you aren't logged in. If you are not able to verify, try clearing the cache. See *Раздел 12.2, «Clearing the Cache»*.

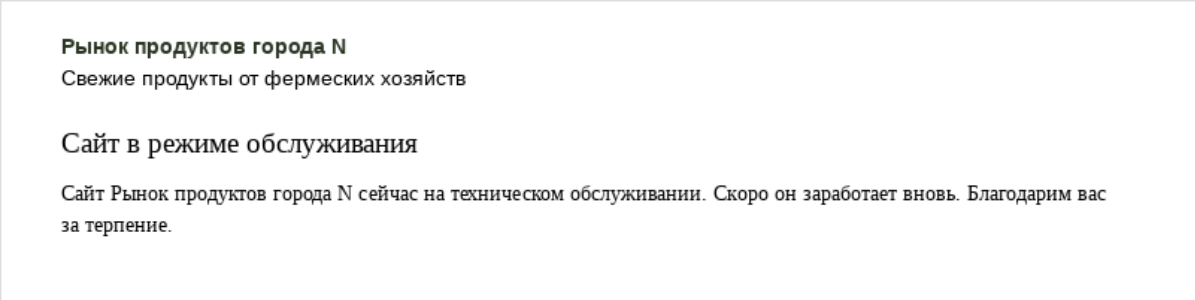


Disabling maintenance mode using the administrative interface

1. In the *Manage* administrative menu, navigate to *Configuration* > *Development* > *Maintenance mode* (*admin/config/development/maintenance*). The *Maintenance mode* page appears.
2. Fill in the fields as shown below.

Field name	Explanation	Value
Put site into maintenance mode	Disable the maintenance mode	Unchecked
Message to display when in maintenance mode	No message required while disabling. You can leave the field blank.	

3. Click *Save configuration*.
4. Verify that the site is no longer in maintenance mode by accessing it from another browser where you aren't logged in. If you are not able to verify, try clearing the cache. See *Раздел 12.2, «Clearing the Cache»*.

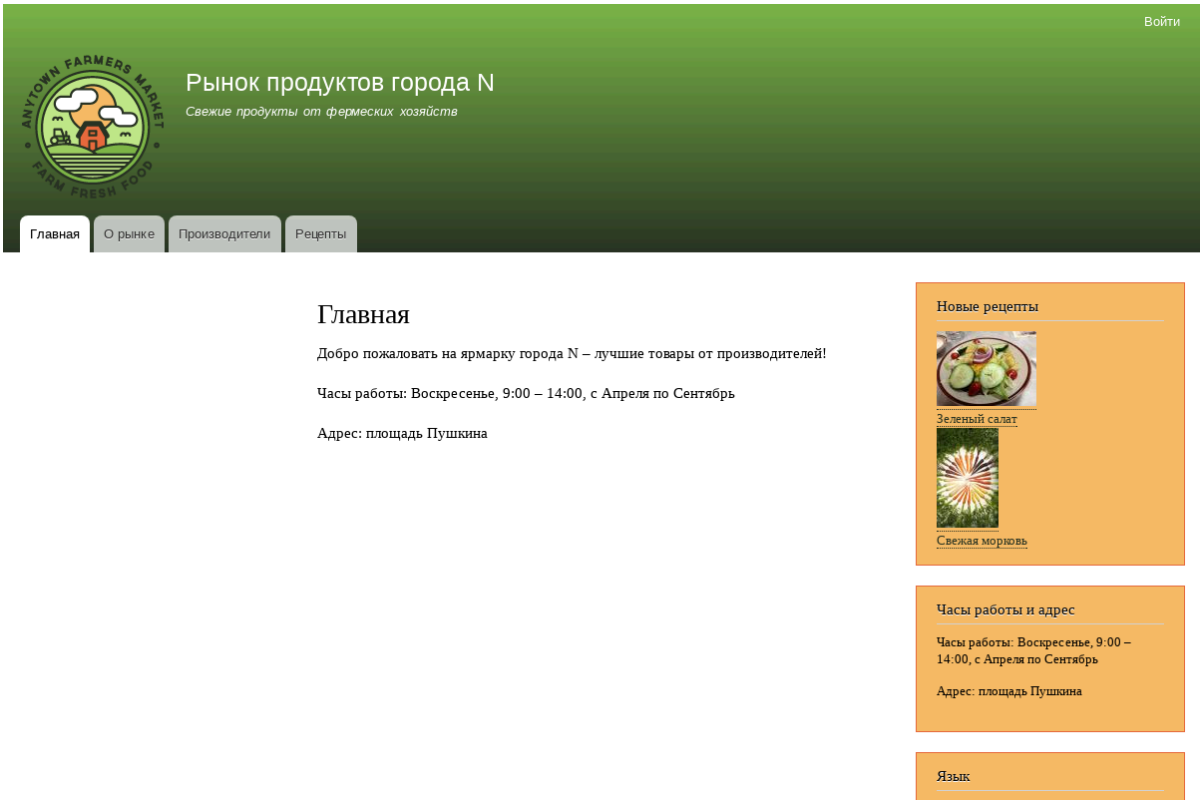

Enabling or disabling maintenance mode using Drush

1. Follow the user interface steps above to edit the site maintenance message, if desired.
2. Run the following Drush commands to enable maintenance mode and clear the cache:

   ```
   drush sset system.maintenance_mode 1
   drush cr
   ```

3. Run the following Drush commands to disable maintenance mode and clear the cache:

   ```
   drush sset system.maintenance_mode 0
   drush cr
   ```

4. After running either set of commands, verify that your site is either in or out of maintenance mode by visiting the site in a browser where you are not logged in.

Expand your understanding

- *Раздел 13.5, «Updating the Core Software»*
- *Раздел 13.7, «Updating a Theme»*
- *Раздел 13.6, «Updating a Module»*

Videos

Enabling and Disabling Maintenance Mode

Enabling and Disabling Maintenance Mode

Attributions

Written and edited by *Boris Doesborg*, *Jojy Alphonso* at *Red Crackle*, and *Jennifer Hodgdon*.

11.3. Downloading and Installing a Module from *Drupal.org*

Goal

Download and install the *contributed Admin Toolbar module*, which allows you to easily browse through the administration section of the website.

Prerequisite knowledge

- *Раздел 1.2, «Основы: Модули»*
- *Раздел 11.1, «Finding Modules»*
- *Раздел 3.2, «Concept: Additional Tools»*

Site prerequisites

- If you want to install modules via the website, the core Update Manager module must be installed. See *Раздел 4.3, «Installing a Module»* for instructions on installing modules.
- If you want to use Drush, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

You can use the administrative interface to download and install a contributed module. If you are installing a custom module rather than a contributed module, if you see a message saying *Installing modules and themes requires FTP access to your server*, or if the steps below do not work to download and unpack the module files, follow the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»*. If you are using Composer to manage the files in your site, follow the steps for downloading in *Раздел 3.5, «Using Composer to Download and Update Files»*. In either of these cases, you can then install the module using Drush, or by continuing with step 7 in the instructions for the administrative interface below.


Using the administrative interface

1. On the *Admin toolbar* project page on drupal.org (*https://www.drupal.org/project/admin_toolbar*), scroll to the *Downloads* section at the bottom of the page.

2. Copy the address of the *tar.gz* link. Depending on your device and browser, you might do this by right clicking and selecting *Copy link address*.



3. In the *Manage* administrative menu, navigate to *Extend* (*admin/modules*). The *Extend* page appears.
4. Click *Install new module*. The *Install new module* page appears.

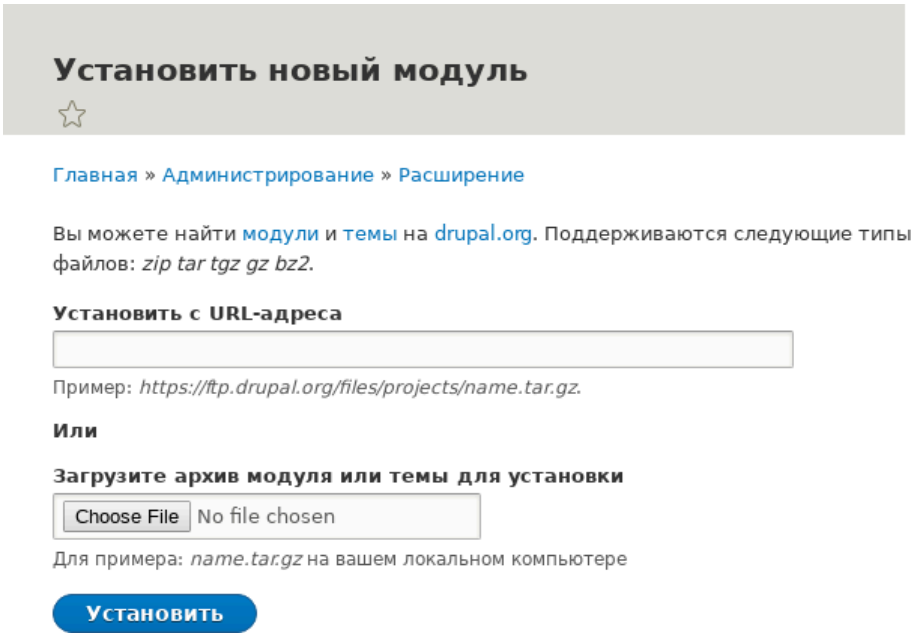

5. In the field *Install from a URL*, paste the copied download link. This value could look like this: *https://ftp.drupal.org/files/projects/admin_toolbar-8.x-1.14.tar.gz*
6. Click *Install* to upload and unpack the new module on the server. The files are being downloaded to the *modules* directory.
7. Click *Enable newly added modules* to return to the *Extend* page. If you used the manual uploading procedure mentioned earlier, then you can continue with this step, and reach the *Extend* page by using the *Manage* administrative menu and navigating to *Extend* (*admin/modules*).
8. Locate the *Admin toolbar* module and check it.
9. Click *Install* to turn on the new module.

Using Drush to install a module

1. Find the project name for the module you want to install, which is the last segment of the module's project page URL. For example, if the project URL is *https://www.drupal.org/project/admin_toolbar*, the project name is "admin_toolbar".
2. Download the module using either the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»* or *Раздел 3.5, «Using Composer to Download and Update Files»*.
3. Run the following Drush command, giving the project name (for example, `admin_toolbar`) as a parameter:

   ```
   drush en admin_toolbar
   ```

4. Follow the instructions on the screen.

Expand your understanding

- Verify that the *contributed Admin Toolbar module* is working by browsing through the menu in the administration section.
- Install and configure the *contributed Pathauto module* so that content pages in your site get nice URLs by default. See *Раздел 5.1, «Concept: Paths, Aliases, and URLs»* for more on URLs.
- If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Downloading and Installing a Module from Drupal.org

Downloading and Installing a Module from Drupal.org

Additional resources

- *Drupal.org community documentation page "Contributed modules"*
- *"Download and Extend" page on Drupal.org*
- *Admin Toolbar module on Drupal.org*

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

11.4. Finding Themes

Goal

Find and evaluate themes on *Drupal.org*.

Prerequisite knowledge


- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 1.3, «Основы: Темы оформления»*

Steps


1. Go to *https://www.drupal.org*, and navigate to *Download & Extend* > *Themes* (*https://www.drupal.org/project/project_theme*).
2. Filter your search using the categories on the theme search page. For example, you might use these filters:

Field name	Explanation	Example value
Maintenance status	How actively is the theme maintained? If a theme is actively maintained, you can expect bug fixes and improvements on a regular basis.	Actively maintained
Development status	What kind of development is the theme undergoing? If you select *Under active development*, you can expect new features to be added, and some aspects may still change. If you select *Maintenance fixes only*, it means that the theme is considered complete.	Any
Core compatibility	The Drupal version the theme is compatible with.	8.x
Status	*Sandbox projects* are experimental projects. *Full projects* have already gone through an approval process, but they can still be in development.	Full projects
Stability	Whether or not the project maintainer has created a production-ready version.	Has a supported stable release
Security advisory coverage	Whether or not the project maintainer has agreed to follow Drupal Security Team procedures.	Has security advisory coverage

Field name	Explanation	Example value
Search themes	Search by search term in the theme's description.	-
Sort by	Order your search results by criteria like *Most installed* (popular themes that many sites use) or *Last release* (date of latest version released).	Most installed

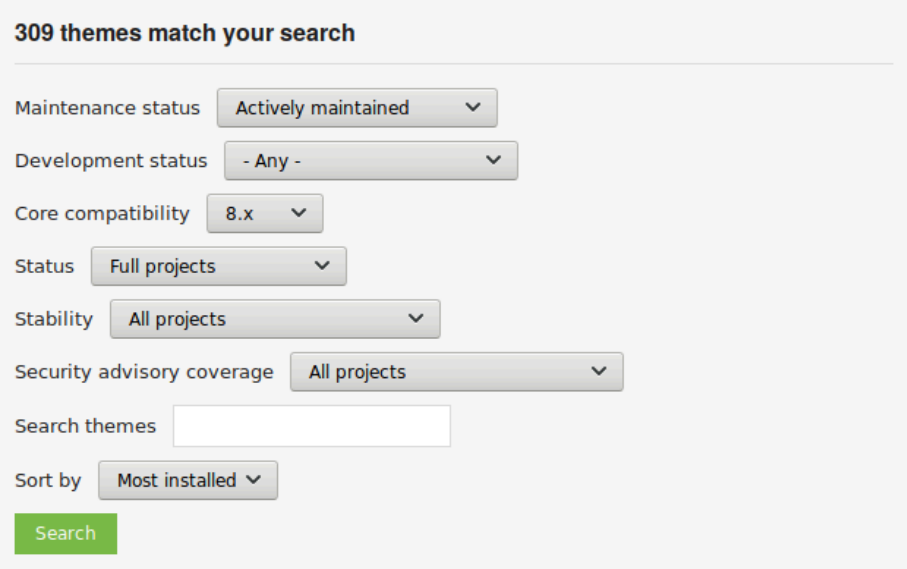

3. Click *Search*. Search results will appear.

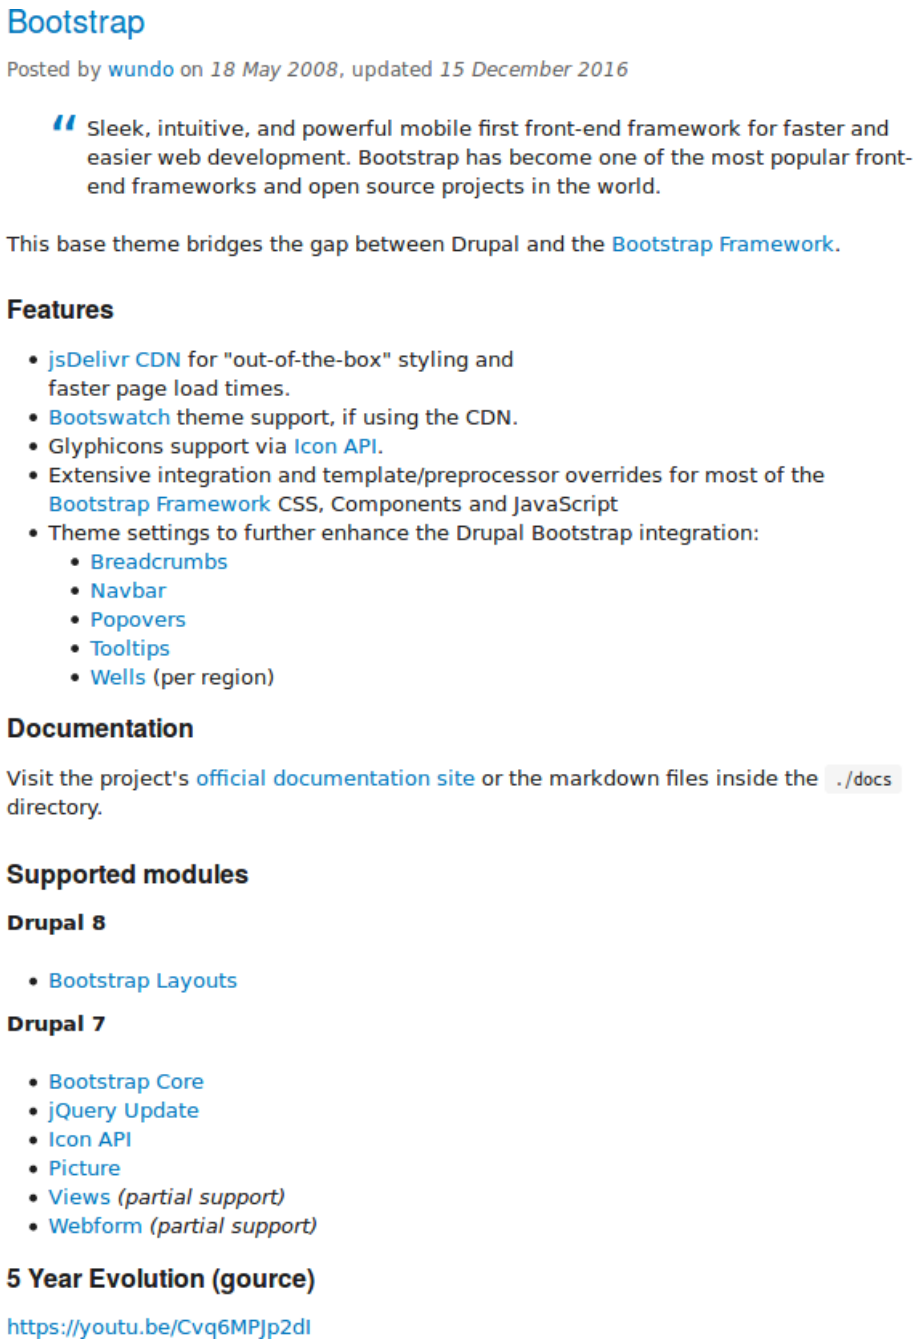

Bootstrap

Posted by wundo on *18 May 2008*, updated *15 December 2016*

> Sleek, intuitive, and powerful mobile first front-end framework for faster and easier web development. Bootstrap has become one of the most popular front-end frameworks and open source projects in the world.

This base theme bridges the gap between Drupal and the Bootstrap Framework.

Features

- jsDelivr CDN for "out-of-the-box" styling and faster page load times.
- Bootswatch theme support, if using the CDN.
- Glyphicons support via Icon API.
- Extensive integration and template/preprocessor overrides for most of the Bootstrap Framework CSS, Components and JavaScript
- Theme settings to further enhance the Drupal Bootstrap integration:
  - Breadcrumbs
  - Navbar
  - Popovers
  - Tooltips
  - Wells (per region)

Documentation

Visit the project's official documentation site or the markdown files inside the `./docs` directory.

Supported modules

Drupal 8

- Bootstrap Layouts

Drupal 7

- Bootstrap Core
- jQuery Update
- Icon API
- Picture
- Views *(partial support)*
- Webform *(partial support)*

5 Year Evolution (gource)

https://youtu.be/Cvq6MPJp2dI

4. To further evaluate a theme, click its title in the list of search results to visit its project page.

Some aspects to pay attention to while evaluating themes:

- Introduction: The description of the theme on its project page should be clear and useful. A screenshot of the theme helps your evaluation as well.
- Project information: There may be warnings in this area of the page, such as if a theme is no longer being developed, or is not covered by the security advisory policy.

- Project information > Reported installs, downloads: You can see how many people have downloaded and how many sites use the theme.
- Issues: See if there are any open issues, potential problems with the theme. Check the Statistics to see how regularly issues are responded to.
- Documentation, Resources: Check if the theme has documentation or a README file, that can help you install, configure, explore, and test it.

Expand your understanding

- *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»*

Videos

Finding Themes

Finding Themes

Attributions

Written by *Diána Lakatos*.

11.5. Downloading and Installing a Theme from *Drupal.org*

Goal

Download and install a theme from *Drupal.org*.

Prerequisite knowledge

- *Раздел 11.4, «Finding Themes»*
- *Раздел 3.2, «Concept: Additional Tools»*

Site prerequisites

If you want to install via the website, the core Update Manager module must be installed. See *Раздел 4.3, «Installing a Module»* for instructions on installing modules.


If you want to use Drush, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps


You can use the administrative interface to download and install a contributed theme. If you are installing a custom theme rather than a contributed theme, if you see a message saying *Installing modules and themes requires FTP access to your server*, or if the steps below do not work to download and unpack the theme files, follow the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»*. If you are using Composer to manage the files in your site, follow the steps for downloading in *Раздел 3.5, «Using Composer to Download and Update Files»*. In either of these cases, you can then install the theme using Drush, or by continuing with step 7 in the instructions for the administrative interface below.

Using the administrative interface

1. On the theme's project page on drupal.org (for example, *https://www.drupal.org/project/mayo*), scroll to the *Downloads* section at the bottom of the page.
2. Right-click *tar.gz* to copy the address.

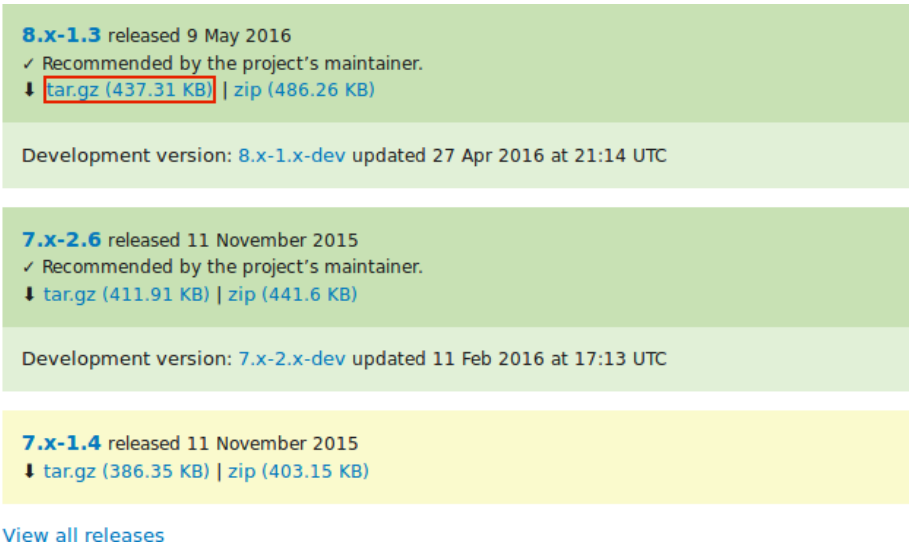

3. In the *Manage* administrative menu, navigate to *Appearance* (*admin/appearance*). The *Appearance* page appears.
4. Click *Install new theme*. The *Install new theme* page appears.

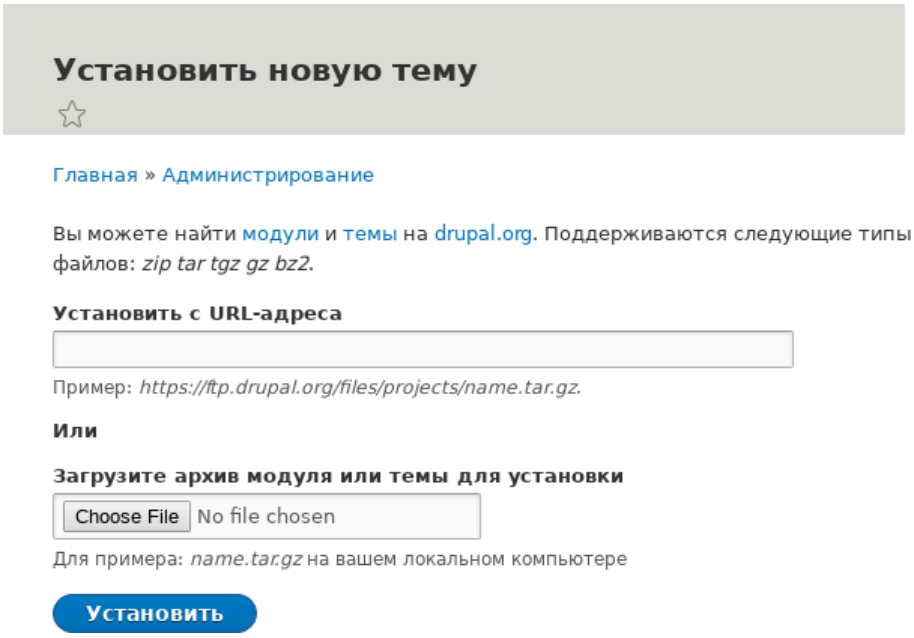

5. In the field *Install from a URL*, paste the copied download link. This value could look like `https://ftp.drupal.org/files/projects/mayo-8.x-1.3.tar.gz`.
6. Click *Install* to upload and unpack the new theme on the server. The files are being downloaded to the *themes* directory.
7. Click *Install newly added themes* to return to the *Appearance* page. If you used the manual uploading procedure mentioned earlier, then you can continue with this step, and reach the *Appearance* page by using the *Manage* administrative menu and navigating to *Appearance* (*admin/appearance*).
8. Locate the new theme under *Uninstalled themes* and click *Install and set as default* to use it. All non-administrative pages on the site will now use this new theme.



Using Drush to install a theme

1. Find the project name for the theme you want to install, which is the last segment of the theme's project page URL. For example, if the project URL is *https://www.drupal.org/project/mayo*, the project name is `mayo`.
2. Download the theme using either the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»* or *Раздел 3.5, «Using Composer to Download and Update Files»*.
3. Run the following Drush commands, giving the project name (for example, *mayo*) as a parameter:

   ```
   drush en mayo
   drush config-set system.theme default mayo
   ```

4. Follow the instructions on the screen.

Expand your understanding

- In the *Manage* administrative menu, navigate to *Appearance* (*admin/appearance*) and uninstall any themes that you are not using.
- *Раздел 11.1, «Finding Modules»*
- *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»*
- If you do not see the effect of these changes in your site, you might need to clear the cache. See *Раздел 12.2, «Clearing the Cache»*.

Videos

Downloading and Installing a Theme from Drupal.org

Downloading and Installing a Theme from Drupal.org

Attributions

Written and edited by *Joe Shindelar* at *Drupalize.Me*, and *Boris Doesborgh*.

11.6. Manually Downloading Module or Theme Files

Goal

Manually download module or theme files and upload them to your site, if the website or Drush methods for installing or updating a module or theme do not work, or if you are placing a custom-written module or theme.

Prerequisite knowledge

- *Раздел 1.2, «Основы: Модули»*
- *Раздел 11.1, «Finding Modules»*
- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 11.4, «Finding Themes»*

Site prerequisites

You need to be facing any of the following to perform the manual download described in this topic:

- File permission issues
- FTP permission issues
- You created a custom module/theme or received its files from someone
- You could not successfully complete the instructions in *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»*, *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»*, *Раздел 13.6, «Updating a Module»*, or *Раздел 13.7, «Updating a Theme»*

Skip this topic if none of the above applies to you. If you are using Composer to manage the files in your site, follow the file updating steps in *Раздел 3.5, «Using Composer to Download and Update Files»* instead of this topic.

Steps

If you are installing a module or theme from *Drupal.org*, follow the downloading instructions, and then the uploading/unpacking instructions. If you created the module or theme, skip the downloading step. Instead, create an archive file (that you know how to extract on the server) and proceed with the steps in uploading/unpacking, using whatever method is appropriate for the way you initially created the archive file.

Downloading the files


1. Open the module or theme project page on drupal.org; for example, the *Admin toolbar* page (*https://www.drupal.org/project/admin_toolbar*).
2. Scroll to the *Downloads* section near the bottom of the page.



3. Click *tar.gz* to download the file to your computer.

Uploading the files to your site and unpacking them

1. If you are adding a new module or theme, create subdirectories in your top-level *modules* and *themes* directories (if they don't already exist). Typically, people make a *contrib* subdirectory for contributed modules and themes that are downloaded from *Drupal.org*, and a *custom* subdirectory for modules and themes that they created. Your *modules* directory might look like this:



2. If you are replacing an existing module or theme with an updated version, put the site into maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
3. If you are replacing an existing module or theme with an updated version, find and delete all the existing files and directories for the existing module or theme. Modules are normally located in directories under the top-level *modules* directory, and themes are normally located in directories under the top-level *themes* directory.

4. Upload the *.tar.gz* file (or whatever archive you created) to your site. Place it in either the same location from which you deleted the directory (if replacing an existing module or theme) or the appropriate subdirectory of *modules* or *themes* (if adding a new module or theme).
5. Extract the files from the *.tar.gz* archive (or whatever archive you created), making a subdirectory in the same location as the archive file. If you do not have terminal access, or your hosting server is not running Linux, your hosting control panel's file manager should provide a way to extract the files. If you have terminal access to your hosting server (running Linux) and you are using a tar.gz file, you can use a command like:

   ```
   tar -xzf admin_toolbar-8.x-1.17.tar.gz
   ```

6. Delete the compressed file from the server, unless your unpacking method already deleted it.
7. Refer to *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»*, *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»*, *Раздел 13.6, «Updating a Module»*, or *Раздел 13.7, «Updating a Theme»* to complete the installation or update of the module or theme. Start at the step after the automatic download has been completed.

Expand your understanding

- If you work with multiple environments (for example, a local development site and a production site) you will have to repeat the steps on each environment, or re-clone the environment. See *Раздел 11.8, «Making a Development Site»*.
- If you added a new theme, navigate in the *Manage* administrative menu to *Appearance* (*admin/appearance*) and uninstall the old theme.

Videos

Manually Downloading Module or Theme Files

Manually Downloading Module or Theme Files

Additional resources

- *Drupal.org community documentation page "Updating modules"*
- *Drupal.org community documentation page "Installing contributed modules (Drupal 8)"*
- *Drupal.org community documentation page "Installing themes"*

Attributions

Written and edited by *Boris Doesborg*, *Jennifer Hodgdon*, and *Marc Isaacson*.

11.7. Concept: Development Sites

What are Development Sites?

Development Sites are different copies of the same site used for developing, updating, and testing a site without risking the integrity of the live site.

An example deployment workflow for site building will usually include the sites mentioned below:

Local environment

: The development process starts with developers working on new features, bug fixes, theming, and configuration in their local environment.

Development site

: Developers push the changes they've been working on to the development site. For a team of more than one developer, version control is usually used. Git is a version control system that tracks your files for any changes. You can then commit those changes to a repository. Using Git allows team members to work on the same site without overriding each other's work. It also makes it possible to easily roll back to previous stages of the development.

Staging site

: The staging site can be used for testing, or presenting the changes to the client for approval. QA (Quality Assurance) and UAT (User Acceptance Testing) are most often carried out on the staging site. It is recommended to have live content on both the development and staging sites, so that you can test how the new features will work with the existing content.

Production site

: The live site on the web available to visitors. It contains new features that have been proven safe to go live.

Based on the project's size, scope, requirements, or stakeholders, stages from the above workflow can be removed, or additional stages can be added. For example, a testing site before staging can be added to separate testing and user acceptance processes.

Related topics

- *Раздел 11.8, «Making a Development Site»*
- *Раздел 2.6, «Concept: Editorial Workflow»*
- *Раздел 11.11, «Управление файлами и конфигурационными редакциями с помощью Git»*

Attributions

Written and edited by *Diána Lakatos*, and *Jojy Alphonso* at *Red Crackle*.

11.8. Making a Development Site

Goal

Make a copy of a site that you can use to develop new features and test updates on.

Prerequisite knowledge

Раздел 11.7, «Concept: Development Sites»

Site prerequisites

- You have a live, developed site that you would like to make a copy of for development purposes.
- If you want to use Drush for some of the steps in this task, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

1. Follow the steps in *Раздел 3.4, «Подготовка в установке»*, so that you have hosting set up for your development site, you know where the web root is for your development site, and you have an empty database and database user for your development site to use.
2. Make a database dump file from your live site's database. Try one of the following methods:
   - If you are using MySQL as your database, and your live site's server has phpMyAdmin installed (it is available from many hosting control panels), use the *Export* tab in phpMyAdmin to export in *SQL* format. Using *gzip* compression on the output file is suggested, to reduce the file size.
   - If you are using MySQL and have access to the command line, use this command (substituting in your site's database name, user name, and password):

     ```
     mysqldump -u USERNAME -p'PASSWORD' DATABASENAME > BACKUPFILE.sql
     ```
   - If you prefer to use Drush, use this command:

     ```
     drush sql-dump > BACKUPFILE.sql
     ```
   - Use the *contributed Backup and Migrate module* from within your live site. See *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»* for instructions on installing contributed modules.

     You now have a database dump stored in the file *BACKUPFILE.sql*. For security reasons, avoid storing this file on your hosting server anywhere under the Drupal site root. This will prevent others from getting a copy of your database.

3. Copy all of the files from the web root of your live site to the web root of your development site. You may wish to use Git to do this; if so, see *Раздел 11.11, «Управление файлами и конфигурационными редакциями с помощью Git»*.
4. Edit the *sites/default/settings.php* file under your development site's top-level directory in a plain-text editor. Find the lines near the end that contain the database name, database username, and database password, and update them to the information about the development site database you set up. The lines look something like this (before editing):

   ```
   $databases['default']['default'] = array (
     'database' => 'live_site_database_name',
     'username' => 'live_site_database_username',
     'password' => 'live_site_database_password',
   ```

5. Check whether your *settings.php* file has the following setting; if yes, then you will need to edit this to point to your development site URL instead of your production site URL:

   ```
   $settings['trusted_host_patterns']
   ```

6. Import the database dump file you created, into the development site's database. Try one of the following methods:
   - If you are using MySQL as your database, and your live site's server has PHPMyAdmin installed (it is available from many hosting control panels), use the *Import* tab in PHPMyAdmin. You may find that you have to restart the import a few times, if your database was large.
   - If you are using MySQL and have access to the command line, use this command (substituting in your site's database name, user name, and password; if you made a gzip-compressed backup file, you will also need to uncompress it first):

     ```
     mysql -u USERNAME -pPASSWORD  DATABASE_NAME < BACKUPFILE.sql
     ```

   - If you prefer to use Drush, use this command:

     ```
     drush sql-query --file=BACKUPFILE.sql
     ```

7. If your development and live sites need to have different configuration, then you have to use configuration overrides in the *settings.php* file. The *$config* variable will help you maintain override values separately from the standard configuration data. For instance, you might want the site name to be "Anytown Farmers Market" on the production site, but "Development Site for Anytown Farmers Market" on the development site. To do that, you could have the production value in the site configuration (in the database), and on the development site, in the settings.php file, you would need to have:

   ```
   $config['system.site']['name'] = "Development Site for Anytown Farmers Market";
   ```

Expand your understanding

- Verify that the development site is working correctly.
- Log in to the development site as an administrator, and clear the cache. See *Раздел 12.2, «Clearing the Cache»*.
- *Раздел 11.9, «Развертывание новых функций сайта»*

- *Раздел 11.11, «Управление файлами и конфигурационными редакциями с помощью Git»*

Videos

Making a Development Site

Making a Development Site

Additional resources

- *Drupal.org community documentation page "Backing up a site"*
- *Drupal.org community documentation page "Create a Test Site"*

Attributions

Written and edited by *Jennifer Hodgdon*, *Joe Shindelar* at *Drupalize.Me*, and *Jojy Alphonso* at *Red Crackle*.

11.9. Развертывание новых функций сайта

Цель

Копирование представления, которое вы создали на локальном сайте разработки, в рабочий сайт.

Необходимые знания


- *Раздел 11.8, «Making a Development Site»*
- *Раздел 11.10, «Синхронизация Версий Конфигурации»*
- *Раздел 11.7, «Concept: Development Sites»*

Требования к сайту

- Модуль ядра Drupal Configuration Manager должен быть установлен как на сайт разработки, так и на рабочий. Смотрите *Раздел 4.3, «Installing a Module»* для инструкций по установке модуля ядра Drupal.
- Предустановленный тип материала должен быть как на сайте разработки, так и на рабочем сайтах, с теми же полями. Смотрите *Раздел 6.1, «Adding a Content Type»*.
- Установленное представление должно быть на сайте разработки, но не на рабочем сайте. Смотрите *Раздел 9.3, «Creating a Content List View»*.

Шаги

1. Откройте сайт локальной разработки.
2. В *Управлении* административного меню, перейдите в *Конфигурация* > *Разаработка* > *Синхронизация конфигурации* > *Экспорт* > *Один элемент* (*admin/config/development/configuration/single/export*). Появится страница *Одиночный экспорт*.
3. Выберите *Представление* из списка *Тип конфигурации*.
4. Выберите созданное представление из списка _Имя конфигурации _. Конфигурация появится в текстовой области.
5. Скопируйте конфигурацию из текстовой области.

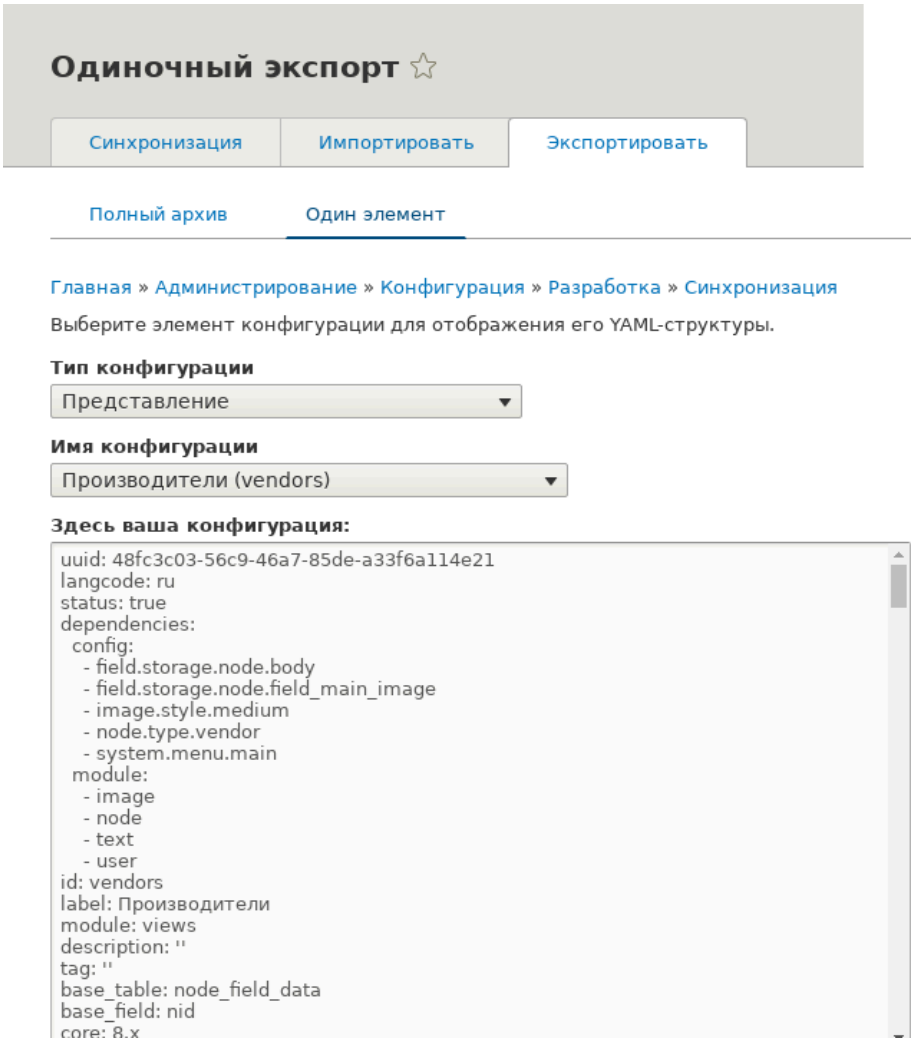

6. Откройте рабочий сайт.
7. В *Управлении* административного меню, перейдите в *Конфигурация* > *Разработка* > *Синхронизация конфигурации* > *Импорт* > *Один элемент* (*admin/config/development/configuration*). Появится страница *Одиночный импорт*.
8. Выберите *Представление* из списка *Тип конфигурации*.

9. Вставьте конфигурацию в текстовое поле.
10. Нажмите *Импортировать*. Появится страница подтверждения.
11. Нажмите *Подтвердить*.
12. Убедитесь, что представление было импортировано, перейдя в *Управление* административного меню *Структура* > *Представления*.

Расширьте свое понимание

Шаги в этом разделе показывают, как экспортировать и импортировать один элемент конфигурации. Однако часто, если вы разрабатываете функциональность на сайте разработки и хотите перенести на рабочий сайт, вам нужно будет перенести несколько элементов конфигурации. Например, если вы разработали новый тип материала с полями, необходимо перенести несколько элементов конфигурации для каждого поля, один для самого типа материала, и возможно множественные виды представления и элементы режима формы, и они должны быть перенесены в правильном порядке. Сделать все правильно может быть утомительно и трудно.

В качестве альтернативы, вы можете экспортировать и импортировать полную конфигурацию сайта. Для этого вам понадобится локальный сайт разработки, который является клоном рабочего сайта (смотрите *Раздел 11.8, «Making a Development Site»*), и тогда вы сможете следовать шагам в *Раздел 11.10, «Синхронизация Версий Конфигурации»* для синхронизации конфигураций между сайтом разработки и рабочим.

Другой альтернативой является использование *contributed Features module*, который позволяет экспортировать и импортировать дополнительные функциональные возможности (например, все конфигурации фотогалереи).

Наконец, если вы не видите последствия изменений на вашем сайте, вам нужно очистить кэш. Смотрите *Раздел 12.2, «Clearing the Cache»*.

Связанные понятия

- *Раздел 11.7, «Concept: Development Sites»*
- *Раздел 2.6, «Concept: Editorial Workflow»*

Видео

Deploying New Site Features

Deploying New Site Features

Авторы

Написано *Boris Doesborg*. Переведено *Михаил Исмайлов*.

11.10. Синхронизация Версий Конфигурации

Цель

Синхронизация конфигурции между разрабатываемым и действующим сайтом.

Необходимые знания

- *Раздел 1.5, «Основы: Типы данных»*
- *Раздел 3.4, «Подготовка в установке»*
- *Раздел 11.7, «Concept: Development Sites»*
- *Раздел 11.8, «Making a Development Site»*

Требования к сайту

- У вас должна быть копия разработки вашего действующего сайта. Смотрите *Раздел 11.8, «Making a Development Site»*.
- Модуль ядра Drupal Configuration Manager должен быть установлен как на сайте разработки, так и на действующем сайте. Смотрите *Раздел 4.3, «Installing a Module»* для инструкции как установить модуль ядра.
- Должно быть, вы изменили конфигурацию в процессе производства или разработки сайта (*исходный сайт*), и хотите синхронизировать изменения с другим сайтом (*конечный сайт*). В качестве примера, вы можете разработать новый тип контента, fields, и views на вашем сайте разработки, и когда это все работает правильно, разверните изменения на действующем сайте.
- Вся конфигурация, которая не должна быть синхронизирована между исходным и конечным сайтами должна храниться в конфигурационном переопределенном *settings.php* файле, а не в базе данных. Смотрите *Раздел 11.8, «Making a Development Site»*.

Шаги

1. В исходном сайте, в *Управлении* административного меню, перейдите в *Конфигурация* > *Разработка* > *Синхронизации конфигурации* > *Экспорт* (*admin/config/development/configuration/full/export*).
2. Нажмите *Экспорт*. Ваш сайт сгенерирует архив полной конфигурации сайта. Сохраните файл на вашем локальном компьютере.
3. В конечном сайте, в *Управлении* административного меню, прейдите в *Конфигурация* > *Разработка* > *Синхронизации конфигурации* > *Импорт* (*admin/config/development/configuration/full/import*).

4. Найдите загруженный архив конфигурации, и нажмите *Upload*. Ваш конфигурационный архив будет загружен на конечный сайт, и вы будете перенаправлены на страницу конфигурации *Синхронизировать* (*admin/config/development/configuration*) с сообщением о том, что ваши файлы были загружены.
5. Убедитесь, что различия, показанные на странице, соответствуют вашим ожиданиям. Вы можете увидеть элементы конфигурации, которые были добавлены, удалены или изменены; для измененных элементов, вы можете нажать *Посмотреть различия* чтобы просмотреть изменения.
6. Когда вы будете удовлетворены, нажмите *Импортировать все* чтобы импортировать изменения конфигурации.

Расширьте своё понимание

- Если внесенные изменения касаются только одного элемента конфигурации (например одного view), вы можете использовать одну конфигурацию export/import возможность для развертывания изменений между сайтами. Смотрите *Раздел 11.9, «Развертывание новых функций сайта»*.
- После шага, на котором вы экспортируете полную конфигурацию с исходного сайта, вы также можете распаковать архив и и зафиксировать это в системе контроля версий, такой как Git, отслеживающей изменения в конфигурации фашего сайта. Смотрите *Раздел 11.11, «Управление файлами и конфигурационными редакциями с помощью Git»*.

Видео

Synchronizing Configuration Versions

Synchronizing Configuration Versions

Авторы

Написано *Jennifer Hodgdon*.

Переведено *Исмайлов Михаил*.

11.11. Управление файлами и конфигурационными редакциями с помощью Git

Цель

Используйте инструмент контроля версий Git, чтобы управлять редакциями файлов и конфигурации на вашем сайте.

Необходимые знания

- *Раздел 3.2, «Concept: Additional Tools»*
- *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*
- *Раздел 11.7, «Concept: Development Sites»*
- Как настроить Git репозиторий и найти его *клон* URL. Например, если вы хотите использовать GitHub хост вашего репозитория, посмотрите *GitHub "Create a repo" page* и *GitHub "Which remote URL should I use" page*.
- Как открыть и использовать окно командной строки и текстовый редактор.
- Для управления конфигурацией, как распаковать и упаковать архивные файлы (например *.zip* и *.tar.gz*).

Требования к сайту

- Вы должны загрузить программное обеспечение для вашего сайта, используя один из методов в *Раздел 3.3, «Concept: Methods for Downloading and Installing the Core Software»*. Если вы хотите управлять конфигурацией, вы должны иметь установленное программное обеспечение и работающий сайт.
- Git клиент должен быть установлен на сервере вашего сайта. Смотрите *Git* для инструкции.
- Вы должны создать новый репозиторий и знать его Git клон URL.

Шаги

Инициализация репозитория

Выполните эти шаги один раз, после создания Git-репозитория, для подключения вашей локальной директории к репозиторию и добавления к нему исходного файла.

1. Откройте окно командной строки и перейдите в директорию, где находятся файлы вашего сайта. Это ваша "верхняя" директория.
2. Определите где находится ваш корневой каталог. Если *core*, *modules*, и *themes* директории расположены в этом каталоге, тогда вы в вашем корневом каталоге. Если вы использовали Композер для загрузки, тогда эти файлы находятся внутри *web* подкаталога (который является вашим корневым каталогом).
3. В текстовом редакторе создайте новый файл с именем_.gitignore_ в верхней директории (или отредактируйте его, если он уже существует). Этот файл содержит список файлов и директорий который Git будет игнорировать (не добавлять в репозиторий). Например, *settings.php* файл для вашего сайта не будет добавлен в Git, потому что он содержит сведения об учетной записи базы данных, и медиафайлы, загруженные на ваш сайт (обычно *sites/default/files*) также не должно быть в Git — цель состоит в том, чтобы в репозитории было програмное обеспечение, а не содержимое сайта.

4. Убедитесь, что следующие строки находятся в файле *.gitignore*. Если ваш корневой каталог не является верхней директорией, проверьте каждую из них, чтобы узнать, нужен ли им префикс. Например, *sites* возможно потребуется заменить на *web/sites*.

   ```
   sites/*/settings*.php
   sites/*/files
   config
   ```

5. Введите следующие команды:

   ```
   git init
   git add -A
   ```

6. При желании проверьте список файлов, которые вы будете добавлять в свой репозиторий Git, введя эту команду и листая (очень длинный) список:

   ```
   git status
   ```

7. Введите следующие команды. Вы можете заменить ваше *сообщение коммита* для "Initial file add" если вы хотите, и вам нужно будет заменить свой собственный Git клон URL на URL во второй команде:

   ```
   git commit -m "Initial file add"
   git remote add origin https://github.com/example-name/example-repo.git
   git push -u origin master
   ```

8. Если вы используете хостинг репозитория GitHub или другой хост с онлайн доступом, вы можете перейти на свою страницу репозитория и увидеть, что файлы там.

Обновление данных в репозитории

Используйте эти шаги, при обновлении, добавлении или удалении одного или нескольких файлов на вашем сайте, чтобы отправить изменения (*push*) в ваш репозиторий.

1. Откройте окно командной строки, и прейдите в директорию где находятся файлы вашего сайта.
2. Проверьте список файлов, которые были добавлены, изменены или удалены::

   ```
   git status
   ```

3. Дополнительно, для текстовых файлов, которые были изменены (не изображения), посмотрите на различия между новой и старой версиями файла:

   ```
   git diff path/to/file.txt
   ```

4. Подготовьте все изменения для следующего коммита и убедитесь, что они внесены:

   ```
   git add -A
   git status
   ```

5. Вы можете пропустить определенный файл из коммита который вы уже поставили, или добавить другой файл к уже созданным. Если конкретный файл

или директория продолжает добавляться по ошибке, рассмотрете возможность добавления его в *.gitignore* файл, чтобы он был проигнорирован в Git. Пропускающие/добавляющие команды:

```
git reset HEAD path/to/file.txt
git add path/to/file.txt
```

6. Коммите и пуште ваши изменения. Напишите что-то значимое в сообщении коммита:

```
git commit -m "commit message here"
git push
```

7. Если у вас есть другие копии вашего репозитория, обновите их, открыв командное окно в директории каждой копии и запустив следующую команду:

```
git pull
```

Создание копии файлов в вашем репозитории

Выполните следующие действия, если вы хотите скопировать все файлы вашего репозитория на новое местоположение. Например, у вас может быть локальная копия разработки вашего сайта и рабочий сайт, или несколько членов команды могут иметь локальные копии сайта.

1. Откройте командное окно в том месте, где вы хотите, чтобы находились файлы.
2. Введите следующую команду, заменив URL вашего клона репозитория на URL и имя подкаталога, в котором вы хотите их использовать для *dirname*:

```
git clone https://github.com/example-name/example-repo.git dirname
```

Управление конфигурацией в репозитории

1. Следуйте инструкциям на *Раздел 11.10, «Синхронизация Версий Конфигурации»* для экспорта полного архива конфигурации вашего сайта.
2. Если вы еще не инициализировали конфигурацию в репозитории, распакуйте архив конфигурации в новую директорию, желательно над корневым каталогом директории, и следуйте инструкциям выше, чтобы добавить эти файлы в свой репозиторий.
3. После инициализации, при изменении конфигурации вашего сайта, экспортируйте и распакуйте архив конфигурации в том же месте. Следуйте инструкциям выше, чтобы обновить эти файлы в вашем репозитории.
4. Чтобы импортировать обновленную конфигурацию на другой сайт, сделайте архив конфигурационной директории из вашего репозитория. Затем следуйте инструкциям на *Раздел 11.10, «Синхронизация Версий Конфигурации»* для загрузки и импорта этого архива на сайт.

Связанные понятия

Раздел 11.7, «Concept: Development Sites»

Авторы

Адаптирован и отредактирован *Jennifer Hodgdon* от *"Building a Drupal site with Git"*, авторские права 2000-2019 отдельных авторов *Drupal Community Documentation*.

Переведено *Исмайлов Михаил*

Глава 12. Предупреждение и решение проблем

12.1. Основы: Кэш

Необходимые знания

Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»

Что такое кэш страницы?

Drupal на котором работает ваш сайт, на каждый запрос страницы, должны выполняться вычисления и обрабатываться данные из базы данных, для того чтобы составить страницу, которая отправляется браузеру или другому приложению имеющему доступ к сайту. Эти вычисления занимают время, которое может приводить к тому, что загрузка страницы займет больше времени, чем хотелось бы.

Ниже приведено несколько путей ускорения загрузки страницы, включая установку приложений на сервер. Ядро Drupal уже включает в себя модули Internal Page Cache и Dynamic Page Cache, которые не требуют дополнительной настройки на сервере; они используют механизм *кэша в базе данных_ для ускорения вашего сайта. Таким образом эти модули работают так, что вычисления, промежуточные результаты и вся страница целиком хранятся в специальных таблицах базы данных (более известные как _кэш*). В следующих раз, когда потребуются те же самые вычисления или та же информация или вся страница целиком, в лучшем случае, может быть отправлена и использована еще раз, избегая пересоздания тех же вычислений заново. В добавление, когда контент или данные подвергаются изменениям, частично вычисления будут обновлены, это приводит к тому что часть кешированных данных будет удалена из кэша, приводя к тому что новые вычисления будут перевыполнены еще раз и сохраненны в кэш, когда это будет необходимо в следующий раз.

Эти модули для кэширования (Internal Page Cache и Dynamic Page Cache) работают стабильно и предают некоторое ускорение для большинства сайтов. Однако, иногда кэш страницы может быть затруден ниже изложенным причинам, таким как:

- Поврежденные данные в кэше приводят к некорректному выводу страницы
- Старые данные остаются в кэше слишком долго приводят к устаревшему выводу страницы
- Неэффективное кэширование приводит к тому, что страница открывается долго

Какие еще данные кешируются?

Назависимо от того включены ли два кэширующих модуля на вашем сайте, ядро Drupal все равно будет использовать кэш для многих внутренних вычислений. Ядро друпал включает кэш для данных:

- Кэш системы темизации для информации в базе данных о шаблонах которые использованы при обработке различных типов данных. Если вы разработываете новую тему и добавляете новый файл шаблона, то вам необходимо очистить этот кэш, чтобы ваш файл был распознан.
- Файлы CSS и JavaScript могут быть по желанию оптимизированы и сжаты (на основании настроек вашего сайта). Также, если сжатые версии храняться в файловой системе, то они не должны пересоздаваться и сжиматься слишком часто. Если вы разрабатываете модуль или тему, вы возможно захотите также отключить или очистить эти файлы кэша, чтобы добавить новый CSS или JavaScript файл.
- Drupal находит определенные низкоуровневые фукнции и классы PHP, такие как *реализации хуков* и *классы плагинов*, из ваших установленных модулей и хранит эту информацию о функционале ваших модулей. Если вы разрабатываете новый модуль или добавляете новый функционал в существующий модуль, вам возможно потребуется очистить этот кэш, чтобы новый функционал был найден.

Связанные темы

Если вы имеете проблемы с вашим сайтом, в первую очередь попробуйте почистить кэш. Смотрите *Раздел 12.2, «Clearing the Cache»* для больше информации.

Дополнительные материалы

Почитайте о дополнительном кеширование и методах оптимизации производительности на странице *Drupal.org community documentation page "Caching to improve performance"*.

Авторы

Написано *Jennifer Hodgdon*

Переведено *Иван Абраменко*.

12.2. Clearing the Cache

Goal

Clear or rebuild your site's internal caches to ensure they are up-to-date with the most recent data, using the user interface or Drush.

Prerequisite knowledge

- *Раздел 12.1, «Основы: Кэш»*
- *Раздел 3.2, «Concept: Additional Tools»*

Site prerequisites

If you want to use Drush to clear the cache, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

Steps

You can use the administrative interface or Drush to clear the cache. You can also use the rebuild script or Drush to do a more complete cache rebuild.

Using the administrative interface to clear the cache

1. In the *Manage* administrative menu, navigate to *Configuration* > *Development* > *Performance* (*admin/config/development/performance*). If you cannot access this page in the administrative interface, use one of the other methods to clear or rebuild the cache.
2. Click *Clear all caches*.
3. A message saying the cache has been cleared appears at the top of the page.
4. If this doesn't resolve the problem that caused you to want to clear the cache, try a rebuild instead.

Using the rebuild script

1. Open *settings.php* (*/sites/default/settings.php*) in any plain text editor. Add this line to the end of the file and save it:

   ```
   $settings['rebuild_access'] = TRUE;
   ```

2. Visit *http://www.example.com/core/rebuild.php* in your browser (where *www.example.com* is your site's URL). After a short pause, you should be redirected to the home page of your site, and the cache should be rebuilt.
3. Open *settings.php* (*/sites/default/settings.php*) in a text editor. Find the line you added with *$settings[*rebuild_access*]*, remove this line, and save the file.

Using Drush to rebuild or clear the cache

You can use one of two commands:

- Use the command `drush cache-rebuild` to clear and rebuild all cached data for a site. After running this command, you will see the output message "Cache rebuild complete."
- Use the command `drush cc` to see a list of individual caches and then choose the specific cache you would like to clear. Running this command should produce output like the following:

  ```
  > drush cc
  ```

```
Enter a number to choose which cache to clear.
 [0]  :  Cancel
 [1]  :  drush
 [2]  :  theme-registry
 [3]  :  menu
 [4]  :  css-js
 [5]  :  block
 [6]  :  module-list
 [7]  :  theme-list
 [8]  :  render
 [9]  :  views
```

Choose a cache to clear by entering the number associated with that cache. Press "Enter" to continue.

Videos

Clearing the Cache

Clearing the Cache

Additional resources

Drupal.org community documentation page "Clearing or rebuilding Drupal's cache"

Attributions

Adapted and edited by *Joe Shindelar* and *Jack Haas* from *"Clearing or rebuilding Drupal's cache"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

12.3. Основы: Резервная копия данных

Необходимые знания

- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 3.4, «Подготовка в установке»*

Что такое резервная копия сайта?

Если что-нибудь случится с компьютером (или компьютерами), на котором ваш сайт и его база данных работают или в случае когда вы потеряете доступ к этому компьютеру, то вы потеряете некоторые или все данные вашего сайта. Вы можете также потерять данные, если ваш сайт взломан, или кто-то с доступом в админку на вашем сайте удалил все данные или изменил данные на сайте с ошибками. Чтобы предупредить все эти возможные ситуации потерь данных, важно делать регулярные резервные копии вашего сайта и хранить их в месте отдельном от компьютера, где ваш сайт работает.

Частота с которой вы должны делать ваши резервные копии и как много копий вам следует хранить, зависит от того как часто ваш сайт изменяется. Если вы имеете большой объем информации на вашем сайте, которая была добавлена или обновлена много раз за день, то вам следует делать резервные копии как можно чаще, чем если сайт меняется редко. Также расчитывайте, что некоторое время должно пройти, между тем когда проблема произойдет и когда вы заметите проблему, так что хранить нужно несколько последовательных копий (так чтобы можно было вернуться к моменту, когда проблема еще не произошла и исправить ее), прежде чем перезаписывать, какую-нибудь резервную копию немедленно, убедитесь что ошибки которая возникла, нет в вашей резервной копии.

Еще одно предостережение, в каком формате бы вы не хранили ваши резервные копии, хорошей идеей будет проверять, что вы можете развернуть вашу копию для восстановления ваших данных. Вам возможно потребуется протестировать различные сценариии потери данных, чтобы быть уверенным, что вы сможете восстановить утраченные данные во всех случаях.

Следующие шаги позволят сделать полную резервную копию вашего сайта:

- Данные в папке *sites*, включая файл *sites/default/settings.php*.
- Данные из базы данных вашего сайта. Некоторые таблицы могут быть очищены, например хранящие временный данные с кэшем и информацией о сессиях авторизованных пользователей, однако всегда безопаснее создавать резервную копию всей базы данных.
- Загруженные файлы, такие как изображения и другие прикрепленные файлы. Местоположожение этих файлов настраивается; стандартное местоположение это папка *sites/default/files* относительно корня сайта. В *Управлении* меню администратора, перейдите на страницу *Конфигурация* > *Медиа* > *Файловая система* (*admin/config/media/file-system*) проверьте папку для загрузки файлов; вы можете изменить папку для файловой системы, вы также можете это сделать это в файле *settings.php*.
- Модули, темы офомления и любые другие пользовательские файлы, которые вы добавили. Вы можете найти пользовательские модули и темы оформления в папках *modules* и *themes* со всеми вложенными папками. Некоторые люди предпочитают создать резервную копию всех файлов, включая файлы Drupal, модулей и тем оформления (которые вы сможете восстановить загрузив их снова из исходников), прежде чем пытаться собрать проект из источников, которые необходимо использовать.

Вам следует выполнить тест, чтобы потвердить, что ваша резервная копия создана верно и вы можете развернуть копию сайта (смотрите *Раздел 11.8, «Making a Development Site»*).

Связанные темы

- *Раздел 13.5, «Updating the Core Software»*
- *Раздел 11.8, «Making a Development Site»*
- *Раздел 12.1, «Основы: Кэш»*

Дополнительные материала

- *Drupal.org community documentation page "Backing up a site"*
- The *contributed Backup and Migrate модуль*, который можно использовать для создания автоматических резервных копий базы данных и загруженных файлов.

Авторы

Написано *Jennifer Hodgdon*.


Написано *Иван Абраменко*

12.4. Concept: Log

What is a Log?

Your site captures system events in a log to be reviewed by an authorized individual at a later time. The log is a list of recorded events containing usage data, performance data, errors, warnings, and operational information. It is vital to check the log on a regular basis as it is often the only way to tell what is going on.

You can find your site's recent log messages in the *Manage* administrative menu by navigating to *Reports* > *Recent log messages* (*admin/reports/dblog*).

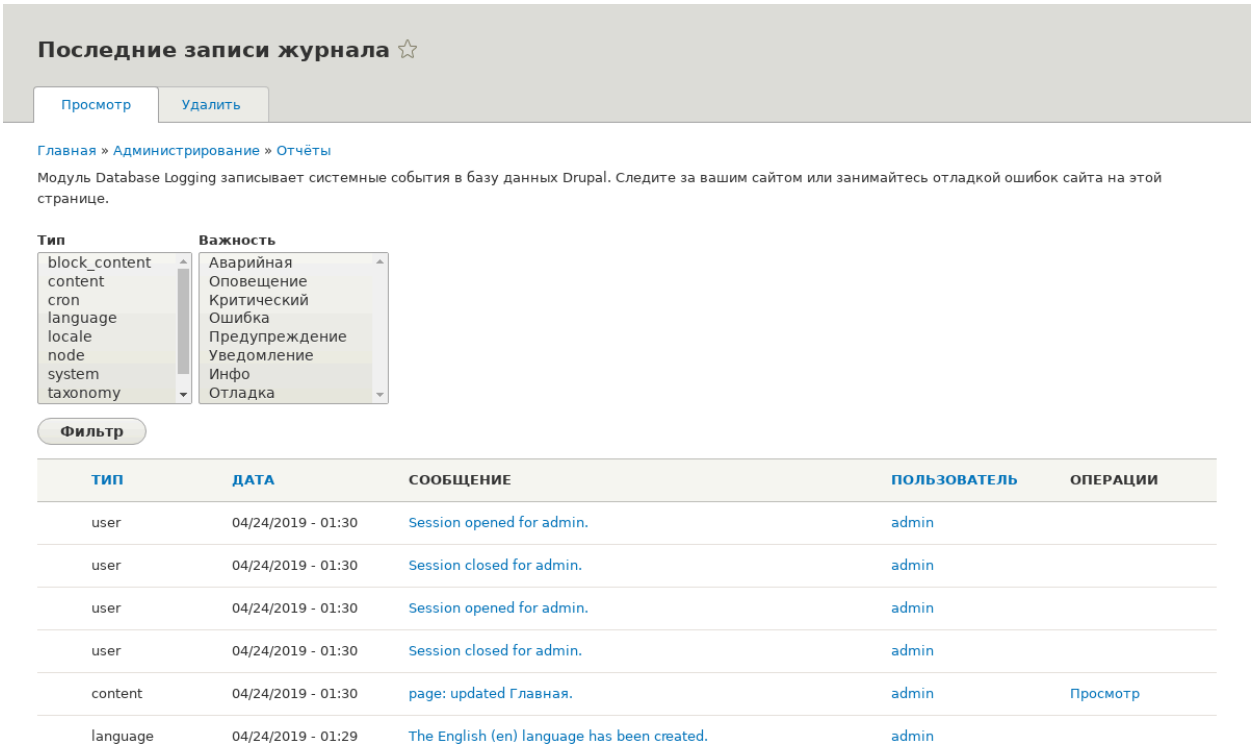

Attributions


Adapted by *Diána Lakatos* from *"Reports"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

12.5. Concept: Status Report

What is a Status Report?

The status report is a short overview of your site's parameters as well as any problems detected with your installation. It may be useful to copy and paste this information into support requests filed on *Drupal.org's* support forums and project issue queues or when asking for help on other channels.

You can find the status report in the *Manage* administrative menu by navigating to *Reports* > *Status report* (*admin/reports/status*).

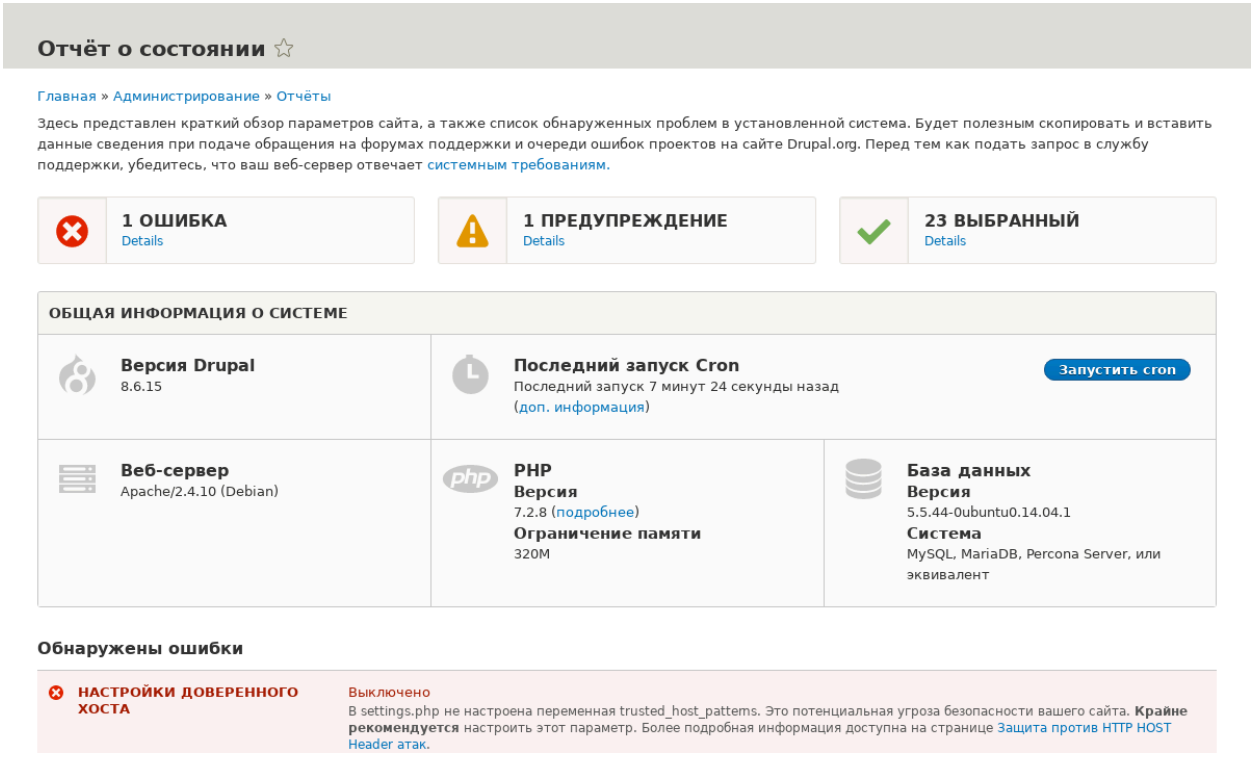

Related topics

Раздел 14.2, «Getting Support»

Attributions

Adapted by *Diána Lakatos* from *"Reports"* copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*

Глава 13. Безопасность и обслуживание сайта

13.1. Concept: Cron

What are cron tasks?

To ensure that your site and its modules continue to function well, a group of administrative operations should be run periodically. These operations are called *cron* tasks. Examples of cron tasks are: checking for module and theme updates, indexing content for search, or cleaning up temporary files.

What is the relationship between the site's cron tasks and Unix cron?

Linux/Unix-based operating systems have a cron scheduler that can be used to run periodic tasks. You can use the server's cron scheduler to schedule runs of the site's cron tasks. Alternatively, you can use the core Automated Cron module to run tasks. You can check the site's cron tasks' status in the status report.

Related topics

- *Раздел 13.2, «Configuring Cron Maintenance Tasks»*
- *Раздел 12.5, «Concept: Status Report»*

Additional resources

Drupal.org community documentation page "Setting up cron"

Attributions

Written and edited by *Diána Lakatos* at *Pronovix*, *Dave Hansen-Lange* at *Advomatic*, and *Boris Doesborg*.

13.2. Configuring Cron Maintenance Tasks

Goal

Check whether cron maintenance tasks are run regularly, and if not, either install the core Automated Cron module or run cron maintenance tasks from outside the website.

Prerequisite knowledge

Раздел 13.1, «Concept: Cron»

Steps

1. Review the *Status report* (see *Раздел 12.5, «Concept: Status Report»*) to see when cron maintenance tasks were last run.


   If you installed the website using the core Standard installation profile (or similar), then cron maintenance tasks might already be running via the core Automated Cron module. By default, these tasks are run about every three hours.

2. Choose whether to run cron maintenance tasks using the core Automated Cron module, or by other means. The core Automated Cron module might not be suitable for some websites because:

   - Each time someone accesses a page on the site, the module checks how long it has been since cron maintenance tasks have last run, and then runs them if necessary. If no one visits the website for a long time, cron maintenance tasks will not be run.
   - Cron maintenance tasks are run after the page has been generated. This means there is less time for the tasks to be run before various server timeouts are reached (for example, PHP execution timeout). If this happens, the logs (see *Раздел 12.4, «Concept: Log»*) will show error messages that cron is unable to complete.
   - There is a small *scalability* cost associated with the core Automated Cron module. This is because one of the web server's processes is occupied (and can't serve other web pages) until the cron maintenance tasks are complete.

3. If you want to use the core Automated Cron module, first make sure it is installed (it is installed with the core Standard install profile; see *Раздел 4.3, «Installing a Module»* if it is not installed).

   Next, configure the module to control how frequently cron maintenance tasks are run. In the *Manage* administrative menu, navigate to *Configuration* > *System* > *Cron* (*admin/config/system/cron*). Select the desired interval from the *Run cron every* field under *Cron settings*, and click *Save configuration*.

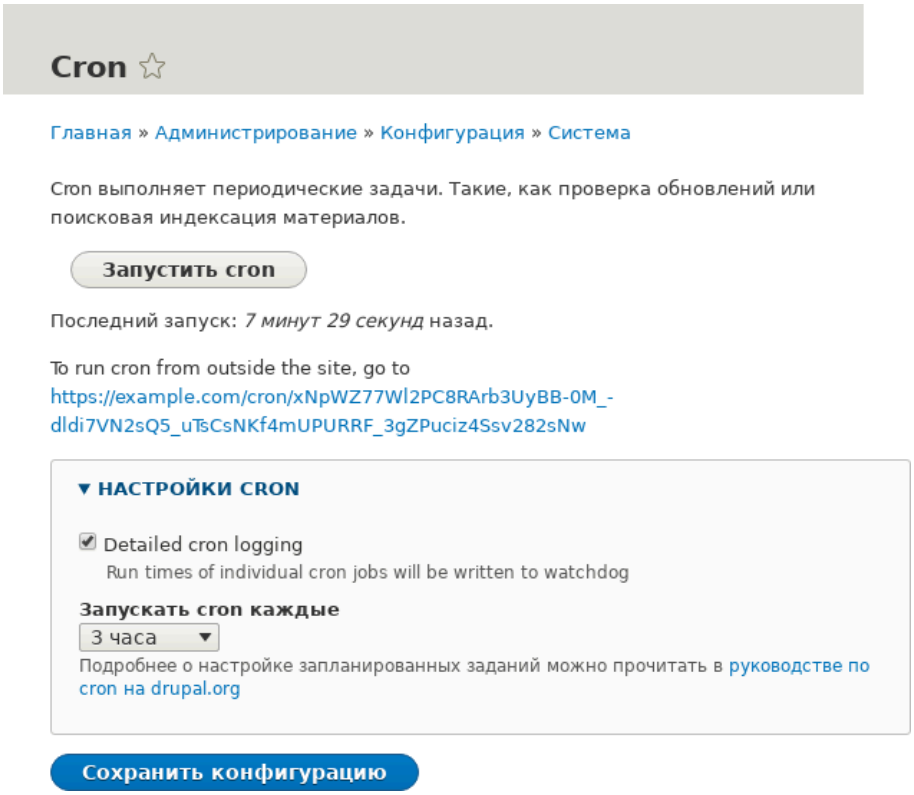

4. If you want to run cron maintenance tasks from outside the website, uninstall the core Automated Cron module (see *Раздел 4.4, «Uninstalling Unused Modules»*). Next, find the cron URL. This URL is shown in the *Status report* (see *Раздел 12.5, «Concept: Status Report»*), and in the *Cron* administration page (see previous step). The URL looks like this: *http://www.example.com/cron/0MgWtfB33FYbbQ5UAC3L0LL3RC0PT3RNUBZILLA0Nf1Re*

   Whenever this URL is visited, cron maintenance tasks will run. Set up one of the following schedulers to access this URL regularly:

   - *The Cron daemon* (Linux, OS X, Solaris, BSD)
   - *Scheduled Tasks* (Windows)
   - A cron SASS provider (software as a service)
   - A cron manager provided by your web hosting provider (see the documentation provided by your provider)

Related concepts

Раздел 13.3, «Concept: Security and Regular Updates»

Videos

Configuring Cron Maintenance Tasks

Configuring Cron Maintenance Tasks

Additional resources

- *Drush page "Running Drupal cron tasks from Drush"*
- *Drupal.org community documentation page "Setting up cron"*

Attributions

Written and edited by *Dave Hansen-Lange* at *Advomatic*, *Boris Doesborg*, and *Jennifer Hodgdon*.

13.3. Concept: Security and Regular Updates

Prerequisite knowledge

- *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»*
- *Раздел 1.2, «Основы: Модули»*
- *Раздел 1.3, «Основы: Темы оформления»*
- *Раздел 1.7, «Основы: Проект Drupal»*

What are security updates?

Any software occasionally has bugs, and sometimes these bugs have security implications. When security bugs are fixed in the core software, modules, or themes that your site uses, they are released in a *security update*. You will need to apply security updates in order to keep your site secure. See *Раздел 13.4, «Keeping Track of Updates»* to learn how to be notified of security updates by email, and *Раздел 13.5, «Updating the Core Software»*, *Раздел 13.6, «Updating a Module»*, and *Раздел 13.7, «Updating a Theme»* to learn how to make updates.

What is the security team?

The Drupal open-source project has a team of volunteers who track security-related bugs and release security updates. They also help other developers fix bugs, and maintain information for users on how to keep their websites secure. You can learn more about the security team and their practices and processes at the *Drupal.org Security Team* page.

How are security bugs reported?

It is important that security problems be kept confidential until they are fixed, so that sites are less likely to be compromised before they can be secured. If you find a potential security problem in any of the software you downloaded from the *Drupal.org* website, follow the procedures on the *Drupal.org Security Team* page to report it.

What are regular (non-security) updates?

The core software, modules, and themes also periodically have regular updates to add new features and fix bugs. These updates are less critical than security updates. As a general best practice, updates should be applied as long as they do not cause problems with your site. Testing on a development copy of your site is always a good idea before applying updates on a live site. This is because some updates may include changes that are not compatible with the modules or themes on your site, or that will break a particular functionality on your site.

Related topics

- *Раздел 13.4, «Keeping Track of Updates»*
- *Раздел 13.5, «Updating the Core Software»*
- *Раздел 13.6, «Updating a Module»*
- *Раздел 13.7, «Updating a Theme»*
- *Раздел 11.8, «Making a Development Site»*

Additional resources

- *Drupal.org community documentation page "Securing your site"*
- *"Security advisories" on Drupal.org*
- *Drupal.org Security team*

Attributions

Written and edited by *Boris Doesborg* and *Jennifer Hodgdon*.

13.4. Keeping Track of Updates

Goal

Keep your site safe and up-to-date by keeping up with the latest security updates.

Prerequisite knowledge

Раздел 13.3, «Concept: Security and Regular Updates»

Steps

There are a few different ways to receive notifications of security releases:

- In the *Manage* administrative menu, navigate to *Reports* > *Available updates* > *Settings*. Enter the email addresses to be notified when updates are available. You can also specify whether you want daily or weekly updates. Click *Save configuration*.
- Subscribe to the security announcements email list. To subscribe, log in to *Drupal.org*, go to your user profile page and subscribe to the security newsletter on the *Edit* > *My newsletters* tab.
- Follow @drupalsecurity on Twitter.
- Subscribe to RSS feeds for *core security updates*, *contributed project updates* and *public service announcements*.

Related concepts

- *Раздел 13.3, «Concept: Security and Regular Updates»*
- *Раздел 13.5, «Updating the Core Software»*
- *Раздел 13.6, «Updating a Module»*
- *Раздел 13.7, «Updating a Theme»*

Videos

Keeping Track of Updates

Keeping Track of Updates

Additional resources

- *"Security advisories" on Drupal.org*
- *Drupal.org Security Team*
- *@drupalsecurity on Twitter*

Attributions

Written by *Sarah German* at *Advomatic*.

13.5. Updating the Core Software

Goal

Update the core software, either through the administrative interface or by using Drush.

Site prerequisites

- If you want to use Drush, Drush must be installed. See *Раздел 3.2, «Concept: Additional Tools»*.

- If your site is live, you should test this process in a development environment before running it on your production site. See *Раздел 11.8, «Making a Development Site»*.

Steps

1. Make a complete backup of your site. Refer to *Раздел 12.3, «Основы: Резервная копия данных»*.
2. Open *settings.php* (*/sites/default/settings.php*) in any plain text editor. Find the line with the *$settings[*update_free_access*]* variable. By default, it is set to "FALSE" due to security reasons. Change the setting to "TRUE":

   ```
   $settings['update_free_access'] = TRUE;
   ```
3. Disable any caching technique (memcache, varnish, and so on) your application might be using.
4. Put your site in maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
5. If you are using Composer to manage dependencies, skip the next six steps, and instead see *Раздел 3.5, «Using Composer to Download and Update Files»* for instructions on downloading updated files. Continue with the *update.php* step.
6. Download the tar.gz or zip file archive for the latest version of Drupal 8.x core from *Drupal.org Drupal Core Downloads*. See *Раздел 3.4, «Подготовка в установке»* for more details on how to find the latest version.
7. Upload the archive file to your web hosting server.
8. Extract the archive file to a temporary directory on your server (should be outside the directory where the site is hosted). Your hosting control panel's file manager should provide a way to extract the files. Or, if you have terminal access to your hosting server (running Linux), you can use a command like:

   ```
   tar -xzf drupal-8.3.2.tar.gz
   ```
9. In your site hosting directory, delete the *core* and *vendor* directories, and all files that are not in a subdirectory, including *.htaccess*, *composer.json*, and *autoload.php*. Don't delete custom and customized files because you may end up losing the custom functionality stored in them.
10. Copy the *core* and *vendor* directories and the non-custom/non-customized files that you deleted in the preceding step from the temporary directory to your site directory.
11. Run the *update.php* script using either of the following:
    - Visit *http://www.example.com/update.php* in your browser (where *www.example.com* is your site's URL). Click *Continue* in the first screen to run the updates and successfully complete the script.
    - Run the following Drush command: `drush updb`
12. If you get any error or warning, re-run the *update.php* script again till all the updates have been completed successfully.
13. Open *settings.php* (*/sites/default/settings.php*) in a text editor. Find the line with the *$settings[*update_free_access*]* variable and update it to "FALSE":

```
$settings['update_free_access'] = FALSE;
```

14. Click *Administration pages* to return to the administration section of your site.
15. Take your site out of maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
16. Clear the cache. See *Раздел 12.2, «Clearing the Cache»*.
17. Re-enable any caching technique you disabled at Step 3.
18. You should have the updated version running. You can verify the current version of your software by checking the *Status report* (see *Раздел 12.5, «Concept: Status Report»*).

Expand your understanding

- *Раздел 3.2, «Concept: Additional Tools»*
- *Раздел 11.8, «Making a Development Site»*
- *Раздел 12.3, «Основы: Резервная копия данных»*

Related concepts

Раздел 12.5, «Concept: Status Report»

Videos

Updating the Core Software

Updating the Core Software

Additional resources

- *"Drupal Core Downloads" page on Drupal.org*
- *"Registry Rebuild" page on Drupal.org*
- The file */core/UPDATE.txt* within your installation.

Attributions

Written and edited by *Surendra Mohan*, *Boris Doesborgh*, and *Jojy Alphonso* at *Red Crackle*.

13.6. Updating a Module

Goal

Update a contributed module and run the *Database updates* script.

Prerequisite knowledge

- *Раздел 13.3, «Concept: Security and Regular Updates»*
- *Раздел 13.1, «Concept: Cron»*


Site prerequisites

- A contributed module has been installed and there is an update available for it. See *Раздел 11.3, «Downloading and Installing a Module from Drupal.org»* and *Раздел 13.4, «Keeping Track of Updates»*.
- If your site is live, you should test this process in a development environment before running it on your production site. See *Раздел 11.8, «Making a Development Site»*.
- You have created a full-site backup. See *Раздел 12.3, «Основы: Резервная копия данных»*.
- If you want to use the user interface, the core Update Manager module must be installed. See *Раздел 4.3, «Installing a Module»* for instructions on installing core modules.

Steps

Before you start, check for module-specific update instructions. This is typically necessary while updating modules that involve the usage of third-party libraries. Read and understand all module-specific requirements before proceeding with the updates. To find instructions, check the module's project page *Read Documentation* link.

To view further instructions, download the tar.gz or .zip file from the project page to your local computer. Unzip the file and look for *README.txt*, *INSTALL.txt*, and *UPGRADE.txt* that come with the module's installation file. Also, review the release notes on the project page by clicking the version number you're downloading.

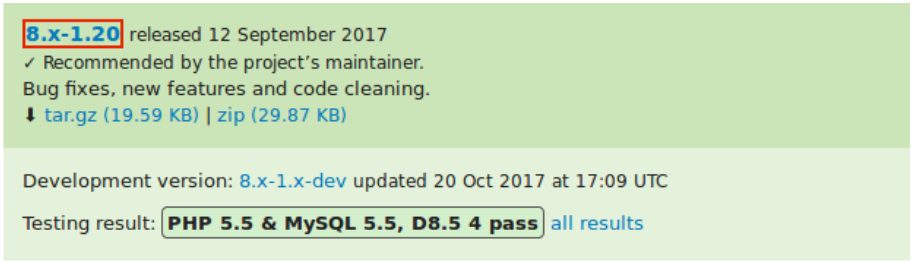


You can use the administrative interface to update a contributed module. If you are updating a custom module rather than a contributed module, if you see a message saying *Installing modules and themes requires FTP access to your server*, or if the steps below do not work to obtain the new module files, follow the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»*. You can then continue here with step 6 in the instructions for the administrative interface below.

If you are using Composer to manage the files in your site, follow the steps in *Раздел 3.5, «Using Composer to Download and Update Files»* to update the files, then continue here with step 6 in the instructions for the administrative interface below.

Using the administrative interface

1. Put your site in maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
2. In the *Manage* administrative menu, navigate to *Reports* > *Available updates* > *Update* (*admin/reports/updates/update*).
3. Find and check the module in the list. Click *Download these updates* for the module.

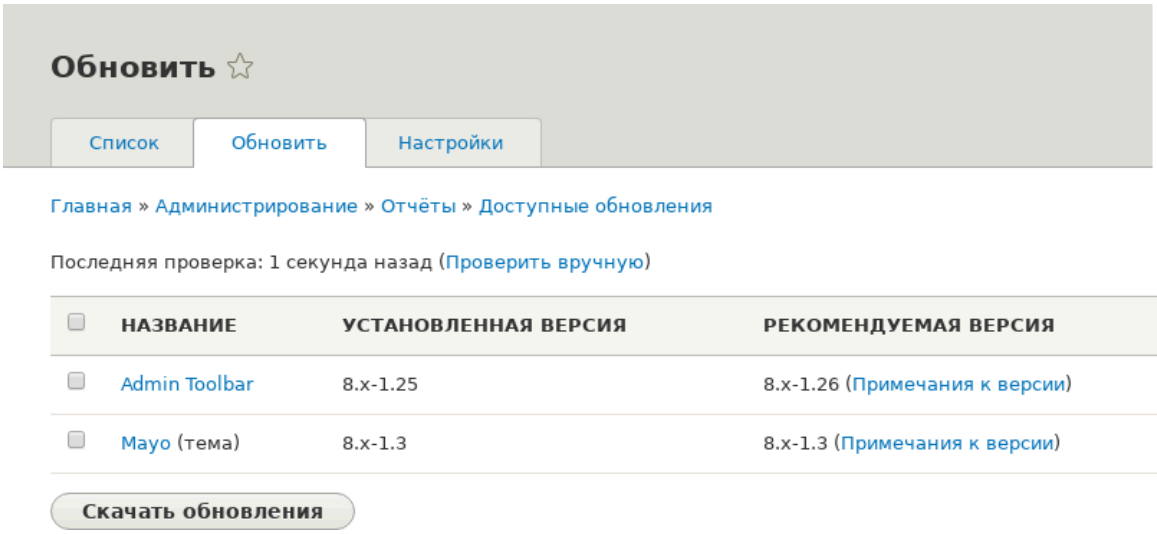

4. Click *Continue*.
5. Click *Run database updates*. If you obtained the new module files manually, start with this step, and reach the database updates page by typing the URL *example.com/update.php* in your browser.
6. Click *Continue* and apply all updates. The database update scripts will be executed.
7. Click *Administration pages* to return to the administration section of your site.
8. Take your site out of maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
9. Clear the cache (refer to *Раздел 12.2, «Clearing the Cache»*).

Expand your understanding

- Review the site log (refer to *Раздел 12.4, «Concept: Log»*) once the updates are complete to check for errors.
- *Раздел 13.7, «Updating a Theme»*

Videos

Updating a Module

Updating a Module

Additional resources

Drupal.org community documentation page "Updating modules"

Attributions

Adapted by *Boris Doesborgh*, and *Sarah German* at *Advomatic*, from *"Updating modules"*, copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.

13.7. Updating a Theme

Goal

Update a contributed theme on your site and run the *Database Updates* script.

Prerequisite knowledge

- *Раздел 13.3, «Concept: Security and Regular Updates»*
- *Раздел 13.1, «Concept: Cron»*

Site prerequisites

- A contributed theme has been installed and there is an update available for it. See *Раздел 11.5, «Downloading and Installing a Theme from Drupal.org»* and *Раздел 13.4, «Keeping Track of Updates»*.
- If your site is live, you should test this process in a development environment before running it on your production site. See *Раздел 11.8, «Making a Development Site»*.
- You have created a full site backup. See *Раздел 12.3, «Основы: Резервная копия данных»*.
- If you want to use the user interface, the core Update Manager module must be installed. See *Раздел 4.3, «Installing a Module»* for instructions on installing core modules.


Steps

You can use the administrative interface to update a contributed theme. If you are updating a custom theme rather than a contributed theme, if you see a message saying *Installing modules and themes requires FTP access to your server*, or if the steps below do not work to obtain the new theme files, follow the steps in *Раздел 11.6, «Manually Downloading Module or Theme Files»*, and then continue with step 6 in the instructions for administrative interface below.

If you are using Composer to manage the files in your site, follow the steps in *Раздел 3.5, «Using Composer to Download and Update Files»* to update the files, then continue here with step 6 in the instructions for the administrative interface below.

Using the administrative interface

1. Put your site in maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
2. In the *Manage* administrative menu, navigate to *Reports* > *Available updates* > *Update* (*admin/reports/updates/update*).
3. Find and check the theme in the list. Click *Download these updates* for the theme.

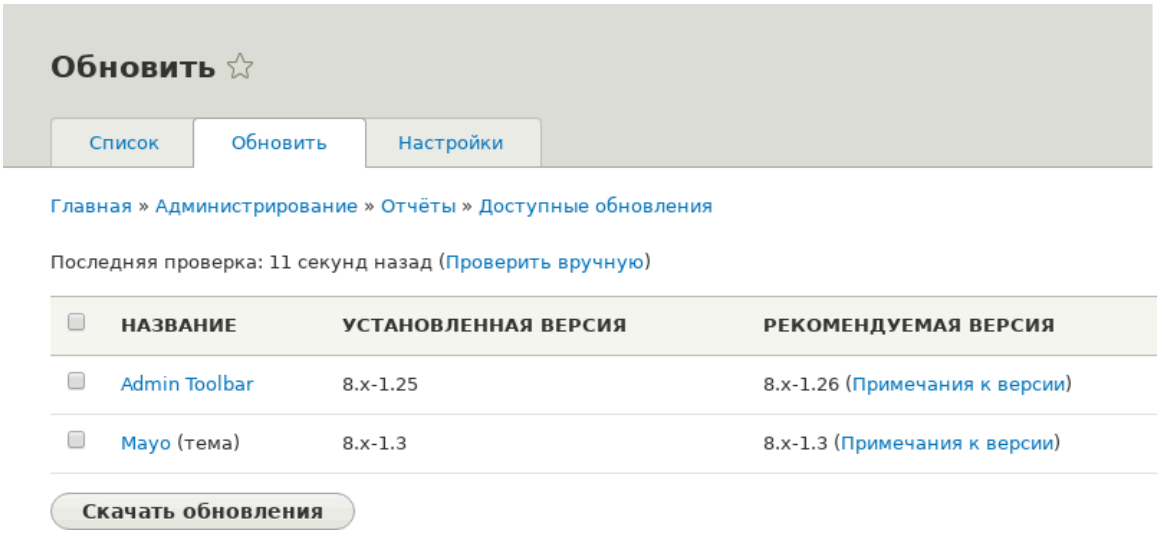

4. Click *Continue*.
5. Click *Run database updates*. If you obtained the new theme files manually, start with this step, and reach the database updates page by typing the URL *example.com/update.php* in your browser.
6. Click *Continue* to run the updates. The database update scripts will be executed.
7. Click *Administration pages* to return to the administration section of your site.
8. Take your site out of maintenance mode. See *Раздел 11.2, «Enabling and Disabling Maintenance Mode»*.
9. Clear the Drupal cache (refer to *Раздел 12.2, «Clearing the Cache»*).

Expand your understanding

- Review the site log, see *Раздел 12.4, «Concept: Log»*, once the updates are complete to check for errors.
- *Раздел 13.6, «Updating a Module»*

Videos

Updating a Theme

Updating a Theme

Attributions

Written by *Boris Doesborg*.

Глава 14. Заключение

14.1. Connecting with the Community

Prerequisite knowledge

Раздел 1.7, «Основы: Проект Drupal»

How can you connect with the community?

The Drupal project has a world-wide community of developers and users. One of the best ways to improve your knowledge of the platform is to connect with others that are using it, and get involved in the open-source community. There are many ways that you can get started:

Attend an event

: There are both regional and international Drupal events held around the world. See the *"DrupalCon" page on Drupal.org* to find international events, and the *"Event Calendar" on groups.drupal.org* or *drupical.com* to find regional events.

Join a local group

: There are Drupal user groups all around the world. Many of them have regular meetings, which you can attend to learn more about Drupal and connect to other Drupal users. Find local user groups on *groups.drupal.org*.

Participate in a topical or language group

: There are also interest groups for a wide range of topics, which have on-line discussion forums. Find topical groups on *groups.drupal.org*. Many languages have their own websites too; you can find them on the *"Language-specific communities" page on Drupal.org*.

Chat online

: The Drupal project uses IRC for on-line chatting. There are regional, topical, and general-purpose chat groups available. Find out more on the *"IRC" page on Drupal.org*.

Report a problem

: See below.

Contribute

: You can contribute your time and expertise to the community in many ways, such as:

- Developing modules or themes. See the *"Contribute to Development" page on Drupal.org*, or improving them (using the issue queues for existing projects).
- Translating the user interface. See *localize.drupal.org*.
- Writing documentation. See *"Contribute to Documentation" on Drupal.org*.
- Answer Support questions. See *Раздел 14.2, «Getting Support»*.

How can you report a problem or suggest a feature?

Each project within the community (such as the Drupal Core project for the base software, and projects for each contributed theme and module) uses *issues* to keep track of software bugs and plans for new features. You can participate by creating a bug report when you find a problem, creating a feature request, or commenting on existing issues. Search before creating an issue, to make sure that the problem or feature has not already been reported or requested. See the *Drupal.org page "Use the issue queue"* and the *Drupal.org page "Reporting a problem"* for more information.

If you find a problem that you believe is related to security, such as a cross-site scripting vulnerability, do not report it in the standard issue queue. Instead, report it to the security team. See the *Drupal.org page "How to report a security issue"* for details.

Related topics

Раздел 14.2, «Getting Support»

Additional resources

- *"Code of Conduct" on Drupal.org*
- *"Event Calendar" on groups.drupal.org* or *drupical.com*
- *"Where is the Drupal Community?" page on Drupal.org*
- *groups.drupal.org*
- *"IRC" page on Drupal.org*
- *"Ways to get involved" page on Drupal.org*
- *Drupal.org page "Why get involved?"*
- *Drupal.org page "Contributor tasks"*
- *Drupal.org page "Use the issue queue"*
- *Drupal.org page "Reporting a problem"*
- *Drupal.org page "How to report a security issue"*

Attributions

Written by *Jennifer Hodgdon*, and *Joe Shindelar* at *Drupalize.Me*.

14.2. Getting Support

Prerequisite knowledge

- *Раздел 1.7, «Основы: Проект Drupal»*
- *Раздел 14.1, «Connecting with the Community»*

Where can you find support?

The Drupal project is open-source, so if you have questions about or problems with the software, your options for finding answers and fixes are somewhat different from what they would be for commercial software.

There are several options for free support provided by community volunteers. First, some IRC channels, local groups, and language communities encourage support questions, through on-line chat, in-person meetings, or websites (find out more about these on *Раздел 14.1, «Connecting with the Community»*).

Second, some (but not all) contributed module, distribution, and theme projects encourage you to post support requests in issues. Generally, projects that have a very large number of users do not allow support requests in their issues (Drupal Core is in that category), while projects with a smaller number of users welcome the occasional support question. Be respectful of developer time and read the documentation for the project before posting a question in an issue. On the other hand, all projects encourage you to use issues to report problems and bugs; see *Раздел 14.1, «Connecting with the Community»* to learn more about that.

In addition to those resources, the following sites provide free forums where volunteers answer support questions about Drupal:

- The *Drupal.org Forums*
- *"Drupal Answers" on StackExchange*

If you prefer to pay for support (presumably in exchange for more extensive service or better availability), you can find service providers in the *"Drupal Marketplace" on Drupal.org*.

Related topics

- *Раздел 14.3, «Learning More»*
- *Раздел 14.1, «Connecting with the Community»*

Additional resources

- *"Support" page on Drupal.org*
- *"Drupal Marketplace" on Drupal.org*

- The *Drupal.org Forums*
- *"Drupal Answers" on StackExchange*

Attributions

Written by *Jennifer Hodgdon*.

14.3. Learning More

Prerequisite knowledge

- *Раздел 1.7, «Основы: Проект Drupal»*
- *Раздел 14.1, «Connecting with the Community»*

Where can you go to learn more?

The following resources should prove useful to you, as you continue to advance your skills:

"Drupal Community Documentation" section on Drupal.org

Wiki-like documentation contributed by the Drupal community, ranging from basic to advanced, about all aspects of Drupal (site building and administration, theming, development, and contributed modules).

api.drupal.org

Reference documentation for programmers about the Drupal API.

"Drupal Planet" page on Drupal.org

An aggregation of blog posts about Drupal from around the web, posted by blogging members of the Drupal community who have applied for inclusion. Topics range from programming to site building to Drupal news.

Groups, events, and meetups

See *Раздел 14.1, «Connecting with the Community»* for more about topical, regional, and language groups, as well as local, regional, and international events.

"Training Marketplace" page on Drupal.org

The Marketplace lists paid training providers. For free training, check whether events include training sessions; there are also free or very low-cost training events listed on the *"Global Training Days" page on Drupal.org*.

Support sites

See *Раздел 14.2, «Getting Support»* to locate support forums; searching them can be useful for learning about specific topics.

Attributions

Written by *Jennifer Hodgdon*, and *Joe Shindelar* at *Drupalize.Me*.

Словарь терминов

Ajax
: A web technology used to exchange data with a server to dynamically update parts of a web page (for example, forms) without needing entire page reloads.

Alias
: A user-friendly name to replace the internal *path* that the system assigns to a URL on the site. For example, you might assign an alias of */about* to the About page on your site, to replace the internal path */node/5*. This would give the page a URL of *http://example.com/about* instead of *http://example.com/node/5*. See *Раздел 5.1, «Concept: Paths, Aliases, and URLs»* for more information.

Anonymous
: A person (*user*) interacting with the site who is not logged in. See *Раздел 7.1, «Concept: Users, Roles, and Permissions»* for more information.

Block
: A chunk of *content* (text, images, links, etc.) that can be displayed on a page of a site. Blocks are displayed in *regions*. See *Раздел 8.1, «Concept: Blocks»* for more information.

Breakpoint
: Breakpoints are used to separate the height or width of browser screens, printers, and other media output types into steps. A *responsive* site adjusts its presentation at these breakpoints. See *Раздел 6.14, «Concept: Responsive Image Styles»* for more information.

Bundle
: Synonym for *Entity subtype*.

Cache
: The site's internal cache stores the output of time-consuming calculations, such as computing output for an HTML page request, and then retrieves them instead of recalculating the next time they are needed. External caching systems can also be used on the web server to speed up a site's response. See *Раздел 12.1, «Основы: Кэш»* for more information on the internal cache.

CMS
: Acronym for *Content Management System*.

Configuration
: Information about your site that is not *content*, and is meant to be more permanent than *state* information, such as the name of your site, the *content types* and *views* you have defined, etc. See *Раздел 1.5, «Основы: Типы данных»* for more information.

Content
: Information meant to be displayed on your site, such as text, images, downloads, etc. See also *Configuration* and *State*. See *Раздел 1.5, «Основы: Типы данных»* for more information.

Content item
: An item of *content* that is typically meant to be displayed as the main content of a page on your site. This is an *entity type*. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Content Management System (CMS)
: A collection of tools designed to allow the creation, modification, organization, search, retrieval and removal of information on a website. See *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»* for more information.

Content type
: An *entity subtype* for the *content itementity type*. Each content type is used for some particular purpose on the site, and each has its own fields. For example, a site for a farmers market might have a content type for simple pages, and another for a vendor listing page. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Contextual link
: A link to an administrative page for editing or configuring a feature of the site, shown in the context where that feature is displayed. Example: a link to configure a *menu* that is shown when you hover your mouse over the menu. See *Раздел 4.1, «Concept: Administrative Overview»* for more information.

Contributed
: *Modules*, *themes*, and *distributions* that are not part of the *Drupal core* download, and that can be downloaded separately from the *Drupal.org* website.

Cron
: On some operating systems, *cron* is a command scheduler application that executes commands or scripts periodically. Your site defines periodic tasks, also known as cron tasks, that need to be triggered either by an operating system cron scheduler, or internally. See *Раздел 13.1, «Concept: Cron»* for more information.

Distribution
: A single download that provides a shortcut for setting up a specific type of site, such as a website for a club or for e-commerce. A distribution contains *Drupal core*, along with *contributedmodules* and/or *themes*; many distributions also pre-configure the site or even create sample content upon installation. See *Раздел 1.4, «Основы: Дистрибутивы»* for more information.

Drupal core
: The files, themes, profiles, and modules included with the standard project software download. See *Раздел 1.1, «Основы: Drupal как Система Управления Сайтом (CMS)»* for more information.

Entity
: An item of either *content* or *configuration* data, although in common usage, the term often refers to content entities. Examples include *content items*, custom *blocks*, *taxonomy terms*, and definitions of *content types*; the first three are content entities, and the last is a configuration entity. See also *Entity type*, *Entity subtype*, and *Field*. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Entity subtype
: Within a *contententity type*, a grouping of entities that share the same *fields*. For example, within the *content item* entity type, a farmers market site might have subtypes (known as *content types*) for static pages and vendor pages, each with its own group of fields. You may also see the term *bundle* used (especially in programmer documentation) as a synonym of entity subtype. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Entity type
: The overall type of an *entity*; in common usage, it is only applied to a *content* entity. Examples include *content types*, *taxonomy terms*, and custom *blocks*. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Field
: Data of a certain type that is attached to a *contententity*. For instance, on a farmers market site's vendor content type, you might have fields for an image, the vendor description, and a *taxonomy term*. See *Раздел 2.3, «Основы: Сущности контента и Поля»* for more information.

Field bundle
: Synonym for *Entity subtype*.

Field formatter
: *Configuration* that defines how the data in a *field* is displayed. For example, a text field could be displayed with a prefix and/or suffix, and it could have its HTML tags stripped out or limited. See also *View mode* and *Field widget*. See *Раздел 6.10, «Concept: View Modes and Formatters»* for more information.

Field widget
: *Configuration* that defines how someone can enter or edit data for a *field* on a data entry form. For example, a text field could use a single-line or multi-line entry box, and there could be a setting for the size of the box. See also *Field formatter*. See *Раздел 6.8, «Concept: Forms and Widgets»* for more information.

Formatter
: See *Field formatter*.

FOSS
: Acronym for *Free and Open Source Software*, meaning software that is developed by a community of people and released under a non-commercial license. See also *GPL*. See *Раздел 1.7, «Основы: Проект Drupal»* for more information.

GPL
: Acronym for the *GNU General Public License*, a non-commercial software license. All software downloaded from the *Drupal.org* website is licensed under the *"GNU General*

Public License, version 2". See also *FOSS*. See *Раздел 1.8, «Концепция: Лицензирование Drupal»* for more information.

Image style
: A set of processing steps that transform a base image into a new image; typical processing includes scaling and cropping. See *Раздел 6.12, «Concept: Image Styles»* for more information.

LAMP
: Acronym for *Linux, Apache, MySQL, and PHP*: the software on the web server that the scripts commonly run on (although it can use other operating systems, web servers, and databases). See *Раздел 3.1, «Concept: Server Requirements»* for more information.

Log
: A list of recorded events on the site, such as usage data, performance data, errors, warnings, and operational information. See *Раздел 12.4, «Concept: Log»* for more information.

Menu
: A set of links used for navigation on a site, which may be arranged in a hierarchy. See *Раздел 5.7, «Concept: Menu»* for more information.

Module
: Software (usually PHP, JavaScript, and/or CSS) that extends site features and adds functionality. The Drupal project distinguishes between *core* and *contributed* modules. See *Раздел 1.2, «Основы: Модули»* for more information.

Path
: The unique, last part of the internal URL that the system assigns to a page on the site, which can be a visitor-facing page or an administrative page. For example, the internal URL for the About page on your site might be *http://example.com/node/5*, and in this case, the path is *node/5*. See also *Alias*. See *Раздел 5.1, «Concept: Paths, Aliases, and URLs»* for more information.

Permission
: The ability to perform some action on the site, such as editing a particular type of *content*, or viewing user profiles. See also *Role*. See *Раздел 7.1, «Concept: Users, Roles, and Permissions»* for more information.

Reference field
: A *field* that represents a relationship between an *entity* and one or more other entities, which may be the same *entity type* or a different type. For example, on a farmers market site, a recipe content item might have a reference field to the vendor (also a content item) that posted the recipe. *Taxonomy term* fields are also reference fields. See *Раздел 6.4, «Concept: Reference Fields»* for more information.

Region
: A defined area of a page where *content* can be placed, such as the header, footer, main content area, left sidebar, etc. Regions are defined by *themes*, and the content displayed in each region is contained in *blocks*. See *Раздел 2.1, «Concept: Regions in a Theme»* for more information.

Responsive
: A site or *theme* is said to be responsive if it adjusts its presentation in response to the size of the browser screen, printer, or other media output type. See also *Breakpoint*. See *Раздел 6.14, «Concept: Responsive Image Styles»* for more information.

Revision
: A record of the past or present state of a *contententity*, as it is edited over time. See *Раздел 2.6, «Concept: Editorial Workflow»* for more information.

Role
: A named set of *permissions* that can be applied to a *user account*. See *Раздел 7.1, «Concept: Users, Roles, and Permissions»* for more information.

Security update
: An *update* that fixes a security-related bug, such as a hacking vulnerability. See *Раздел 13.3, «Concept: Security and Regular Updates»* for more information.

State
: Information of a temporary nature about the current state of your site, such as the time when *cron* was last run, etc. See also *Content* and *Configuration*. See *Раздел 1.5, «Основы: Типы данных»* for more information.

Taxonomy
: The process of classifying *content*. See *Раздел 6.5, «Concept: Taxonomy»* for more information.

Taxonomy term
: A term used to classify *content*, such as a tag or a category. See also *Vocabulary*. See *Раздел 6.5, «Concept: Taxonomy»* for more information.

Text format
: *Configuration* that defines the processing that happens to user-entered text before it is shown in the browser. This might include stripping or limiting HTML tags, or turning URLs into links. See *Раздел 6.15, «Concept: Text Formats and Editors»* for more information.

Theme
: Software and asset files (images, CSS, PHP code, and/or templates) that determine the style and layout of the site. The Drupal project distinguishes between *core* and *contributed* themes. See *Раздел 1.3, «Основы: Темы оформления»* for more information.

UI
: Acronym for *User Interface*.

Update
: A newer version of your site's software, either *Drupal core* or a *module* or *theme*. See also *Security update*. See *Раздел 13.3, «Concept: Security and Regular Updates»* for more information.

User
: A person interacting with the site, either logged-in or *anonymous*. See *Раздел 7.1, «Concept: Users, Roles, and Permissions»* for more information.

User interface
: The text, styles, and images that are visible on a site, separated logically into the user interface for site visitors and the administrative user interface.

User one (User 1)
: The initial *user* account that is created when you install the site (whose ID number is 1). It automatically has all *permissions*, even if it is not assigned an administrative *role*. See *Раздел 7.2, «Concept: The User 1 Account»* for more information.

View
: A formatted listing of data; typically, the data comes from *contententities*. For example, on a farmers market site, you might create a *content item* for each vendor. You could then make view that generates a listing page that shows a thumbnail image and short description of each vendor, linking to the full-page content item. Using the same data, you could also make a view that generates a new vendors block, which would show information from the most recently added vendors. See *Раздел 2.4, «Основы: Модульный Контент»* for more information.

View mode
: A set of *field formatterconfiguration* for all of the *fields* of a *contententity*, some of which may be hidden. Each *entity subtype* can have one or more view modes defined; for example, *content types* typically have *Full* and *Teaser* view modes, where the *Teaser* view mode displays fewer or trimmed-down fields. See *Раздел 6.10, «Concept: View Modes and Formatters»* for more information.

Vocabulary
: A group of *taxonomy terms* to choose from when classifying *content* in a particular way, such as the list of all of the vendor categories on a farmers market site. Technically, vocabularies are the *entity subtype* for the taxonomy term *entity type*. See *Раздел 6.5, «Concept: Taxonomy»* for more information.

Widget
: See *Field widget*.

Wizard
: A web form that allows you to fill in a few values, and creates something with sensible defaults based on the values you chose. For example, there are wizards for creating *views* of different types. See *Раздел 9.3, «Creating a Content List View»* for more information.

WYSIWYG
: Acronym for *What You See is What You Get*, meaning a method for editing *content* where what you see on the editing screen closely resembles the final product. See *Раздел 6.16, «Configuring Text Formats and Editors»* for more information.

Предметный указатель

Символы

Ассоциация Drupal
  обзор, 7
База данных
  создание резервных копий, 197
Бесплатное программное обеспечение с открытым исходным кодом
  обзор, 7, 7
Блок
  тип сущности, 14
Главная страница
  конфигурирование, 67
  создание, 61
Городская ярмарка
  использование сценария в этом документе, xii
Действующий сайт
  синхронизация с разрабатываемым сайта, 188
Дистрибутив
  быстрый старт, 5
  загрузка, 35
  обзор, 5
  полнофункциональный, 5
Дистрибутив для быстрого начала
  обзор, 5
Домашняя страница
  создание, 61
Дополнительный модуль
  обзор, 3
Загрузка
  дистрибутив, 35
  основное программное обеспечение, 31
  ядро Drupal, 35
Инструмент
  Git, 189
Использование сценария в этом документе (городская ярмарка), xii
Композитная страница
  создание с модульным контентом, 17
Контент
  модульный, 17
  создание резервных копий, 197
  тип сущности, 14
Контент как тип данных, 6
Контент тип материал
  обзор, 14
Конфигурация
  копирование, 185
  развертывание, 185
  синхронизация между разрабатываемым и действующим сайтом, 188
Конфигурация как тип данных, 6
Конфигурирование
  Главная страница, 67
Кэш
  обзор, 194
Кэш страницы
  обзор, 194
Лицензирование
  обзор, 9
Лицензирование Drupal
  обзор, 9
Макет
  планирование, 12
Макет сайта
  планирование, 12
Модуль
  Comment, 14
  Configuration Manager, 188
  Contact, 14
  Custom Block, 14
  Dynamic Page Cache, 194
  Field, 3
  Field UI, 3, 3
  File, 14
  Internal Page Cache, 194
  Node, 3, 14
  Taxonomy, 14
  User, 3, 14
  Views, 3
  Views UI, 3
  дополнительный, 3
  обзор, 3
  ядро, 3
Модуль Configuration Manager
  используемый для синхронизации конфигурации между сайтом разрабатываемым и действующим сайтом, 188

Модуль Field
обзор, 3
Модуль Field UI
обзор, 3
Модуль Menu UI
обзор, 3
Модуль Node
обзор, 3
Модуль Views
обзор, 3
Модуль Views UI
обзор, 3
Модуль ядра Drupal
обзор, 3
Модульный контент
обзор, 17
Начальная страница
конфигурирование, 67
План сайта
структура контента, 18
Планирование
макет сайта, 12
Подтип сущности
обзор, 14
Поле
обзор, 14
Полнофункциональный дистрибутив
обзор, 5
Пользовательская тема оформления
обзор, 4
Пользовательский блок
тип сущности, 14
Пользовательский модуль
обзор, 3
Правовой
обзор, 9
Проект Drupal
обзор, 7
Профиль пользователя тип материала
обзор, 14
Разработка сайта
синхронизация с действующим сайтом, 188
Резервная копия
обзор, 197
Сеанс работы как тип данных, 6
Словарь таксономии
обзор, 14
Составление страницы
создание страницы через модульный контент, 17
Состояние как тип данных, 6
Сторонние темы оформления
обзор, 4
Страница
композит, 17
Структура контента
планирование, 18
Сущность
обзор, 14
Сценарий в этом документе (городская ярмарка)
обзор, xii
Сценарий руководства в этом документе (городская ярмарка), xii
Тема оформления
обзор, 4
сторонние темы офомления, 4
ядро Drupal, 4
Темы оформления
Пользовательские темы оформления, 4
Темы оформления ядра
обзор, 4
Термин таксономии
обзор, 14
Тип данных
контент, 6
конфигурация, 6
обзор, 6
сессия, 6
состояние, 6
Тип сущности
обзор, 14
Тип сущности Комментарий
обзор, 14
Тип сущности Контактная форма
обзор, 14
Файл
создание резервных копий, 197
Форма тип сущности
обзор, 14
Функция
копирование, 185
развертывание, 185
Элемент контента
создание, 61
Ядро Drupal
загрузка, 35

подготовка установки, 31

A

Account setting
configuring, 53
Admin Toolbar module
downloading, 169
installing, 169
Administration
overview, 43
Administrative interface
using to update the core software, 207
Administrative menu
overview, 43, 69
Administrative user account
overview, 116
Ajax
definition, 220
Alias
definition, 220
overview, 60
Anonymous
definition, 220
Anonymous user
overview, 116
Apache web server
version requirements, 25
Appearance menu entry
administrative menu, 43
Attributions for this document, 237
Authenticated user
overview, 116
Author
assigning, 127
Automated Cron module
configuring, 202
overview, 202

B

Bartik theme
configuring, 56
regions in, 11
Block
creating, 131
creating from a view, 148
definition, 220
overview, 131
placing in a region, 133
Breadcrumb region
overview, 11
Breakpoint
definition, 220
overview, 112
Bug
reporting, 205, 215
Bundle
definition, 220

C

Cache
clearing, 195
definition, 220
rebuilding, 195
Chatting online, 215, 217
CKEditor module
configuring, 114
CKEditor text editor
default assignment to text format, 114
CMS (Content Management System)
definition, 220
overview, 1
Coder tool
overview, 26
Color scheme
configuring, 56
Comment модуль
тип сущности, 14
Community
connecting with, 215
Composer tool
overview, 26
using to download modules, 32
using to download the core software, 32
using to download themes, 32
Configuration
definition, 220
translating, 22, 159
Configuration menu entry
administrative menu, 43
Configuration Translation module
installing, 152
overview, 22
Configuring
content translation, 154
site, 47
text format, 114
Contact модульь
тип сущности, 14

Content
  adding to menu while editing, 70
  assigning author, 127
  definition, 220
  displaying, 104
  editing, 63, 65
  editing entry form, 99
  finding, 63
  translating, 22, 157
  translation, 154
Content attributions for this document, 237
Content display
  changing, 104
  managing, 104
Content editing form
  overview, 99
Content item
  definition, 221
Content list view
  creating, 140
Content Management System (CMS)
  definition, 220, 221
  overview, 1
Content menu entry
  administrative menu, 43
Content reference field
  adding, 96
  overview, 87
Content region
  overview, 11
Content Translation module
  installing, 152
  overview, 22
Content type
  adding, 76
  adding field to, 82
  definition, 221
  deleting, 81
Contextual filters part of view
  overview, 138
Contextual link
  definition, 221
  overview, 43
Contributed
  definition, 221
Contributed module
  definition, 221
  downloading, 32, 169, 179
  evaluating, 162
  finding, 162
  installing, 169
  updating, 32, 209
Contributed theme
  definition, 221
  downloading, 32, 175, 179
  enabling, 175
  evaluating, 171
  finding, 171
  installing, 175
  updating, 32, 212
Contributing to the project, 215
Copyright for this document, vi, 237
Core software
  downloading, 29, 32
  installation requirements, 25
  installing, 29, 36
  updating, 32, 207
Country setting
  configuring, 47
Cron command scheduler
  definition, 221
Cron task
  configuring, 202
  definition, 221
  overview, 202
Cross-site scripting (XSS)
  preventing, 113
Custom block
  creating, 131
Custom block модуль
  тип сущности, 14
Custom menu
  overview, 69
Custom theme
  enabling, 175
  installing, 175

D

Database
  configuring during the installation process, 36
  installation requirements, 25
Deployment workflow
  overview, 182
Devel tool
  overview, 26
Development site

making, 183
overview, 182
Disk space
installation requirements, 25
Display part of view
overview, 138
Distribution
definition, 221
Documentation
about Drupal, 218
about the Drupal API, 218
available on drupal.org, 218
contributed by the Drupal Community, 218
Drupal Planet blog posts, 218
for programmers, 218
Downloading
core software, 29, 32
module, 32, 169
module or theme files manually, 179
theme, 32, 175
Drupal Console tool
overview, 26
Drupal content management system
overview, 1
server requirements, 1
Drupal core
definition, 221
installing, 36
overview, 1
Drupal project
connecting with, 215
Drupal training
resources for, 218
Drupal user group
finding, 215
Drupal.org website
downloading and installing module from, 169
downloading and installing theme from, 175
downloading modules and themes from, 1
finding and evaluating modules on, 162
finding and evaluating themes on, 171
Drush tool
overview, 26
using to install module, 169
using to install theme, 175
using to uninstall module, 50
using to update the core software, 207
Dynamic Page Cache модуль
обзор, 194

E

Editing content, 63, 65
Editor
configuring, 114
Editor module
configuring, 114
Editorial Workflow
overview, 21
Effect
image, 107, 108
Email address
configuring, 47
Enabling
module, 169
theme, 175
Entity
definition, 221
Entity reference field
adding, 96
Entity subtype
definition, 222
Entity type
definition, 222
Entity view mode
overview, 103
Error
log report, 199
Error page
configuring, 47
Event
Drupal, 215
Extend menu entry
administrative menu, 43

F

Featured regions
overview, 11
Field
adding to content type, 82
content reference, 87
definition, 222
for adding references, 96
overview, 99
reference, 87
taxonomy term reference, 87

user reference, 87
Field bundle
definition, 222
Field formatter
definition, 222
overview, 103
Field widget
definition, 222
Fields part of view
overview, 138
File модуль
тип сущности, 14
Filter criteria part of view
overview, 138
Filter module
configuring, 114
First day of week
configuring, 47
Footer menu
overview, 69
Footer regions
overview, 11
Form
overview, 99
Format part of view
overview, 138
Formatter
definition, 222
overview, 103
Forum
user support, 217
FOSS (Free and Open Source Software)
definition, 222
Free and Open Source Software (FOSS)
definition, 222
Front page
configuring, 47
Full editor, 65
Functionality
extending, 169

G

Git tool
overview, 26
Git инструмент
использование, 189
Glossary, 220
GNU General Public License
definition, 222
GNU Универсальная общедоступная лицензия
обзор, 9
GPL (General Public License or GNU General Public License)
definition, 222
GPL (Универсальная общедоступная лицензия или Открытое лицензионное соглашение)
обзор, 9
Group
finding, 215

H

Header region
overview, 11
Help menu entry
administrative menu, 43
Help region
overview, 11
Hiawatha web server
version requirements, 25
Highlighted region
overview, 11
HTML5 picture tag
and responsive images, 112

I

Image
resizing, 108
Image effect
overview, 107
Image field
adding, 82
Image module
creating a view, 140
Image style
creating, 108
definition, 223
overview, 107
responsive, 112
In-place editor, 65
Installation process, 36
Installation profile, 36
Installation requirements
database, 25
disk space, 25
overview, 25
PHP programming language, 25

web server, 25
Installer tool
running, 36
Installing
core software, 25, 29
development site, 182
module, 169
staging site, 182
theme, 175
Interest group
finding, 215
Interface Translation module
installing, 152
overview, 22
Internal Page Cache модуль
обзор, 194
Internet Relay Chat (IRC)
using to chat online, 215, 217
IRC (Internet Relay Chat)
using to chat online, 215, 217

L

Label
translating, 159
LAMP (Linux Apache MySQL PHP)
definition, 223
Language
adding, 152
Language module
installing, 152
overview, 22
Languages
overview, 22
Learning resource
link to, 218
Linux Apache MySQL PHP (LAMP)
definition, 223
Listing content
using Views module to, 140
Locale setting
configuring, 47
Log
definition, 223
overview, 199
Logo image
configuring, 56

M

Maintenance mode
disabling, 166
enabling, 166
overview, 166
Manage administrative menu
overview, 43
Manually downloading module or theme files
overview, 179
Menu
adding a link to page, 70
administrative, 69
custom, 69
definition, 223
footer, 69
main, 69
overview, 69
user account, 69
Menu items
reordering, 73
Menu region
overview, 11
Metadata
creating, 89
Microsoft IIS web server
version requirements, 25
Module
Admin Toolbar, 169
CKEditor, 114
Configuration Translation, 22, 152
Content Translation, 22, 152
contributed, 169
custom, 169
definition, 223
downloading, 32, 169, 179
Editor, 114
enabling, 49, 169
evaluating, 162
Filter, 114
finding, 162
Image, 140
installing, 49, 169
Interface Translation, 22, 152
Language, 22, 152
uninstalling unused, 50
Update Manager, 169, 175
updating, 32, 209
Views, 140, 144, 148
Multilingual modules
enabling, 152

installing, 152
MySQL database
version requirements, 25

N

Navigation
changing the order of menu items, 73
linking menu to page, 70
Nginx web server
version requirements, 25
Node модуль
тип сущности, 14

P

Page
adding to menu while editing, 70
Path
definition, 223
overview, 60
People menu entry
administrative menu, 43
Performance
improving, 50
log report, 199
status report, 200
Permission
changing, 123
changing role, 125
definition, 223
denying, 123
granting, 123
overview, 116
PHP programming language
version requirements, 25
PHP version
status report, 200
PostgreSQL database
version requirements, 25
Primary menu region
overview, 11
Profile
installation, 36
Published flag
overview, 21

Q

Quick editor, 65

R

Reference field
adding, 96
content, 87
definition, 223
overview, 87
taxonomy term, 87
user, 87
Region
breadcrumb, 11
content, 11
definition, 223
featured, 11
footer, 11
header, 11
help, 11
highlighted, 11
menu, 11
overview, 11
placing a block in, 133
primary menu, 11
secondary menu, 11
sidebar, 11
Regional setting
configuring, 47
Relationships part of view
overview, 138
Report
Recent log messages, 199
Reports menu entry
administrative menu, 43
Resource
documentation and training, 218
Responsive
definition, 223
Responsive image style
overview, 112
Revision
definition, 224
overview, 21
Role
administrator, 118
anonymous user, 118
authenticated user, 118
changing, 125
changing permission, 123
creating, 118
definition, 224

overview, 116

S

Secondary menu region
overview, 11
Security
assigning permission, 123
cross-site scripting, 113
managing user accounts, 53
overview, 205
status report, 200
text format, 113
user account settings, 53
user one account, 117
Security announcement
subscribing to by email, 206
subscribing to on Twitter, 206
Security bug
reporting, 205
Security team
overview, 205
Security update
applying, 32, 209, 212
definition, 224
keeping track of, 206
Server information
status report, 200
Sidebar regions
overview, 11
Site email address
configuring, 47
Site information
status report, 200
Site name
configuring, 47
Site slogan
configuring, 47
Site tagline
configuring, 47
Slogan
configuring, 47
Software dependencies
managing, 32
Software version
status report, 200
Sort criteria part of view
overview, 138
SQLight database
version requirements, 25
Staging site
making, 183
overview, 182
State
definition, 224
Status report
overview, 200
Structure menu entry
administrative menu, 43
Style
image, 107, 108
Support
finding, 217

T

Tagline
configuring, 47
Taxonomy
creating, 89
definition, 224
overview, 88
Taxonomy term
definition, 224
Taxonomy term reference field
adding, 96
overview, 87
Taxonomy модуль
тип сущности, 14
Term (taxonomy)
fixed list, 88
free tagging, 88
overview, 88
Term list
creating, 89
Terminology (Glossary), 220
Text format
configuring, 114
definition, 224
overview, 113
Theme
configuring, 56
contributed, 175
custom, 175
definition, 224
downloading, 32, 175, 179
enabling, 175
evaluating, 171
finding, 171
installing, 175

regions in, 11
updating, 32, 212
Time zone setting
configuring, 47
Tool
Coder, 26
Composer, 26
Devel, 26
Drupal Console, 26
Drush, 26
Git, 26
Toolbar
overview, 43
Training
Global Training Days, 218
resource, 218
Training Marketplace, 218
Translating
configuration, 159
content, 157
label, 159
overview, 22
view, 159
Troubleshooting
log report, 199
status report, 200

U

UI (User Interface)
definition, 224
Uniform Resource Locator (URL)
overview, 60
Uninstalling
unused modules, 50
Unpublished flag
overview, 21
Update
definition, 224
keeping track of, 206
overview, 205
status report, 200
Update Manager module
overview, 206
using to install module, 169
using to install theme, 175
Update status
status report, 200
URL (Uniform Resource Locator)
overview, 60
URL alias
overview, 60
URL field
adding, 82
User
administrative, 117
configuring account setting, 53
creating account, 120
definition, 224
overview, 116
root, 117
user one, 117
User account menu
overview, 69
User group
finding, 215
User interface
translating, 22
User Interface (UI)
definition, 224
User one
definition, 225
User reference field
adding, 96
overview, 87
User role
changing, 125
creating, 118
overview, 116
User модуль
тип сущности, 14
User-entered content
filtering, 113

V

View
adding block display to, 148
contextual filters part, 138
creating, 140
definition, 225
display part, 138
duplicating, 144
fields part, 138
filter criteria part, 138
format part, 138
overview, 137
parts of, 138
relationships part, 138
sort criteria part, 138

translating, 159
View mode
definition, 225
overview, 103
Views module
adding to a view, 148
creating a view, 140
duplicating a view, 144
overview, 137
Views модуль
обзор, 17
Vocabulary
creating, 89
definition, 225
overview, 88

W

Web installer
running, 36
Web server
installation requirements, 25
What You See Is What You Get (WYSIWYG)
configuring editor, 114
definition, 225
Widget
definition, 222, 225
overview, 99
Wizard
definition, 225
WYSIWYG (What You See Is What You Get)
configuring editor, 114
definition, 225

X

XSS (Cross-site scripting)
preventing, 113

Приложение A. Дополнения

A.1. Guide-Wide Attributions

This guide was written by contributors to the Drupal open-source project, and is licensed under the *CC BY-SA 2.0* license. See *Раздел i.1, «Copyright»* for more information. Details about the contributors for guide-wide tasks are below. For individual topics, the attributions for writing, editing, and/or translating are at the end of each topic.

Project coordination of original (English, Drupal 8) text

Writing of the initial version of this guide was coordinated by the following people:

- *Amber Matz* - Volunteer coordination and project management
- *Jennifer Hodgdon* - Content oversight
- *Joe Shindelar* - Content oversight
- *Antje Lorch* - Content oversight

Writing, editing, and testing of original text

The following people contributed to guide-wide writing:

- The glossary was written and adapted by *Jennifer Hodgdon*, with parts from *"Glossary"*, *"Overview of Configuration (vs. other types of information)"*, and *"Working with breakpoints in Drupal 8"*, each copyright 2000-2017 by the individual contributors to the *Drupal Community Documentation*.
- The index was improved and curated by *Anna van Raaphorst*.
- Topic summaries were written by *Jojy Alphonso* at *Red Crackle*.

Guide-wide editing was done by the following people:

- *Amber Matz* at *Drupalize.Me*
- *Anna van Raaphorst*
- *Antje Lorch*
- *Balu Ertl*
- *Boris Doesborg*
- *Charles Leverington*
- *chirag shah*
- *Grant Dunham*

- *Jennifer Hodgdon*
- *Joe Shindelar* at *Drupalize.Me*
- *Jojy Alphonso* at *Red Crackle* — who copy edited the vast majority of the User Guide
- *Kamal Kant Pansari* at *Intelliswift*
- *Michael Lenahan* at *erdfisch*
- *Swarad Mokal* at *Blisstering Solutions*

The content was tested by:

- *Zach Carter*
- A workshop organized by the *"Spokane Drupal User Group" on groups.drupal.org*, with students from the Web Development Certificate program at *Spokane Community College*

Images

Most of the images in the guide are screen captures from the Drupal software, generated by software written by *Jennifer Hodgdon*.

The word Drupal, the Druplicon logo (which appears as part of several images throughout the guide), and the Drupal wordmark logo (which is part of the cover image), are *registered trademarks of Dries Buytaert*).

The cover image is a CC BY-SA 2.0 licensed illustration by *Amanda Luker* at *Advomatic*.

The Anytown Farmers Market logo, which appears as part of several images throughout the guide, is a CC BY-SA 2.0 licensed illustration by Justin Harrell at *Drupalize.Me*.

The honey bee image, which appears as part of several images throughout the guide, is a public domain image by *John Severns* at the *English Wikipedia project* via *Wikimedia Commons*.

The farm image, which appears as part of several images throughout the guide, is a public domain image by Xianmin Chang via *Wikimedia Commons*.

The salad image, which appears as part of several images throughout the guide, is a public domain image by *Yinan Chen* via *Wikimedia Commons*.

The carrot image, which appears as part of several images throughout the guide, is public domain image *K11611-1* by Stephen Ausmus at the *Agricultural Research Service of the United States Department of Agriculture* via *Wikimedia Commons*.

Translation into Russian

The Russian translation of this guide was coordinated by:

- *Ivan Abramenko* of *Technocrat*
- *Sergey Trubitsyn*