ACCESSING SERVER(OHS) STATUS FROM BROWSER

STEPS:

1-Go to O_H/mid/Apache/Apache/conf

2-cp httpd.conf httpd.conf_bkp (backup the httpd.conf file in the same location)

3-vi httpd.conf file add this lines to the file---->


```
_ | - |
                   root@of582:/d01/praveen/mid/Apache/Apache/conf
File Edit View
               Terminal Tabs Help
ExtendedStatus On
<Location /server-status>
   SetHandler server-status
   order deny, allow
   deny from all
    allow from of582.orafact.com
</Location>
### Section 2: 'Main' server configuration
# The directives in this section set up the values used by the 'main'
# server, which responds to any requests that aren't handled by a
# <VirtualHost> definition. These values also provide defaults for
# any <VirtualHost> containers you may define later in the file.
# All of these directives may appear inside <VirtualHost> containers,
# in which case these default settings will be overridden for the
# virtual host being defined.
# If your ServerType directive (set earlier in the 'Global Environment'
section) is set to "inetd", the next few directives don't have any
                                                               266.1
                                                                             22%
```

ExtendedStatus on

```
<Location /server-status>
    SetHandler server-status
    order deny,allow
    deny from all
    allow from of582.orafact.com
</Location>
    save and exit
```


ACCESSING SERVER(OHS) STATUS FROM BROWSER

4-open browser type address http://of582.orafact.com:7777/server-status

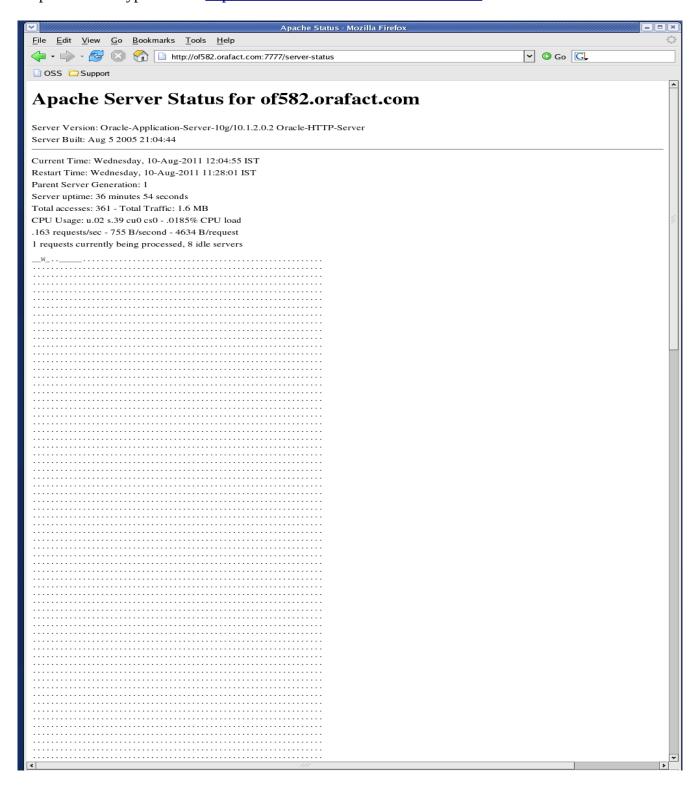

ACCESSING SERVER(OHS) STATUS FROM BROWSER

5-open browser type address http://of582.orafact.com:7777/server-status?refresh=2

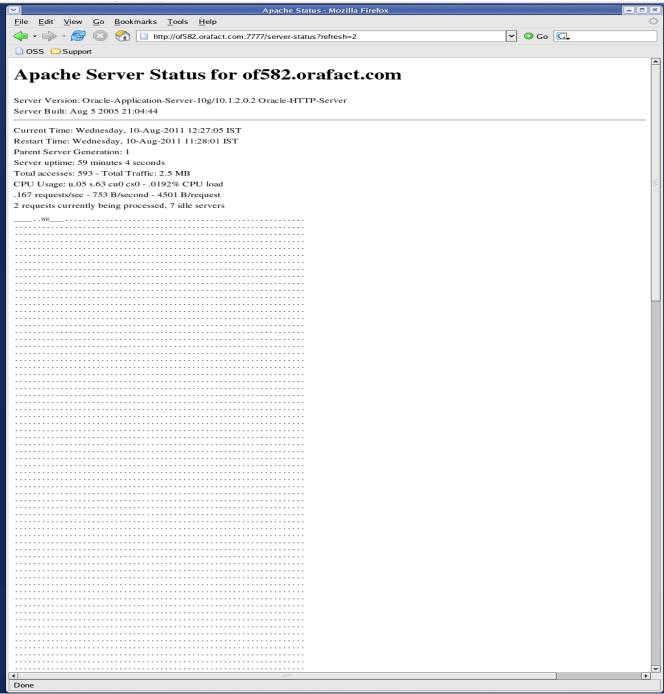

open browser type address http://of582.orafact.com:7777/server-status?refresh=2 by giving this url the server status page gets refreshed automatically for every 2 seconds the time intervel can be cahanged to your desired intervel