Project 1

1. Clone the repo

```
ubuntu@ip-172-31-9-197:~$ git clone https://github.com/Vennilavanguvi/Brain-Task
s-App.git
Cloning into 'Brain-Tasks-App'...
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (10/10), done.
remote: Total 11 (delta 0), reused 8 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (11/11), 101.89 KiB | 14.55 MiB/s, done.
ubuntu@ip-172-31-9-197:~$ ls
Brain-Tasks-App
ubuntu@ip-172-31-9-197:~$
```

2. Creating docker file

```
ubuntu@ip-172-31-9-197: ~
FROM nginx:latest

COPY . /usr/share/nginx/html

EXPOSE 80

CMD ["nginx", "-g", "daemon off;"]
~
~
~
~
```

3. Build Docker Image

```
ubuntu@ip-172-31-9-197:~$ docker build -t vite-app .
[+] Building 7.9s (7/7) FINISHED                                docker:default
 => [internal] load build definition from Dockerfile                        0.1s
 => => transferring dockerfile: 132B                                        0.0s
 => [internal] load metadata for docker.io/library/nginx:latest             2.7s
 => [internal] load .dockerignore                                           0.0s
 => => transferring context: 2B                                             0.0s
 => [internal] load build context                                           0.2s
 => => transferring context: 463.87kB                                       0.1s
 => [1/2] FROM docker.io/library/nginx:latest@sha256:bc45d248c4e1d1709321  4.5s
 => => resolve docker.io/library/nginx:latest@sha256:bc45d248c4e1d1709321  0.1s
 => => sha256:9eef040df109a68da4ee0f20ef79c6a5a3b4942ac19 1.40kB / 1.40kB  0.6s
 => => sha256:79697674b8970919d82181f2856f2494024570b22db 1.21kB / 1.21kB  0.8s
 => => sha256:18a071c04bd15da01eff3b9f14e784c765ae4e2220ba204 403B / 403B  0.9s
 => => sha256:df9da45c1db2401fec7485da87d95235e97e1824cb70c59 954B / 954B  0.9s
 => => sha256:a9d395129dcefbfb212cd08db7cf1f70d256eefd83c2458 629B / 629B  0.6s
 => => sha256:75a1d70aee5027b89aeb5eec54823d28982ec97ad 33.16MB / 33.16MB  1.1s
 => => sha256:206356c42440674ecbdf1070cf70ce8ef7885ac2e 29.78MB / 29.78MB  1.0s
 => => extracting sha256:206356c42440674ecbdf1070cf70ce8ef7885ac2e5c56f1e  1.2s
 => => extracting sha256:75a1d70aee5027b89aeb5eec54823d28982ec97ade2fc5d8  1.0s
 => => extracting sha256:a9d395129dcefbfb212cd08db7cf1f70d256eefd83c2458c  0.0s
 => => extracting sha256:df9da45c1db2401fec7485da87d95235e97e1824cb70c590  0.0s
 => => extracting sha256:18a071c04bd15da01eff3b9f14e784c765ae4e2220ba2041  0.0s
 => => extracting sha256:79697674b8970919d82181f2856f2494024570b22db3103c  0.0s
 => => extracting sha256:9eef040df109a68da4ee0f20ef79c6a5a3b4942ac19e6842  0.0s
 => [2/2] COPY . /usr/share/nginx/html                                      0.2s
 => exporting to image                                                      0.3s
 => => exporting layers                                                     0.1s
 => => exporting manifest sha256:b92a58d8ca1cdc4ae91c2beab3cac449798195f7  0.0s
 => => exporting config sha256:3d90eddee0e7b77a26d149253d2acdbddc5ee12f52  0.0s
 => => exporting attestation manifest sha256:20a01cd8c8c8ccf8d5bbdca02624  0.0s
 => => exporting manifest list sha256:8c3fb263486a25b417e3e11cb9f8342f34a  0.0s
 => => naming to docker.io/library/vite-app:latest                          0.0s
 => => unpacking to docker.io/library/vite-app:latest                       0.0s
ubuntu@ip-172-31-9-197:~$ docker images

IMAGE             ID             DISK USAGE   CONTENT SIZE   EXTRA
vite-app:latest   8c3fb263486a        238MB          63.2MB
ubuntu@ip-172-31-9-197:~$ |
```

4. Run container

```
ubuntu@ip-172-31-9-197:~$ docker run -d -p 8080:80 vite-app
f9b65f4fc331761a6ab9695ab5b67c5a199b23ff6559d574d93359c051dc46d5
ubuntu@ip-172-31-9-197:~$
```

5. Test locally

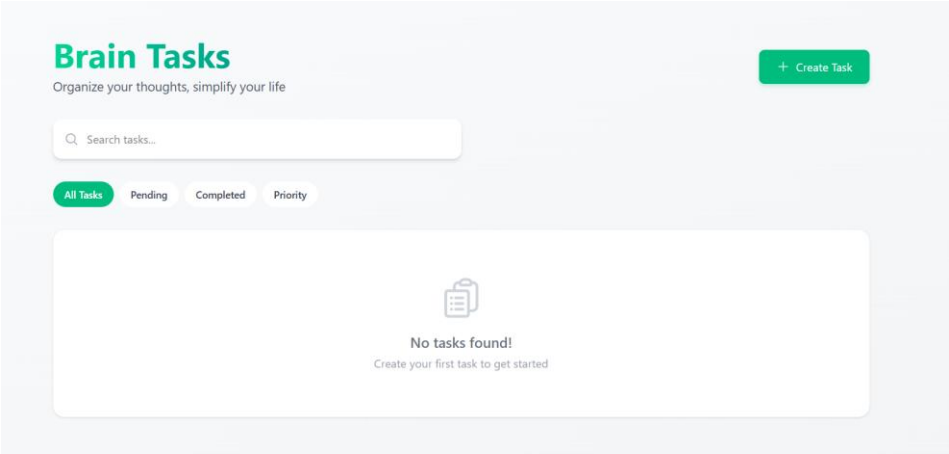

6. Push Image to DockerHub

```
ubuntu@ip-172-31-9-197:~$
docker login

USING WEB-BASED LOGIN

i Info → To sign in with credentials on the command line, use 'docker login -u <
username>'


Your one-time device confirmation code is: TWVW-TQKJ
Press ENTER to open your browser or submit your device code here: https://login.
docker.com/activate

Waiting for authentication in the browser…




WARNING! Your credentials are stored unencrypted in '/home/ubuntu/.docker/config
.json'.
Configure a credential helper to remove this warning. See
https://docs.docker.com/go/credential-store/

Login Succeeded
ubuntu@ip-172-31-9-197:~$
ubuntu@ip-172-31-9-197:~$
ubuntu@ip-172-31-9-197:~$
ubuntu@ip-172-31-9-197:~$ docker tag vite-app dugyalaravali28/vite-app:latest
ubuntu@ip-172-31-9-197:~$ docker push dugyalaravali28/vite-app:latest
The push refers to repository [docker.io/dugyalaravali28/vite-app]
3b09275ecc6f: Pushed
75a1d70aee50: Pushed
ecb4410db37b: Pushed
a9d395129dce: Pushed
206356c42440: Pushed
9eef040df109: Pushed
18a071c04bd1: Pushed
79697674b897: Pushed
df9da45c1db2: Pushed
latest: digest: sha256:8c3fb263486a25b417e3e11cb9f8342f34ab1d73c480484ea6774b025
cb3beee size: 856
ubuntu@ip-172-31-9-197:~$
```

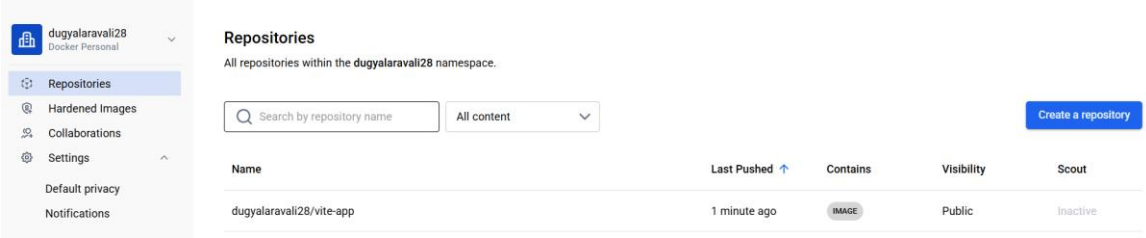

7. Setup Kubernetes Cluster (EKS)

```
ubuntu@ip-172-31-9-197:~$ eksctl create cluster \
--name vote-app-cluster \
--region ap-south-1
2026-03-11 10:16:43 [ℹ]  eksctl version 0.224.0
2026-03-11 10:16:43 [ℹ]  using region ap-south-1
2026-03-11 10:16:43 [ℹ]  setting availability zones to [ap-south-1c ap-south-1b
ap-south-1a]
2026-03-11 10:16:43 [ℹ]  subnets for ap-south-1c - public:192.168.0.0/19 private
:192.168.96.0/19
2026-03-11 10:16:43 [ℹ]  subnets for ap-south-1b - public:192.168.32.0/19 privat
e:192.168.128.0/19
2026-03-11 10:16:43 [ℹ]  subnets for ap-south-1a - public:192.168.64.0/19 privat
e:192.168.160.0/19
```

```
2026-03-11 10:24:44 [ℹ]  creating addon: coredns
2026-03-11 10:24:45 [ℹ]  successfully created addon: coredns
2026-03-11 10:24:45 [!]  recommended policies were found for "vpc-cni" addon, bu
t since OIDC is disabled on the cluster, eksctl cannot configure the requested p
ermissions; the recommended way to provide IAM permissions for "vpc-cni" addon i
s via pod identity associations; after addon creation is completed, add all reco
mmended policies to the config file, under `addon.PodIdentityAssociations`, and
run `eksctl update addon`
2026-03-11 10:24:45 [ℹ]  creating addon: vpc-cni
2026-03-11 10:24:45 [ℹ]  successfully created addon: vpc-cni
2026-03-11 10:24:46 [ℹ]  creating addon: kube-proxy
2026-03-11 10:24:46 [ℹ]  successfully created addon: kube-proxy
```

```
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$ kubectl get nodes
NAME                                           STATUS   ROLES    AGE   VERSION
ip-192-168-46-155.ap-south-1.compute.internal  Ready    <none>   21h   v1.34.4-eks-f69f56f
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$
```

Clusters (1) Info

Delete | Create cluster

Filter clusters

Cluster name	Status	Kubernetes version	Support period	Upgrade policy	Created	Provider
vite-cluster	Active	1.34 Upgrade now	Standard support until December 2, 2026	Extended support	21 hours ago	EKS

8. Creating deployment.yaml and service.yaml files

ubuntu@ip-172-31-9-197: ~

```yaml
apiVersion: apps/v1
kind: Deployment
metadata:
  name: brain-app
spec:
  replicas: 2
  selector:
    matchLabels:
      app: brain-app
  template:
    metadata:
      labels:
        app: brain-app
    spec:
      containers:
      - name: brain-app
        image: dugyalaravali28/vite-app:latest
        ports:
        - containerPort: 80
~
~
~
~
```

```
ubuntu@ip-172-31-9-197: ~
apiVersion: v1
kind: Service
metadata:
  name: brain-service
spec:
  type: LoadBalancer
  selector:
    app: brain-app
  ports:
    - protocol: TCP
      port: 80
      targetPort: 80
~
~
~
~
~
~
~
```

9. Test locally

```
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$ kubectl apply -f deployment.yaml
deployment.apps/brain-app unchanged
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$ kubectl apply -f service.yaml
service/brain-service unchanged
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$ kubectl get svc
NAME            TYPE           CLUSTER-IP       EXTERNAL-IP                                                              PORT(S)        AGE
brain-service   LoadBalancer   10.100.185.151   a2525a7d3f0084e3faa273ca87ba6cb4-958280048.ap-south-1.elb.amazonaws.com   80:32127/TCP   18h
kubernetes      ClusterIP      10.100.0.1       <none>                                                                   443/TCP        21h
ubuntu@ip-172-31-4-49:~/dev/Brain-Tasks-App$
/dev/pty0 [1] @56:045 U+0020
```

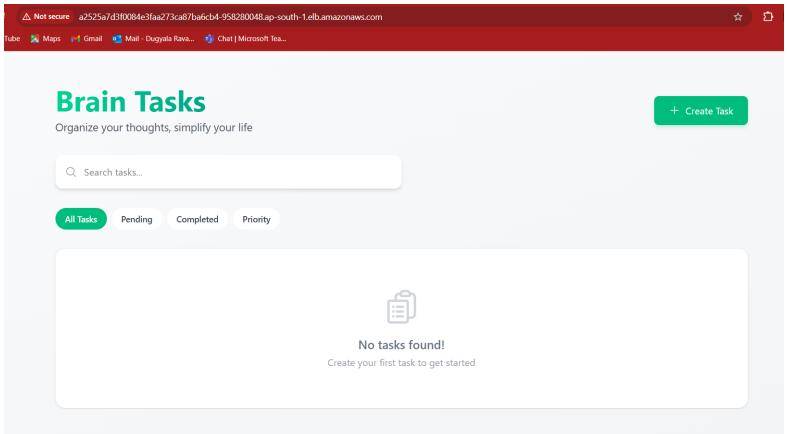

10. Creating buildspec.yml file

```
ubuntu@ip-172-31-9-197: ~
version: 0.2

env:
  variables:
    IMAGE_NAME: dugyalaravali28/vite-app

phases:
  pre_build:
    commands:
      - echo "Logging in to Docker Hub..."
      - echo $DOCKER_PASSWORD | docker login -u $DOCKER_USERNAME --password-stdin

  build:
    commands:
      - echo "Building Docker image..."
      - docker build -t $IMAGE_NAME .
      - docker tag $IMAGE_NAME:latest $IMAGE_NAME:latest

  post_build:
    commands:
      - echo "Pushing image to Docker Hub..."
      - docker push $IMAGE_NAME:latest

      - echo "Updating kubeconfig..."
      - aws eks update-kubeconfig --region eu-west-1 --name brain-cluster

      - echo "Deploying to EKS..."
      - kubectl apply -f deployment.yaml
      - kubectl apply -f service.yaml

artifacts:
  files:
    - '**/*'
~
~
~
~
~
~
```

11. Code pipeline setup

Developer Tools > CodePipeline > Pipelines > Create new pipeline

Step 1
Choose creation option

Step 2
Choose pipeline settings

Step 3
Add source stage

Step 4 - *optional*
Add build stage

Step 5 - *optional*
Add test stage

Step 6
Add deploy stage

Step 7
Review

Choose pipeline settings Info

Step 2 of 7

Pipeline settings

Pipeline name
Enter the pipeline name. You cannot edit the pipeline name after it is created.

vite-pipeline

No more than 100 characters

Execution mode Info
Choose the execution mode for your pipeline. This determines how the pipeline is run.

- Superseded
- Queued
- Parallel

Service role

- New service role — Create a service role in your account
- Existing service role — Choose an existing service role from your account

Role name

AWSCodePipelineServiceRole-us-east-1-vite-pipeline

Type your service role name

☑ Allow AWS CodePipeline to create a service role so it can be used with this new pipeline

Advanced settings

Configure artifact store location, encryption settings, and pipeline variables for your pipeline.

Action name
Choose a name for your action

Source

No more than 100 characters

Action provider

GitHub (via OAuth app)

Grant AWS CodePipeline access to your GitHub repository. This allows AWS CodePipeline to upload commits from GitHub to your pipeline.

Connect to GitHub

Repository Dugyalaravali/Brain-Tasks-App

Branch main

The GitHub (via OAuth app) action is not recommended
The selected action uses OAuth apps to access your GitHub repository. This is no longer the recommended method. Instead, choose the GitHub (via GitHub App) action to access your repository by creating a connection. Connections use GitHub Apps to manage authentication and can be shared with other resources. Learn more

Variable namespace - *optional*
Choose a namespace for the output variables from this action. You must choose a namespace if you want to use the variables this action produces in your configuration. Learn more

SourceVariables

Output artifacts
Choose a name for the output of this action.

SourceArtifact

No more than 100 characters

Cancel Done

Build type

- Single build — Triggers a single build.
- Batch build — Triggers multiple builds as a single execution.

Variable namespace - *optional*
Choose a namespace for the output variables from this action. You must choose a namespace if you want to use the variables this action produces in your configuration. Learn more

BuildVariables

Output artifacts
Choose a name for the output of this action.

BuildArtifact

Add

No more than 100 characters

Action name
Choose a name for your action
Build
No more than 100 characters

Action provider
AWS CodeBuild

Region
Asia Pacific (Mumbai)

Input artifacts
Choose an input artifact for this action. Learn more

SourceArtifact
Defined by: Source
No more than 100 characters

Project name
Choose a build project that you have already created in the AWS CodeBuild console. Or create a build project in the AWS CodeBuild console and then return to this task.
vite-project or Create project

Define buildspec override - *optional*
Buildspec file or definition that overrides the latest one defined in the build project, for this build only.

Environment variables - *optional*
Choose the key, value, and type for your CodeBuild environment variables. In the value field, you can reference variables generated by CodePipeline. Learn more

Name	Value	Type	
DOCKER_USERNAME	dugyalaravali28	Plaintext	Remove
DOCKER_PASSWORD	dckr_pat_KZdSfKIMv98wymWB_Ld9tG	Plaintext	Remove

Action name
Choose a name for your action
Deploy
No more than 100 characters

Action provider
Amazon EKS

Region
Asia Pacific (Mumbai)

Input artifacts
Choose an input artifact for this action. Learn more

SourceArtifact
Defined by: Source
No more than 100 characters

EKS Cluster Name
Choose a name for the EKS cluster.
vite-cluster

Deploy configuration type
Please select deploy configuration type.

- Helm — Helm configuration type
- Kubectl — Kubectl configuration type

Manifest file paths
Enter comma-separated manifest file paths.
deployment.yaml, service.yaml

Kubernetes namespace - *optional*
You can provide a name for the Kubernetes namespace to override the default.

Subnet IDs
Specify the subnet IDs that your compute action will use.

Security group IDs
Specify the security group IDs that your compute action will use.

Environment variables - *optional*
Key value pair that is supplied to actions with managed compute.

Name	Value	
DOCKER_USERNAME	dugyalaravali28	Remove

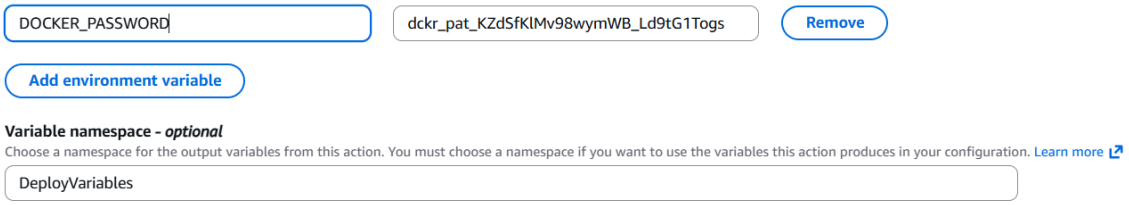

12. Pushing code to github

```
your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 5 files changed, 71 insertions(+), 91 deletions(-)
 create mode 100644 Dockerfile
 delete mode 100644 README.md
 create mode 100644 buildspec.yml
 create mode 100644 deployment.yaml
 create mode 100644 service.yaml
ubuntu@ip-172-31-9-197:~/Brain-Tasks-App$ git push -u origin main
Username for 'https://github.com': Dugyalaravali
Password for 'https://Dugyalaravali@github.com':
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 2 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 1.16 KiB | 1.16 MiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0
remote: This repository moved. Please use the new location:
remote:   https://github.com/Dugyalaravali/Brain-Tasks-App.git
To https://github.com/dugyalaravali/Brain-Tasks-App.git
   d611aeb..3861b04  main -> main
branch 'main' set up to track 'origin/main'.
ubuntu@ip-172-31-9-197:~/Brain-Tasks-App$
```

13. Pipeline trigged

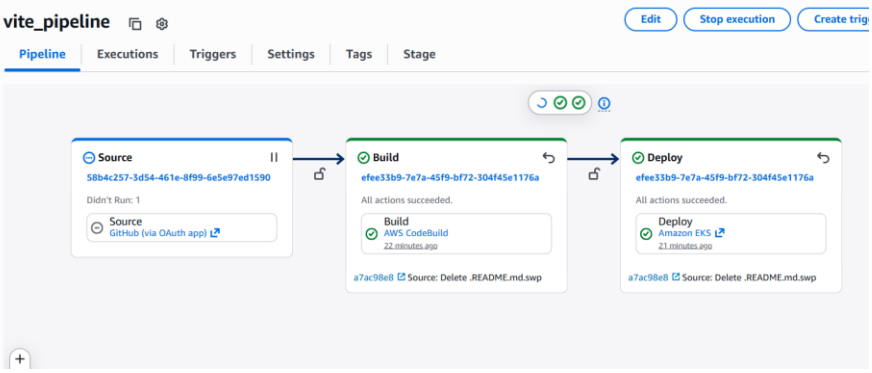

14. Pipeline success and deployed on eks.

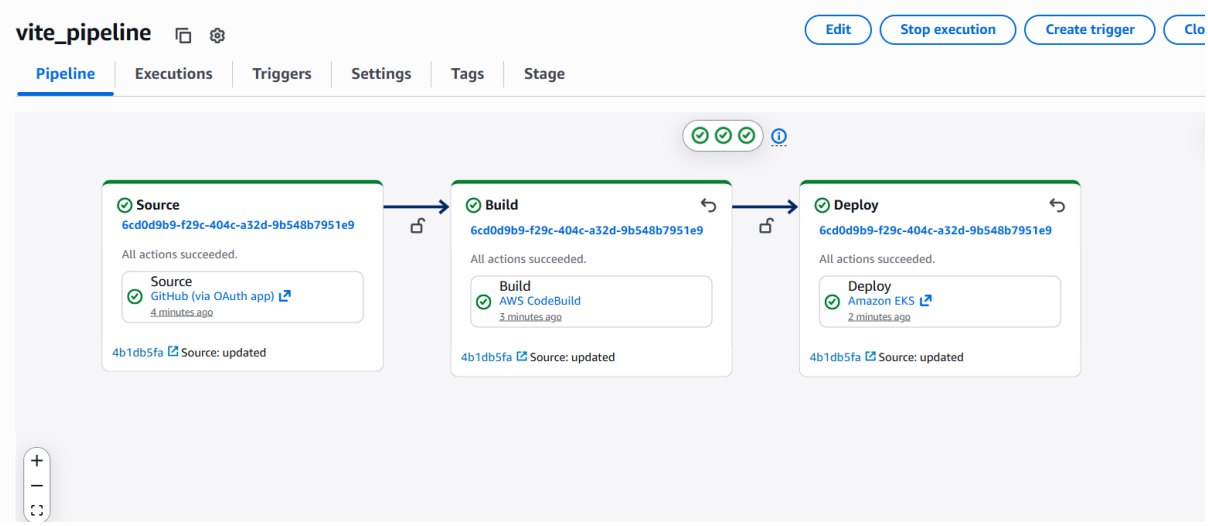

15.checking for external ip.

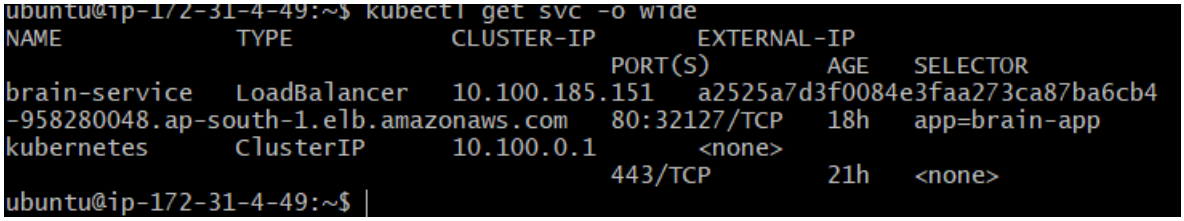

```
ubuntu@ip-172-31-4-49:~$ kubectl get svc -o wide
NAME            TYPE           CLUSTER-IP       EXTERNAL-IP
                                                PORT(S)        AGE    SELECTOR
brain-service   LoadBalancer   10.100.185.151   a2525a7d3f0084e3faa273ca87ba6cb4
-958280048.ap-south-1.elb.amazonaws.com   80:32127/TCP   18h    app=brain-app
kubernetes      ClusterIP      10.100.0.1       <none>
                                                443/TCP        21h    <none>
ubuntu@ip-172-31-4-49:~$
```

16.open external ip in browser.

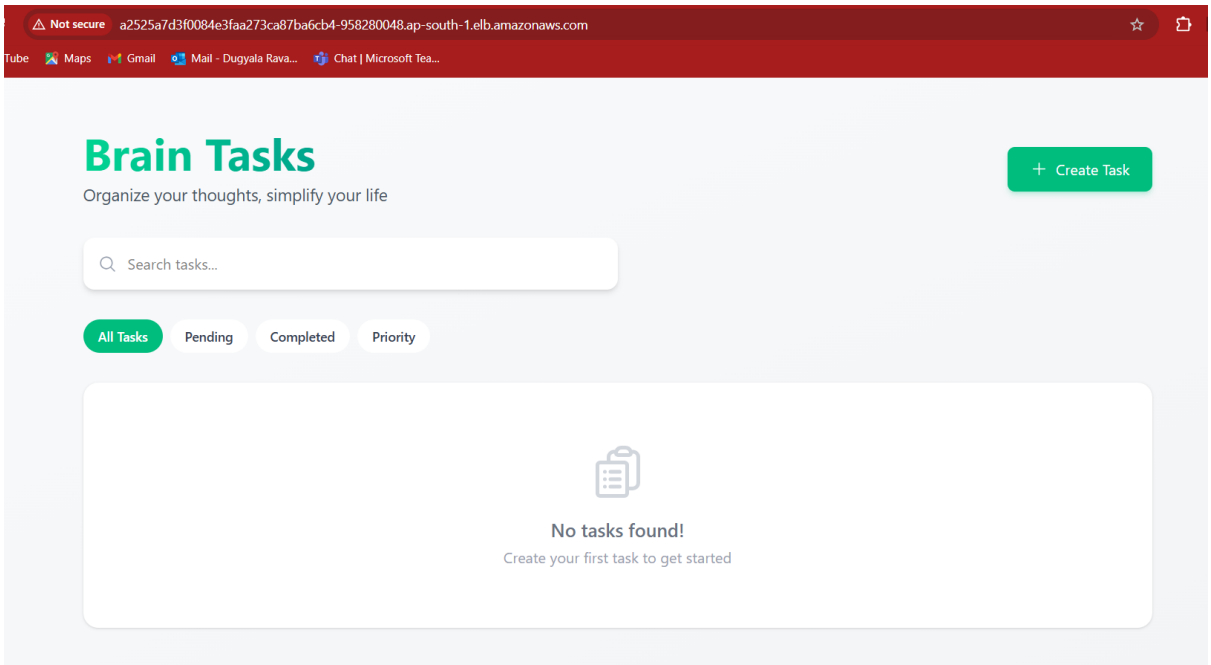

17. cloud watch logs.

Log groups (2)

Actions ▼ | View in Logs Insights | St

By default, we only load up to 10,000 log groups.

Filter log groups or try pattern search | Exact match

Log group	Log class	Anomaly d...	Deleti...	Bearer...	Dat.
/aws/codepipeline/vite_pipeline	Standard	Configure	Off	Off	-
/aws/codebuild/vite-project	Standard	Configure	Off	Off	-

Log events

Actions ▼ | Start tailing

You can use the filter bar below to search for and match terms, phrases, or values in your log events. Learn more about filter patterns

Filter events - press enter to search | Clear | 1m | 30m | 1h | 12h | Custom

Display ▼

Timestamp	Message
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.240299 Running command [-f /tmp/cp-action-source/action-output-variables
2026-04-15T06:26:17.570Z	
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.249940 Running command if [[! -z $CodePipeline_ErrorCode || ! -z $CodePi
2026-04-15T06:26:17.570Z	
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.276874 Phase complete: BUILD State: SUCCEEDED
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.276891 Phase context status code: Message:
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.325218 Entering phase POST_BUILD
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.347555 Phase complete: POST_BUILD State: SUCCEEDED
2026-04-15T06:26:17.570Z	[Container] 2026/04/15 06:26:17.347577 Phase context status code: Message:

No newer events at this moment. *Auto retry paused.* *Resume*

18. application logs.

```
ubuntu@ip-172-31-4-49:~$ kubectl logs --tail=100 brain-app-665d5b9b9d-c46lp
/docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
/docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
/docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf
/docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh
/docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh
/docker-entrypoint.sh: Configuration complete; ready for start up
2026/04/15 01:09:51 [notice] 1#1: using the "epoll" event method
2026/04/15 01:09:51 [notice] 1#1: nginx/1.29.8
2026/04/15 01:09:51 [notice] 1#1: built by gcc 15.2.0 (Alpine 15.2.0)
2026/04/15 01:09:51 [notice] 1#1: OS: Linux 6.12.77-99.140.amzn2023.x86_64
2026/04/15 01:09:51 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 65536:1048576
2026/04/15 01:09:51 [notice] 1#1: start worker processes
2026/04/15 01:09:51 [notice] 1#1: start worker process 31
2026/04/15 01:09:51 [notice] 1#1: start worker process 32
192.168.46.155 - - [15/Apr/2026:01:17:18 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 (iPhone; CPU iPhone OS 13_2_3 like Mac OS X) AppleW
i/604.1" "-"
192.168.46.155 - - [15/Apr/2026:01:41:49 +0000] "\x16\x03\x01\x00\xEE\x01\x00\x00\xEA\x03\x03_\xC4N\x02k\xBA\xE6-X\xB7E\xDAj\xD5\x8D\x04\xC4@
xB3N\x98\x1B\x80\xFE\xEA\xE01\x8B\xDA#dx\xAA\xEFV\x91\xBF\xCC\x13\x00&\xC0+\xC0/\xC0,\xC00\xCC\xA9\xCC\xA8\xC0\x09\xC0\x13\xC0" 400 157 "-" "
192.168.46.155 - - [15/Apr/2026:01:43:52 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 zgrab/0.x" "-"
192.168.46.155 - - [15/Apr/2026:01:50:11 +0000] "GET / HTTP/1.1" 200 603 "-" "Go-http-client/1.1" "-"
192.168.46.155 - - [15/Apr/2026:01:58:06 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 zgrab/0.x" "-"
192.168.46.155 - - [15/Apr/2026:02:08:30 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.cens
192.168.46.155 - - [15/Apr/2026:02:08:34 +0000] "GET /robots.txt HTTP/1.1" 404 153 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://
2026/04/15 02:08:34 [error] 32#32: *341 open() "/usr/share/nginx/html/robots.txt" failed (2: No such file or directory), client: 192.168.46.1
.234.249.118"
```

```
192.168.46.155 - - [15/Apr/2026:04:38:05 +0000] "GET /api-docs HTTP/1.1" 404 153 "-" "Mozilla/5.0" "-"
192.168.46.155 - - [15/Apr/2026:04:38:05 +0000] "GET /swagger.json HTTP/1.1" 404 153 "-" "Mozilla/5.0" "-"
2026/04/15 04:38:05 [error] 32#32: *1240 open() "/usr/share/nginx/html/swagger.json" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /swagger.json HTT
: "13.234.249.118"
192.168.46.155 - - [15/Apr/2026:04:38:06 +0000] "GET /swagger/v1/swagger.json HTTP/1.1" 404 153 "-" "Mozilla/5.0" "-"
2026/04/15 04:38:06 [error] 32#32: *1241 open() "/usr/share/nginx/html/swagger/v1/swagger.json" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /swagg
r.json HTTP/1.1", host: "13.234.249.118"
192.168.46.155 - - [15/Apr/2026:04:46:55 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)" "-"
192.168.46.155 - - [15/Apr/2026:04:46:56 +0000] "GET /favicon.ico HTTP/1.1" 404 153 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)" "-"
2026/04/15 04:46:56 [error] 31#31: *1297 open() "/usr/share/nginx/html/favicon.ico" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /favicon.ico HTTP/
"52.66.162.74"
2026/04/15 04:46:59 [error] 32#32: *1300 open() "/usr/share/nginx/html/robots.txt" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /robots.txt HTTP/1.
2.66.162.74"
192.168.46.155 - - [15/Apr/2026:04:46:59 +0000] "GET /robots.txt HTTP/1.1" 404 153 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)" "-"
192.168.46.155 - - [15/Apr/2026:04:47:01 +0000] "\x16\x03\x01\x00\xEE\x01\x00\x00\xEA\x03\x03V\x05\x8A\x1D\xF1\xDC\xBF\xDE3\xAD\x1Cc\xF7s\x885g\x85\xB63\xA7!A%-b\x09\xB5\x98-\xEF\xE6 \x8C\x12\xC1u<\
\x85\xC5\xC6\xFFy/\xB1\xEF\xF3\x1C3\xFBr$U\xE2C\xB3\xDB\x94\xF9K$\x00&\xCC\xA8\xCC\xA9\xC0/\xC00\xC0+\xC0,\xC0\x13\xC0\x09\xC0\x14\xC0" 400 157 "-" "-" "-"
192.168.46.155 - - [15/Apr/2026:05:16:47 +0000] "GET /assets/index-DPTLVrPB.css HTTP/1.1" 200 20448 "http://a2525a7d3f0084e3faa273ca87ba6cb4-958280048.ap-south-1.elb.amazonaws.com/" "Mozilla/5.0 (Wi
0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/147.0.0.0 Safari/537.36" "-"
192.168.46.155 - - [15/Apr/2026:05:19:26 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 zgrab/0.x" "-"
192.168.46.155 - - [15/Apr/2026:05:26:35 +0000] "GET / HTTP/1.1" 200 603 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)" "-"
192.168.46.155 - - [15/Apr/2026:05:26:36 +0000] "PRI * HTTP/2.0" 400 157 "-" "-" "-"
192.168.46.155 - - [15/Apr/2026:05:26:36 +0000] "\x16\x03\x01\x00\xEE\x01\x00\x00\xEA\x03\x03\xE1\x90wM?sv\xF1E\x84\x95\xBC\xDF\x83m>\xBCM_O;\x86\xCC\x19\xD6\x80w\x90W\xCC\xA9l ~\x82\xB1\x7F>o\x08\x
xC6\xE4\x12{t\xAFret\xB7\xCEx\xBE\xC6a\xE5\xC2\xEE&c\xD9\x00&\xCC\xA8\xCC\xA9\xC0/\xC00\xC0+\xC0,\xC0\x13\xC0\x09\xC0\x14\xC0" 400 157 "-" "-" "-"
2026/04/15 05:26:40 [error] 31#31: *1541 open() "/usr/share/nginx/html/sitemap.xml" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /sitemap.xml HTTP/
"13.234.249.118"
192.168.46.155 - - [15/Apr/2026:05:26:40 +0000] "GET /sitemap.xml HTTP/1.1" 404 153 "-" "Mozilla/5.0 (compatible; CensysInspect/1.1; +https://about.censys.io/)" "-"
2026/04/15 05:58:34 [error] 32#32: *1747 open() "/usr/share/nginx/html/.env" failed (2: No such file or directory), client: 192.168.46.155, server: localhost, request: "GET /.env HTTP/1.1", host: "S
192.168.46.155 - - [15/Apr/2026:05:58:34 +0000] "GET /.env HTTP/1.1" 404 555 "-" "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/116.0.5845.140 Safari/537.36
ubuntu@ip-172-31-4-49:~$
/dev/pty0 11,056:025 U+0026
```