Task

Task: Create a simple script file and push it to repo. Create a project in Jenkins connected to your GitHub repository. When a commit is made to your repo, automatically build must get triggered from Jenkins and the output must be shared to me via email.

1. Create a Simple Script File

```
ubuntu@ip-172-31-9-49:~$ vi sample script
2 files to edit
ubuntu@ip-172-31-9-49:~$ chmod +x sample script
chmod: cannot access 'script': No such file or directory
ubuntu@ip-172-31-9-49:~$ chmod +x sample script
chmod: cannot access 'script': No such file or directory
ubuntu@ip-172-31-9-49:~$ vi sample script
2 files to edit
ubuntu@ip-172-31-9-49:~$ ls
sample
ubuntu@ip-172-31-9-49:~$ chmod +x sample
```

ubuntu@ip-172-31-0-14: ~

```
#!/bin/bash
echo "Build Process Started..."
echo "Running tests..."
echo "Build Successful at $(date)"
~
~
~
~
~
```

2. Push Script to GitHub Repository

```
ubuntu@ip-172-31-9-49:~$ git init
hint: Using 'master' as the name for the initial branch. This default branch nam
e
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/ubuntu/.git/
ubuntu@ip-172-31-9-49:~$ git add sample
ubuntu@ip-172-31-9-49:~$ git commit -m "testing"
[master (root-commit) 3e1161e] testing
 Committer: Ubuntu <ubuntu@ip-172-31-9-49.eu-north-1.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 3 insertions(+)
 create mode 100755 sample
ubuntu@ip-172-31-9-49:~$ git branch -M main
```

```
ubuntu@ip-172-31-9-49:~$ git push origin main
Username for 'https://github.com': Dugyalaravali
Password for 'https://Dugyalaravali@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 290 bytes | 290.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Dugyalaravali/jenkin
 * [new branch]      main -> main
ubuntu@ip-172-31-9-49:~$
```

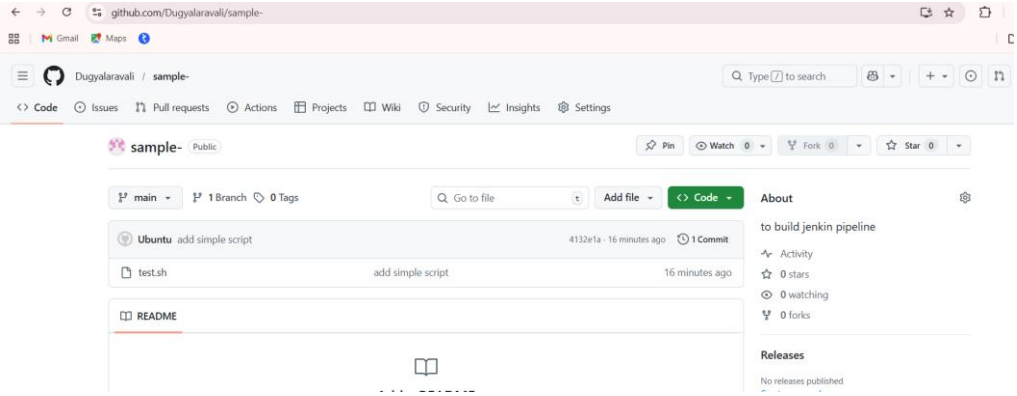

3. Add a Jenkinsfile to Your Repo

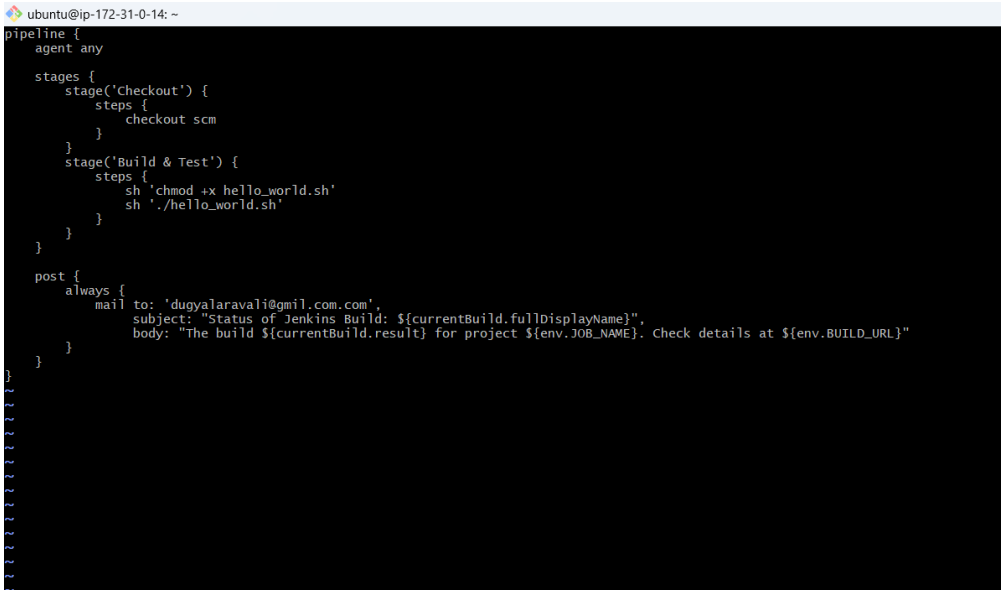

```
ubuntu@ip-172-31-0-14: ~
pipeline {
    agent any

    stages {
        stage('Checkout') {
            steps {
                checkout scm
            }
        }
        stage('Build & Test') {
            steps {
                sh 'chmod +x hello_world.sh'
                sh './hello_world.sh'
            }
        }
    }

    post {
        always {
            mail to: 'dugyalaravali@gmil.com.com',
                 subject: "Status of Jenkins Build: ${currentBuild.fullDisplayName}",
                 body: "The build ${currentBuild.result} for project ${env.JOB_NAME}. Check details at ${env.BUILD_URL}"
        }
    }
}
~
~
~
```

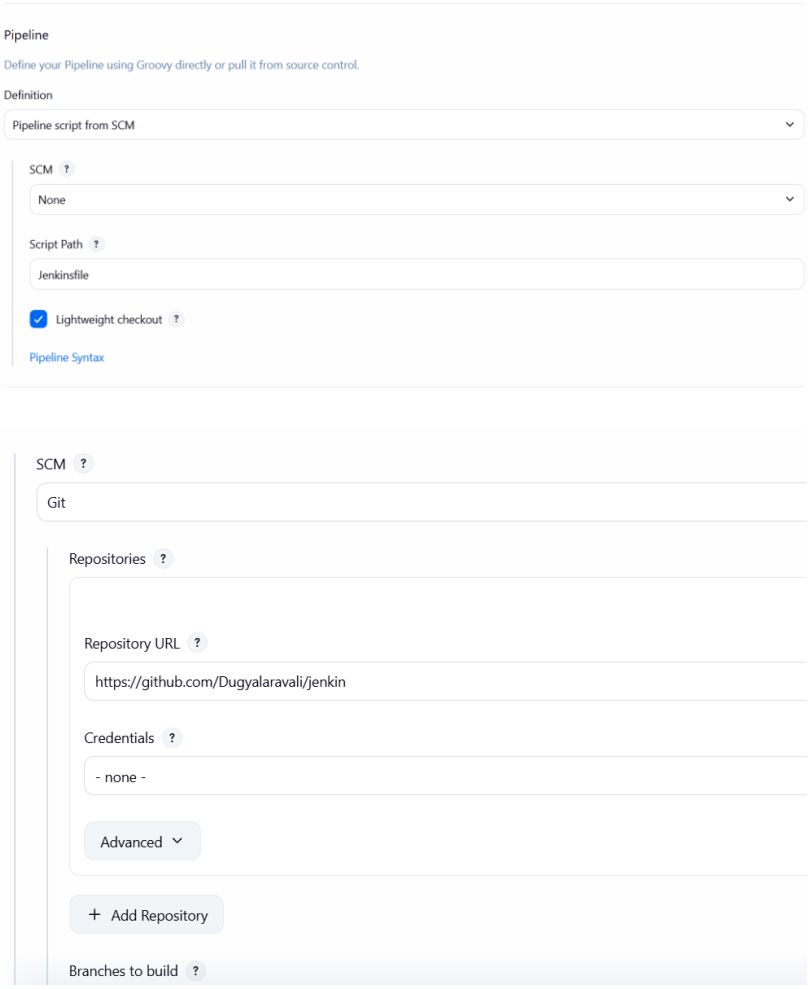

5. Configure a webhook in your GitHub repo:

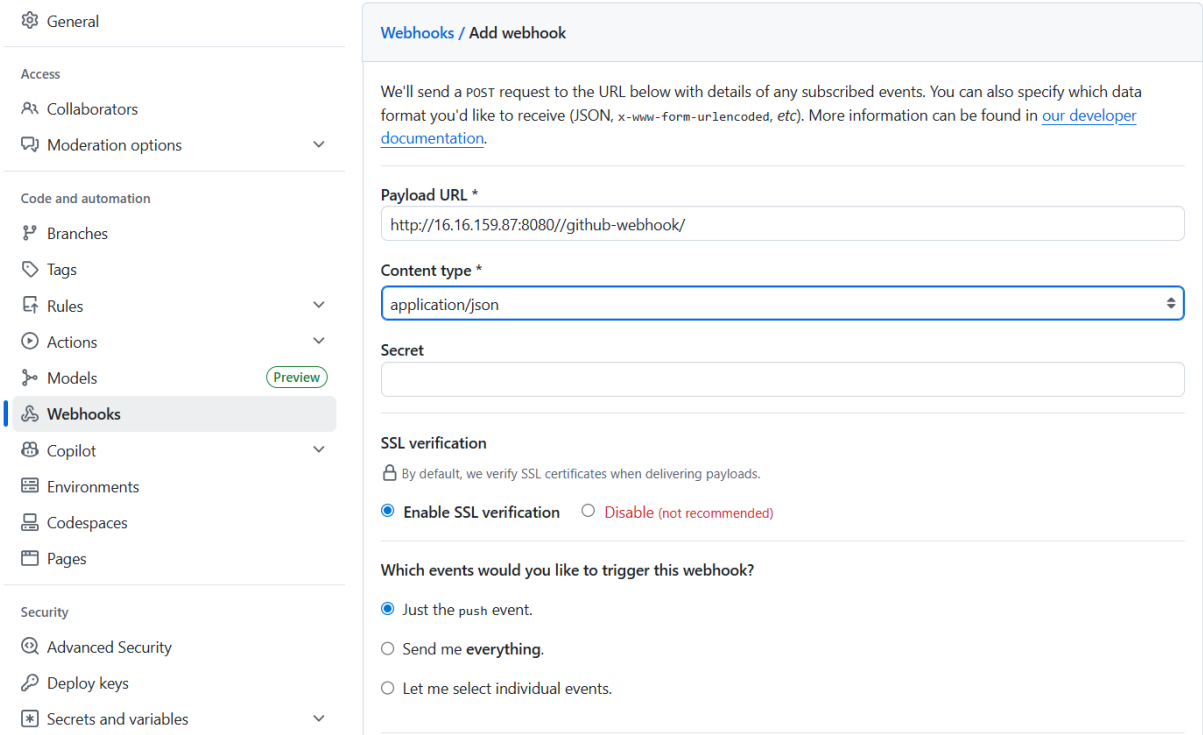

6. Install Required Jenkins Plugins

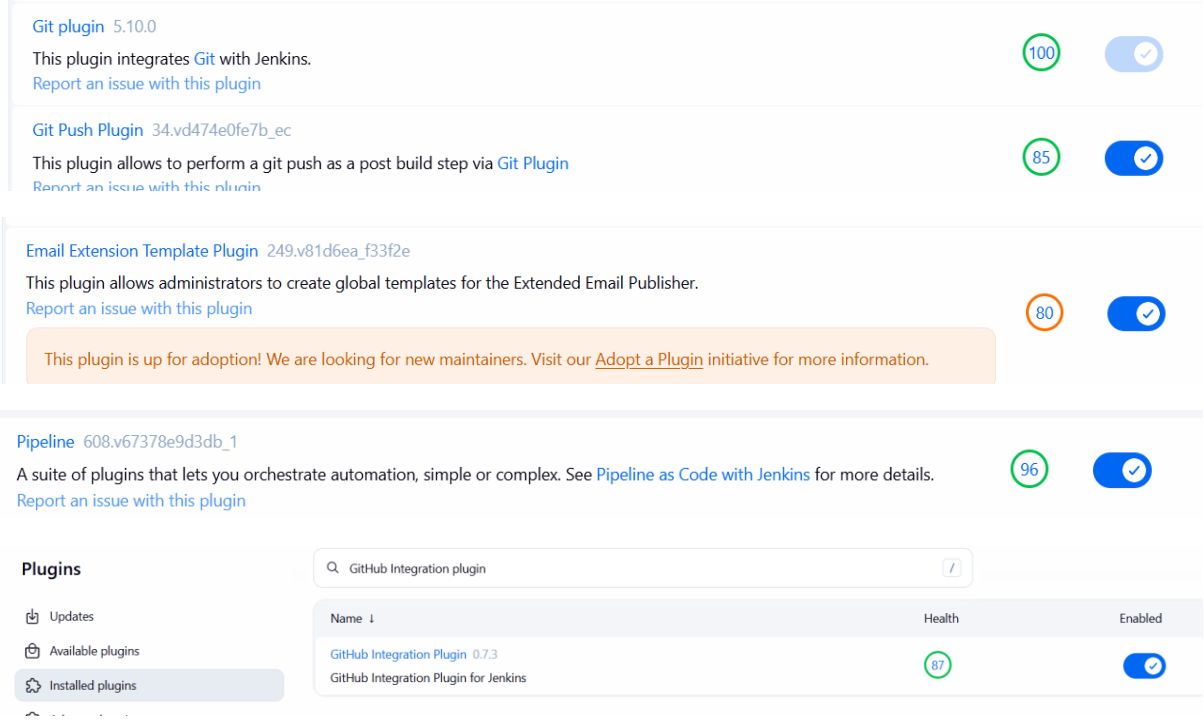

7. Configure Email in Jenkins (SMTP)

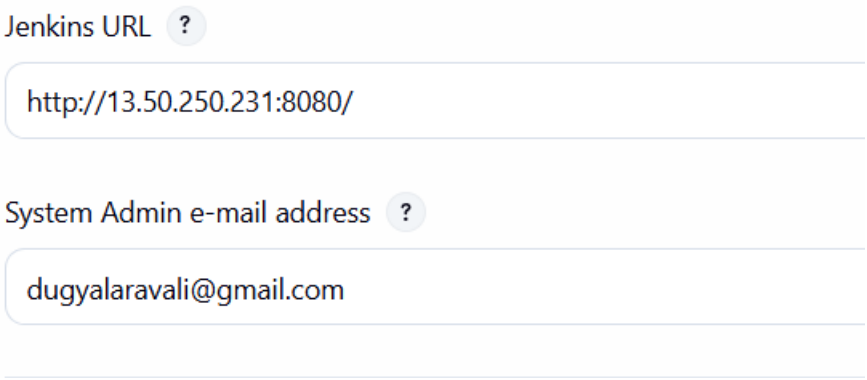

Extended E-mail Notification

SMTP server

smtp.gmail.com

SMTP Port

465

Advanced ^ Edited

Credentials

dugylaravali@gmail.com/******

- [x] Use SSL
- [ ] Use TLS
- [ ] Use OAuth 2.0

8. Test the pipeline

```
ubuntu@ip-172-31-3-51:~$ cd jenkins-ci-demo
ubuntu@ip-172-31-3-51:~/jenkins-ci-demo$ echo "echo 'Second commit test'" >> build.sh
ubuntu@ip-172-31-3-51:~/jenkins-ci-demo$ git add build.sh
ubuntu@ip-172-31-3-51:~/jenkins-ci-demo$ git push origin main
Username for 'https://github.com': dugyalaravali
Password for 'https://dugyalaravali@github.com':
```

Jenkins / github-jenkins-demo / #7

- Changes
- Console Output
- Edit Build Information
- Delete build '#7'
- Timings
- Git Build Data
- Previous Build

```
Started by user Dugyala Ravali
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/github-jenkins-demo
The recommended git tool is: NONE
No credentials specified
 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/github-jenkins-demo/.git # timeout=10
Fetching changes from the remote Git repository
 > git config remote.origin.url https://github.com/Dugyalaravali/jenkins-ci-demo # timeout=10
Fetching upstream changes from https://github.com/Dugyalaravali/jenkins-ci-demo
 > git --version # timeout=10
 > git --version # 'git version 2.43.0'
 > git fetch --tags --force --progress -- https://github.com/Dugyalaravali/jenkins-ci-demo +refs/heads/*:refs/remotes/origin/* # timeout=10
 > git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 8ee7b6d17acc577d37127287fe1d5458b13747f1 (refs/remotes/origin/main)
 > git config core.sparsecheckout # timeout=10
 > git checkout -f 8ee7b6d17acc577d37127287fe1d5458b13747f1 # timeout=10
Commit message: "updated"
 > git rev-list --no-walk 8ee7b6d17acc577d37127287fe1d5458b13747f1 # timeout=10
No emails were triggered.
[github-jenkins-demo] $ /bin/sh -xe /tmp/jenkins13978824299141987111.sh
+ chmod +x build.sh
+ ./build.sh
Build Started...
Mon Mar  9 11:17:22 UTC 2026
Hello, Jenkins CI Pipeline!
Build Completed Successfully!
Email was triggered for: Always
Email was triggered for: Success
Sending email for trigger: Always
Sending email to: dugyalaravali@gmail.com
Sending email for trigger: Success
Sending email to: dugyalaravali@gmail.com
Finished: SUCCESS
```