

Leibniz University Hannover
School of Economics and Management
Institute of Banking and Finance

Hedge Funds: Trading Strategies and Performance Evaluation (Belegnummer: 374040)

Thema:

Thesis Title

Prüfer: Prof. Dr. Maik Dierkes
Betreuer: M.Sc. Sebastian Schrön

vorgelegt von:

Name:	Max Mustermann	Melissa Musterfrau	Maxi Musterperson
Anschrift:	Königsworther Platz 1 30167 Hannover	Königsworther Platz 2 30167 Hannover	Königsworther Platz 3 30167 Hannover
Studiengang:	Wirtschaftswissenschaft	Wirtschaftswissenschaft	Wirtschaftswissenschaft
Fachsemester:	1	2	3
Matrikelnummer:	1234567	7654321	1235813

Hannover, den 31.03.2022

Table of Contents

1	Introduction	1
2	Language	1
2.1	Switch from English to German	1
2.2	RStudio spell-checking	1
3	Equations	2
3.1	Inline equations	2
3.2	Block equations	2
4	Figures and Tables	3
4.1	Figures	3
4.1.1	Figures from local files or the internet	3
4.2	Figures from R plots	3
4.3	Tables	4
4.3.1	kable	4
4.3.2	Markdown tables	5
4.3.3	LaTeX tables	6
4.3.4	Tables generator	6
5	Citations	7
5.1	Citations in Markdown	7
5.2	Footnotes	7
5.3	Generating a bib-file and bib-keys	7
6	Debugging	9
6.1	Debugging R Code	9
6.2	Debugging LaTeX issues	10
7	Additional LaTeX features	10
8	How to get started	10
A	Contributions	11
	Literature	12

List of Tables

1	Example Table with kable.	5
2	Example Table in Markdown.	5
3	Example Table in LaTeX.	6

List of Figures

1	Example figure, Source: Allison Horst.	4
2	A dangerous animal. Source: Allison Horst.	5
3	Creating a Zotero bibliography.	8
4	Faces of debugging. Source: Allison Horst.	9
5	Debugging LaTeX errors.	10

1 Introduction

This simplified RMarkdown template is designed for students at the Leibniz University Hannover (LUH) to prepare their (seminar) thesis. The cover sheet and the statutory declaration (ehrenwörtliche Erklärung) are in compliance with the requirements of the Student Dean's office. Margins, font size and citation style are in line with the formal guidelines of the Institute of Banking and Finance and may be adapted to the requirements at other LUH institutes.

This document is structured as a main document (Thesis.Rmd) with several child documents which are the main chapters. To knit the document, always knit the master document Thesis.Rmd. The code chunks

```
“{r child=‘01_Introduction.Rmd’}”
```

will then tell RMarkdown to include the child document “01_Introduction.Rmd” in the **same** folder as the main document.

This is optional, as you can easily write the chapters in the main document, but it helps separating chapters between group members. Note that the chapters will not compile individually!

2 Language

2.1 Switch from English to German

This template supports theses in German and English. To switch between them, use the **lang** parameter in the yaml header. To write in American English (German), use “en-us” (“de”). This affects the name of the table of contents, list of figures, list of tables and the statutory declaration. However, this does not change the title of the references, this has to be adapted manually.

2.2 RStudio spell-checking

From RStudio 1.3 upwards, the RStudio IDE offers live spell checking. To change it from English to German, go to Tools -> Global Options -> Spelling and change the main dictionary to German. Live spelling doesn't work for German (new) just yet, but in most cases, the German dictionary will suffice. Make sure to check “use

live spell checking” after changing the dictionary. The change will affect the output after you save the document. In order to install a full German dictionary for spelling suggestions, follow these steps:

1. Download the German dictionary files `de_DE_frami.aff` and `de_DE_frami.dic` from the libreoffice repository (free!).
2. Click [here](#) to add them to RStudio by copying them into the correct folder. This depends on your operating system, but the explanation on the website is pretty thorough.

3 Equations

3.1 Inline equations

RMarkdown and LaTeX are the perfect combination for theses with math equations. In this case, RMarkdown relies on the syntax of LaTeX when typesetting equations, so it is hard to distinguish between the two languages. To add an equation to the text, simply use $e = mc^2$. There are many more expressions, just download the corresponding cheat sheet:

LaTeX cheat sheet

3.2 Block equations

Sometimes, equations are too central to be written in a line of text. In this case, use block equations. RMarkdown does this by doing the following:

```
$$ \overline{x} = \frac{1}{N} \sum_{i = 1}^N x_i $$
```

Once you write it outside a code chunk, RMarkdown is setting the equation for you:

$$\overline{x} = \frac{1}{N} \sum_{i=1}^N x_i$$

This has one major disadvantage, namely that there are no numbers for the equations. Numbered equations are useful if you want to refer to the equation later on.

Since the syntax above is 99% LaTeX anyway, just use the native LaTeX equation environment:

```
\begin{equation}
  \label{equation_arithmetic_mean}
  \overline{x} = \frac{1}{N} \sum_{i = 1}^N x_i
\end{equation}
```

The result is the same, but you get a numbered equation:

$$\bar{x} = \frac{1}{N} \sum_{i=1}^N x_i \tag{1}$$

If you want to deactivate enumeration, use `equation*` within the braces. Use the label to refer to this important equation by using `\eqref{label}`.¹ Equation (1) is the arithmetic mean. There are other equation environments, e.g. `array` for more complicated expressions.

4 Figures and Tables

4.1 Figures

4.1.1 Figures from local files or the internet

Figures and tables are important tools to present results or illustrate important aspects of your thesis. Just as LaTeX, Word, OpenOffice or Pages, RMarkdown allows you to include figures from files such as .png or .pdf or websites. The syntax is quite simple, just use

```
! [Caption] (Source){width=100%}
```

The source can be a file on your computer like in the example below, or a web address.

4.2 Figures from R plots

Thanks to the unique combination of R Code and text, you can also directly present R plots and add a caption. Just see this example:

¹`\eqref{label}` directly wraps the equation number with parentheses. `\ref{label}` can be used for all kinds of cross-referencing. This is pure LaTeX, doing this in Markdown would require additional packages.



Figure 1: Example figure, Source: Allison Horst.

```
data <- read.csv(sharkdata)
plot(data$x, data$y, xlab = "", ylab = "")
```

Rather than using `{width=75%}` to control the size of the figure, just use the chunk options above. In most cases this is trial and error to get the looks right², so feel free to change the settings above. Note that the figure won't necessarily show up right below the chunk in order to manage the space efficiently.

4.3 Tables

4.3.1 kable

Tables are another important tool to present information. RMarkdown provides several ways to include tables. A simple way to print data frames – for example a table with summary statistics – is the `knitr` function `kable` (presumably stands for “knit table”).

```
example_data <- read.csv("DATA/example_data.csv")
kable(example_data,
      booktabs = TRUE,
```

²For example, the shark looks far less dangerous (chubby, even), if you use `fig.height = 5` above.

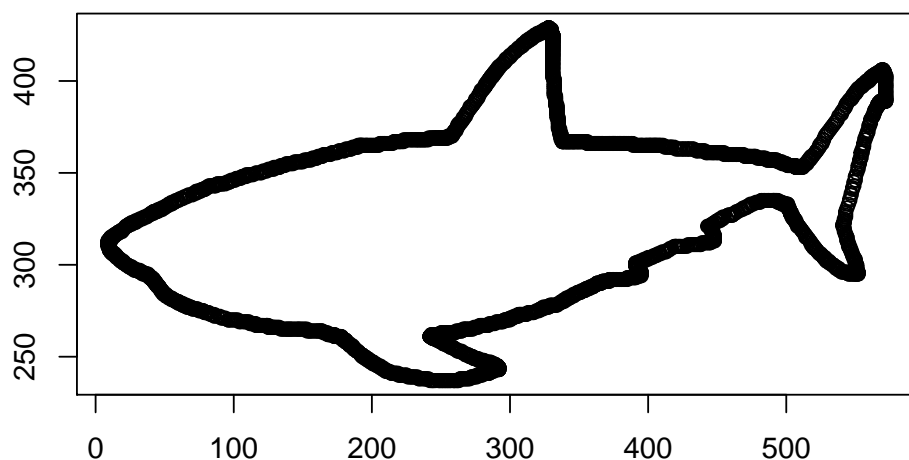


Figure 2: A dangerous animal. Source: Allison Horst.

```
digits = 2,
caption = "Example Table with kable.")
```

Table 1: Example Table with kable.

STOCK	MEAN	VOLATILITY	MIN	MAX
A	0.10	0.25	-0.25	0.25
B	0.25	0.10	-0.10	0.15
C	0.07	0.15	-0.15	0.20
D	0.00	0.05	-0.05	0.05

The option `booktabs = TRUE` uses the LaTeX `booktabs` package which produces nice tables without vertical lines. The option `digits= 2` should be self-explanatory. To see more options, visit the documentation for `kable` or use the help function in your R console.

4.3.2 Markdown tables

Markdown comes with a native syntax to set tables which is different from LaTeX or html, but very simple. Just to give you an example:

```

      5
| A          | Simple      | Table |
|-----|:-----:|-----:|
| First col. | left-aligned | More  |
```


A	Simple	Table
Second col.	centered	data
Third col.	right-aligned	here

4.3.3 LaTeX tables

If you are used to LaTeX already, it might be natural to continue using LaTeX syntax for tables. RMarkdown supports this.

```
\begin{table}[]
  \caption{Example Table in LaTeX.}
  \begin{tabular}{lcr}
    \toprule
    A          & LaTeX          & Table \\ \midrule
    First col. & left-aligned   & More   \\
    Second col. & centered       & data   \\
    Third col. & right-aligned  & here
  \end{tabular}
\end{table}
```

Once you write this outside a chunk, this is how it will turn out:

Table 3: Example Table in LaTeX.

A	LaTeX	Table
First col.	left-aligned	More
Second col.	centered	data
Third col.	right-aligned	here

LaTeX tables come with a nice option called floats. By adding `!htp` between the brackets in `\begin{table}[!htp]`, you can tell LaTeX to put the table (h)ere, at the (t)op of the page or on its own (p)age. Those options will be prioritized in this order.

4.3.4 Tables generator

Setting the tables manually is quite difficult. The website tablesgenerator.com is a nice interface to paste information into tables and make adjustments such as alignments

etc. You can choose between LaTeX and Markdown tables, the functionalities of LaTeX are a little more advanced.

5 Citations

5.1 Citations in Markdown

For in-text citations, simply use `@bib_key`, where the `bib_key` is the key of your reference in the bibliography (explained below). For example, `@wickham_r_2016` will produce the following: Wickham & Grolemund (2016) is an outstanding introduction to data science with R.

To cite in parentheses, just wrap the bib-key in squared brackets `[@wickham_r_2016]`. You can add multiple entries by separating them with a comma and also write text before and after the reference, for example `[see @wickham_r_2016, p. 109]`.³ The following example illustrates this:

A three factor model including a size and a value factor improves the explanatory power of the CAPM (see Fama & French, 1993, p. 4.).

5.2 Footnotes

Instead of citing in parentheses, we recommend citation in footnotes. This is not mandatory, as long as you cite properly and include the pages. To include a footnote, just write `^[Content of the footnote]` and add the citation without the parentheses in the footnote, e.g.: `^[See @fama_common_1993, p. 4.]`. In your thesis, this should look as follows:

A three factor model including a size and a value factor improves the explanatory power of the CAPM.⁴

5.3 Generating a bib-file and bib-keys

In this example, the references are in the example file for the bibliography which come with the template. Once you start working on your thesis, you have to add your own literature to the bibliography, this requires a certain syntax. Instead of

³Note that LaTeX citation, i.e. `\cite{}` and `\citep{}` are also fully supported.

⁴See Fama & French (1993), p. 4

creating the bib-file manually, I recommend a reference manager. The easiest options are Zotero and Jabref. I recommend Zotero, because future RStudio releases will support Zotero directly (unfortunately, we're not there yet).

To organize your library in Zotero, you can drag and drop pdf files or add new entries with common indicators such as ISBN or DOI. Once you gathered all the literature, just highlight the references, click right -> Export Items to get to the following menu:

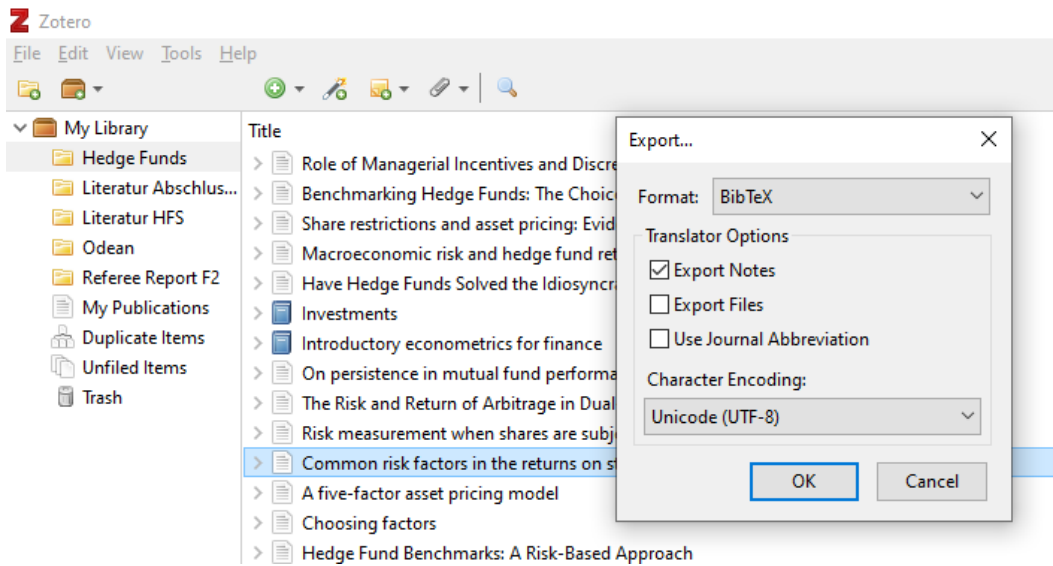


Figure 3: Creating a Zotero bibliography.

Then select “BibTex” to save the .bib file in the folder BIB. Just adapt the bibliography: `BIB/example_bibliography.bib` statement in the header to use your file and you're done.

One important drawback is that you have to use the key instead of the full title. Zotero creates bib-keys in the following way:

1. First author (last name)
2. First word of the title
3. Year of the reference.

Each element is separated with `_`. Just look up `@fama_common_1993` in the bibliography below to see that. For now, it is straightforward to have the bib-file open in a text editor and copy the entries manually. A direct support in RStudio is on the way. **Note: Make sure to maintain the references in Zotero (reference type, authors etc.) to export them correctly to the bib-file.**

6 Debugging

6.1 Debugging R Code

While the advantages of this template are obvious (looks great, convenient support of equations, tables and figures), programming is prone to errors which won't happen if you work with WYSIWYG software (e.g. Word). Even worse, the combination of R Code and text in this document has two sources of error, that is the R Code itself and the typesetting RMarkdown/LaTeX.

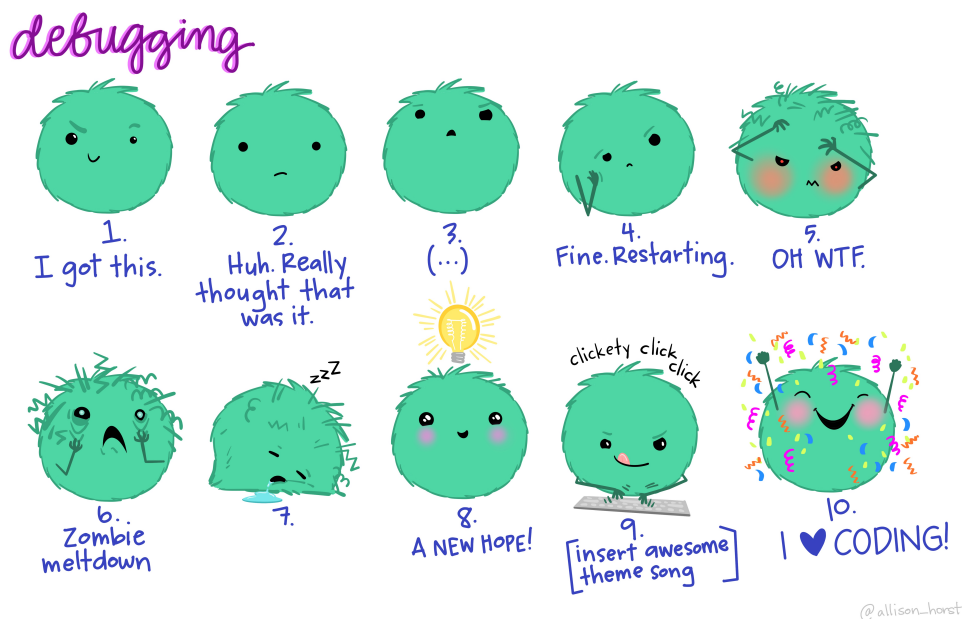



Figure 4: Faces of debugging. Source: Allison Horst.

When you want to knit the document, these two sources of error can be annoying. First, it is reasonable to rule out R errors. To do this, run each chunk separately by clicking on the play button on the top right or press `Ctrl+Shift+Enter` in the chunk. The output below will tell you if the chunk runs smoothly. Make sure to eradicate all potential R errors this way.⁵ **Either way, make sure to tread the error message closely, pasting the error text to Google is usually helpful.**

⁵A common error which won't show up this way happens if you have a pipe `%>%` at the end of a code chunk.

6.2 Debugging LaTeX issues

Unfortunately, the error messages for LaTeX errors are not always straightforward, users typically separate informative from non-informative errors. In most cases, the errors are helpful, for example:

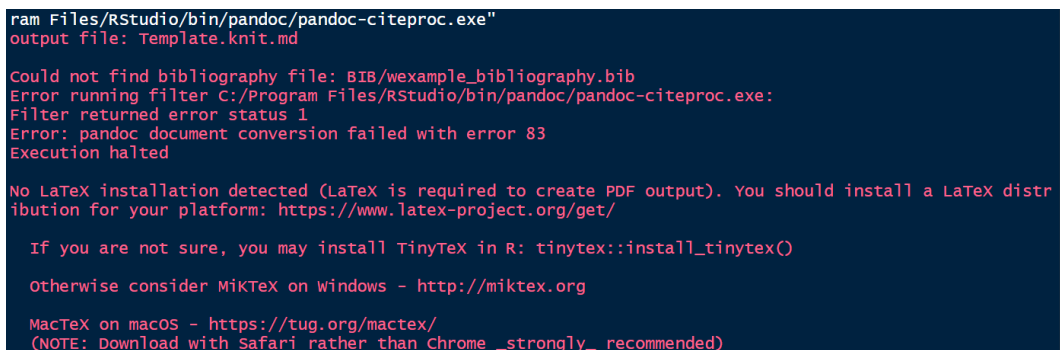A screenshot of a terminal window with a dark blue background and light blue text. The text shows the command 'pandoc -c Files/RStudio/bin/pandoc/pandoc-citeproc.exe' being run, followed by an error message: 'Could not find bibliography file: BIB/wexample_bibliography.bib'. It then states 'Error running filter C:/Program Files/RStudio/bin/pandoc/pandoc-citeproc.exe: Filter returned error status 1' and 'Error: pandoc document conversion failed with error 83'. Finally, it says 'Execution halted' and provides instructions on how to install LaTeX, including links for TinyTeX, MiKTeX, and MacTeX.

```
ram Files/RStudio/bin/pandoc/pandoc-citeproc.exe"
output file: Template.knit.md

Could not find bibliography file: BIB/wexample_bibliography.bib
Error running filter C:/Program Files/RStudio/bin/pandoc/pandoc-citeproc.exe:
Filter returned error status 1
Error: pandoc document conversion failed with error 83
Execution halted

No LaTeX installation detected (LaTeX is required to create PDF output). You should install a LaTeX distr
ibution for your platform: https://www.latex-project.org/get/

If you are not sure, you may install TinyTeX in R: tinytex::install_tinytex()

otherwise consider MiKTeX on Windows - http://miktex.org

MacTeX on macOS - https://tug.org/mactex/
(NOTE: Download with Safari rather than Chrome _strongly_ recommended)
```

Figure 5: Debugging LaTeX errors.

“Could not find bibliography file: BIB/wexample_bibliography.bib” means that there is probably something wrong with the bib-file I provided, there is obviously a typo. Unfortunately, RMarkdown **almost always** tells you that you have no LaTeX installation. This is not true if you followed the instructions before downloading this template.

7 Additional LaTeX features

Some experienced LaTeX users might feel that the basic functions of this template are insufficient. To add packages, just add them to the extra dependencies in the header in the following way:

```
extra_dependencies:
  - dcolumn
  - newpackage1
  - newpackage2
```

8 How to get started

Now to get started and put this template to use, just save it in your working directory, get rid of all the stuff above and start with your thesis. This document is work in

progress, so if you encounter any unsolvable issues, write an e-mail to Sebastian Schrön

A Contributions

If your thesis needs an appendix, simply use `\appendix` to separate the main body of your thesis from the appendix. The sections will have alphabetic enumeration instead of Arabic numbers to indicate appendices. Ideally, use `\newpage` to start the appendix on a new page.

If you write as a group, one appendix should be dedicated to the contribution of each student. Please edit the following table accordingly to highlight which student contributed to which section:

Section	Student
1	Melissa Musterfrau
2.1	Maxi Musterperson
2.2	Maxi Musterperson
3.1	Max Mustermann
...	...

Hint: Use the [tablesgenerator.com](https://www.tablesgenerator.com) for this table.

Finally, please state whether you want a joint or individual evaluation of your thesis by altering the following sentence:

We decided for a joint evaluation of the thesis.

Literature

Fama, E. F., & French, K. R. (1993). Common risk factors in the returns on stocks and bonds. *Journal of Financial Economics*, 33(1), 3–56.

Wickham, H., & Grolemund, G. (2016). *R for data science: Import, tidy, transform, visualize, and model data* (First Ed). Sebastopol, CA: O'Reilly.

Statutory Declaration

Hiermit versichere ich, dass ich die vorliegende Arbeit selbständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt habe, dass alle Stellen der Arbeit, die wörtlich oder sinngemäß aus anderen Quellen übernommen wurden, als solche kenntlich gemacht habe und dass die Arbeit in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegt wurde.

Ort, Datum

Max Mustermann

Ort, Datum

Melissa Musterfrau

Ort, Datum

Maxi Musterperson