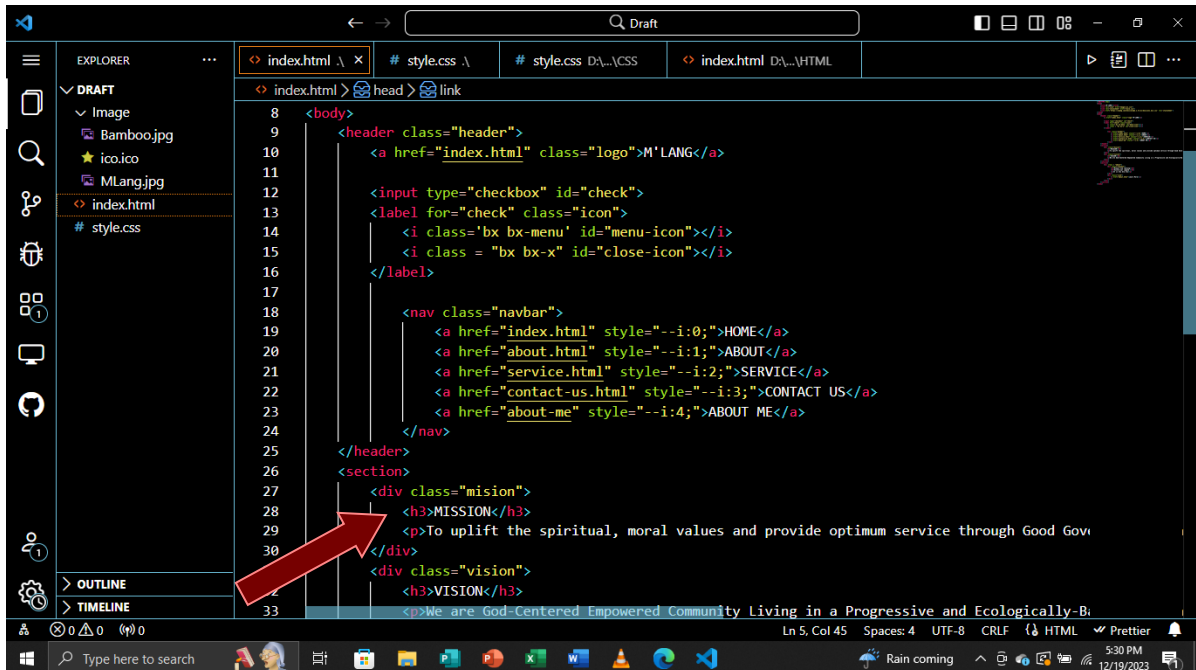# Challenge #7: Block, Inline, Class, and Id

According to w3school, A block-level element always starts on a new line, and the browsers automatically add some space (a margin) before and after the element.

A block-level element always takes up the full width available (stretches out to the left and right as far as it can). Two commonly used block elements are: <p> and <div>. The <p> element defines a paragraph in an HTML document. The <div> element defines a division or a section in an HTML document. See in figure 1 and 1.2
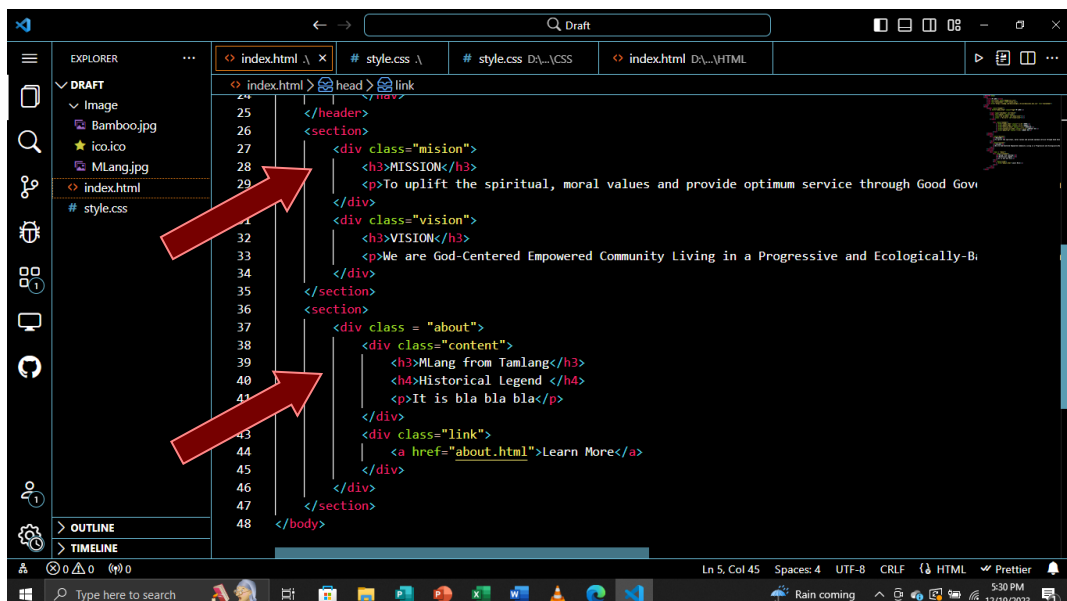
Figure 1

I only used class tag. I will put an ID if I will implement a script for ID is call when you want to change the content in HTML.

Figure 1.2