




## Relations & Functions

### Part 2




## Binary Relations

### How Stuff Compares to Stuff

## Relations

- A *binary relation* is a stated fact between on two objects
- "fact" is called a *predicate*
- Evaluates to true or false
- These are the foundation of most programming tasks



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

3

## Example Relations

- "x is taller than y"
- "x lives less than 50 miles from y"
- " $x \leq y$ "
- "x and y are siblings"
- "x has a y"

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

4

## Relations


- A *binary relation* from  $A$  to  $B$  is a subset of  $A \times B$
- So, a relation from  $A$  to  $B$  is a set of ordered pairs  $(a, b)$  where  $a \in A$  and  $b \in B$
- We can use the shorthand notation of  $a R b$  to denote that  $(a, b) \in R$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

5

## Relationship Chart




	a	b
1	✓	✓
2	✓	
3		✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

6

## Relationship Chart

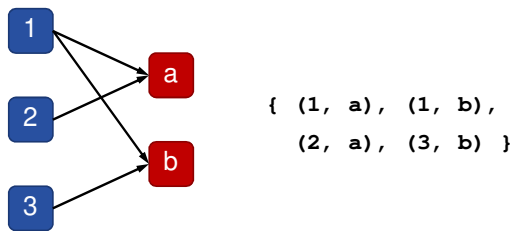

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

7

## Example: Capitols

- $A$  is a set of all cities in the World
- $B$  is a set of all states in the World
- The relation  $a R b$  specifies that  $a$  is the capitol of  $b$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

8

## Example: Capitol Members

- (London, Britain)
- (Sacramento, California)
- (Madrid, Spain)
- (Tokyo, Japan)
- (New Delhi, India)
- (Albany, New York)


2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

9

## Let's Draw One!

- Let's draw a relationship graph
- It will be between students and stuff they have



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

10

## Relation Domain

- The *domain* of a relation is a set of all the first elements of each tuple
- So, it is the elements that the make up the left-hand side of  $a R b$

$\{ a \mid (a, b) \in R \text{ for some } b \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

11

## Relation Range

- The *range* of a relation is a set of all second elements from each tuple
- So, it is the elements that the make up the right-hand side of  $a R b$

$\{ b \mid (a, b) \in R \text{ for some } a \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

12

## Example

$$R = \{ (1,1), (1,2), (1,3), (1,4), (2,4), (4,4) \}$$

Domain of  $R = \{ 1, 2, 4 \}$

Range of  $R = \{ 1, 2, 3, 4 \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

13

## Inverse Relation

- The *inverse* of a relation swaps first and last element for each tuple
- The number of elements are the same, but the range and domain are reversed

$$R^{-1} = \{ (b,a) \mid (a,b) \in R \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

14

## Inverse Example

$$R = \{ (1,1), (1,2), (1,3), (1,4), (2,4), (4,4) \}$$
$$R^{-1} = \{ (1,1), (2,1), (3,1), (4,1), (4,2), (4,4) \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

15

## Relations can be infinitely large

- On a finite set, relations are quite simple...
- For a set with  $n$  elements, the maximum number of relations is simply  $n \times n = n^2$
- However, many relations are defined over an infinite set – e.g. all integers, reals, etc...

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

16

## Representing Relations


- We can represent a relation using set notation
- However, some are required to be denoted using set builder notation

$$R1 = \{ (a, b) \mid a \text{ is taller than } b \}$$
$$R2 = \{ (a, b) \mid a \leq b \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

17




## Types of Relations

How a Set Sees Itself

## "Relation On"

- Some relations of a set  $A$  are on itself
- In other words, each object in the related to the same "type" of object
- This is called a *relation on A*
- ...and it is important to examine its properties




2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

19

## Example Relationship Chart



	1	2	3	4
1	✓	✓	✓	✓
2		✓		✓
3			✓	
4				✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

20

## Example Relation Chart


- The previous chart represents when  $a$  divides  $b$
- In other words,  $a$  times some integer equals the value  $b$
- So,  $R = \{ (1, 1), (1, 2), (1, 3), (1, 4), (2, 2), (2, 4), (3, 3), (4, 4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

21

## Reflexive Relations



- A *reflexive* relationship means that there is  $aRa$  for every  $a$
- Basically, everything has to be related to itself
- Every element, in the domain, must be related to itself*

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

22

## To Determine Reflexive...

- Look for some  $a \in A$  where there isn't a  $aRa$
- If found, not reflexive
- Otherwise reflexive



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

23

## Reflexive Example

Relation on set  $\{1, 2, 3, 4\}$

$R = \{ (1, 1), (1, 4), (2, 2), (2, 3), (3, 3), (4, 4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

24

## Reflexive Example

Relation on set  $\{1, 2, 3, 4\}$


$R = \{ (1,1), (1,4), (2,2), (2,3), (3,3), (4,4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

25

## Reflexive Example



	1	2	3	4
1	✓			✓
2		✓	✓	
3			✓	
4				✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

26

## Nonreflexive Example

Relation on set  $\{1, 2, 3, 4\}$


$R = \{ (1,1), (1,4), (2,2), (2,3), (3,1), (4,4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

27

## Nonreflexive Example




	1	2	3	4
1	✓	✓		
2		✓	✓	
3				✓
4				✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

28

## Symmetric Relations




- A *symmetric* relationship means that for every  $aRb$  there is a  $bRa$
- So, if  $(a, b)$  exists in the relation, so must  $(b, a)$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

29

## Symmetric Relations



- Note: Unlike the definition for reflexive, not every element in the domain needs to exist
- If a relation is not symmetric, it is *antisymmetric*

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

30

## To Determine Symmetric

- Look for an  $a$  and  $b$  where there is a  $aRb$  but no  $bRa$
- If found, nonsymmetric
- Otherwise symmetric



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

31

## Symmetric Example

Relation on set  $\{1, 2, 3, 4\}$

$R = \{ (1,1), (1,2), (2,1), (2,4), (3,3), (4,2) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

32

## Symmetric Example

Relation on set  $\{1, 2, 3, 4\}$


$R = \{ (1,1), (1,2), (2,1), (2,4), (3,3), (4,2) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

33

## Symmetric Example



	1	2	3	4
1	✓	✓		
2	✓			✓
3			✓	
4		✓		

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

34

## Nonsymmetric Example

Relation on set  $\{1, 2, 3, 4\}$


$R = \{ (1,1), (1,4), (2,2), (2,3), (3,3), (4,4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

35

## Nonsymmetric Example




	1	2	3	4
1	✓			✓
2		✓	✓	
3			✓	
4				✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

36

## Transitive Relations



- A *transitive* relationship means that for every  $aRb$  and  $bRc$  that also  $aRc$
- So, if  $(a, b)$  and  $(b, c)$  exists in the relation, so must  $(a, c)$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

37

## To Determine Transitive

- Look for an  $a, b, c$  where there is a  $aRb$  and  $bRc$  but no  $aRc$
- If found, non transitive
- Otherwise transitive



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

38

## Transitive Example

Relation on set  $\{1, 2, 3, 4\}$

$R = \{ (2,1), (3,1), (3,2), (4,1), (4,2), (4,3) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

39

## Transitive Example

Relation on set  $\{1, 2, 3, 4\}$

$R = \{ (2,1), (3,1), (3,2), (4,1), (4,2), (4,3) \}$

Starting with (4,3)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

40

## Transitive Example

Relation on set  $\{1, 2, 3, 4\}$

Starting with (3,2)

$R = \{ (2,1), (3,1), (3,2), (4,1), (4,2), (4,3) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

41

## Transitive Example

Relation on set  $\{1, 2, 3, 4\}$

$R = \{ (2,1), (3,1), (3,2), (4,1), (4,2), (4,3) \}$


Starting (again) with (4,3)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

42

## Transitive Example

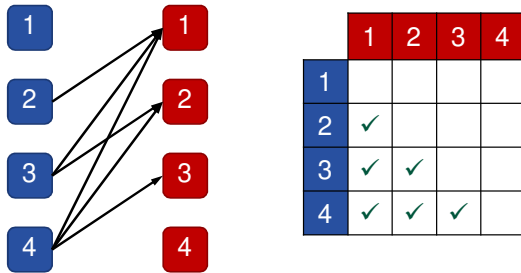


2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

43

## Equivalence Relations

- If a relation is:
  - reflexive
  - symmetric
  - transitive
- It is an equivalence



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

44

## Example Table

Relation	Reflexive	Symmetric	Transitive	Equivalent
$\leq$				
$\subset$				
Perpendicular lines				
Parallel lines				

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

45


## Example Table

Relation	Reflexive	Symmetric	Transitive	Equivalent
$\leq$	✓	✗	✓	✗
$\subset$	✗	✗	✓	✗
Perpendicular lines	✗	✓	✗	✗
Parallel lines	✓	✓	✓	✓

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

46




## Manipulating Relations

How a Set Sees Itself

## Manipulating Relations

- Because relations are representable as sets, we can use set notation to define them
- We can also use set notation to manipulate them



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

48



## Example

$$A = \{ (1,1), (2,2), (3,3) \}$$
$$B = \{ (1,1), (2,4), (3,9) \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

49

## Example

$$A \cup B = \{ (1,1), (2,2), (2,4), (3,3), (3,9) \}$$
$$A \cap B = \{ (1,1) \}$$
$$A - B = \{ (2,2), (3,3) \}$$
$$B - A = \{ (2,4), (3,9) \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

50

## Let's Examine Some...

- Let's use students to create two relations
- Classes you plan to take
- Classes you enjoy




2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

51

## Let's Examine Some...

- Let's examine two relations over a simple set A of {1, 2, 3} using set operators
- We can check if it is:
  - reflexive
  - symmetric
  - transitive



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

52

## Let's Examine Some...

$$A = \{1, 2, 3\}: R, S \text{ relations.}$$
$$R = \{ (1,1), (1,2), (2,2), (2,3), (3,1), (3,3) \}$$
$$S = \{ (1,1), (1,2), (1,3), (2,1), (2,3), (3,2) \}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

53



## Closures

Making a relation "complete"

## Closure

- **Closure** of relation  $R$  is the **smallest** set (when unioned) gives  $R$  the desired property
- So, the closure of  $R$  is  $R \cup C$ , where  $C$  is the smallest set giving  $R \cup C$  the desired property



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

55

## Some Examples

- For the following examples, the relation is over the set  $\{1, 2, 3, 4\}$
- The slides will show how to make the closures for reflexive, symmetric, and (the hard one) transitive

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

56

## Example Reflexive Closure

$R = \{ (1, 2), (2, 3), (3, 4) \}$

$C = \{ (1, 1), (2, 2), (3, 3), (4, 4) \}$

Missing (1,1) (2,2), (3,3) and (4,4)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

57

## Example Reflexive Closure

$R \cup C = \{ (1, 2), (2, 3), (3, 4), (1, 1), (2, 2), (3, 3), (4, 4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

58

## Example Symmetric Closure

$R = \{ (1, 2), (2, 3), (3, 4) \}$

$C = \{ (2, 1), (3, 2), (4, 3) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

59

## Example Symmetric Closure

$R \cup C = \{ (1, 2), (2, 3), (3, 4), (2, 1), (3, 2), (4, 3) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

60

### Example Transitive Closure (1 of 3)

$R = \{ (1,2), (2,3), (3,4) \}$

$C = \{ (1,3) \}$

Added due to (1,2) and (2,3)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

61

### Example Transitive Closure (2 of 3)

$R = \{ (1,2), (2,3), (3,4) \}$

$C = \{ (1,3), (2,4) \}$

Added due to (2,3) and (3,4)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

62

### Example Transitive Closure (3 of 3)

$R = \{ (1,2), (2,3), (3,4) \}$

$C = \{ (1,3), (2,4), (1,4) \}$

Had to add after we added (2,4)  
since R contains (1,2)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

63

### Example Transitive Closure

$R \cup C = \{ (1,2), (2,3), (3,4), (1,3), (2,4), (1,4) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

64

### Let's Try Some


- Set is over  $\{1, 2, 3, 4, 5\}$
- $R = \{ (1,2), (2,3), (3,3), (4,1) \}$
- What are the closures for this relation?



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

65




Functions

Math Friendly Relations

## Functions

- We have all seen functions – which take inputs and produce output
- Example:  $f(x) = x^2$ 
  - $f(1) = 1$
  - $f(2) = 4$
  - $f(3) = 9 \dots$




2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

67

## Functions

- Sets give a way to document "types" in mathematical functions
- A *function* from set  $X$  to set  $Y$  is a mapping from each element in  $X$  to elements in  $Y$




2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

68

## Relationship Review



$\{ (1, a), (1, b), (2, a), (3, b) \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

69

## Relations vs. Functions

- Each domain element, in a relation, can specify *many* relationships
- While, each element in a function domain only specifies *one* relationship
- So....
  - *every* function is a relation
  - but not every relation is a function

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

70

## Function Attributes

- Function Rules:
  - must be defined for *every element in domain*
  - each value in domain *maps to one element*
- Notice that a function defines a set of ordered pairs: e.g.  $(1,1) (2,4) (3,9) \dots$
- We can therefore think of a function as a special kind of relation.

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

71

## Definition of a Function

Let  $f$  be a relation from  $A \rightarrow B$

Where, each  $a \in A$  appears exactly once in an ordered pair  $(a,b) \in f$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

72

## Function Signature

- We will restrict a functions inputs and outputs by giving a "signature" for it
- $f$  is the function name

$f: \mathbb{N} \rightarrow \mathbb{N}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

73

## Function Signature

- The first  $\mathbb{N}$  is the function domain
- The second  $\mathbb{N}$  is the function range (codomain)

$f: \mathbb{N} \rightarrow \mathbb{N}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

74

## Domain and Range Definitions

- The domain and range of  $f$  is defined exactly as we saw for relations
- Which is not surprising given what a function really is

$\text{domain}(f) = \{ x \mid (x, y) \in f \text{ for some } y \}$   
 $\text{range}(f) = \{ y \mid (x, y) \in f \text{ for some } x \}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

75

## Relations vs. Functions


- Not that in the example (with 1,2,3 and a, b) that some elements in  $A$  had multiple values in  $B$
- In a function, each member in  $A$  maps to exactly one value in  $B$
- So, that relation was not a function!

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

76

## Function Example

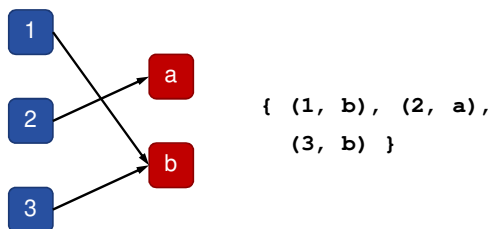

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

77

## Examples

- For the following examples, let each example be defined as a relation from  $A$  to  $B$
- Domain and range (codomain) are defined as:

$A = \{1, 2, 3\}$   
 $B = \{x, y, z\}$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

78

## Is This a Function?

Let  $f = \{ (1,x), (2,y) \}$

**No**, the domain value 3 is missing as a first ordered-pair element

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

79

## Is This a Function?

Let  $g = \{ (1,x), (2,y), (3,z), (1,y) \}$

**No**, the domain element 1 is listed twice.

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

80

## Is This a Function?

Let  $h = \{ (1,x), (2,y), (3,x) \}$

**Yes**, each domain element of  $A$  is the first element once.


(There is no restriction on the second element)

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

81

## Is This a Function?

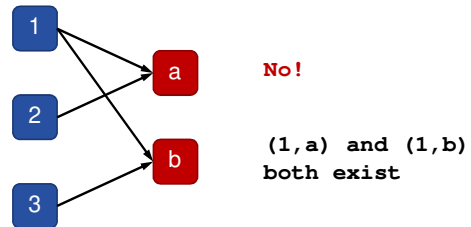


2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

82

## Is This a Function?

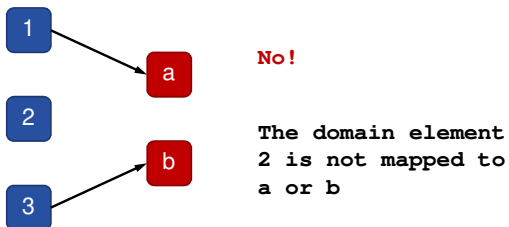


2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

83


## Is This a Function?



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

84



## Function Definitions

### The Mapping of Sets

## Function Definitions

- Functions are usually defined using a formula
- You should be able to tell that these match a Java method definition – header and body

```
f: Z → Z
f(x) = x * x
```

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

86

## Function Definitions

- First part tells us that  $f$  maps every integer to an integer
- Second part tells us  $f(x)$  and  $x^2$  are the same thing

```
f: Z → Z
f(x) = x * x
```

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

87

## Example

- In the following, is  $g$  a function?
- $R$  is a set of reals
- $\text{sqrt}()$  is the square root function

```
g: R → R
g(x) = sqrt(x)
```

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

88

## Example

- No.**
- Not every element of  $R$  maps to something in  $R$
- For example,  $g(-1) \notin R$

```
g: R → R
g(x) = sqrt(x)
```

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

89



## Composition

### The Inception of Functions

## Composition

- *Composition* of two functions means the output of one function is used as the input as another
- This is very common in programming – you use the result of one expression as input to another



2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

91

## Notation

- Notation for composition is straight forward – it simply consists of a empty circle operator
- Sometimes the (x) is put in front of the first function, but this is not always the case

$$f \circ g(x) \equiv f(g(x))$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

92

## Composition Example

$$\begin{aligned} f(x) &= x + 4 \\ g(x) &= x^2 \\ f \circ g(z) &= f(g(z)) \\ &= f(z^2) \\ &= z^2 + 4 \end{aligned}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

93

## Composition Example 2

$$\begin{aligned} f(x) &= x + 4 \\ g(x) &= x^2 \\ g \circ f(z) &= g(f(z)) \\ &= g(z + 4) \\ &= z^2 + 8z + 16 \end{aligned}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

94

## Composite Example

$$\begin{aligned} R &= \{ (1, 2), (3, 1), (5, 3) \} \\ S &= \{ (2, 3), (2, 6), (3, 9) \} \\ R \circ S &= \{ (1, 3), (1, 6), (5, 9) \} \end{aligned}$$

2/13/2018

Sacramento State - Cook - CSc 28 - Spring 2018

95