Program :

```
#include <stdio.h>

// Function using a static storage class variable as a counter
void counterFunction() {
// 'static' keyword ensures the variable retains its value between function
calls
static int count = 0;

count++;
printf("Function called %d time(s).\n", count);
}

int main() {
int n, i;

printf("Enter how many times you want to call the counter function: ");
scanf("%d", &n);

printf("\n--- Calling Counter Function ---\n");
for (i = 0; i < n; i++) {
counterFunction();
}

return 0;
}
```
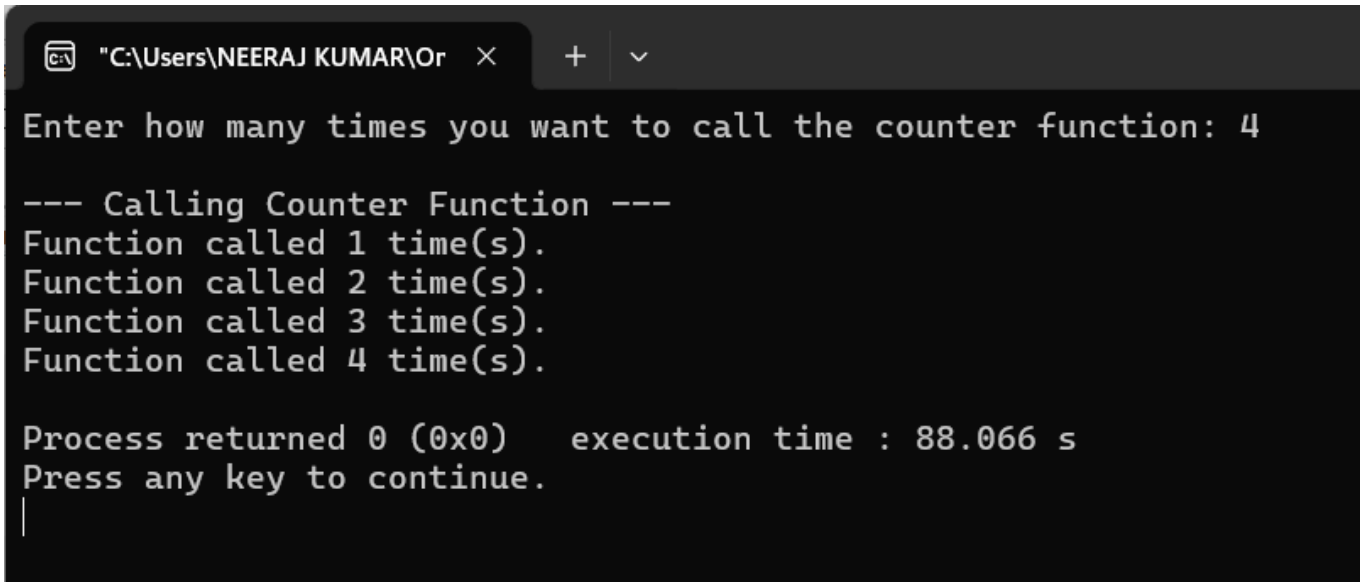
Output :